SINCE

2016

10 years in service

Software Requirements Specification · ISO/IEC/IEEE 29148

# SCHEDULE · Academic Decision System

What the system must provide, for whom, and under which guarantees.

v1.0 | 2026-11-07 | English

| 1041 | 20 | 618 | 373 |
|---|---|---|---|
| Requirements | Modules | Server routes | Test files |

**Dr. Ahmad Alfailakawi** · **Dr. Abdulaziz Alenezi**

Prepared by

# Document control

| | |
|---|---|
| **System** | SCHEDULE · Academic Decision System |
| **Document** | Software Requirements Specification |
| **Standard** | ISO/IEC/IEEE 29148 |
| **In service since** | 2016 |
| **Version** | 1.0 |
| **Date** | 2026-11-07 |
| **Prepared by** | Dr. Ahmad Alfailakawi · Dr. Abdulaziz Alenezi |
| **Content fingerprint** | 30eb9a2607a228ed |

## The document in numbers

| | | | |
|---|---|---|---|
| **1041** Requirements | **20** Modules | **100%** Implemented | **85%** Test-proven |
| **618** Server routes | **182** Screens and components | **373** Test files | **3179** Acceptance criteria |

## Revision history

| Version | Date | Changes |
|---|---|---|
| 1.0 | 2026-11-07 | First release: the baseline document with all its modules, requirement-to-code-and-test traceability, and the interactive page. |

## Contents


**Document control** 1

1 **Introduction** 3

2 **Overall description** 4

2.6 Applying the regulation 9

3 **Specific requirements** 22

3.1 Identity, accounts, roles and access scope 23

3.2 Academic structure and reference data 53

3.3 Locations 83

3.4 Deterministic scheduling engine 106

3.5 Drafts, scenarios and the time machine 155

3.6 Viewing, sharing, copying and transferring schedules 174

3.7 Approval cycle 192

3.8 Import 221

3.9 Faculty requests and public links 245

3.10 Section planning and curricula 290

3.11 Student and advising services 321

3.12 Analytics Center and Guide 372

3.13 Reports, queries, printing and export 413

3.14 Notifications, activity and live channel 442

3.15 Engagement and public presence 462
3.16 Dashboards and term awareness 484
3.17 Operations 502
3.18 Non-functional requirements 531
3.19 Data model and integrity 548
3.20 External interfaces 566

A **Appendix A: Traceability and requirement index** 580

B **Appendix B: Inferred requirements for confirmation** 626

C **Appendix C: Glossary** 632

D **Appendix D: Revision history** 641

E **Appendix E: Integration and operation** 642
E.1 Connecting university accounts 642
E.2 Keys that must travel with the data 644
E.3 Runtime settings (environment variables) 645
E.4 Server interface index 648

# 1 Introduction

↑ Contents

## 1.1 Purpose

This document specifies the functional and non-functional requirements of the SCHEDULE system. It is a shared reference for academic administration, the development team and testers during design, implementation and acceptance.

It follows the structure of ISO/IEC/IEEE 29148. Every requirement is testable and linked to its place in the code and, where one exists, to the test that proves it.

## 1.2 Scope

The scope covers building department and college timetables from terms, courses, instructors and halls; conflict detection; schedule drafts and scenarios; the approval and freeze cycle; import of the official authority file; faculty requests; section planning and study plans; student, advising and seat services; and analytics, reports and notifications.

The scope excludes the official registration system, grades and fees. The authority file is the reference for course numbers and departments; the system compares against it and does not replace it.

## 1.3 Intended audience

- Academic administration and schedule committees, to confirm the system covers university policy.
- Development and test teams, to turn a requirement into work and a test case.
- Reviewing bodies, to understand the guarantees, permissions and scope.

## 1.4 Document conventions

- **Identifier:** `FR` functional, `NFR` non-functional, `DR` data, `IR` interface; then a three-letter module code and three digits, e.g. `FR-SCH-012`. A number is never reused after deletion.
- **Priority:** `Must` the system cannot operate without it, `Should` important with a temporary workaround, `Could` an enhancement.
- **Status:** every requirement in this release is `Implemented` and present in the current version, proven by its code reference and its test.
- **Inferred:** a mark placed on a requirement derived from the behaviour of the code that has no test proving it yet, and needs owner confirmation.
- **References:** every requirement carries the file paths that implement it and the tests that prove it, and these are checked automatically on every build.
- **Language:** the Arabic and English texts carry the same requirements under the same numbering.

## 1.5 References

1. ISO/IEC/IEEE 29148:2018, Systems and software engineering: Life cycle processes: Requirements engineering.
2. W3C, Web Content Accessibility Guidelines (WCAG) 2.1, level AA.
3. RFC 5545, Internet Calendaring and Scheduling Core Object Specification (iCalendar).
4. RFC 8030, Generic Event Delivery Using HTTP Push.

## 1.6 Definitions

Appendix C lists 156 terms with their Arabic and English equivalents.

# 2 Overall description

↑ Contents

## 2.1 Summary

SCHEDULE is an operational web platform for building, reviewing, approving and publishing academic timetables inside the university. It is driven by a deterministic scheduling engine that detects a conflict at the moment it occurs and refuses to approve a timetable that contains a material one. This document states what the system must provide, for whom, and under which guarantees, using stable numbering that can be traced to code and tests.

**Deterministic engine**
Scheduling and conflict rules are explicit and tested; the same input always yields the same result.

**Governed approval**
A cycle of submission, review, return, acceptance and freeze, each step with its own permission and recorded trail.

**Safe import**
Reading proposes, deterministic validators decide, and nothing is written without explicit confirmation.

**Scope and permissions**
Every role sees only its own college or department, and the guard lives on the server, not in the interface.

**Secret public links**
Faculty and students reach their card through a secret link with guess-limited access.

**Arabic first**
A right-to-left interface that adapts to the phone and prints its reports on A4 with a fixed design.

## 2.2 Product perspective

The system is a progressive web application (PWA) with a React interface and a Node.js server running on Google Cloud Run. Its database is Firestore, reached by the server alone with administrative credentials, so there is no direct door from the browser.

Beside the application there are public pages built by the server for each secret link: the faculty card, the department card, the room door, the building board, partner pages and the signature verification page.

## 2.3 History and use

The system is not new: it has been in service since 2016, and every past term is kept for the system to read and analyse. This history is what makes its comparisons and forecasts rest on facts rather than assumptions.

**2016** — **Go-live** (2016 – 2026)
The system went live with a large pilot study and began keeping academic terms one after another.

**A decade of kept terms** (Migration)
Every past term is frozen read-only and stays a reference for comparisons and forecasts.

FR-APR-016

**Legacy data under its ids** (2026-10-17)
The legacy data moved under its original ids, and its historical tables stay archived as they were.

FR-DAT-021

**Live audience measurement** (2026-11-07)
From this date measured figures add to the approved baseline, so usage figures refresh on their own.

**Rec doc v1.(**
A dc tied and refr ever

### What the system reads from its history

**Each department’s rhythm**

Learns a department’s habitual starts and lengths from all its terms and gently notes what departs from them.

FR-SCH-020

**Season history and course lineage**

Gathers each course’s history from earlier terms of the same season and lets a renumbered course inherit its predecessor’s.

FR-PLN-005

**Next-term forecast**

Forecasts each course’s sections as a value and a range from previous terms.

FR-INT-018

**Visiting history across years**

One yearly matrix of visiting instructors that keeps anyone delegated even after leaving the directory.

FR-RPT-011

**Back to a previous version**

Every version of a schedule is kept and can be restored with explicit confirmation and full checks.

FR-DRF-012

## Use in figures

Aggregated, anonymous figures from the system administration as of 2026-10-17; “about” is an estimate and “over” is a lower bound. The interactive page shows them live from the system.

about **80,000** students served

over **5.3 million** visits

about **786** faculty members

over **75,000** faculty card opens

over **90%** of faculty open their card

## 2.4 Architecture and technologies

Three layers work together: a front end built once for computer and phone, a server that guards the rules and the data, and a cloud operation with automatic checks before every release. Version numbers are read from the project files themselves on every build.

### 01 Front end

- **Programming languages** — JavaScript · TypeScript `v5.8`
- **UI library** — React `v19`
- **Build and development tool** — Vite `v6`
- **Install and offline use** — PWA · Service Worker
- **Icons and typeface** — Lucide · IBM Plex Sans Arabic

### 02 Server and data

- **Server runtime** — Node.js `v22`
- **Server framework** — Express `v4`
- **Database** — Google Cloud Firestore `v8`
- **Server-to-data access** — Firebase Admin SDK `v14`
- **Security and performance** — express-rate-limit · compression

### 03 Operations and quality

- **Hosting and cloud runtime** — Google Cloud Run
- **Version and project management** — Git · GitHub
- **Automated tests, quality and conflict checks** — **373** test files
- **Continuous integration and delivery** — CI/CD
- **Build and run tooling** — esbuild · tsx

### Supporting services

- **PDF reading** — PDF.js `v6`
- **Assisted import reading** — Gemini
- **Mobile push notifications** — Web Push
- **Deployment packaging** — Docker
- **Demo and development mode** — Isolated local data
- **Scanned document reading** — Tesseract OCR `v7`
- **Excel import and export** — SheetJS `v0.20`
- **Faculty calendar feed** — iCalendar (ICS)
- **Image processing** — Canvas · HEIC

## 2.5 How the system computes its decisions

### Does the system rely on algorithms or on plain calculation?

Algorithms. Every decision in the system is produced by an explicit, written and tested algorithm: 50 algorithms across 17 modules, each with its steps, thresholds and code references. Most are deterministic: the same input always yields the same result, and every result traces back to its rule. Some search the possible options and rank them, and some are descriptive statistics over the terms kept since 2016. No trained model or probabilistic output enters a decision; where the Gemini service is used (import reading and text queries) it only reads and proposes, while deterministic validators and the user's confirmation decide.

**32 — Deterministic**

Explicit rules and comparisons: the same input always yields the same result.

**11 — Search and ranking**

Explores the possible options within constraints and ranks them by a stated criterion.

**5 — Statistics from history**

Descriptive statistics over past terms with stated thresholds; deterministic code, not a trained model.

**2 — Assisted reading, confirmed**

The Gemini service reads and proposes, deterministic validators decide, and the user confirms.

## Algorithm index

| ID | Algorithm | Module | Kind |
|---|---|---|---|
| ALG-ACC-01 | Scope decision | ACC | Deterministic |
| ALG-ACD-01 | Duplicate course and spelling-twin detection | ACD | Deterministic |
| ALG-ACD-02 | Instructor name-identity matching | ACD | Deterministic |
| ALG-ACD-03 | Teaching-load computation and classification | ACD | Deterministic |
| ALG-LOC-01 | Building and hall resolution against the official registry | LOC | Deterministic |
| ALG-LOC-02 | Hall barter windows and their enforcement | LOC | Deterministic |
| ALG-LOC-03 | Ranking candidate halls for an instructor request | LOC | Search and ranking |
| ALG-SCH-01 | Indexed conflict detection | SCH | Deterministic |
| ALG-SCH-02 | Regulation rules: length, start ladder, patterns and hours ceiling | SCH | Deterministic |
| ALG-SCH-03 | Department rhythm and memory from history | SCH | Statistics from history |
| ALG-SCH-04 | Travel time between campuses and buildings | SCH | Deterministic |
| ALG-SCH-05 | Time and hall suggestion engine | SCH | Search and ranking |
| ALG-SCH-06 | Least-impact repair chain (domino) | SCH | Search and ranking |
| ALG-SCH-07 | Cover availability and substitute ranking | SCH | Search and ranking |
| ALG-SCH-08 | Common meeting time | SCH | Search and ranking |
| ALG-DRF-01 | Scenario overlay: apply, drift and write plan | DRF | Deterministic |
| ALG-DRF-02 | Green, yellow and red impact indicator | DRF | Deterministic |
| ALG-DRF-03 | Problem reading and three ranked solutions | DRF | Search and ranking |
| ALG-DRF-04 | Time-collision repair for a start-of-term draft | DRF | Search and ranking |
| ALG-VIW-01 | Two-snapshot diff and instructor schedule fingerprint | VIW | Deterministic |
| ALG-APR-01 | Approval state machine and guards | APR | Deterministic |
| ALG-APR-02 | Effective deadline and wholesale-change detection | APR | Deterministic |
| ALG-APR-03 | Registrar inbox priority and insistence escalation | APR | Deterministic |
| ALG-IMP-01 | Header proof, file department, course and section identity | IMP | Deterministic |
| ALG-IMP-02 | Scan legibility and cell plausibility checks | IMP | Deterministic |
| ALG-IMP-03 | Comparison with the authority source file | IMP | Deterministic |
| ALG-IMP-04 | Gemini-assisted reading with cross-verification | IMP | Assisted reading, confirmed |
| ALG-REQ-01 | Faculty request item verdict and meeting length | REQ | Deterministic |
| ALG-PLN-01 | Section-count suggestion from department history and full need | PLN | Statistics from history |
| ALG-PLN-02 | Section gap and surplus review | PLN | Deterministic |
| ALG-PLN-03 | Placement search for new sections | PLN | Search and ranking |
| ALG-PLN-04 | Not-yet-reached course verdict | PLN | Deterministic |
| ALG-PLN-05 | Plan-sheet rule check and reconciliation | PLN | Deterministic |
| ALG-PLN-06 | Study proposal check, alternatives and vacancy ranking | PLN | Search and ranking |
| ALG-STU-01 | Passed-course closure over prerequisites | STU | Deterministic |
| ALG-STU-02 | Graduate plan choice and graduation-sheet proof | STU | Deterministic |
| ALG-STU-03 | Registration rehearsal and semester readiness | STU | Search and ranking |
| ALG-STU-04 | Shortfall cause attribution by scenario comparison | STU | Deterministic |

| ID | Algorithm | Module | Kind |
|---|---|---|---|
| ALG-STU-05 | Advisor seat cap and section-request capacity | STU | Deterministic |
| ALG-INT-01 | Next-term demand forecast with confidence | INT | Statistics from history |
| ALG-INT-02 | Academic decision lab | INT | Search and ranking |
| ALG-INT-03 | Natural-language query layer | INT | Assisted reading, confirmed |
| ALG-INT-04 | Guide question understanding by lexicon and weights | INT | Deterministic |
| ALG-RPT-01 | Load fairness index | RPT | Statistics from history |
| ALG-RPT-02 | Occupancy rate grid | RPT | Deterministic |
| ALG-NTF-01 | Live broadcast coalescing, foreign-write detection and stale-write refusal | NTF | Deterministic |
| ALG-ENG-01 | Ad image quality check from its pixels | ENG | Deterministic |
| ALG-ENG-02 | Aggregated anonymous audience statistics | ENG | Statistics from history |
| ALG-DSH-01 | Term early warning | DSH | Deterministic |
| ALG-DAT-01 | Legacy migration with count parity | DAT | Deterministic |

# 2.6 Applying the regulation

Decision 1913/2016

2.6.1 Rules | 2.6.2 Pattern library | 2.6.3 Checks | 2.6.4 Approvals | 2.6.5 Where it applies

↑ Contents

## 2.6.1 Rules

The system carries the timetable rules of the regulation as code and applies them at every door an appointment is written through: the schedule editor, the approval review and signing, the faculty card, the import preview and the study proposal. Screens show the decision as «Decision 1913/2016», and every notice names the article it comes from. The figures in this section are read from the code at every sync, so the document never lags behind the system.

**The regulation is the standard; the department decides**

Most rules are notices that say «look here», not «forbidden». Blocking is reserved for what is impossible or breaks a course's hours and shape.

**History grants no exemption**

The department's habit and the course's history are suggestions; they never allow a pattern outside the library or hours above the ceiling.

**One verdict everywhere**

The same functions judge the save, the live check, the review, the faculty card and the import, so no screen says «sound» while approval refuses it.

### The two day families: length, gap and ladder

**Sunday · Tuesday · Thursday**

Lecture **50 min** · Gap **10 min** · Ladder step **60 min** · First start **08:00**

Two consecutive lectures: 50 min | 10 | 50 min

Ladder

08:00 · 09:00 · 10:00 · 11:00 · 12:00 · 13:00 · 14:00 · 15:00 · 16:00 · 17:00 · 18:00 · 19:00

**Monday · Wednesday**

Lecture **80 min** · Gap **10 min** · Ladder step **90 min** · First start **08:00**

Two consecutive lectures: 80 min | 10 | 80 min

Ladder

08:00 · 09:30 · 11:00 · 12:30 · 14:00 · 15:30 · 17:00 · 18:30

## Rules 13

The rules the system applies. Each has its effect at each door: «blocks» refuses the save, signature or send; «warns» says it without blocking; «review» shows in the approval review without blocking the signature; «note» is read and never counted as a blocker; «automatic» is applied by the system itself.

Blocks | Warns | Review | Note | Automatic

### The university day

Every appointment lies between 08:00 and 20:00 (changeable by the root account). One outside it is refused on save; an edit whose time is unchanged is not. A narrower department window is a notice in the appointment form and blocks a faculty request.

| | | | |
|---|---|---|---|
| Editor and save | Blocks | Review and signing | – |
| Faculty card | Blocks | Import | – |

FR-SCH-015 · FR-ACD-034

src/server/core/scheduleRules.ts#schedulePayloadIssues

src/utils/scheduleTime.ts#DEFAULT_SCHEDULE_DAY_END_TIME

### Lecture length by day

Sunday, Tuesday and Thursday lectures are 50 minutes; Monday and Wednesday lectures are 80. A longer appointment is a whole number of the day's lectures with 10-minute gaps, no more than the course hours, or a library block length. The Monday/Wednesday double block is accepted five minutes short (08:00–10:50).

| | |
|---|---|
| Sun · Tue · Thu | 50 · 110 · 170 · 230 · 290 |
| Mon · Wed | 80 · 165 · 170 · 260 · 290 · 350 · 440 |

Accepted one-day row lengths for a five-hour course (minutes)

| | | | |
|---|---|---|---|
| Editor and save | Warns | Review and signing | Note |
| Faculty card | Automatic | Import | – |

FR-SCH-016 · FR-SCH-055 · FR-REQ-015 · ALG-SCH-02

src/utils/scheduleRegulations.ts#expectedMinutesForDay

src/utils/scheduleRegulations.ts#lectureLengthProblem

src/server/routes/scheduleReviewRoutes.ts#scheduleLengthNotice

### Gap between two lectures

Ten minutes between consecutive lectures in the same hall, in both day families. A shorter gap is a soft note that never blocks, and a figure the department declares (1–60 minutes) replaces it.

Editor and save: Warns · Review and signing: –
Faculty card: Automatic · Import: –

FR-SCH-009 FR-SCH-016 FR-REQ-018

src/utils/scheduleRegulations.ts#requiredGapForDay
src/utils/scheduleIntelligence.ts#requiredGapForDays

### Start ladder

Sunday, Tuesday and Thursday lectures start on the hour from 08:00; Monday and Wednesday lectures start at 08:00 and then every hour and a half. A start off the ladder is a notice on department screens and blocks what a faculty member picks himself on his card. Mixed days have no single ladder: the pattern rule governs them.

Editor and save: Warns · Review and signing: Note
Faculty card: Blocks · Import: –

FR-SCH-016 FR-REQ-014 FR-REQ-018 ALG-SCH-02

src/utils/scheduleRegulations.ts#startLadderNote
src/utils/scheduleRegulations.ts#ladderStepForDays
src/server/core/scheduleConflicts.ts#rhythmNote
src/utils/instructorRequestVerdict.ts#ladderBlocks

### Pattern library

All of a section's days, together with its other meetings in the department and term, form an approved pattern for the course hours, and only the library counts: Monday and Thursday, Sunday and Wednesday, and Sunday and Thursday are not patterns for any number of hours. An unapproved pattern is refused on create and on an edit that changes days or time, and the message lists the approved patterns. A one-day row may be part of a pattern, and a one-day block fits any day. The length is part of the pattern: the end is computed from the pattern when a start is typed or an appointment is moved, and approved days with an end that does not match the pattern's length are refused with a message naming the correct end, unless an existing appointment's shape is unchanged.

Editor and save: Blocks · Review and signing: Blocks
Faculty card: Blocks · Import: Blocks

FR-SCH-017 FR-SCH-068 FR-SCH-055 FR-IMP-042 FR-REQ-014 FR-REQ-015 ALG-SCH-02

src/utils/scheduleRegulations.ts#daysFitLibrary
src/server/core/scheduleRules.ts#unapprovedPatternIssue
src/utils/appointmentRegulation.ts#patternLengthIssue
src/components/ScheduleTransfer.tsx#manualPatternIssues

### Section hours ceiling

A section's weekly teaching minutes (this row and its other distinct meetings, never counting an identical copy twice) stay within course hours × 50 with a 10% margin for the 50/80 difference. A laboratory block counts its teaching minutes, not its elapsed time. An existing section already over the ceiling may move as long as its total does not grow.

| 1 h | 2 h | 3 h | 4 h | 5 h |
|---|---|---|---|---|
| 55 | 110 | 165 | 220 | 275 |

max minutes a week

Editor and save: Blocks · Review and signing: –
Faculty card: Blocks · Import: –

FR-SCH-018 FR-REQ-014 ALG-SCH-02

src/utils/scheduleRegulations.ts#maxWeeklyMinutesFor
src/utils/scheduleRegulations.ts#sectionWeeklyHours
src/server/core/scheduleRules.ts#scheduleLengthIssue

### One start time per section

Art. 7/9

The meetings of one section start at the same time on all of its days. A section is identified by its college and number together, so section 501 in two colleges is two sections.

Editor and save: – · Review and signing: Blocks
Faculty card: Blocks · Import: –

FR-APR-003 FR-REQ-014

src/utils/scheduleRegulations.ts#reviewSchedule
src/server/core/approvals.ts#regulationNoticesForScope

### Consecutive teaching limits

Art. 6/2, 6/3

A faculty member teaches no more than two consecutive sections a day whose lectures exceed an hour, and no more than three consecutive one-hour sections. Consecutive means starting within a quarter of an hour of the previous end; an overlap is not a sequence. The faculty placeholder is not counted as a person.

Over 60 min: 2 max
One hour: 3 max

Editor and save: – · Review and signing: Blocks
Faculty card: Blocks · Import: –

FR-APR-003 FR-REQ-014

src/utils/scheduleRegulations.ts#reviewSchedule

### Spreading a course's sections

Art. 7/5

The sections of one course in one college spread over different hours or days. Two sections at the same hour on a shared day are a «review» item and a soft note on save; on the faculty card it is a clear warning that does not block or require an exception, and nothing is flagged for what the department itself offered. Two colleges do not compete for the same student.

| | | | |
|---|---|---|---|
| Editor and save | Warns | Review and signing | Review |
| Faculty card | Warns | Import | – |

`FR-SCH-010` `FR-REQ-014` `IR-APR-037`

`src/utils/scheduleRegulations.ts#sameCourseSectionClash`

`src/server/core/scheduleConflicts.ts#sectionClashNote`

`src/utils/instructorRequestVerdict.ts#sectionClashWarns`

### Rotating single-section courses

Art. 6/4

A course offered as a single section in two consecutive terms does not stay with the same member. It is read in the approval review when the previous term's schedule is available, and never blocks.

| | | | |
|---|---|---|---|
| Editor and save | – | Review and signing | Review |
| Faculty card | – | Import | – |

`IR-APR-037`

`src/utils/scheduleRegulations.ts#reviewSchedule`

`src/components/ScheduleReview.tsx`

### Morning and evening balance

Art. 7/2

The morning period holds 50–70% of the department's appointments and the evening 30–50%, counted by start hour across the whole department family and its colleges. The share is read on any number of appointments because the regulation sets no minimum; it is a note shown in approval and it never blocks signing or sending.




Accepted morning share (08:00–14:00), from undefined appointments up

| | | | |
|---|---|---|---|
| Editor and save | – | Review and signing | Note |
| Faculty card | – | Import | – |

`IR-APR-037`

`src/utils/scheduleRegulations.ts#periodBalanceFinding`

`src/server/core/approvals.ts#regulationNoticesForScope`

### Student limits per section

Art. 8, 9

The section capacity recorded on a course stays within the limits of its nature: theoretical 20–60, applied 15–40, practical 15–25, field training 15–60 in theoretical specializations and 15–25 in scientific ones. Anything outside blocks saving and approval unless the system administrator records an exception for the course in the department family for one of the Art. 9 reasons: a single-offering course needed for graduation, expected graduates, a nature that needs fewer students, too few admitted students, or stopped admission. A course with no teaching nature or no capacity is not judged. The regulation's minimum is for the number actually registered, which the schedule does not hold, so only the capacity is measured.

| | | | |
|---|---|---|---|
| Editor and save | Blocks | Review and signing | Blocks |
| Faculty card | – | Import | – |

`IR-APR-037`

`src/utils/capacityLimits.ts`

`src/utils/scheduleRegulations.ts#reviewSchedule`

`src/server/core/capacityRules.ts` `src/server/routes/coursesRoutes.ts`

### Department meeting window

Department decision

A window the department keeps for its meeting on one day and time. An appointment inside it is a «review» item whose source is the department's decision, not the regulation, so it never enters the signing gates.

| | | | |
|---|---|---|---|
| Editor and save | – | Review and signing | Review |
| Faculty card | – | Import | – |

`IR-APR-037`

`src/utils/scheduleRegulations.ts#reviewSchedule`

## 2.6.2 Pattern library

The approved patterns for each number of weekly hours, exactly as in the code. Each meeting is a bar sized by its minutes on a Sunday–Thursday week. One-day patterns are blocks for laboratories, workshops and training that fit any day; Wednesday is the example.

| 18 | 5 | 5 | `round(round(h) × 50 × 1.1)` |
|---|---|---|---|
| approved patterns | hour groups (1–5) | one-day blocks | weekly-minutes ceiling |

### 1 weekly hour

1 pattern · ceiling 55 min

`1h-single` **Block · any day** — **50** teaching min/week




One 50-minute block on any day: 1 teaching periods of 50 minutes.

### 2 weekly hours

4 patterns · ceiling 110 min

`2h-two-days` — **100** teaching min/week




50 min on Sunday, 50 min on Tuesday; 100 teaching minutes a week.

`2h-tue-thu` — **100** teaching min/week




50 min on Tuesday, 50 min on Thursday; 100 teaching minutes a week.

`2h-mon-wed` — **100** teaching min/week




50 min on Monday, 50 min on Wednesday; 100 teaching minutes a week.

`2h-one-block` **Block · any day** — **100** teaching min/week




One 110-minute block on any day: 2 teaching periods of 50 minutes.

### 3 weekly hours

5 patterns · ceiling 165 min

`3h-three-days` — **150** teaching min/week




50 min on Sunday, 50 min on Tuesday, 50 min on Thursday; 150 teaching minutes a week.

`3h-two-days` — **160** teaching min/week




80 min on Monday, 80 min on Wednesday; 160 teaching minutes a week.

`3h-sun-tue` — **160** teaching min/week




80 min on Sunday, 80 min on Tuesday; 160 teaching minutes a week.

`3h-tue-thu` — **160** teaching min/week




80 min on Tuesday, 80 min on Thursday; 160 teaching minutes a week.

`3h-block` **Block · any day** — **150** teaching min/week




One 170-minute block on any day: 3 teaching periods of 50 minutes.

### 4 weekly hours

4 patterns · ceiling 220 min

`4h-mon-wed` — **200** teaching min/week




110 min on Monday, 110 min on Wednesday; 200 teaching minutes a week.

`4h-sun-tue` — **200** teaching min/week




110 min on Sunday, 110 min on Tuesday; 200 teaching minutes a week.

`4h-tue-thu` — **200** teaching min/week




110 min on Tuesday, 110 min on Thursday; 200 teaching minutes a week.

`4h-block` **Block · any day** — **200** teaching min/week




One 230-minute block on any day: 4 teaching periods of 50 minutes.

### 5 weekly hours

4 patterns · ceiling 275 min

`5h-block` **Block · any day** — **250** teaching min/week




One 290-minute block on any day: 5 teaching periods of 50 minutes.

`5h-split` — **250** teaching min/week




170 min on Monday, 110 min on Wednesday; 250 teaching minutes a week.

`5h-sun-tue` — **250** teaching min/week




170 min on Sunday, 110 min on Tuesday; 250 teaching minutes a week.

`5h-tue-thu` — **250** teaching min/week




170 min on Tuesday, 110 min on Thursday; 250 teaching minutes a week.

- Block lengths are elapsed time: 110 = two 50-minute lectures with a 10-minute gap, 170 = three, 230 = four, 290 = five. Teaching minutes exclude the gaps.
- A theoretical course of three or four hours matches a library pattern by its days and lengths, or a one-day block of its length on any day; days that are not a library pattern do not match even when spread out, such as Monday and Thursday (art. 7/8).
- Moving between families reshapes the whole course: three hours are two 80-minute meetings on Monday and Wednesday, or three 50-minute meetings on Sunday, Tuesday and Thursday.

`FR-SCH-017` `FR-SCH-055` `ALG-SCH-02`

`src/utils/scheduleRegulations.ts#PATTERN_LIBRARY` `src/utils/scheduleRegulations.ts#patternLibraryByHours`
`src/utils/scheduleRegulations.ts#meetingsMatchApprovedPattern` `src/utils/scheduleRegulations.ts#planMove`

## 2.6.3 Checks

Every check the system runs on the schedule, with its severity and effect. The regulation review reads the whole schedule and gives each finding a severity and an approval effect; the save gate checks one appointment as it is written and answers 400, 409 or passes the soft note through.

### Regulation review 12

Each finding carries a severity (high, medium, low), a source and an approval effect. Only findings whose effect is «block» and whose source is the decision stop signing and sending; a failed review also blocks rather than treating the schedule as sound.

Blocks 7 · Review 3 · Note 2 — 5 of them stop signing and sending

| Finding | Article and source | Severity | On approval | What it detects |
|---|---|---|---|---|
| **Section below course hours**<br>`section-hours-under` | Approval readiness<br>Readiness | High | Blocks | The section's weekly teaching minutes fall below the course's approved weekly hours; shown as a blocker in review and save.<br>`FR-SCH-018` |
| **Off the regulation ladder**<br>`regulation-ladder` | Start ladder and pattern library<br>Decision 1913/2016 | Low | Note | An appointment starting off its days' ladder or whose length is not a library length for its days; one finding per course.<br>`FR-SCH-016` |
| **Theoretical course pattern**<br>`theoretical-pattern` | Art. 7/8<br>Decision 1913/2016 | High | Blocks | A section of a three- or four-hour theoretical course whose meetings match no library pattern by days and lengths.<br>`FR-APR-003` `FR-SCH-017` |
| **Section time not fixed**<br>`fixed-course-time` | Art. 7/9<br>Decision 1913/2016 | High | Blocks | A section whose meetings start at two or more different times.<br>`FR-APR-003` |
| **Course sections at the same hour**<br>`sections-same-hour` | Art. 7/5<br>Decision 1913/2016 | High | Review | Two sections of the same course in the same college starting at the same hour on a shared day.<br>`IR-APR-037` `FR-REQ-014` |
| **More than two consecutive over-an-hour sections**<br>`consecutive-long-lecture` | Art. 6/2<br>Decision 1913/2016 | High | Blocks | Three or more consecutive lectures of one member in a day, each longer than 60 minutes.<br>`FR-APR-003` |
| **More than three consecutive one-hour sections**<br>`consecutive-one-hour` | Art. 6/3<br>Decision 1913/2016 | High | Blocks | Four or more consecutive lectures of one member in a day, each an hour or shorter.<br>`FR-APR-003` |
| **Rotation not achieved**<br>`rotation` | Art. 6/4<br>Decision 1913/2016 | Medium | Review | A course offered as one section in both terms and still with the same member.<br>`IR-APR-037` |
| **Period balance**<br>`period-balance` | Art. 7/2<br>Decision 1913/2016 | Low | Note | A morning share outside 50–70% of the department family's appointments.<br>`IR-APR-037` |
| **Section capacity outside the regulation limits**<br>`capacity-range` | Art. 8<br>Decision 1913/2016 | High | Blocks | A capacity on a course with a teaching nature, outside the limits of that nature, with no Art. 9 exception recorded by the administrator.<br>`IR-APR-037` |
| **Inside the department meeting window**<br>`meeting-window` | Department decision<br>Department | Medium | Review | An appointment overlapping the window the department keeps for its meeting.<br>`IR-APR-037` |
| **Incomplete data**<br>`incomplete` | Approval readiness<br>Readiness | High | Blocks | An appointment with no days, no time or no instructor. It counts in the review and the score; its source is readiness, not the decision, so it is not among the regulation signing gates.<br>`IR-APR-037` `FR-APR-025` |

## Save gate 16

What is checked when an appointment is added or edited, in the same order in the live check (check-conflicts) and the save. A soft note reaches the screen with the reply and never blocks.

### Refused with 400 — 3

Shape and hours validation

**Days, time and the university day**
At least one day, a valid clock, an end after the start, inside 08:00–20:00.

FR-SCH-015

`src/server/core/scheduleRules.ts#schedulePayloadIssues`

**Approved section hours**
The section's minutes after this appointment fall below the approved hours or exceed the ceiling.

FR-SCH-018

`src/server/core/scheduleRules.ts#scheduleLengthIssue`

**Unapproved pattern**
The section's days are not a library pattern for the course hours, or its end does not match the pattern's length.

FR-SCH-017 FR-SCH-068

`src/server/core/scheduleRules.ts#unapprovedPatternIssue`

### Refused with 409 — 6

A conflict or a lock

**Instructor double booking**
The instructor has an overlapping appointment anywhere in the term; the faculty placeholder is not a person.

FR-SCH-010 FR-SCH-008

`src/server/core/scheduleConflicts.ts#scheduleConflicts`

**Hall double booking**
The hall is taken at the same time.

FR-SCH-010

`src/server/core/scheduleConflicts.ts#scheduleConflicts`

**Duplicate entry**
Same course, section, days and time with nothing telling the two rows apart.

FR-SCH-007

`src/utils/scheduleIntelligence.ts#isBlockingConflict`

**Another department's hall and barter windows**
A hall registered to another department with no barter window covering the appointment, or an appointment beyond an approved window.

FR-SCH-012

`src/server/core/scheduleConflicts.ts#hallBarterWindow`

**Faculty request hold**
The slot is held by a faculty request awaiting the department; answered with code request-hold and may be overridden explicitly.

FR-SCH-013

`src/server/core/scheduleConflicts.ts#requestHoldRefusal`

**Schedule with the registrar**
No write to a schedule with the registrar except in an open amendment round, nor to an ended term (schedule-locked).

FR-APR-014

`src/server/core/approvals.ts#scheduleLockRefusal`

### Said, never blocks — 7

A soft note with the reply

**Same section in two places**
The section recorded twice at the same days and time in two halls or with two instructors.

FR-SCH-007

`src/utils/scheduleBlockers.ts#readScopeConflicts`

**Hall turnaround gap**
Less than 10 minutes between two lectures in the same hall.

FR-SCH-009

`src/utils/scheduleIntelligence.ts#requiredGapForDays`

**Start ladder and department habit**
A start off the ladder, otherwise a start slightly off the department's habit.

FR-SCH-016 FR-SCH-020

`src/server/core/scheduleConflicts.ts#rhythmNote`

**Lecture length**
A length matching neither the day's lectures and gaps nor a library block.

FR-SCH-016 FR-SCH-021

`src/server/routes/scheduleReviewRoutes.ts#scheduleLengthNotice`

**Another section of the same course**
Another section of the specialisation course at the same time (art. 7/5).

FR-SCH-010

`src/server/core/scheduleConflicts.ts#sectionClashNote`

**Shared-student clash**
Two courses students need together overlap, per the survey.

FR-SCH-009

`src/server/core/scheduleConflicts.ts#scheduleConflicts`

**Inter-campus travel time**
Less than the configured time to reach an appointment at another campus.

FR-SCH-019

`src/server/core/scheduleConflicts.ts#interCampusWarnings`

## 2.6.4 Approvals

Each department's schedule passes through six states every term. The schedule committee chair signs, then the department head, and the head's signature is the send: the schedule reaches the registrar in a numbered round. The registrar writes notes on cells and returns or accepts; after acceptance every edit opens an amendment round automatically.

**In preparation**
Schedule committee chair
The committee builds and signs

**Signed by the committee**
Department head
The head signs or returns it to the committee

**With the registrar**
Registration officer
Editing is locked; the registrar writes notes and returns or accepts

**Accepted**
The system (automatic)
Any edit opens an amendment round and sends it back to the registrar

**Signed by the head:** A passing state: the head's signature sends the schedule in the same save; if a gate blocks the send, the signature stays and the reason is given.

**Signed by the committee** → **In preparation** Head return with a written reason (3–400 characters): signatures drop

**With the registrar** → **Returned with notes** Registrar return with at least one open note: both signatures stay, and the department resends in a new round

**Accepted** → **With the registrar** An edit after acceptance, or returning an accepted schedule: a new round based on what was accepted

### What blocks each decision

#### Sign

`POST /api/approvals/sign`

Schedule committee chair · Department head

Captures a version and records the signature on it with a verification code, the appointment count and the regulation-notice count. The head's signature sends the schedule.

**Refused when**

1. A course with no suitable room type or teaching nature
   `course-requirements-missing`
2. A regulation finding with effect «block»: theoretical pattern, section time, consecutive teaching
   `regulation-blockers`
3. A material conflict: instructor or hall double booking, or a duplicate entry
   `blocking-conflicts`
4. A course with no registered capacity
   `missing-capacity`
5. The head before the committee, or the same person for both stages
   `wrong-order · same-person-both-stages`
6. An empty schedule, one with the registrar, or one already signed
   `empty · locked · already-signed`

`FR-APR-001` `FR-APR-002` `FR-APR-003` `FR-APR-004`

`src/server/routes/approvalsRoutes.ts#/api/approvals/sign`

`src/utils/approvalWorkflow.ts#canSign`

#### Send to the registrar

`POST /api/approvals/submit`

Schedule committee chair · Department head

Opens a numbered round with its version, locks editing and clears any pending extension request.

**Refused when**

1. Already sent, or accepted and unchanged since
   `already-submitted · already-accepted`
2. The committee or head signature is missing
   `not-signed`
3. Sections added after the head's signature await his acknowledgement
   `pending-additions`
4. A regulation finding with effect «block»
   `regulation-blockers`
5. A material conflict
   `blocking-conflicts`
6. A registrar note still open, neither fixed nor answered
   `unresolved-notes`
7. The first send after the deadline (later rounds pass)
   `deadline`

`FR-APR-004` `FR-APR-005` `FR-APR-007` `FR-APR-017`

`src/server/routes/approvalsRoutes.ts#submitToRegistrar`

`src/utils/approvalWorkflow.ts#canSubmit`

#### Registrar return

`POST /api/approvals/return`

Registration officer · College registrar · University registrar

Sends the schedule back and reopens editing, keeps both signatures, and records on the round the time, who returned it and the note count.

**Refused when**

1. No open registrar note, or the schedule is neither with the registrar nor accepted
   `no-notes · not-reviewable`

`FR-APR-008` `FR-APR-009` `FR-APR-010`

`src/server/routes/approvalsRoutes.ts#/api/approvals/return`

`src/utils/approvalWorkflow.ts#canReturn`

#### Final acceptance

`POST /api/approvals/accept`

Registration officer · College registrar · University registrar

Captures the accepted version, empties the additions queue and closes remaining registrar notes «by acceptance», keeping their text. The regulation is shown here and does not block.

**Refused when**

1. The schedule is not «with the registrar» now
2. A material conflict: return it to the department to fix
   `blocking-conflicts`

`FR-APR-011` `FR-APR-013`

`src/server/routes/approvalsRoutes.ts#/api/approvals/accept`

Before every decision: role and scope (403), the ended term (term-closed), the round, appointment count and status as the decider saw them (stale-view), and one queue per department with a revision number (approval-revision).

`FR-APR-012` `FR-APR-015` `NFR-APR-001`

### What does not block signing

- Regulation notes and «review» items: ladder, period balance, sections at the same hour, rotation
- The same section recorded twice in two halls or with two instructors
- Data gaps other than capacity, room type and teaching nature

### Approval score

**Score = sound appointments ÷ all scope appointments × 100**

sound 81 ÷ all 100 × 100 = 81

A sound appointment is one no finding needing action touches. Each appointment is counted once at the first category touching it in severity order (blockers, then regulation), so the ring's slices plus the sound ones equal the whole. Each category shows the score if it alone were fixed: (sound + those only it touches) ÷ all. The formula is shown as a sentence the reader can check by hand.

`FR-APR-025` `IR-APR-037`

`src/utils/approvalScore.ts#approvalScoreBreakdown`

## Deadlines and extensions

University registrar

The university registrar sets or clears the term's submission date. It passes after 23:59:59 of its day in Kuwait time and is «near» at seven days or fewer.

`FR-APR-017`

College registrar

The university and college registrars grant an exception to a department, a college or named departments: 1–60 days or an explicit date, with a written reason, never before the term deadline.

`FR-APR-018` `FR-APR-029`

Department head

The committee or head requests an extension (1–60 days, 7 by default) when three days or fewer remain or after it passes, for a schedule not yet with the registrar.

`FR-APR-019`

The system (automatic)

After the effective deadline the first send, file import, term copy and bulk deletion above 30% are refused, while partial edits and later rounds stay open.

`FR-APR-017`

`FR-APR-001` `FR-APR-006` `FR-APR-013` `FR-APR-014` `IR-APR-031` `IR-APR-035`

`src/utils/approvalWorkflow.ts#APPROVAL_STATUS_LABEL` `src/utils/academicRoles.ts#signatureStage` `src/utils/academicRoles.ts#canReviewSubmissions` `src/server/core/approvals.ts#regulationNoticesForScope`

## 2.6.5 Where it applies

The doors the regulation passes through, and each rule's effect at each door. The table reads one row per rule and one column per door.

Blocks · Warns · Review · Note · Automatic – Not applied here

| Rule | Editor and save | Review and signing | Faculty card | Import |
|---|---|---|---|---|
| The university day | Blocks | – | Blocks | – |
| Lecture length by day | Warns | Note | Automatic | – |
| Gap between two lectures | Warns | – | Automatic | – |
| Start ladder | Warns | Note | Blocks | – |
| Pattern library | Blocks | Blocks | Blocks | Blocks |
| Section hours ceiling | Blocks | – | Blocks | – |
| One start time per section | – | Blocks | Blocks | – |
| Consecutive teaching limits | – | Blocks | Blocks | – |
| Spreading a course's sections | Warns | Review | Warns | – |
| Rotating single-section courses | – | Review | – | – |
| Morning and evening balance | – | Note | – | – |
| Student limits per section | Blocks | Blocks | – | – |
| Department meeting window | – | Review | – | – |

### The doors 6

#### Schedule: appointment form

The editor completes the course's days and end with an approved pattern whenever the course, days or start change, and the live check runs the same steps that govern the save, blocking a length outside the pattern with one line and an «apply the pattern» button. The save refuses with 400 or 409 and passes soft notes through.

`FR-SCH-055` `FR-SCH-068` `FR-SCH-021` `FR-SCH-010`
`src/components/Schedules.tsx#applyApprovedPattern`
`src/server/core/scheduleWrites.ts`

#### The «approval review» sheet

Reads every regulation finding grouped into one card per kind, with the article, the number of appointments and the score if fixed, the period balance, and prints with a signature.

`IR-APR-037` `FR-APR-024` `FR-APR-025`
`src/components/ScheduleReview.tsx`
`src/server/routes/scheduleReviewRoutes.ts#/api/schedules/review-readiness`

#### Approval bar and signing

Shows the regulation-notice and blocker counts, and refuses signing and sending with code regulation-blockers whenever a regulation finding with effect «block» lies in the department's rows.

`IR-APR-031` `IR-APR-035` `FR-APR-003`
`src/components/ApprovalBar.tsx`
`src/server/core/approvals.ts#regulationNoticesForScope`

#### Faculty card (personal link)

The regulation is binding on the faculty card: the meeting length and the pattern's days are filled in automatically, and an unapproved pattern, a start off the ladder and exceeding the hours are blocked; another section of the same course at the same time is a clear warning that neither prevents sending nor requires an exception. A «review» finding makes the request «needs an exception» with a written reason. A row the member did not touch is never blocked.

`FR-REQ-014` `FR-REQ-015` `FR-REQ-018`
`src/utils/instructorRequestVerdict.ts#judgeRequest`
`src/server/core/instructorRequests.ts#judgeRequestItems`

#### Import preview

Checks the rows against each other with the same conflict function, and blocks publishing a row whose days or time the reviewer changed by hand unless its days are an approved pattern, with a note on the days cell naming the patterns.

`FR-IMP-042`
`src/components/ScheduleTransfer.tsx#manualPatternIssues`
`src/components/ScheduleTransfer.tsx#previewConflicts`

#### Study proposal

Checks the schedule the proposal would produce with the same hours ceiling, and states the regulation findings on the operations they touch as notes or review items without blocking.

`FR-PLN-026`
`src/server/studyProposalEngine.ts#evaluateProposal`

## 2.7 Module map

### Foundation

3.1 · ACC
**Identity, accounts, roles and access scope**
Who signs in, in which role, what they may read or write, and in which department.

3.2 · ACD
**Academic structure and reference data**
Terms, colleges, departments, courses, faculty and visiting instructors: the reference every schedule is built on.

3.3 · LOC
**Locations**
One official registry of buildings and halls, hall barter between departments, door pages and occupancy

3.19 · DAT
**Data model and integrity**
What is stored, how it relates, and what keeps it sound

### Scheduling core

3.4 · SCH
**Deterministic scheduling engine**
Every appointment passes fixed rules before it is written: conflicts, regulation, teaching day, holds and a rollback version.

3.5 · DRF
**Drafts, scenarios and the time machine**
Try on a copy, compare the effect, apply in one piece and go back with one click.

3.6 · VIW
**Viewing, sharing, copying and transferring schedules**
The department schedule to read, a link for whoever needs it, copying from term to term, and an export that keeps the whole picture.

3.7 · APR
**Approval cycle**
From committee signature to registrar acceptance: rounds, notes, deadlines, term freeze and verifiable stamps.

3.8 · IMP
**Import**
From authority documents, scans and spreadsheets to a reviewed and confirmed schedule.

### Collaboration and services

3.9 · REQ
**Faculty requests and public links**
A secret personal link lets each faculty member request schedule changes, and an inbox lets the department decide item by item.

3.10 · PLN
**Section planning and curricula**
From the registrar's demand report and plan sheet to the term's sections and the study proposal

3.11 · STU
**Student and advising services**
Masari for students, the registration sheet, section requests, seats and the registration rehearsal

3.14 · NTF
**Notifications, activity and live channel**
A bell derived from state, a live channel that announces change, an immutable trail, and a calendar you subscribe to.

### Insight and reporting

3.12 · INT
**Analytics Center and Guide**
Deterministic schedule readings, next-term forecasts, a natural-language query layer that never executes, and an in-app Guide that runs in the browser.

3.13 · RPT
**Reports, queries, printing and export**
One question, many lenses; A4 landscape sheets in their approved design; Excel files with seven-digit course numbers.

3.16 · DSH
**Dashboards and term awareness**
The home dashboard, term story, semester readiness and the welcome tour.

3.15 · ENG

**Engagement and public presence**

Student survey, partner advertising, audience dashboard and the public pages.

### Platform

3.17 · OPS

**Operations**

From server boot to release: runtime, backups, the demo sandbox and the installable app.

3.18 · NFR

**Non-functional requirements**

Performance, security, privacy, accessibility, Arabic-first design and reliability, with measured figures.

3.20 · EXT

**External interfaces**

Everything the system connects to from outside, and under what contract

## 2.8 User classes

| Actor | Requirements | Modules |
|---|---|---|
| Root administrator | **185** | **17** |
| System administrator | **162** | **18** |
| College dean | **89** | **10** |
| Vice dean for academic affairs | **30** | **6** |
| Dean of Admission and Registration | **12** | **4** |
| University registrar | **46** | **9** |
| College registrar | **42** | **8** |
| Registration officer | **92** | **10** |
| Department head | **465** | **19** |
| Department advisor | **24** | **7** |
| Schedule committee chair | **536** | **18** |
| Standard user | **77** | **12** |
| Faculty member | **89** | **12** |
| Student | **105** | **11** |
| Public visitor | **62** | **13** |
| Partner organisation | **13** | **2** |
| The system (automatic) | **236** | **20** |
| External service | **13** | **6** |

## 2.9 Design constraints

- **The engine is deterministic:** no schedule changes without an explicit rule, and the deterministic validators are the final judge before any write.
- **Assisted reading never writes:** every import or text query passes the validators and then the user's confirmation.
- **Course numbers are seven digits:** college (2) + department (2) + course (3), e.g. `0109105`, on every screen, report and export.
- **The header decides the department** in the authority file, even if a course number carries another department's code.
- **Printed reports keep their design:** content and data are fixed, not layout.
- **The server is the guard:** hiding screens in the interface is courtesy to the user's time, not protection.

## 2.10 Assumptions and dependencies

- Users reach the system with a modern browser on a computer or a phone at least 320 pixels wide.
- The official authority file (SWRSCHA) is the approved source of course numbers and departments.
- Google Cloud and Firestore are available, and the system runs in an isolated demonstration mode when the database is unavailable or for showcasing.
- Every account belongs to one or more colleges or departments within a scope set by the administrator.
- Enabling point-in-time recovery, delete protection and scheduled exports for the production database, and unifying rate limits at the network edge, are decisions for the hosting party on its own project; the documented procedure is ready to run.

# 3 Specific requirements

↑ Contents

This part holds 20 modules. Each has an overview, user journeys, diagrams, screens, requirements with acceptance criteria and evidence, and edge cases.

Implemented Planned

## Requirements by module

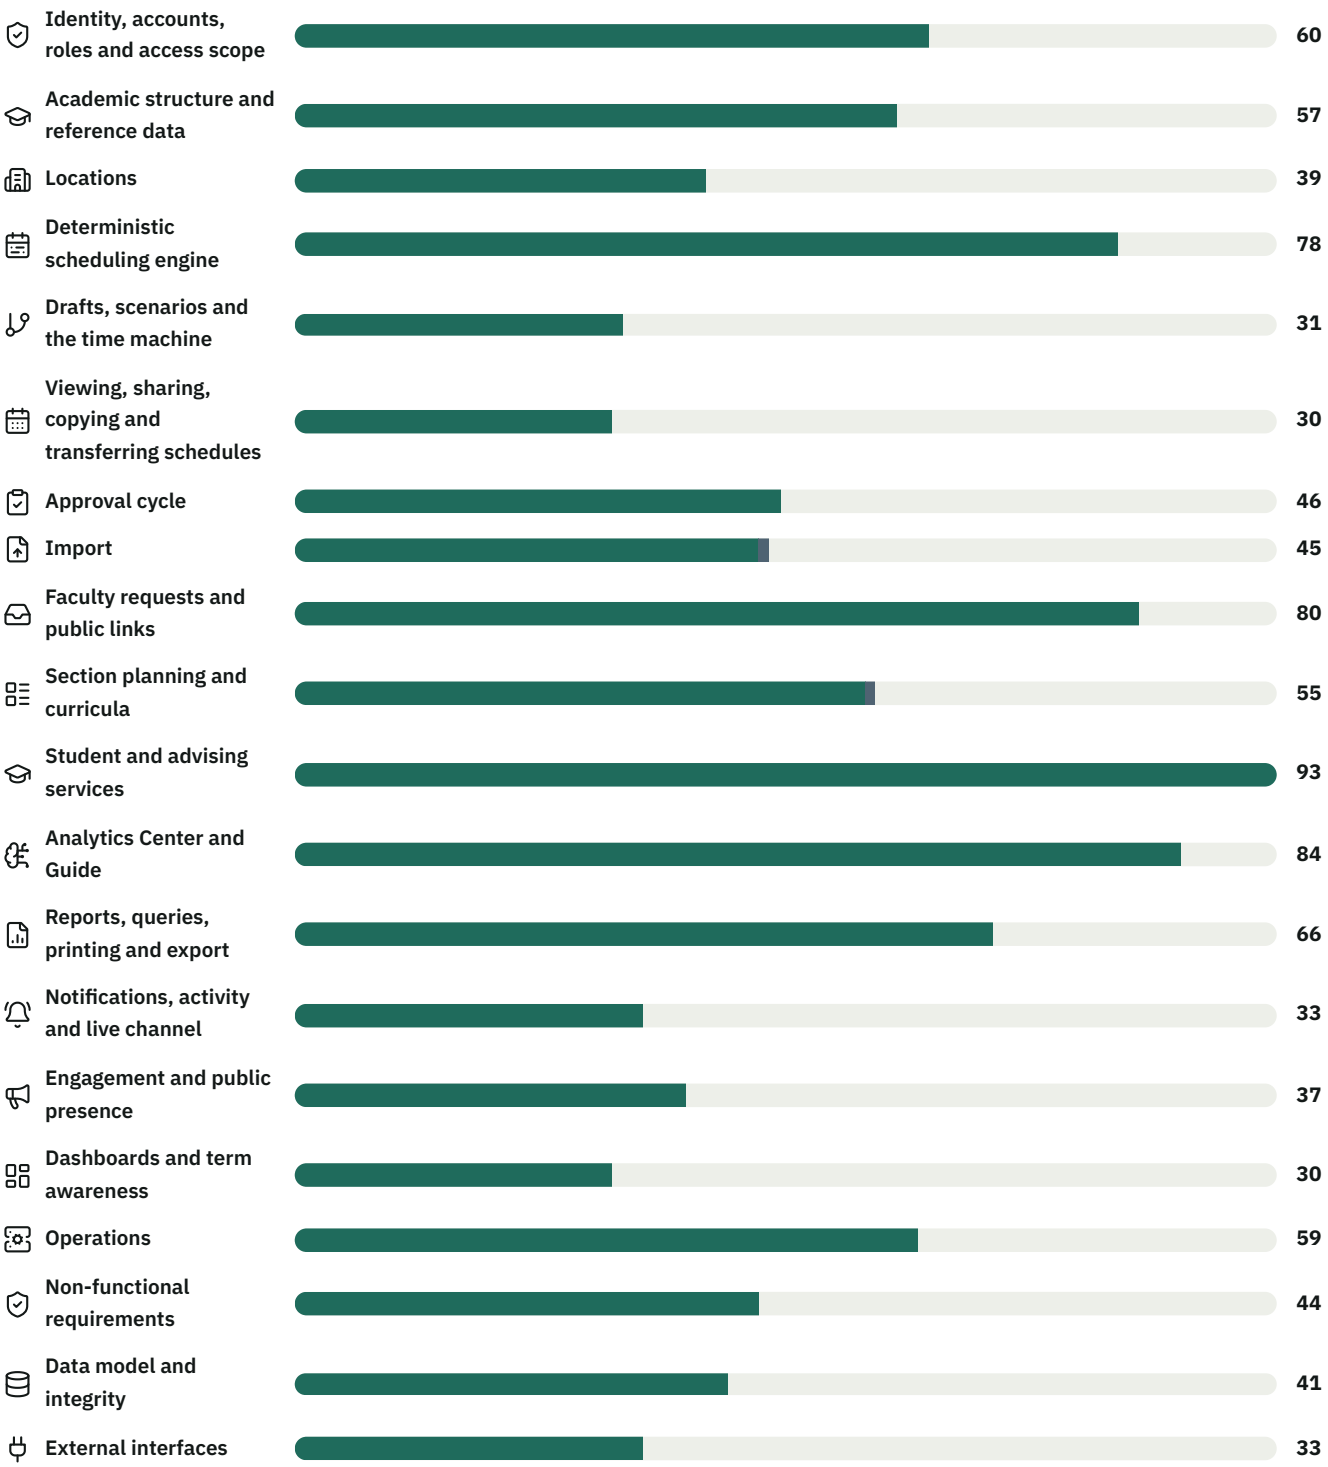

3.1 · ACC

# Identity, accounts, roles and access scope

Who signs in, in which role, what they may read or write, and in which department.

| 60 | 100% | 58 | 39 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.1.1 Overview

This module describes sign-in, sessions and passwords, and account administration from the Users screen. It defines the ten roles that decide read or write access, screens and scope, and the server guard that enforces them on every write request. It also covers college and department scope and how data is filtered by it, rate limits on anonymous doors, the demo environment and the audit trail. The server is always the authority; hiding buttons in the interface is only a visual convenience.

Root administrator · System administrator · College dean · Vice dean for academic affairs · Dean of Admission and Registration · University registrar · College registrar · Registration officer · Department head · Department advisor · Schedule committee chair · Standard user · Public visitor · The system (automatic)

## 3.1.2 User journeys

**System administrator** — **Creating a read-only dean account**

1. The system administrator opens Users and chooses to add an account.
2. They enter the name, login and password, and pick the role College dean, which reveals the college list.
3. They select the college and save; the system writes screen 14 and a single scope row with department 0 for that college.
4. The account is flagged to change its password at first sign-in, and an access card is issued for the administrator to send to its owner.
5. The dean signs in and sees every department of that college, including ones created later, with no editing controls.

### Department head — First sign-in with the initial password

1. The department head receives an invitation link carrying the login name and an initial password from the administrator.
2. Opening the link fills in the login name and the # fragment is removed from the browser address.
3. Signing in with the initial password opens a session, but the server allows nothing beyond the sign-in paths.
4. The Choose your password screen appears without a current-password field; they type a new password of at least 8 characters and confirm it.
5. The password is saved, the account's other sessions are closed, the flag is cleared and the workspace opens with department-head permissions.

### College dean — A write attempt from a view-only account

1. The dean opens the department report for their college and reads without obstruction.
2. A modifying request is sent straight to the server, bypassing the interface.
3. The guard decides the role is read-only with no exception path and answers 403.
4. The message names the role and carries a readOnly marker so the interface can show it clearly.
5. The refusal is recorded in the audit log as refused (outside permission).

### 3.1.3 Diagrams

**Sign-in flow**

Order of checks in POST /api/auth/login; refusals after the password check reveal nothing to someone who does not know it.

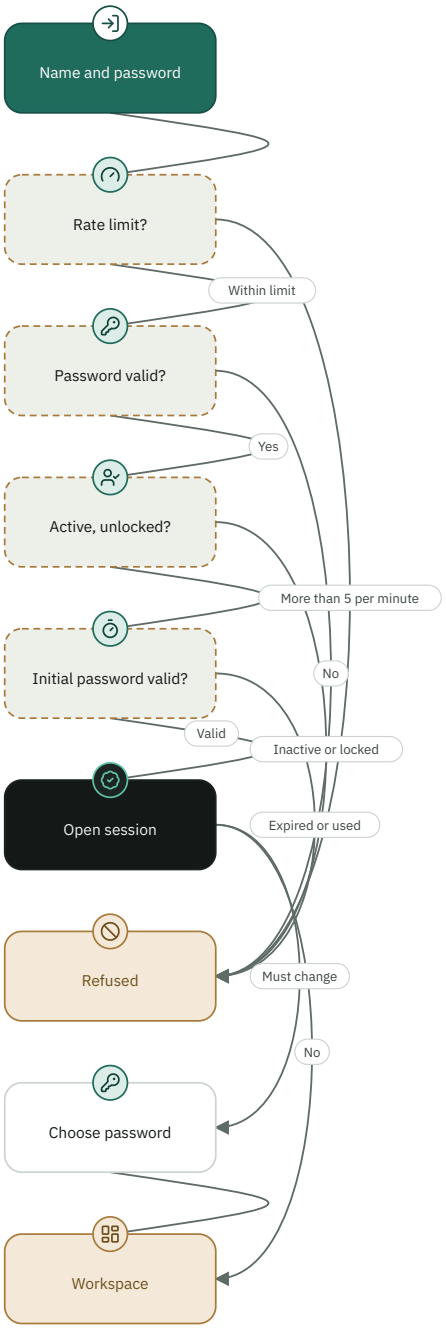

## Role write guard

The roleWriteDecision order; each step precedes the next for a reason.

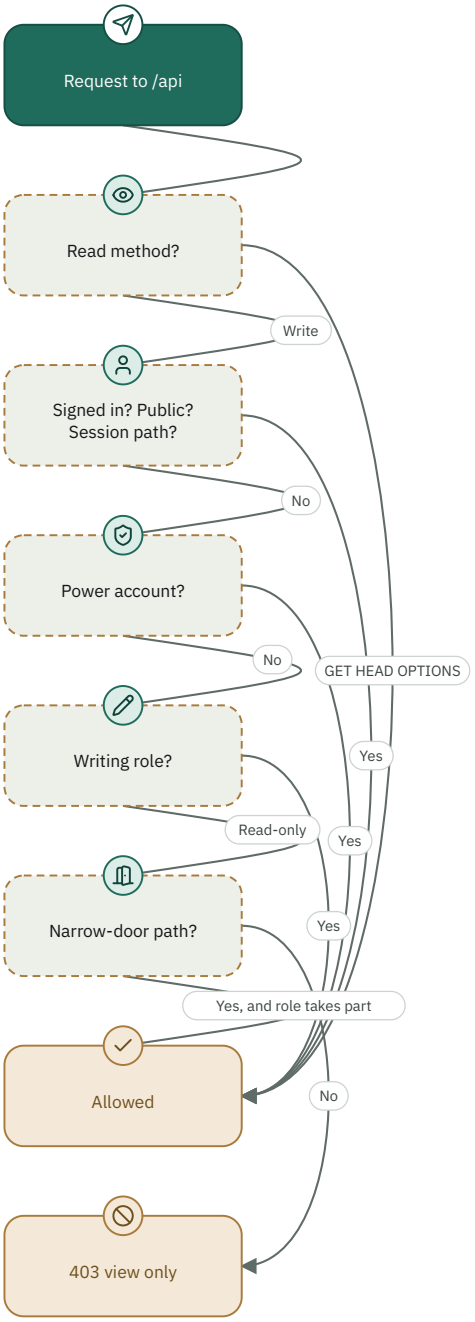

**Permission matrix: roles × capabilities**

| | Schedule workspace (screen 7) | Reports and queries | Cell comments | Schedule signature | Inbox: accept and return | Delivery deadline and extension | per s |
|---|---|---|---|---|---|---|---|
| Root administrator | ✎ | 👁 | — | — | — | — | |
| System administrator | ✎ | 👁 | — | — | — | — | |
| College dean | — | 👁 | — | — | — | — | |
| Vice dean for academic affairs | — | 👁 | — | — | — | — | |
| Dean of Admission and Registration | — | 👁 | — | — | 👁 | — | |
| University registrar | — | 👁 | ✎ | — | ✎ | ✎ | |
| College registrar | — | 👁 | ✎ | — | ✎ | ✎ | |
| Registration officer | — | 👁 | ✎ | — | ✎ | — | |
| Department head | — | 👁 | ✎ | ✎ | — | — | |
| Department advisor | — | 👁 | — | — | — | — | |
| Schedule committee chair | ✎ | 👁 | ✎ | ✎ | — | — | |
| Standard user | ✎ | — | — | — | — | — | |

✎ Write 👁 Read — No access

### 3.1.4 Screens

**Sign-in**
User name and password, the invitation link fragment that pre-fills the name and is never sent to the server, and the demo entry button when enabled.`src/components/Login.tsx`

**Choose your password**
Blocks the workspace until the account owner picks a password; the current-password field is hidden for someone who has just signed in with the initial password.`src/components/ChangePassword.tsx`

**Users, permissions, scopes and audit log**
The administration screen in its modes: users (role, template, password), permissions, scopes, audit log, and backup for the root account only.`src/components/AdminUsers.tsx`

**Access card**
SCHEDULE header, name, role caption and a QR code for the personal link, with copy-message, copy-link and save-card/save-code-as-image actions.`src/components/AccessCard.tsx`

**Advising college and department picker**
Lists only what the reader's scope allows and pins a sole option as a fixed label instead of a list.`src/components/AdvisingScopePicker.tsx`

**Welcome tour**
A tour shown once per account and role, with its own variant for seven roles.`src/components/Onboarding.tsx`

### 3.1.5 Requirements

#### FR-ACC-001 Sign-in with user name and password

The system shall verify the user name and password and open a session whose random identifier is held in an HttpOnly cookie with SameSite=Lax (and Secure in production), and shall answer unknown name, wrong password and deleted account with one identical message.

Implemented · Must · Functional · Standard user, Schedule committee chair, Department head, College dean

**RATIONALE**

> A single message does not reveal whether an account exists to someone guessing names.

**ACCEPTANCE CRITERIA**

1. A request without a name or password returns 400; a wrong password for an existing name returns 400 with the same message as an unknown name.
2. An inactive account returns 403, and a locked one returns 403, both only after the password has been verified.
3. The session identifier has the form sess_ followed by 64 hexadecimal characters and is not echoed in the response body.

**EVIDENCE**

`src/server/routes/authRoutes.ts` `src/components/Login.tsx` `tests/owner-approved-2026-10-29-audit.ts` `tests/password-reset-audit.ts`

#### FR-ACC-002 Rate limiting of anonymous requests

The system shall limit sign-in attempts to five per address per minute, shall limit the public surface under /api/public to 60 requests per address per minute by default, and shall answer 429 when a limit is exceeded.

Implemented · Must · Functional · Public visitor, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A sixth request to the sign-in route within 60 seconds returns 429, and a successful sign-in clears the counter for that address.
2. The same counter is shared by the change-password, demo sign-in and short invitation-link routes.
3. A public-surface refusal carries a Retry-After header; the limit is set by PUBLIC_RATE_LIMIT_MAX, the window by PUBLIC_RATE_LIMIT_WINDOW_MS, and 0 disables it.
4. The faculty card has two further limits: 240 requests per link and 1500 per address per minute.
5. The card limits are set by PUBLIC_REQUEST_PER_LINK_PER_MINUTE and PUBLIC_REQUEST_PER_IP_PER_MINUTE (a non-positive value keeps the default), and a link is counted by its sha256 digest, not its text; /api/public/me/ and /api/public/request/ are outside the public-surface limit because they have their own.
6. The counters live in each server instance's memory, and demo role switching is limited to 30 per minute.

**EVIDENCE**

`src/server/routes/authRoutes.ts` `src/server/core/rateLimits.ts` `tests/run-tests.ts`

### FR-ACC-003 Idle expiry and presence-based renewal

Inferred

The system shall end a session after 15 minutes of inactivity, renew it from user presence rather than a write on every request, and warn in the interface one minute before it ends.

Implemented · Must · Functional · Standard user, Schedule committee chair, Department head, College dean

#### ACCEPTANCE CRITERIA

1. The session record is renewed at most once every two minutes however many requests arrive.
2. The interface sends a beat to /api/auth/heartbeat every 4 minutes while active, and the server renews the session immediately, bypassing the throttle.
3. A warning appears 60 seconds before the end and the user is signed out automatically at 15 minutes.
4. A demo session lasts 60 minutes.
5. The beat answers {ok, idleTimeoutMs, demo} with the applied idle timeout: 900000 for a normal session and 3600000 for a demo one.

#### EVIDENCE

`src/server/core/auth.ts` `src/server/routes/authRoutes.ts#/api/auth/heartbeat` `src/App.tsx`

### FR-ACC-004 Sign-out and session invalidation

On sign-out the system shall drop the cached identity before deleting the session record, clear the cookie, and keep sign-out available to every role including view-only ones.

Implemented · Must · Functional · Standard user, College dean, Dean of Admission and Registration, Department advisor

#### ACCEPTANCE CRITERIA

1. No request after sign-out is served from the cached identity of that session.
2. The server sends Set-Cookie with Max-Age=0 for session_id.
3. The role guard allows POST /auth/logout for every role including College dean.
4. Sign-out also drops that session's mobile notification registration and remembers the session as dead so another tab with the old cookie is not looked up again; a request without a session still clears the cookie and answers {success: true}.

#### EVIDENCE

`src/server/routes/authRoutes.ts#/api/auth/logout` `src/server/roleGuard.ts` `tests/role-guard-audit.ts`

### NFR-ACC-005 Anonymous-door limits: count failures, never block success

The system shall not query the database for a session identifier it did not mint, shall remember sessions that no longer exist, and shall limit lookups of nonexistent sessions or links per address without limiting the successful ones.

Implemented · Must · Non-functional · Public visitor, The system (automatic)

#### RATIONALE

> A university network is one address for thousands of people, so legitimate users must never meet a wall.

#### ACCEPTANCE CRITERIA

1. An identifier is accepted only as sess_ or demo_ followed by 64 lowercase hexadecimal characters.
2. A gone session is remembered for 30 minutes with a capacity of 20000 identifiers, evicting the oldest when full.
3. An address inventing identifiers is looked up for 120 of them in 10 minutes and the rest are read as signed out, with an absolute ceiling of 1200.
4. Public link pages count tokens matching nothing: 40, then 429 with Retry-After, and an absolute ceiling of 400 in 10 minutes.
5. Two thousand sessions from one address, two hundred of them expired, produce no refusals.

#### EVIDENCE

`src/server/anonymousGuard.ts` `src/server/core/auth.ts` `tests/anonymous-guard-audit.ts`

### DR-ACC-006 Password storage and non-disclosure

The system shall store a password as a salted scrypt hash, shall never return the hash or the encrypted copy in any response, and shall show an administrator only whether a password exists through the HasPassword field.

Implemented · Must · Data · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. A stored hash begins with scrypt$ and is derived from a salt with a 64-byte derived key.
2. GET /api/users, GET /api/auth/me and the sign-in response contain neither SystemUserPass nor SystemUserPassVault.
3. A temporary reset password is stored as a hash only, with the encrypted-copy field empty.

#### EVIDENCE

`src/db/repository.ts#hashPassword` `src/server/core/scope.ts#safeSystemUser` `src/server/routes/usersRoutes.ts` `tests/password-reset-audit.ts`

### FR-ACC-007 Password-change gate

The system shall deny an account flagged for a password change every /api path except /auth/, /public/, health, version and demo configuration, until the password is changed.

Implemented · Must · Functional · Standard user, Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. GET /api/schedules from a flagged account returns 403 with the code password-change-required.
2. /auth/change-password, /auth/me, /auth/logout, /auth/login and /health remain open to it.
3. The gate is mounted after identity resolution and before any data route.

#### EVIDENCE

`src/server/accountPassword.ts` `server.ts` `tests/owner-approved-2026-10-29-audit.ts`

### FR-ACC-008 New-password rules and change

When an account owner changes their password the system shall require a length of 8 to 128 characters, reject the old shared password and the current password itself, and require the current password except in the waived case.

Implemented · Must · Functional · Standard user, Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A password of 7 or 129 characters is refused with 400 and a reason message.
2. The legacy shared first password and a value equal to the current password are both refused.
3. A successful change saves the hash, clears the mandatory-change flag and the initial-password deadline, and closes the account's other sessions but not the current one.
4. The service is unavailable in the demo environment and returns 403.

#### EVIDENCE

`src/server/accountPassword.ts` `src/server/routes/authRoutes.ts` `src/components/ChangePassword.tsx` `tests/first-password-room-loans-audit.ts` `tests/owner-approved-2026-10-29-audit.ts`

### FR-ACC-009 Current-password waiver at first sign-in

The system shall not ask for the current password from someone who has just signed in with the initial password, provided three conditions hold together: the account is flagged for change, the session was opened with that same password, and less than 15 minutes have passed since it opened.

Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. The session record carries a mark derived from the stored password hash, neither the password nor its hash, and it is not returned to the browser.
2. An administrator changing the password after the session opened, or more than 900 seconds passing, drops the waiver and a request without a current password returns 400 with the code current-password-required.
3. A team-member session (carrying a member identifier) is never waived.
4. The screen shows the current-password field when /api/auth/me says it is required.

**EVIDENCE**

`src/server/accountPassword.ts` `src/components/ChangePassword.tsx` `tests/first-login-password-audit.tsx`

### FR-ACC-010 Initial password, flagging and lifetime

The system shall flag for a password change every account whose password an administrator sets for someone else, shall expire the default initial password 7 days after issue, and shall flag, give a deadline to, but not lock out, an account that signs in with the old shared password.

Implemented · Must · Functional · System administrator, Root administrator, Department head

**ACCEPTANCE CRITERIA**

1. Creating an account from Users sets MustChangePassword and sets a deadline only when the password is the default one.
2. Signing in exactly 7 days after issue returns 403 with the code initial-password-expired, and one moment earlier succeeds.
3. An existing account signing in with the shared password and no deadline receives one from that sign-in, and the shared password is refused as a new password.
4. A password an owner changes for themselves from Users loses only the initial-password deadline.

**EVIDENCE**

`src/server/accountPassword.ts` `src/server/routes/authRoutes.ts` `src/server/routes/usersRoutes.ts` `tests/first-password-room-loans-audit.ts` `tests/password-reset-audit.ts`

### FR-ACC-011 Temporary password for reset

On reset the system shall issue the team head a random temporary password of 14 characters valid for 24 hours and a single sign-in, shall sign out their sessions, and shall limit an administrator to 12 resets in 10 minutes.

Implemented · Must · Functional · System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. Characters are drawn from 54 symbols excluding look-alikes (0 O 1 l I); the password is shown once and only its trace is stored.
2. A second sign-in with the same password from another device returns 403 with the code temporary-password-used, and after 24 hours with the code initial-password-expired.
3. A random initial password for a new account is 10 characters.
4. Any change of password after issue invalidates the reset record, and no secret appears in the audit trail.

**EVIDENCE**

`src/server/accountPassword.ts` `src/server/seatsRoutes.ts` `src/server/routes/authRoutes.ts` `tests/password-reset-audit.ts`

### DR-ACC-012 Catalogue of the ten roles

The system shall define ten roles from a single source shared by server and interface, each with an identifier, label, one-line hint, read-only flag, granted screen numbers, scope mode, landing screen and display order.

● Implemented · Must · Data ·

System administrator, College dean, Vice dean for academic affairs, Dean of Admission and Registration, University registrar, College registrar, Registration officer, Department head, Department advisor, Schedule committee chair, Standard user

**RATIONALE**

> The server guard is the real protection, so the definition of a role must not diverge from what the interface shows.

**ACCEPTANCE CRITERIA**

1. The ten roles in order: College dean 1, Vice dean 2, Dean of Admission and Registration 3, University registrar 4, College registrar 4.5, Registration officer 5, Department head 6, Department advisor 6.5, Schedule committee chair 7, Standard user 8.
2. Screen numbers: Dean [14]; Vice dean, Dean of Admission and Registration, University registrar and College registrar [14,8,9,16]; Registration officer [14,9]; Department head and Advisor [14]; Committee chair [7,14,8,9,10,16,17,6]; Standard user [7].
3. Only Schedule committee chair and Standard user are not read-only; scope modes are college (Dean, Vice dean, College registrar), all colleges (Dean of Admission and Registration, University registrar), section (Department head, Advisor, Committee chair) and manual (Registration officer, Standard user).
4. An account with no role or an unknown role reads as Schedule committee chair, and an unknown role submitted on create or edit is refused with 400.
5. GET /api/roles returns the same fields to any signed-in user.

**EVIDENCE**

`src/utils/academicRoles.ts` `src/server/routes/usersRoutes.ts#/api/roles` `tests/role-guard-audit.ts` `tests/demo-roles-audit.ts`

### FR-ACC-013 Server guard for read-only roles

The server shall refuse with 403 every write request from a read-only role regardless of its screens or interface tampering, deciding in a fixed order: read, unauthenticated, public, session, power account, writing role, then the exception paths.

● Implemented · Must · Functional ·

College dean, Vice dean for academic affairs, Dean of Admission and Registration, University registrar, College registrar, Registration officer, Department head, Department advisor

**ACCEPTANCE CRITERIA**

1. Every read-only role is refused on every tested combination of write method and path, while the committee chair and standard user write.
2. Power accounts are above roles, and session paths (sign-in, sign-out, heartbeat, presence, mobile notification registration) are open to every role.
3. The refusal carries a message naming the role, the role identifier and readOnly:true.
4. The guard is mounted after identity resolution and before the first write route, and paths under /public/ are governed by the link token rather than the role.

**EVIDENCE**

`src/server/roleGuard.ts` `server.ts` `tests/role-guard-audit.ts`

### FR-ACC-014 Narrow doors for read-only roles

The server shall open to read-only roles that take part in the approval cycle only the /approvals, /schedule-notes and /student-registration paths, shall exclude the Dean, Vice dean and Dean of Admission and Registration from them entirely, and shall open named paths to the Department head, Advisor and University registrar.

Implemented · Must · Functional · Department head, Department advisor, University registrar, Registration officer, College registrar, College dean

**ACCEPTANCE CRITERIA**

1. The Department head writes to only four plan-review paths (rule, group, group/delete, course-details) and computes meeting times with POST /schedules/meeting-slots, but cannot write to /courses.
2. The Advisor passes only to /advisor-seats/add and /advisor-seats/exception and does not pass through the approval-cycle paths.
3. Only the University registrar writes PUT /campus-travel-policy; everyone except view-only roles writes /section-requests.
4. POST /report-stamps is open to read-only roles, and the route itself checks sign-in and scope.
5. A similar prefix such as /approvals-export is not opened.

**EVIDENCE**

`src/server/roleGuard.ts` `src/utils/academicRoles.ts` `tests/role-guard-audit.ts` `tests/demo-roles-audit.ts`

### FR-ACC-015 Role template: screens and scope in one operation

When creating an account with a chosen role or changing its role the system shall write the role's screens and scope together, shall not rewrite the template on a save that leaves the role unchanged, and shall remove whole-college rows when the derivation type changes.

Implemented · Must · Functional · System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. The all-colleges mode writes one row per stored college with department 0 and rewrites it on every save; the college mode writes one row per submitted college with department 0.
2. An empty college list sent explicitly withdraws the scope, while omitting the field leaves it as it is.
3. Moving from University registrar (all colleges) to Dean (college) deletes the university-wide rows before the new template is written.
4. Saving an account with its current role, even one with no stored role that reads as committee chair, does not erase manually granted screens.
5. Creating without naming a role grants screen 7 only; at start-up accounts with no role are migrated to Schedule committee chair and screen 7 is removed from every Department head.

**EVIDENCE**

`src/server/routes/usersRoutes.ts` `server.ts` `tests/approval-integrity-audit.ts` `tests/role-guard-audit.ts`

### FR-ACC-016 User administration

The system shall let a holder of screen 11 list, create, edit and delete accounts, shall reject a duplicate login and missing fields, shall warn the administrator when a role does not match the name, and shall close the sessions of anyone whose password another person sets.

Implemented · Must · Functional · System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. Creating without a name, login or password returns 400; an already registered login returns 400 on both create and edit.
2. Setting a password for another account through PUT /api/users/:id deletes all of its sessions and empties the identity cache.
3. A review-role badge appears for a name containing the registration word with a non-registration role, or beginning with the dean word with a non-dean role; a warning, not a change.
4. Screen 11 is reserved for main system administration, so a committee chair cannot reach it even with a stale grant row.

**EVIDENCE**

`src/server/routes/usersRoutes.ts` `src/utils/academicRoles.ts` `src/components/AdminUsers.tsx` `tests/approval-integrity-audit.ts`

### FR-ACC-017 Main-administration screens and the root account

Inferred

The system shall reserve screens 2, 3, 4, 5, 11, 12 and 15 for the main administration account (IsAdminUser or the root identifier, default 1), shall require a FormSecurity row for the other screens even from an administrator, and shall restrict the vault to the root account.

Implemented · Must · Functional · Root administrator, System administrator, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A non-administrator receives 403 on a reserved screen even if a legacy permission row exists.
2. A missing row for an unreserved screen returns 403, and a request with no session returns 401.
3. The backup routes and the advisor-account consolidation return 403 for anyone but the root account.
4. Advisor-account consolidation touches only an inactive account that has no password.

**EVIDENCE**

`src/server/core/auth.ts` `src/server/routes/usersRoutes.ts` `src/server/routes/adminRoutes.ts` `tests/colleague-guard-measure-audit.ts`

### FR-ACC-018 Permission and scope administration

Inferred

The system shall let screen 12 add, edit and delete permission rows, let screen 15 write scope rows, let a holder of 11 or 15 read scopes, and refuse a scope whose department does not belong to its college.

Implemented · Must · Functional · System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. A permission row requires non-zero SystemUserId and FormNameId or the answer is 400.
2. Adding a scope with a department not in the college returns 400, and department 0 is rejected from this screen.
3. Duplicates are not removed automatically on read because the legacy database contains duplicated rows; saving an account's permissions from its grid keeps one row per screen for it.

**EVIDENCE**

`src/server/routes/usersRoutes.ts` `src/components/AdminUsers.tsx` `tests/demo-roles-audit.ts` `tests/handover-fixes-audit.ts`

### DR-ACC-019 Screen and scope records

The system shall hold a screen permission as a row (legacy id, account, screen number from 1 to 17) and a scope as a row (legacy id, account, college, department) whose zero department means the whole college for the college and all-colleges roles only.

Implemented · Must · Data · System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. The 17 screens are: Home, Colleges, Instructors, Departments, Terms, Courses, Schedules and Analytics Center, Instructor query, Room query, Time query, Users, Permissions, Indicators board, Department report, Scopes, Rooms and times, Advanced search.
2. A row does not require uniqueness of (account, screen), and saving reconciles surplus and missing rows by count.
3. Demo-environment accounts are seeded with permissions and scope derived from the role definition itself.

**EVIDENCE**

`src/db/repository.ts` `src/utils/academicRoles.ts` `src/server/routes/usersRoutes.ts` `tests/demo-roles-audit.ts`

### FR-ACC-020 The scope decision isScopeAllowed

The system shall answer whether an account may see a department from one place: an administration account sees everything, an all-colleges role sees everything even without a row, a row with department 0 means the whole college for college and all-colleges roles only, and anything else matches literally.

Implemented · Must · Functional ·

College dean, Vice dean for academic affairs, Dean of Admission and Registration, University registrar, College registrar, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A college created after the account was saved is readable by the University registrar without adding a row.
2. A query with department 0 is answered yes if the account has any row in that college.
3. A committee chair with a stale department-0 row is not widened to the college; only a Dean is.
4. A non-administrator with no scope sees nothing.

**EVIDENCE**

`src/server/core/scope.ts` `tests/dean-notify-audit.ts` `tests/role-scope-audit.ts`

### FR-ACC-021 Scope filtering and directed reads

The system shall filter lists with the same decision function and shall not trust a request's stated scope: a named department is checked, a college paired with another college's department is refused, and a whole-college read is allowed only to someone covering all its departments.

Implemented · Must · Functional · College dean, Dean of Admission and Registration, Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A data row lacking a department requires a literal match against a department-0 scope row and does not widen to everyone with anything in the college.
2. When nothing is named a department is chosen from inside the account's scope only, busiest first; the whole university is never read.
3. A Dean with one whole college is read at college level, and a Dean of Admission and Registration with several colleges must choose one.

**EVIDENCE**

`src/server/core/scope.ts` `src/server/readScope.ts` `tests/dean-notify-audit.ts`

### IR-ACC-022 Identity payload sent to the interface

On sign-in and in GET /api/auth/me the system shall send the interface the user without secrets, the role descriptor, the permissions resolved for the session, scope expanded with college and department names, the password-change state and the data mode.

Implemented · Must · Interface · Standard user, College dean, Department advisor, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The role descriptor carries id, label, readOnly, landing, canReview, canManageDeadline, canExtendDeadline, watchesInbox, canAnnotate, signatureStage and canSign.
2. A scope row with department 0 is expanded to one row per department in the college with an AdCollegeWide marker, for display only; authorization reads the raw zero.
3. An account with one department in one college is not asked for college or department, one with a department at several sites is asked for the site, and others see college, department and term pickers.
4. An account with no written role describes itself as Schedule committee chair, but the server requires a written role wherever a prohibition or permission is built on it.

**EVIDENCE**

`src/server/routes/authRoutes.ts` `src/utils/scopeShape.ts` `src/utils/scopeContext.ts` `src/components/AdvisingScopePicker.tsx` `tests/role-scope-audit.ts` `tests/single-department-scope-audit.ts`

### FR-ACC-023 Hiding instructors' personal data from read-only roles

The system shall blank the civil ID and mobile fields of every instructor record delivered to a read-only role, in every route that returns the instructor directory.

Implemented · Must · Functional ·

College dean, Vice dean for academic affairs, Dean of Admission and Registration, Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. AdInstructorCivil and AdInstructorMobile reach the Dean, Department head and registration roles empty, and reach the Committee chair and system administration complete.
2. The fields are not removed from the shape; they remain with an empty value.

#### EVIDENCE

`src/server/core/scope.ts#instructorsForReader` `tests/approval-integrity-audit.ts`

### FR-ACC-024 Provisioning department-head and advisor accounts from a previewed plan

The system shall show the administrator a plan of department-head and advisor accounts before writing, create only rows marked create, inactive and without a password, with a login derived from the department account prefix, and never create anything twice.

Implemented · Should · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. The department account Techdept proposes Techhead and Techadvisor; when the prefix repeats in another college the college code is appended.
2. A leading 01 prefix is removed from the login, and a second run yields exists for every row and creates nothing.
3. One advisor account per department covers the boys' and girls' colleges, and an account with no scope whose prefix is shared is classed review, not create.
4. Preview and creation are for the main administrator only.

#### EVIDENCE

`src/utils/departmentHeadAccounts.ts` `src/server/routes/usersRoutes.ts` `tests/department-head-accounts-audit.ts`

### NFR-ACC-025 One identity resolution per request with a short cache

Inferred

The system shall resolve session, user, scope and screens once and hold them for two minutes per session, clear them at once in the writing process on sign-out or any change to an account, scope or permission (and in every other instance within about ten seconds, NFR-ACC-059), and read a locked, inactive or deleted account as anonymous and delete its session.

Implemented · Should · Non-functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. The cache lasts 120 seconds and is emptied by an identity-change announcement.
2. Session, user, permission and scope reads happen once per session, not per request.
3. A demo session without its sandbox is read as anonymous and never takes a real administrator identity.

#### EVIDENCE

`src/server/core/auth.ts`

### FR-ACC-026 Demo environment and role switching

The system shall open an isolated demo environment with a demo_ session from POST /api/auth/demo, allow switching role among fictitious accounts carrying their real permissions, and keep administration screens read-only.

Implemented · Should · Functional · Public visitor, Root administrator

#### ACCEPTANCE CRITERIA

1. SCHEDULE_DEMO_ENABLED=false makes the route answer 404.
2. Writing to /users, /permissions, /user-scopes, /system-backup, /admin/teaching-load and /admin/university-day returns 403 in the demo.
3. POST /api/demo/role outside a demo request returns 404, an unknown role 400, and the same guard applies to the switched role.
4. Signing in with a name and password on an isolated demo service is refused with 403, and role switching is limited to 30 requests per minute.

#### EVIDENCE

`src/server/routes/authRoutes.ts#/api/demo/role` `src/server/routes/authRoutes.ts` `src/server/core/auth.ts` `tests/demo-roles-audit.ts` `tests/demo-every-role-audit.ts`

### FR-ACC-027 Audit trail for sign-in and refusals

Inferred

The system shall record every successful write, sign-in, sign-out, refused sign-in attempt, permission refusal 403 and conflict 409, excluding heartbeat and presence, and let the administrator read the log.

Implemented · Should · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. A refused sign-in is recorded under the account tried as a refused sign-in attempt, and the password is never recorded.
2. GET /api/audit-logs returns 250 records by default (the limit parameter) and only an administration account can reach it; the screen asks for 500.
3. A refusal of a view-only role is recorded as refused (outside permission).
4. A sign-in attempt with an unknown name is recorded under number 0 with the typed name (or anonymous), no request body is ever stored, and of the non-sign-in refusals only 403 and 409 are kept.
5. The log screen is searched by user, operation or change, filtered by user, shows for each line what changed, the method, path, entity and status, and has a refresh button.
6. Each log line's badge on the log screen is red for delete, green for add and blue otherwise, the time uses Western digits, and the root administration account sees the «appointment entry time» card above the log.

#### EVIDENCE

`server.ts` `src/server/routes/adminRoutes.ts#/api/audit-logs` `src/server/routes/authRoutes.ts` `src/components/AdminUsers.tsx`

### FR-ACC-028 Backup vault for the root account

Inferred

The system shall restrict full backup, its import, reset and undo to the root account, and decompress an uploaded archive as a stream with a ceiling of 80 megabytes after decompression.

Implemented · Must · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. Every /api/system-backup route returns 403 for anyone but the root account.
2. An archive exceeding 80 megabytes after decompression is abandoned when the ceiling is crossed with a refusal message, without blocking other requests.
3. Live session tokens and the server's own rollback copies are not exported.
4. The routes are GET /api/system-backup/status (restore points, latest export and import), POST and DELETE /api/system-backup/export-jobs (start an export, a fresh one with force=true, or clear the jobs), GET /api/system-backup/export-jobs/:id with its POST .../step and GET .../download, POST /api/system-backup/preview, POST /api/system-backup/import-jobs with GET /api/system-backup/import-jobs/:id and its POST .../step, POST /api/system-backup/reset and POST /api/system-backup/undo; the old GET /api/system-backup/export and POST /api/system-backup/import answer 409. The stages are detailed in FR-OPS-015 and FR-OPS-016.
5. An export or import step answers 202 while running and 200 when ready; the import body is accepted raw up to 30 megabytes.

#### EVIDENCE

`src/server/routes/adminRoutes.ts#/api/system-backup/status` `src/server/routes/adminRoutes.ts#/api/system-backup/export-jobs` `src/server/routes/adminRoutes.ts#/api/system-backup/export-jobs/:id` `src/server/routes/adminRoutes.ts#/api/system-backup/export-jobs/:id/step` `src/server/routes/adminRoutes.ts#/api/system-backup/export-jobs/:id/download` `src/server/routes/adminRoutes.ts#/api/system-backup/export` `src/server/routes/adminRoutes.ts#/api/system-backup/preview` `src/server/routes/adminRoutes.ts#/api/system-backup/import-jobs` `src/server/routes/adminRoutes.ts#/api/system-backup/import-jobs/:id` `src/server/routes/adminRoutes.ts#/api/system-backup/import-jobs/:id/step` `src/server/routes/adminRoutes.ts#/api/system-backup/import` `src/server/routes/adminRoutes.ts#/api/system-backup/reset` `src/server/routes/adminRoutes.ts#/api/system-backup/undo` `src/server/core/auth.ts`

### FR-ACC-029 Invitation link and access card without sending the password to the server

The system shall carry the login name and initial password in the # fragment of the link, which the browser never sends to the server, shall limit the short /i/ link to the login name alone, and the interface shall clear the fragment from the address after reading it.

Implemented · Must · Functional · System administrator, Department head, Standard user

#### ACCEPTANCE CRITERIA

1. GET /i/:username answers 302 to /#invite= with Cache-Control: no-store and Referrer-Policy: no-referrer.
2. An empty name or one longer than 200 characters returns 400, and a link password is truncated at 128 characters.
3. Both #invite= and #invite& forms are read for older messaging links.
4. The short link is not completed with the shared password, so no guessed name becomes a ready invitation.

#### EVIDENCE

`src/utils/invitationLink.ts` `src/server/routes/authRoutes.ts` `src/components/Login.tsx` `src/components/AccessCard.tsx` `tests/scope-controls-audit.tsx` `tests/password-reset-audit.ts`

### FR-ACC-030 Remember-this-device key for the faculty card

The system shall issue the instructor's device a key signed with HMAC and bound to the link token, internal instructor number and expiry, in an HttpOnly, SameSite=Strict cookie scoped to that link path alone, and carrying no civil ID.

Implemented · Should · Functional · Public visitor, The system (automatic)

#### ACCEPTANCE CRITERIA

1. The key is not valid for another link, after its expiry, or with a single character of its signature changed.
2. It expires at the earlier of the link end or 180 days.
3. The cookie is named sk_dev with path /api/public/staff/<link token> and is cleared by the forget-this-device action.
4. The secret is derived from the shared secret with the label staff-device-key-v1 so one key is never used for two purposes.

#### EVIDENCE

`src/server/staffDeviceKey.ts` `tests/staff-device-key-audit.ts`

### FR-ACC-031 Order of sign-in checks and those that depend on the password

On POST /api/auth/login the system shall run its checks in a fixed order: an isolated Demo service is refused first, then name and password presence, then account lookup by an exact name match and then a case-insensitive one, then password verification, then inactive, locked and deleted, then expiry of the initial or temporary password, then claiming a temporary password for its single use, then flagging an account that used the old shared password, and only then opening the session.

Implemented · Must · Functional · Standard user, Schedule committee chair, Department head, College dean, The system (automatic)

#### RATIONALE

> Whoever replaces sign-in with the university's own accounts needs to know which decisions follow the local password and which follow the account state.

#### ACCEPTANCE CRITERIA

1. On a Demo-mode service the name-and-password sign-in returns 403 before any field is read.
2. The name Techdept matches an account stored as techdept after the exact match fails, and the interface trims spaces around the name before sending.
3. An account with no stored password, or one in the old hash_ form, never signs in and returns 400 like a wrong password; the old form also writes a warning to the server log.
4. Inactive and locked are revealed only to someone who knew the password; a soft-deleted account returns the uniform 400 message even after a correct password.
5. A successful sign-in clears the attempt counter for that address, reads the seat identity (holder name and role) before building the response, and the response carries IsRootAdmin, IsDemo:false and the data mode.
6. When a service error carries a reference (database down, 503) the sign-in screen shows the message followed by the reference.

#### EVIDENCE

`src/server/routes/authRoutes.ts#/api/auth/login` `src/db/repository.ts#getUserByLogin` `src/db/repository.ts#verifyPassword` `src/components/Login.tsx` `tests/password-reset-audit.ts` `tests/owner-approved-2026-10-29-audit.ts`

### IR-ACC-032 The session contract everything after sign-in relies on

The system shall represent every sign-in as a session record in the sessions collection, keyed by sessionId and carrying userId, createdAt, expiresAt (plus expiresAtTtl for automatic database clean-up) and, when relevant, memberId for a team member and initialPassMark for the initial password; the browser shall hold only the identifier in a session_id cookie with path /, and identity shall be resolved for /api requests only.

Implemented · Must · Interface · The system (automatic)

#### RATIONALE

> Any alternative sign-in method only has to create this record and this cookie for the rest to work unchanged.

#### ACCEPTANCE CRITERIA

1. Records are created in four places only: name-and-password sign-in, the demo sign-in and its role switch, switching to a seat or team membership (POST /api/seats/switch), and a team member's link; all use the same HttpOnly, SameSite=Lax cookie, Secure in production.
2. Identity is resolved in order: cookie, identifier shape, record (deleted if expired), account active, unlocked and not deleted, scopes and screens, seat identity, then a 120-second cache; any broken link makes the request anonymous rather than an error.
3. A protected request without an identity returns 401 asking the user to sign in, and a request carrying a demo_ cookie gets the message that the demo session ended or the server restarted.
4. Deleting an account, having another person set its password, or the owner changing it removes its sessions (except the current one when the owner changes it, and except team-member sessions).

#### EVIDENCE

`src/db/repository.ts#createSession` `src/db/repository.ts#getSession` `src/server/core/auth.ts#authMiddleware` `src/server/core/auth.ts#requireAuth` `src/server/seatsRoutes.ts` `server.ts` `tests/anonymous-guard-audit.ts`

### FR-ACC-033 The root administration account and what belongs to it alone

The system shall identify the root administration account by the account number in ROOT_ADMIN_USER_ID (default 1, never below 1), shall reserve to it the system vault, advisor-account consolidation, and the administration sections Add buildings and rooms, Teaching load, Copy term, Backup and the appointment-entry time card, and shall treat it as main administration even when IsAdminUser is not set.

Implemented · Must · Functional · Root administrator, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A non-numeric value or 0 in ROOT_ADMIN_USER_ID is read as 1.
2. Any other account requesting a root-only route receives 403 saying the vault is for the main administration account only.
3. The start-up role migration skips the root account so no role is written for it; the demo sign-in starts as its identity with the active role admin.
4. In development only, a missing local data file creates account 1 with login admin and the password from DEFAULT_ADMIN_PASSWORD or admin123; in production the server refuses to start instead of creating it.

#### EVIDENCE

`src/server/core/auth.ts#ROOT_ADMIN_USER_ID` `src/server/core/auth.ts#requireRootAdmin` `src/components/AdminUsers.tsx` `src/db/repository.ts` `server.ts#migrateLegacyAccountsToCommitteeRole` `tests/teaching-load-audit.ts`

### FR-ACC-034 The administrator flag overrides the role

The system shall treat an account flagged IsAdminUser above its role: it sees every college and department, writes even when its role is read-only, reads instructors' personal data in full, is not subject to the seat model, and reaches reserved screens when it holds their permission rows; the Users screen shall warn when Administrator is ticked together with a read-only role.

Implemented · Must · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. isScopeAllowed and filterByScope answer yes for every department for an IsAdminUser account with no scope rows.
2. The role guard allows its writes with the reason power before its role is considered.
3. The form warning says Administrator overrides the chosen role and asks that read-only roles be left without it.

#### EVIDENCE

`src/server/core/scope.ts#isScopeAllowed` `src/server/core/scope.ts#instructorsForReader` `src/server/core/auth.ts#isPowerUser` `src/server/seats.ts#seatIdentity` `src/components/AdminUsers.tsx` `tests/role-guard-audit.ts`

### DR-ACC-035 The encrypted copy of the password (vault)

Alongside the hash the system shall keep an encrypted copy of the password in SystemUserPassVault using AES-256-GCM with a key from PASSWORD_VAULT_KEY or from the legacy-password-vault.key file in the private directory, shall leave it empty when no key exists or when the password is a temporary reset password, and no route shall decrypt it.

Implemented · Should · Data · The system (automatic)

#### ACCEPTANCE CRITERIA

1. The key is 64 hexadecimal characters or base64 of 32 bytes, otherwise it counts as absent.
2. The format is aesgcm$ followed by the IV, ciphertext and tag, with fixed associated data SCHEDULE-SystemUserPass-v1.
3. It is written when an account is created, when an administrator sets its password and when the owner changes it; the field is never sent to any browser.
4. No route or screen calls decryptPasswordFromVault today.

#### EVIDENCE

`src/db/repository.ts#encryptPasswordForVault` `src/db/repository.ts#passwordVaultKey` `src/server/routes/usersRoutes.ts` `src/server/routes/authRoutes.ts#/api/auth/change-password` `tests/owner-approved-2026-10-29-audit.ts`

### FR-ACC-036 Editing an account and deleting it permanently

Inferred

On PUT /api/users/:id the system shall store the status fields (administrator, active, locked) as sent so an absent value reads as false — after they pass the guards of FR-ACC-054 — and on DELETE /api/users/:id it shall delete the account itself together with its screen and scope rows in one operation after an explicit on-screen confirmation, then sign out all its sessions.

Implemented · Must · Functional · System administrator, Root administrator

#### RATIONALE

> A new account takes the next number after the highest, so rows left behind by a deleted account would be inherited by the next one.

#### ACCEPTANCE CRITERIA

1. An edit without a name or login returns 400, a missing account returns 404, and an empty password field keeps the current password.
2. The confirmation says the account's permissions and department links are deleted with it and cannot be undone.
3. The route does not prevent deleting the signed-in account or the root account; the only protection is screen 11.
4. A login that differs from another account only in letter case is refused as a duplicate with 400.

#### EVIDENCE

`src/server/routes/usersRoutes.ts#/api/users/:id` `src/db/repository.ts#deleteUser` `src/components/AdminUsers.tsx`

### FR-ACC-037 Granting the schedule screen (7) to every account missing it in one call

Inferred

Through POST /api/users/grant-decision-centre the system shall grant screen 7 to every active, non-deleted account that lacks it, without duplicates and without touching any other screen, and shall answer with the counts granted, already holding and total, and the names of the first 40.

Implemented · Could · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. It requires both screen 11 and main administration, otherwise 403.
2. A second call returns granted=0 and writes no row.
3. The audit trail records the granted and already-holding counts; no interface button calls it today.

#### EVIDENCE

`src/server/routes/usersRoutes.ts#/api/users/grant-decision-centre`

### FR-ACC-038 Previewing department-head and advisor accounts and consolidating duplicates

The system shall show the plan through GET /api/users/department-heads/preview and GET /api/users/advisors/preview, create through POST /api/users/department-heads and POST /api/users/advisors only rows marked create after a last login check, and consolidate through POST /api/users/advisors/consolidate duplicate advisor accounts of the same department when all are inactive, have no password and hold scope only inside that department.

Implemented · Should · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. Preview and creation need screen 11 with main administration; consolidation is for the root account alone.
2. Consolidation keeps one account under the proposed login with the scope of all the department's colleges, and hides the surplus: its screens and scope are withdrawn and it is marked inactive, locked and soft-deleted with the Standard user role, so its record remains.
3. A case that changed since the preview (an account activated, given a password or another scope, or the login taken by someone else) is skipped with a written reason and nothing is written for it.
4. A proposed login repeated for two different departments marks both rows review; no button on the Users screen opens the preview panel today.

#### EVIDENCE

`src/server/routes/usersRoutes.ts#/api/users/department-heads/preview`
`src/server/routes/usersRoutes.ts#/api/users/department-heads` `src/server/routes/usersRoutes.ts#/api/users/advisors/preview`
`src/server/routes/usersRoutes.ts#/api/users/advisors` `src/server/routes/usersRoutes.ts#/api/users/advisors/consolidate`
`src/utils/departmentHeadAccounts.ts#planAdvisorAccounts` `tests/department-head-accounts-audit.ts`

### FR-ACC-039 Editing and deleting permission and scope rows

Inferred

The system shall give a holder of screen 12 the screen list through GET /api/permissions/forms and editing and deletion of a permission row through PUT and DELETE /api/permissions/:id, give a holder of screen 15 editing and deletion of a scope row through PUT and DELETE /api/user-scopes/:id, and edit a user's permissions on the Users screen itself with a selection grid saved by a single PUT /api/permissions/user/:userId that replaces the account's permission set in one write and adds an audit-log line.

Implemented · Should · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. An edit without a row, account or screen number returns 400, a missing row returns 404, and a delete without a valid number returns 400.
2. Editing a scope row with a department outside its college returns 400.
3. Saving the grid is one request: ticked rows keep their ids, unticked rows (including legacy rows without an id and duplicates) are removed and new ones added in a single write; an unknown screen is refused with 400 and nothing changes; clearing every tick and saving withdraws all the account's screens; the audit line reads «permissions of account N: added [...], removed [...]».
4. The scope creation form shows the departments the user is currently assigned to, or that none is assigned yet.

#### EVIDENCE

`src/server/routes/usersRoutes.ts#/api/permissions/forms` `src/server/routes/usersRoutes.ts#/api/permissions/:id`
`src/server/routes/usersRoutes.ts#/api/user-scopes/:id` `src/components/AdminUsers.tsx` `tests/handover-fixes-audit.ts`

### FR-ACC-040 Administration pick lists: accounts and instructors

Inferred

Through GET /api/admin-user-options the system shall return non-deleted accounts without secrets to main administration, and through GET /api/admin-instructor-options each instructor's number, name and civil ID to a holder of screen 11 so an account can be linked to an instructor dashboard (AdInstructorId).

Implemented · Could · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. Administration sections other than Users read accounts from /api/admin-user-options rather than /api/users.
2. The link is optional (no link), and the account card shows the instructor dashboard as not linked when absent.

#### EVIDENCE

`src/server/routes/adminRoutes.ts#/api/admin-user-options` `src/server/routes/adminRoutes.ts#/api/admin-instructor-options` `src/components/AdminUsers.tsx`

### FR-ACC-041 Sections of the system administration screen and who sees them

Inferred

The system shall show the system administration rail with the sections Users and Teams for a holder of screen 11, Scopes for a holder of 15, Log and Department working hours for anyone reaching the screen, and Add buildings and rooms, Teaching load, Copy term and Backup for the root account alone.

Implemented · Should · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. There is no separate Permissions section: permissions are edited inside the user card, and the old Permissions link opens the Users screen; Copy term redirects to the schedule-copy screen and never shows the log in its place.
2. The Log and Department working hours tabs appear to anyone reaching the screen, but their data comes from routes for main administration (log) and the root account (working hours).
3. Switching section clears the search, filter and selection and stops the browser-side export driver without discarding its progress saved on the server.
4. The user list is searched by name or login and shows each account's role, a review-role badge and its status (locked, active, stopped), and its card shows the password as saved and encrypted or not set.
5. In the demo the interface refuses any administrative write with a display-only message, except «add buildings and halls», which saves into the visitor's in-memory sandbox only with the note that what is added stays in the session and never reaches the university data.

#### EVIDENCE

`src/components/AdminUsers.tsx` `src/components/LocationQuickSetup.tsx` `tests/handover-fixes-audit.ts` `tests/demo-showcase-audit.ts`

### FR-ACC-042 Demo session management: reset, story preparation and the faculty card

After a demo sign-in the system shall prepare the showcase stories in the background with the status preparing then ready or failed, and shall offer POST /api/demo/reset to return the sandbox to its start, GET /api/demo/seed-status for the preparation status, and GET /api/demo/teacher-card to open the demo faculty card; all answer 404 outside a demo session.

Implemented · Could · Functional · Public visitor, The system (automatic)

#### ACCEPTANCE CRITERIA

1. The demo sign-in response does not wait for preparation; jobs of one session are serialised so a reset does not race an older preparation, and one failed story sets the status failed while the rest still run.
2. A reset with no live sandbox returns 401 with the demo-ended message; otherwise it drops the cached identity and extends the session to 60 minutes.
3. The faculty card redirects 302 to /s/<staff link> once ready, otherwise a 202 waiting page that refreshes every 2 seconds, and 503 if preparation failed; with Cache-Control: no-store.
4. The demo identity payload carries demo: the 60-minute lifetime, read-only administration, the role list, the active role and the preparation status.

#### EVIDENCE

`src/server/routes/authRoutes.ts#/api/demo/reset` `src/server/routes/authRoutes.ts#/api/demo/seed-status` `src/server/routes/authRoutes.ts#/api/demo/teacher-card` `src/server/routes/authRoutes.ts#scheduleDemoExtras` `tests/demo-complete-audit.ts`

### FR-ACC-043 Board position beat

On POST /api/auth/presence the system shall accept the session owner's position on the board (scope, cell, and what they hold or edit) for their own live stream only, and answer 204 without writing to the database and without an audit row.

Implemented · Could · Functional · Schedule committee chair, Department head, The system (automatic)

#### ACCEPTANCE CRITERIA

1. The stream identifier is cut to 64 characters, and a beat for a stream not owned by the same account is ignored with 204.
2. The scope is taken only if isScopeAllowed permits it, a cell only for a day from Sunday to Thursday and a time in h:mm form, and the room name is cut to 32 characters.
3. gone:true clears the mark; a demo session's board key stays inside its sandbox so a visitor's name never appears on a real board.

#### EVIDENCE

`src/server/routes/authRoutes.ts#/api/auth/presence` `src/server/roleGuard.ts` `tests/live-pulse-audit.ts`

### FR-ACC-044 Sign-in screen conveniences

Inferred

The sign-in screen shall fill the name from the ?username= parameter or from the invitation fragment, greet a name that signed in from this browser before with a welcome back, show the try-the-system button only when /api/demo/config says it is enabled, and open the Journey from its button or from the ?journey=1 parameter.

Implemented · Could · Functional · Standard user, Public visitor

#### ACCEPTANCE CRITERIA

1. The name from the parameter is cut to 200 characters; the memory key is schedule-login-seen:<lower-cased name> in local storage and is written after every successful sign-in.
2. Closing the Journey with back=/me returns the student to /me.
3. Submitting without a name or password is refused in the interface before any request.

#### EVIDENCE

`src/components/Login.tsx`

### FR-ACC-045 The account access card: when it is ready and how it is saved

From the Users screen, for an account with no seat, the system shall prepare an access card carrying the invitation link with the login and the password the administrator types, shall allow sharing only for an active, unlocked account that has an unexpired password and once the password is typed, and shall save it as a 1200×1080 image and the QR code as a separate image.

Implemented · Should · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. Preparing the card does not change the password; the typed password is cut to 128 characters and cleared when the account changes.
2. An account with a seat has its card in Teams, and the Users screen shows an open-Teams button instead.
3. The four buttons copy the message, copy the link, save the card as an image and save the QR; on touch devices the share sheet opens, otherwise SCHEDULE-invitation.png and SCHEDULE-invitation-QR.png are downloaded.
4. The QR uses correction level M; copying falls back to an older method when the clipboard is refused, and a failed save suggests a long press on the code.
5. The code (and the system's other QR codes) is drawn by a QR library bundled in the repository (src/utils/qrcodeGenerator.js, MIT licence) loaded only when the card opens, so the link is never sent to an external service to draw it.

#### EVIDENCE

`src/components/AccountInvitation.tsx` `src/components/AccessCard.tsx` `src/utils/accessCardImage.ts` `src/utils/accessCardImage.ts#loadQrFactory` `src/utils/qrcodeGenerator.js` `src/utils/invitationLink.ts#invitationHref` `tests/owner-approved-2026-10-29-audit.ts`

### FR-ACC-046 Welcome tour by role

The system shall show the welcome tour once per account and role, with its own tour for the Department head, the three registration roles, the Dean, the Vice dean and the Dean of Admission and Registration, and the general tour for others, and shall keep the seen mark in the browser.

Implemented · Could · Functional · Department head, University registrar, College dean, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The mark key is schedule-onboarding-v5-<account number>-<role>, and a role without its own tour also accepts the old mark schedule-onboarding-v4-<account number>.
2. The University registrar sees an extra scene on setting the submission deadline, and the Vice dean one on instructors, rooms and the matrix.
3. A change of the account's role, or trying a role in the demo, shows the new role's tour once.

**EVIDENCE**

`src/utils/onboardingKey.ts` `src/components/Onboarding.tsx#onboardingScenesFor` `tests/dean-notify-audit.ts`

### DR-ACC-047 Capabilities derived from the role

The system shall derive from the role alone the capabilities that screens and routes build on: setting the submission deadline, extending it, reviewing submissions, watching the inbox, annotating cells, the signature stage, pure-viewer and advisor.

Implemented · Must · Data · The system (automatic)

**ACCEPTANCE CRITERIA**

1. Setting the deadline: University registrar only; extending: University registrar and College registrar; reviewing: those two and Registration officer; watching the inbox: those three and Dean of Admission and Registration.
2. Annotating cells: the three registration roles, Department head and Committee chair; the signature stage is committee for the Committee chair, head for the Department head and none otherwise.
3. Pure viewer: Dean, Vice dean and Dean of Admission and Registration; committeeEligible holds only for a role actually written whose stage is committee.

**EVIDENCE**

`src/utils/academicRoles.ts` `src/server/routes/authRoutes.ts#roleDescriptor` `tests/deadlines-panel-audit.ts` `tests/report-approval-audit.ts`

### FR-ACC-048 The account form and user list on the screen

Inferred

The Users screen shall require the name and login (and the password on creation only), saying «please fill in the required fields in red» when missing, keep the current password when left empty on edit, list roles in order tagged «— view only» or «— edits» with the role hint, show college buttons for a college-scoped role (filled on edit from the account's department-zero rows only) and a fixed «all colleges of the university» line for an all-colleges role, make a new account active by default, and show the instructor-board link as a «name — civil ID» list with «no link»; it shall show summary counts of users, administrators and linked boards, and in the list the name's first letter, a role badge (neutral for view-only, blue for writers), a «review the role» badge and a status badge (locked red, active green, stopped amber), selecting the first account automatically; it shall show the permission grid with «selected n of m» and a «clear selection» button; and when a reply is not JSON it shall say «the server is busy (status). Try again shortly.».

Implemented · Could · Functional · System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. Editing an account without typing a password ← no password field is sent and the current one stays.
2. Turning a University registrar (all colleges) into a Dean ← the college buttons start empty and are not filled with every college.
3. A gateway 502 reply with an HTML body ← «the server is busy (502)...».

**EVIDENCE**

`src/components/AdminUsers.tsx#saveUser` `src/components/AdminUsers.tsx#editUser` `src/components/AdminUsers.tsx#savePermission` `src/components/AdminUsers.tsx#api`

### FR-ACC-049 Department account provisioning scripts

Inferred

The system shall give the root administration account three terminal tools for provisioning department accounts, all previewing by default and writing nothing without --apply, reading .env, forcing DATA_MODE=firestore and taking FIREBASE_PROJECT_ID and FIREBASE_DATABASE_ID from firebase-applet-config.json when absent: (1) scripts/create-department-advisors.ts creates one advisor account per department with login <department prefix>advisor covering the same department family in every college (scopeAssignments), prints the rows by status create, exists and review, and creates no account whose prefix starts with a digit, warning that its name must be set by hand; (2) scripts/create-department-heads.ts creates one department head per department family (departmentFamilyKey) with a login derived from the ...dept account by replacing the suffix with head, or from a fixed table for three departments with no ...dept account, puts the family in review when no name exists or the name is taken, and counts a family that already has a ...head account as existing; both scripts create the account inactive and passwordless with the role template's permissions and the department's college scopes, skipping a login that already exists; (3) scripts/provision-department-accounts.ts works on the four sites of one college fixed in the script (girls, boys and two branch sites, by their site codes fixed in it), warns about a college that is not registered without creating it, creates a department missing from one of the four colleges with the code and name of the department's oldest record, then ensures each department has three accounts <prefix>dept (schedule committee chair), <prefix>head (department head) and <prefix>advisor (advisor), each covering the four colleges; a missing account is created active with the default password, an existing one has only its missing scopes added without removing a scope or changing its role, password or login, no account is created when another account of the same role already covers the department under a different login, and anything ambiguous (unknown or invalid prefix, a review note) is listed under «manual review» untouched. The default password is fixed in scripts/lib/defaultPassword.ts and can be replaced with the DEFAULT_ACCOUNT_PASSWORD variable at run time; it writes the SystemUserPass hash and the SystemUserPassVault vault copy with IsActive=true, is applied to an existing account only when that account is inactive and passwordless, and the closing message of an applied run prints it so the operator can pass it to the account owners.

● Implemented · Should · Functional · Root administrator

#### RATIONALE

> Owner decision: one account per role per department covering its colleges, handed over active, its owner changing the password at first sign-in.

#### ACCEPTANCE CRITERIA

1. Running any of the three without --apply ← it prints «preview only — nothing will be written» and no user or scope changes.
2. A department whose ...dept account is inactive, passwordless and scoped to two colleges ← it is activated with the default password and the other two colleges are added to its scope.
3. An existing advisor account with a password ← its password and login are untouched and only its missing scopes are added.
4. The new advisor account carries every scope of the department across its colleges, not the first college alone.

#### EVIDENCE

`scripts/create-department-advisors.ts` `scripts/create-department-heads.ts` `scripts/provision-department-accounts.ts` `scripts/lib/defaultPassword.ts#defaultCredentials` `scripts/lib/defaultPassword.ts#needsDefaultCredentials` `src/utils/departmentHeadAccounts.ts#planAdvisorAccounts` `tests/department-head-accounts-audit.ts`

### FR-ACC-050 Leadership account provisioning script

Inferred

scripts/provision-leadership-accounts.ts (previewing by default, writing with --apply) shall provision seven leadership accounts, across all colleges: five with the roles College dean, Vice dean for academic affairs, Dean of Admission and Registration, University registrar (the account named «registration head») and Registration officer, scoped to one department-zero row per college, an account named «general registrar» with the Dean of Admission and Registration role and the same scope, and a «general advising» account with the Department advisor role scoped to one row per department in every college (because a zero row does not mean the whole college for the advisor role); it shall create a missing account active with the default password (DEFAULT_ACCOUNT_PASSWORD) and its role template's permissions, activate an existing inactive passwordless account with it, add only the missing scopes to an existing account and report «exists with full scope» when nothing is missing; and it shall delete the eight old accounts (a dean and a vice dean for each of the four colleges) created by its first version if they are still inactive and passwordless, leaving them with the notice «activated or has a password — not deleted» otherwise.

● Implemented · Should · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. A second run after applying ← all seven accounts report «exists with full scope» and nothing is created.
2. An old per-college dean account that has a password ← it is not deleted and a notice is printed.
3. Adding a new college and running again ← the college's row is added to the existing accounts without creating new ones.

#### EVIDENCE

`scripts/provision-leadership-accounts.ts` `scripts/lib/defaultPassword.ts`

### FR-ACC-051 One-time repair: consolidating duplicate advisor accounts

Inferred

scripts/consolidate-department-advisors.ts shall be a one-time repair for advisor accounts created per college before the «one account per department» rule; it shall refuse to run unless FIREBASE_PROJECT_ID and FIREBASE_DATABASE_ID are set explicitly (the config file is not read instead), and by default print a JSON preview (candidate departments, the safe ones, extra accounts to retire, accounts to rename, and those needing manual review with the reason) and exit without writing; with --apply it shall re-read the state before each department and stop entirely if it changed after the preview, and touch a department only if all its duplicate accounts have the advisor role, are not deleted, inactive, with neither password nor vault copy, all their scopes lie within the same department family, and the proposed login is not owned by an account outside them; it then gives the primary account the proposed name and login, the template permissions and the department's full scope while keeping it inactive, and strips each extra account of permissions and scopes, making it inactive, locked and soft-deleted with role standard so its record remains recoverable; it shall rename an existing inactive advisor account whose login differs from the proposed one under the same conditions; it shall write one audit-log line per department and per rename as «SCHEDULE migration» with method SCRIPT; and it shall finish by printing the number of visible advisors and the groups left for review.

● Implemented · Could · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. Running without FIREBASE_DATABASE_ID ← the error asking to set both explicitly, and no connection.
2. A department where one duplicate is active or has a password ← «the safety check failed» and the run stops at that department.
3. A safe department with three accounts ← one primary account with all scopes, two soft-deleted accounts with no permissions or scope, and an audit line for consolidating advisor accounts.

#### EVIDENCE

`scripts/consolidate-department-advisors.ts` `src/utils/departmentHeadAccounts.ts#planAdvisorAccounts`

### NFR-ACC-052 Live per-role scope leak audit

Inferred

scripts/role-scope-live-audit.mjs shall let the developer check scope leaks on an isolated demo server (DATA_MODE=demo, no .env) whose address is the first argument (default http://localhost:3000): it opens the demo sign-in session, reads departments, schedule rows and approvals as administration, then switches through /api/demo/role to each of ten roles (administration, dean, vice dean, dean of registration, university registrar, registration officer, department head, committee chair, standard user and a multi-site committee chair) and calls more than a hundred read routes with the role's scope, a foreign department's scope and a «college only» variant without the department, reading returned Excel files as text; for each cell it shall judge OK, DENIED (401, 403 or 404), ERR with the status, LEAK when the reply holds a (college, department) pair outside the scope, a schedule-row number belonging to a foreign department, a row of a non-accepted department for the two dean readers, or a full 12-digit civil ID of an instructor who never taught in the reader's scope, or NAME? when a foreign department's name appears in the text; excluding the other course in a student's two-course conflict request marked read-only; it shall accept --verbose, --only=<roles> and --json, print a route × role table and the number of leak cells, and exit with 1 on a leak and 2 on a crash.

● Implemented · Should · Non-functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. A department head reading a schedule list holding another department's row ← the cell is LEAK and the exit code 1.
2. A route answering 403 for a foreign scope ← DENIED, not counted as a leak.
3. --only=dean ← only the dean role is checked.

#### EVIDENCE

`scripts/role-scope-live-audit.mjs`

### FR-ACC-053 Forgot password for all staff by civil ID

Every staff account holder, department heads and seat holders included, shall recover their password from the sign-in screen themselves: they type the username and the last four digits of the civil ID on record for whoever sits on the account (the seat holder, else the faculty member linked to the account), receive a ten-minute single-use ticket, then choose a new password and are signed in with it. Nothing changes on the account before the new password is saved: the old one keeps working until then, after which it stops and every session of the account is closed. An unknown username, wrong digits, an administration account, an account with no civil ID on record and a disabled account all receive one neutral answer in similar time. System administration accounts are excluded and are reset by the system administrator. Every attempt and its outcome is written to the audit trail, and every recovery of a head (seat) account notifies the system administrator by push and in the bell.

● Implemented · Must · Functional · Department head, Schedule committee chair, System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. POST /api/auth/recover/verify with an unknown username, wrong digits or an administration account returns 400 with the same neutral text and no ticket.
2. Five consecutive wrong attempts on a username lock it for half an hour (then doubling up to a day) with code recovery-locked, and an unknown username locks exactly like a known one; a username allows eight attempts per hour and an address ten per quarter hour.
3. POST /api/auth/recover/complete with the ticket saves the new password and closes sessions; the ticket a second time, after ten minutes or after the password changed returns 400 with code recovery-ticket.
4. Guard documents carry no username (only its fingerprint), tickets are stored by hash, and the audit trail holds neither the digits nor the password.

#### EVIDENCE

`src/server/staffRecovery.ts#registerStaffRecoveryRoutes` `src/server/staffRecoveryWiring.ts#staffRecoveryDeps`
`src/components/Login.tsx` `src/server/routes/notificationsRoutes.ts` `tests/staff-recovery-audit.ts`

### FR-ACC-054 User-screen guards: root account, yourself and the last administrator

Before any write from PUT and DELETE /api/users/:id and POST /api/users the server shall refuse with 403 and a reason: editing or deleting the root administration account by anyone else; deactivating, locking, deleting or removing the administrator flag from one's own account; deactivating, locking, removing the flag from or deleting the last active administrator (active, unlocked, flagged administrator or the root account); granting or removing the administrator flag by anyone but the root account; and changing an existing account's role by someone holding neither screen 12 (because the role rewrites the account's screens) nor the root account. It shall refuse with 400 an administrator-set password shorter than 8 or longer than 128 characters, and require the current password, under the same rules as change-password, when one changes one's own password from this screen. The interface shall disable the refused checkboxes and buttons and print the reason under them. The team administration routes (/api/seats, first password, reset and registrar team creation) shall be guarded by screen 11, as their screen is in the interface.

● Implemented · Must · Functional · System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. An administrator other than the root account sending PUT /api/users/1 ← 403 and nothing changes.
2. An administrator sending IsActive=false or IsLocked=true for their own account, or DELETE for it ← 403; deactivating the last active administrator ← 403.
3. A five-character password ← 400; changing one's own password without currentPassword ← 400 with code current-password-required.

**EVIDENCE**

`src/server/userAdminGuards.ts` `src/server/routes/usersRoutes.ts` `src/server/seatsRoutes.ts` `src/components/AdminUsers.tsx` `tests/admin-station-audit.ts`

### FR-ACC-055 Permissions of the root account and of yourself

The permission routes (PUT /api/permissions/user/:userId and POST, PUT and DELETE /api/permissions) shall refuse with 403 changing the root account's permissions by anyone else and removing screen 11 or 12 from one's own account; the interface shall disable those toggles with their reason, keep the permission grid filled with what was saved after saving, and warn about unsaved toggles before moving to another account.

● Implemented · Must · Functional · System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. An administrator saving their own permissions without 11 ← 403 and nothing changes.
2. After saving permissions the grid stays on the same account showing what was saved, not zero.

**EVIDENCE**

`src/server/routes/usersRoutes.ts` `src/components/AdminUsers.tsx` `tests/admin-station-audit.ts`

### FR-ACC-056 Audit log: what changed, page by page, and export

Creating, editing and deleting an account shall write to the log what changed from what to what: name, login, administrator flag, active, locked, role and dashboard link, and the password only as a «password reset» flag, never its value or hash; GET /api/audit-logs shall accept before and beforeId (the timestamp and id of the last row already shown, so rows sharing a timestamp at a page boundary are not skipped), from and to (date range), newest first, ordered by timestamp then id; the log screen shall show the date range, «load older» and export of what is shown as a CSV file.

● Implemented · Should · Functional · System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. Deactivating an account ← an «active: yes → no» line; setting a password ← «password reset» with no value.
2. before=<last row timestamp> returns only older rows.

**EVIDENCE**

`src/server/userAdminGuards.ts` `src/server/routes/usersRoutes.ts` `src/server/routes/adminRoutes.ts` `src/db/repository.ts` `src/components/AdminUsers.tsx` `tests/admin-station-audit.ts`

### NFR-ACC-057 Identity cache cleared after the write

An identity change (account, permission, scope) shall be announced after the write completes, not before it, and authMiddleware shall not cache an identity read before a change that happened during the read, so a revoked permission cannot return to memory for two minutes. Each server instance's cache is separate, so other instances follow within two minutes at most.

● Implemented · Must · Non-functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A request from the account owner reading during the revocation is not cached; the next request reads the new permission.

**EVIDENCE**

`src/db/repository.ts` `src/server/core/auth.ts` `tests/admin-station-audit.ts`

### NFR-ACC-059 Identity and permission changes reach every server instance within about ten seconds

Every change to an account, scope or permission shall, after its write, increment a counter in a small shared Firestore document (_meta/identityGeneration), and every server instance shall read that counter at most once every ten seconds — lazily on the first request after the interval, with one read that concurrent requests wait on — and, when it changed, clear its identity cache and raise its local generation so a read begun before the change is never cached. The worst-case staleness of a revoked permission on another instance is therefore about ten seconds rather than two minutes, with no Firestore read per request (at most about 8,640 reads per day per active instance). A failed counter read clears the cache as a precaution, and a failed increment is retried once and then logged (staleness falls back to the cache lifetime). Demo mode and the local file are unaffected. The increment is awaited in the post-write path with a short timeout (about 1.5 seconds), so the response never returns before it was attempted (a failure or slowness is logged and never fails the user's request); the counter read has the same timeout so it cannot stall every authenticated request, and a timeout clears the cache (fail closed); the first successful read after any failure counts as a change so a change in the gap is not missed; and _meta/identityGeneration is outside export, reset and restore so the counter never goes back to a value another instance saw.

● Implemented · Should · Non-functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A permission change on instance A ← instance B clears its cache on the first request within ten seconds at most.
2. Requests inside the ten seconds never read the counter again.
3. A hanging read ← the cache is cleared after the timeout; the first successful read after a failure ← clears.

**EVIDENCE**

`src/server/identityGeneration.ts` `src/server/core/auth.ts` `src/db/repository.ts` `tests/vault-jobs-audit.ts`

### FR-ACC-058 Users screen: nothing typed is lost, preview before creating

The account form shall ask before closing (backdrop, Escape or Cancel) when it holds an unsaved edit, and ask before saving a college role with no college since that withdraws the whole scope; the screen shall open «department-head accounts» and «advisor accounts» with a server preview before creating; it shall label a scope row with department zero «whole college»; the system administration rail shall show every section's name, wrapping at medium widths and scrolling on phones; team and consolidation actions shall be confirmed with the visual confirmation dialog, not the browser's.

● Implemented · Should · Functional · System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. Editing the name then clicking the backdrop ← an unsaved-changes prompt; it closes only on confirmation.
2. The department-head accounts button calls /api/users/department-heads/preview and shows the plan before any write.

**EVIDENCE**

`src/components/AdminUsers.tsx` `src/components/seats/SeatsAdmin.tsx` `src/components/seats/SeatPanel.tsx` `src/styles/35-visual-polish.css` `tests/admin-station-audit.ts`

### FR-ACC-059 What-if-I-delete map before deleting an account

The account delete dialog shall show what goes with the account and what stays linked to it: the permissions and scopes (colleges and departments) deleted with it, the team members on it and its holder, and its instructor-panel link, and shall disable confirmation and state the reason when the server would refuse (the root account, your own account, the last active manager) through the very function (userDeleteRefusal) the route refuses with. Counts only, no personal data.

Implemented · Should · Functional · Root administrator, System administrator

**RATIONALE**

> The confirmation named permissions and departments without counts and did not show the seat team tied to the account.

**ACCEPTANCE CRITERIA**

1. Deleting an account with permissions and scopes shows their counts before confirming.
2. Deleting the last active manager shows «cannot delete now» with the server's text and a disabled button.

**EVIDENCE**

`src/server/deleteImpact.ts#deleteBlockers` `src/utils/deleteImpact.ts#blockersFor` `src/components/AdminUsers.tsx#deleteUser` `src/server/routes/usersRoutes.ts#registerUsersRoutes` `tests/delete-impact-audit.ts`

## 3.1.6 Algorithms

ALG-ACC-01 · Identity, accounts, roles and access scope

**Scope decision**

Deterministic

*May this account see a given department of a college?*

1. An administration account sees everything, and an all-colleges role sees everything even without a scope row.
2. Department zero in the question means any department of that college.
3. A scope row with department zero means the whole college, for college and all-colleges roles only.
4. Otherwise a literal match of college and department.

**Inputs**

The user, role and scope rows, and the requested college and department.

**Output**

Yes or no.

One source of the decision; never widens an old row that merely happens to have the same shape.

`src/server/core/scope.ts#isScopeAllowed` `tests/role-scope-audit.ts`

`FR-ACC-020` `FR-ACC-021`

## 3.1.7 Edge cases

### ⚠ A college created after the dean's account was saved

**Scenario** A dean's account has one scope row with department 0, then a new department is added to the college.

**Behaviour** The dean reads it immediately with no new row, because the zero row means the whole college for college roles; a zero row on a committee chair does not widen scope.

### ⚠ Moving from an all-colleges role to a one-college role

**Scenario** A University registrar (one row per college) is changed to a Dean of one college from the Users screen.

**Behaviour** The derived whole-college rows are deleted before the new template is written, so the dean keeps no university-wide door.

### ⚠ Saving an account whose role has not changed

**Scenario** The administrator suspends an account or changes its password, and the interface sends the same role with every save.

**Behaviour** The server compares the resolved role, not the raw value, so the template is not rewritten and manually granted screens are not erased.

### ⚠ A stale initial-password session

**Scenario** An owner signs in with the initial password then leaves the screen for 20 minutes before choosing a password, or the administrator changes it meanwhile.

**Behaviour** The current-password waiver lapses, the server returns 400 with the code current-password-required and the screen shows the field.

### ⚠ A temporary password used from two devices at once

**Scenario** Two devices type the same temporary password at the same moment.

**Behaviour** The sign-in is counted inside an atomic write, so one succeeds and the other receives 403 with the code temporary-password-used.

### ⚠ A university network behind one address

**Scenario** Two thousand real sessions, two hundred of them expired, arrive from one address, while another address invents identifiers.

**Behaviour** Nobody from the network is refused because each success pays its lookup back, and the inventor stops after 120 failed lookups in 10 minutes.

## 3.1.8 Standing owner decisions

- The default initial password must be changed at first sign-in and lapses after seven days (owner decision 2026-11-05).
- Reset uses a random temporary password valid for 24 hours and one sign-in, and civil ID digits are never used as a password (owner decision 2026-11-06).
- Someone who has just signed in with the initial password is not asked for it again when choosing their own (owner decision 2026-10-30).
- Accounts are seats, not people: the holder changes while the seat and its scope remain (owner decision 2026-10-29, docs/SEATS.md).
- The Department head reads, comments and signs but does not edit a schedule; the committee builds.
- Printed reports keep their design; permissions change the data they show, never their layout.

↑ Contents

3.2 · ACD

# Academic structure and reference data

Terms, colleges, departments, courses, faculty and visiting instructors: the reference every schedule is built on.

| 57 | 100% | 90 | 77 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.2.1 Overview

This module holds the reference data without which no schedule can work: the term and its calendar, the college, the department, the course with its seven-digit official number, the faculty member with identity, rank and teaching load, and the offering state of a course in a term. It enforces input limits and delete guards so that no historical record is left without its reference. It also manages visiting instructors, the department visiting directory and the conversion of an instructor between visiting and appointed, and it detects duplicate courses and spelling twins and merges them only after explicit confirmation. System administrators and schedule committee chairs maintain the data; the other roles read it within their scope.

Root administrator · System administrator · Schedule committee chair · Department head · College dean · Registration officer · The system (automatic)

## 3.2.2 User journeys

**System administrator** — **Adding a new department to a college**

1. The administrator opens the Departments screen and picks the college.
2. He enters the department code and name; the code is up to 40 characters and the name up to 120.
3. If the code is already registered in the same college the request is refused with a clear message.
4. On success the department is created together with its own faculty-placeholder record, without duplicates.
5. The administrator adds the department's courses; the department can no longer be deleted while it has courses.

**Schedule committee chair** — **Converting a visiting instructor to appointed**

1. The schedule committee chair opens the faculty card and reads the current visiting state.
2. He chooses the appointed direction and the departments from which the secondment is lifted.
3. The dry-run preview lists every change: removal from the visiting directory and from the rosters of the current and future terms.
4. On confirmation the changes are applied to these records only; no schedule and no past-term roster is touched.

**Root administrator** — **Merging two spellings of one course**

1. The root administrator runs the spelling-twin scan and the groups appear per department.
2. For each copy he sees the appointment and sheet-link counts and the reason a merge is blocked, if any (student data or sheet rules).
3. He picks the keeper, the duplicate and the canonical name from the course's own spellings.
4. The scan is repeated at merge time and, after explicit confirmation, appointments and links move to the keeper and the duplicate is archived.

### 3.2.3 Diagrams

**Visiting / appointed conversion**

The plan is a pure function used for both preview and execution; execution writes only the visiting directory and the rosters of the current and future terms.

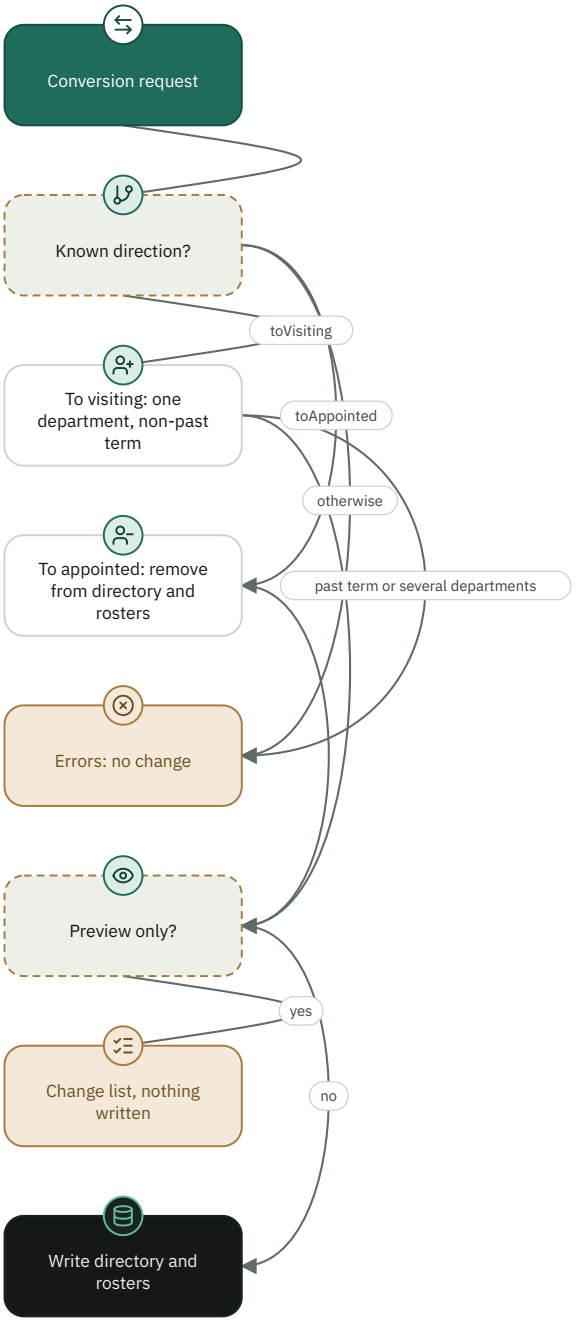

## Course offering states

A course with no entry is offered; only a confirmed entry changes what the instructor and the proposal engines see.

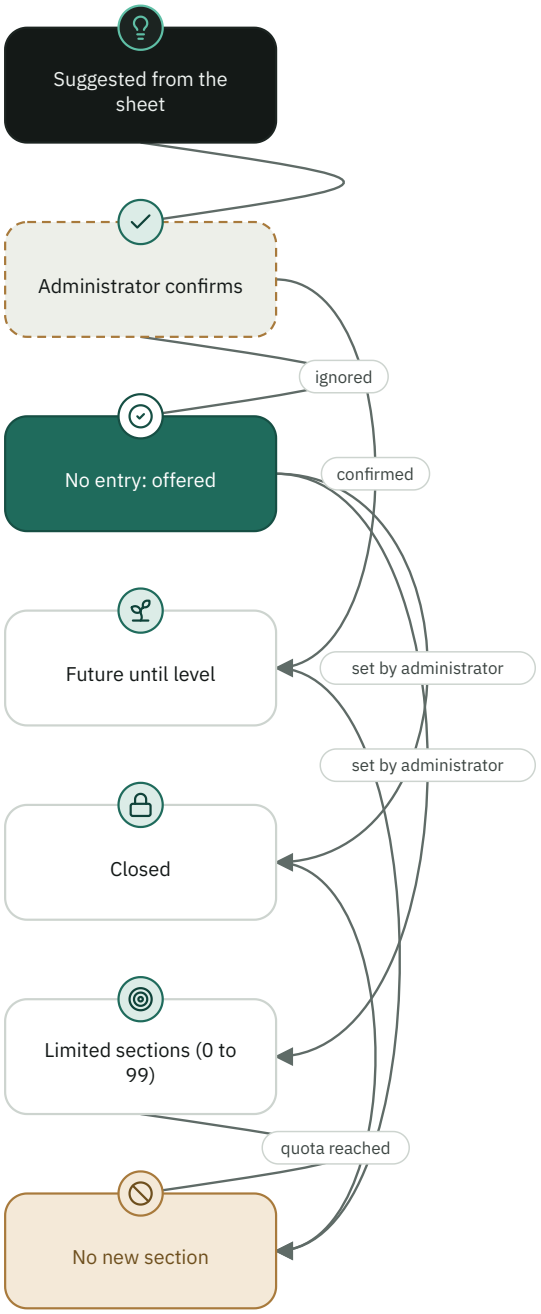

**Who reads and who writes reference data**

| | Terms | Colleges and departments | Courses | Faculty members | Visiting and offering state |
|---|---|---|---|---|---|
| Root administrator | ✎ | ✎ | ✎ | ✎ | ✎ |
| System administrator | ✎ | ✎ | ✎ | ✎ | ✎ |
| Schedule committee chair | 👁 | 👁 | ✎ | ✎ | ✎ |
| Department head | 👁 | 👁 | 👁 | 👁 | 👁 |
| College dean | 👁 | 👁 | 👁 | 👁 | 👁 |
| Registration officer | 👁 | 👁 | 👁 | — | — |

✎ Write 👁 Read — No access

### 3.2.4 Screens

**Terms**
Create and edit a term with start date, number of weeks and the ended flag, with a suggested name for the next term.`src/components/Terms.tsx`

**Colleges**
College and its code, and the travel-time matrix between the college's buildings.`src/components/Colleges.tsx`

**Departments**
Department, its code and college, and the department's degree rule.`src/components/Sections.tsx`

**Courses**
Course catalogue with credits, hours, capacity, room type and teaching mode.`src/components/Courses.tsx`

**Faculty members**
Members in four groups: faculty, TA, on sabbatical, retired; with status, load and visiting conversion.`src/components/Instructors.tsx`

**Visiting / appointed conversion**
Preview of the changes, then execution, from the faculty card.`src/components/VisitingConversionPanel.tsx`

**Course offering state**
Offered, closed, future or limited sections for each course in a term and department.`src/components/CourseOfferingPanel.tsx`

**Duplicate courses and spelling twins**
Scan, then merge or archived delete after administrator confirmation.`src/components/SpellingTwinsMerge.tsx`

### 3.2.5 Requirements

#### FR-ACD-001 Term create, update and delete

The system shall let a holder of the terms permission create and edit a term with a name of at most 120 characters, a start date in YYYY-MM-DD form, a whole number of weeks from 1 to 30 and an optional ended flag.

Implemented · Must · Functional · System administrator, Root administrator

**RATIONALE**

> The shared calendar depends on the start date and week count; the ended flag is stored only as a real boolean so that "not stated" never turns into "open".

**ACCEPTANCE CRITERIA**

1. A request with no name or a name longer than 120 characters is refused with status 400.
2. A week value outside 1 to 30 or a date in another format is not stored and the term is saved with the remaining fields.
3. Updating a missing term returns 404.
4. Deleting a term with at least one schedule row returns 409 and deletes nothing, and deleting an empty term succeeds.
5. GET /api/terms returns every term newest first to any signed-in user; every create, update or delete empties the scoped-terms cache.

**EVIDENCE**

`src/server/routes/referenceRoutes.ts#registerReferenceRoutes` `src/db/repository.ts#termCalendarFields` `src/components/Terms.tsx` `src/server/routes/referenceRoutes.ts` `src/server/routes/referenceRoutes.ts#/api/terms` `src/server/routes/referenceRoutes.ts#/api/terms/:id` `tests/term-calendar-audit.ts`

#### FR-ACD-002 Automatic creation of the next term

The system shall create the next term by itself at start-up and every 24 hours: from 1 October the second term Y/Y+1, from 1 January the summer term (Y-1)/Y, from 1 April the first term Y/Y+1; it shall skip a term of the same name that already exists and shall not run in demo mode.

Implemented · Should · Functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. On 15 November 2026 the term named second term 2026/2027 is created with a Sunday start date and 14 weeks.
2. The summer term lasts 7 weeks and the first and second 14 weeks, anchored at 13 September, 31 January and 13 June to the nearest Sunday.
3. Re-running the job after creation does not duplicate the term.

**EVIDENCE**

`src/server/autoTerms.ts#runAutoTermJob` `src/utils/termSequence.ts#autoTermDue` `src/utils/termSequence.ts#TERM_CALENDAR` `tests/term-calendar-audit.ts`

#### FR-ACD-003 Automatic closing of an ended term

The system shall mark a term whose end date has passed as ended (AdTermClosed=true) by itself, unless it was genuinely re-opened after its end.

Implemented · Must · Functional · The system (automatic)

**RATIONALE**

> Owner decision of 2026-10-01: a stored false alone does not protect, because the edit form writes it on every save.

**ACCEPTANCE CRITERIA**

1. An unclosed term past its end date is closed on the first run and the event is logged.
2. A term re-opened (AdTermReopenedAt) at or after its end is not closed again.

**EVIDENCE**

`src/server/autoTerms.ts#closeEndedTerms` `src/utils/termSequence.ts#termHasEnded` `tests/term-calendar-audit.ts`

### FR-ACD-004 Scope-aware term list

The system shall show a reader only the terms that have rows in his scope, always keeping the newest created term even when empty, and shall cache the result for 60 seconds per scope.

Implemented · Should · Functional · Department head, Schedule committee chair, College dean

#### ACCEPTANCE CRITERIA

1. A past term with no rows in the reader's scope does not appear in his list.
2. The newest term appears even with no rows, and the current and newest term ids are returned with it.

#### EVIDENCE

`src/utils/scopedTerms.ts#visibleTermIds` `src/server/routes/referenceRoutes.ts#registerReferenceRoutes`
`src/server/routes/referenceRoutes.ts#/api/terms/scoped` `tests/fixed-scope-terms-audit.ts`

### FR-ACD-005 College CRUD and delete guard

The system shall allow creating and editing a college with a code of at most 40 characters and a name of at most 120, shall refuse with status 409 to delete a college that has departments, and shall restrict a non-administrator to the colleges in his scope.

Implemented · Must · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. Creating a college without a code or without a name returns 400.
2. Deleting a college with at least one department returns 409.
3. The college list for a non-administrator is limited to his scope and sorted in Arabic.
4. Editing or deleting a college outside a non-administrator's scope returns 403, editing a missing college returns 404, and an administrator sees every college.

#### EVIDENCE

`src/server/routes/referenceRoutes.ts#registerReferenceRoutes` `src/components/Colleges.tsx`
`src/server/routes/referenceRoutes.ts#/api/colleges` `src/server/routes/referenceRoutes.ts#/api/colleges/:id`
`tests/role-scope-audit.ts`

### FR-ACD-006 Department, faculty placeholder and delete guard

The system shall allow creating, editing and moving a department between colleges within the user's scope, shall not register a duplicate department code in the same college, and shall create for each new department exactly one faculty-placeholder record with a synthetic 12-digit civil number starting with 29999.

Implemented · Must · Functional · System administrator, Root administrator

#### RATIONALE

> The placeholder receives sections that have no instructor yet and receives the visiting instructor in an imported schedule; its number cannot be confused with a person's because its month digits are 99.

#### ACCEPTANCE CRITERIA

1. Creating a department with a code that exists in the college returns 400 with a registered-code message.
2. The department's synthetic civil number is 29999 plus the college id in three digits plus the department id in four digits.
3. Calling the provisioning again for a department that already has its record creates no second record.
4. Deleting a department with at least one course returns 409 and deletes nothing.
5. GET /api/sections accepts collegeId, filters by scope and sorts in Arabic; moving a department requires scope over both the current department and the target college, and a missing target college returns 400.
6. A failure to create the faculty-placeholder record does not undo the department creation; it is retried at the first import.

#### EVIDENCE

`src/server/sectionFaculty.ts#ensureSectionFaculty` `src/server/routes/referenceRoutes.ts#registerReferenceRoutes`
`src/utils/placeholderInstructor.ts` `src/server/routes/referenceRoutes.ts#/api/sections`
`src/server/routes/referenceRoutes.ts#/api/sections/:id` `tests/section-faculty-audit.ts`

### DR-ACD-007 Seven-digit authority course number

The system shall build every course number a reader sees (printed report, query or Excel) in seven digits: college (2), department (2), course (3), such as 0109105, through authorityCourseCode, and shall never display the stored CourseCode, CourseCodeSnapshot or AdCourseId.

Implemented · Must · Data · The system (automatic)

**RATIONALE**

> A fixed owner rule: the catalogue usually stores only the last three digits, and the internal id means nothing to the reader.

**ACCEPTANCE CRITERIA**

1. authorityCourseCode("105", "0109") returns 0109105, ("5", "0109") returns 0109005, and Arabic-Indic digits are read as digits.
2. A code containing letters (ENG101), or given no department key, is returned as stored and no number is invented.
3. A seven-digit course of another department (0102102 under 0101) is not re-linked.
4. npm run test:course-number-seven-digit passes with no failure.

**EVIDENCE**

`src/utils/authorityAcademicCodes.ts#authorityCourseCode` `src/utils/authorityAcademicCodes.ts#authorityDepartmentCode` `tests/course-number-seven-digit-audit.ts` `tests/authority-course-prefix-audit.ts`

### DR-ACD-008 Department key from college and department codes

The system shall derive the four-digit department key from the first two digits of the college code plus the two-digit local department code, so that the boys' and girls' branches share the same key, and shall never match a key against another department's key.

Implemented · Must · Data · The system (automatic)

**ACCEPTANCE CRITERIA**

1. authorityDepartmentCode("011", "09") and ("012", "09") both return 0109.
2. A department code of four digits that starts with another college's code is re-linked to the report's college: 0101 under college 02 becomes 0201.
3. 0201 does not match 0202.

**EVIDENCE**

`src/utils/authorityAcademicCodes.ts#authorityDepartmentCode` `src/utils/authorityAcademicCodes.ts#authorityDepartmentMatches` `tests/course-number-seven-digit-audit.ts` `tests/authority-course-prefix-audit.ts`

### FR-ACD-009 Linking a course to its printed number

The system shall not link a course to the catalogue by the three-digit tail alone, and shall require the department key or the printed name to agree, so that 0114464 remains a different course from 0120464, and a linked row is kept under its printed number.

Implemented · Must · Functional · The system (automatic)

**RATIONALE**

> Standing owner decision of 2026-11-05: the page header decides the department and the printed code does not change a course's identity.

**ACCEPTANCE CRITERIA**

1. A printed number 0114101 matches the catalogue row "101" of department 0120 only if the printed name agrees, and does not match the full row 0120101.
2. A six-digit number starting with the department key (013099 under 0130) is read as 0130099.
3. The row snapshot keeps the seven-digit printed number when its tail matches the catalogue row.

**EVIDENCE**

`src/utils/authorityAcademicCodes.ts#authorityInheritedCourseMatches` `src/utils/authorityAcademicCodes.ts#authorityCourseCodeMatches` `src/utils/authorityAcademicCodes.ts#authorityCourseSnapshot` `tests/authority-course-prefix-audit.ts`

### FR-ACD-010 Course creation and numeric limits

The system shall accept course creation with a non-empty code and name and a college and department that belong together, with whole credits from 0 to 20, hours from 0 to 40 (fractions allowed) and a whole capacity from 0 to 200, and shall refuse anything else with a message naming the field.

Implemented · Must · Functional · System administrator, Root administrator, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Capacity 201, credits 21 or hours 41 returns 400 with a message naming the field and its range.
2. A department that does not belong to the chosen college returns 400.
3. A course code is not repeated within a department and a repeated attempt returns 400.
4. A room type longer than 60 characters, or a teaching mode other than theoretical, applied, practical or field_training, is refused.

**EVIDENCE**

`src/server/routes/coursesRoutes.ts#registerCoursesRoutes` `src/server/core/input.ts` `src/components/Courses.tsx` `tests/department-course-catalog-audit.ts`

### FR-ACD-011 Freezing the identity of a course with history

Inferred

The system shall refuse with 409 to change a course's code or name when it has schedule history or belongs to a non-active sheet, shall still allow correcting credits, hours and capacity, and shall prevent moving it to another department while it is linked to a sheet.

Implemented · Must · Functional · System administrator, Root administrator, Schedule committee chair

**RATIONALE**

> Code and name protect links and the teaching history; the name is compared after normalising presentation forms, so that is not counted as a change.

**ACCEPTANCE CRITERIA**

1. Editing the name of a course that has one appointment in any term returns 409 and saves nothing.
2. Changing only the capacity of a course in a transition sheet succeeds.
3. Moving a course linked to a sheet to another department returns 409.

**EVIDENCE**

`src/server/routes/coursesRoutes.ts#registerCoursesRoutes` `src/server/routes/coursesRoutes.ts#/api/courses/:id`

### FR-ACD-012 Block deleting a linked course

Inferred

The system shall refuse with status 409 to delete a course that is linked to an academic sheet or to a schedule row.

Implemented · Must · Functional · System administrator, Root administrator, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Deleting a course that is a member of a sheet returns 409 with a message directing to remove it from the sheet.
2. Deleting a course with a schedule row returns 409.

**EVIDENCE**

`src/server/routes/coursesRoutes.ts#registerCoursesRoutes` `src/server/routes/coursesRoutes.ts#/api/courses/:id`

### FR-ACD-013 Room type and teaching mode sync across copies

The system shall, when a non-empty room type or teaching mode is saved on a course, apply it to its sibling copies with the same code in the same department family and college family, within the user's scope, and report what it skipped and why.

Implemented · Should · Functional · System administrator, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The course copy at another campus of the same family changes; a course of another department with the same code does not change and is not mentioned.
2. A copy outside the user's scope is skipped and reported as outside his permissions; at most 8 skips are returned.
3. Copies are written before the edited course so that the next save redoes what was missed.
4. The teaching mode and the companion facility type (up to 60 characters) spread to the same copies under the same limits; a stored mixed mode is accepted when re-saved even though it is not one of the four.
5. The save response carries roomTypeSynced, roomTypeAligned, roomTypeSkipped, teachingModeSynced, teachingModeSkipped and companionSynced; saving a non-empty type aligns the copies even when it did not change.

**EVIDENCE**

`src/utils/courseRoomTypeSync.ts#roomTypeSiblingIds` `src/server/routes/coursesRoutes.ts#registerCoursesRoutes` `tests/course-room-type-sync-audit.ts`

### FR-ACD-014 Course tags in a fixed order

The system shall show every applicable course tag in one order on all screens: the sheet, then the requirement type (college, university, department or elective), then not reached yet, and shall show no tag for a mandatory course.

Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A course in the 2026 sheet that is a college requirement appears with two tags in that order: sheet, then requirement.
2. The last tag, not reached yet, does not print, and the requirement tag prints only for service courses.
3. The coverage guard fails if a course name is drawn on screen without tags and without a justified exception.

**EVIDENCE**

`src/utils/courseTags.ts#courseTagsOf` `src/components/CourseTags.tsx` `tests/course-tags-coverage-audit.ts`

### FR-ACD-015 Duplicate course detection and archived delete

The system shall detect duplicate courses within one department by the same printed number, shall pick the keeper by usage priority (schedule, then students, then sheet rules, then capacity, then sheet link), shall offer for deletion only an unused duplicate, and shall rescan before an archived delete.

Implemented · Should · Functional · Root administrator, System administrator

**ACCEPTANCE CRITERIA**

1. Weights are 16 for schedule, 8 for students, 4 for rules, 2 for capacity and 1 for link, and the highest score is kept.
2. A duplicate with a schedule is shown with the reason has a schedule and is not removable.
3. Deletion reports the number deleted and then rescans.

**EVIDENCE**

`src/server/planReviewRoutes.ts` `src/components/DuplicateCoursesPanel.tsx` `tests/department-course-catalog-audit.ts`

### FR-ACD-016 Spelling-twin merge with confirmation

The system shall let only the root account preview courses whose names are spelling twins and then merge them with explicit confirmation, so that appointments and sheet links move to the keeper, the canonical name is applied and the duplicate is archived, and shall refuse automatic merging of a course referenced by student data or sheet rules.

Implemented · Should · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. A merge request without confirm=true returns 428 and without the root account returns 403.
2. The scan is repeated at merge time: a group that changed returns 409 and a canonical name from outside the course's spellings returns 400.
3. A course used by students returns 409 with reason student data, and a course used in rules returns 409 with reason sheet rules.

**EVIDENCE**

`src/utils/courseSpellingTwins.ts#spellingTwinGroups` `src/utils/courseNameRelation.ts#courseNameRelation` `src/server/planReviewRoutes.ts` `src/components/SpellingTwinsMerge.tsx` `tests/course-spelling-merge-audit.ts` `tests/course-name-relation-audit.ts`

### DR-ACD-017 Faculty identity: civil number

Inferred

The system shall store the civil number in one form (Latin digits only, with every non-digit removed), shall accept a 12-digit number that satisfies the check digit, and shall not register a number already held by another member.

Implemented · Must · Data · System administrator, Root administrator, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A number typed with Arabic digits or spaces is stored as clean Latin digits.
2. A number whose length is not 12 returns the exactly-12-digits message, and one with a wrong check digit is refused.
3. Editing with another member's number returns 400.

**EVIDENCE**

`src/utils/civilId.ts#validateCivilId` `src/utils/civilId.ts#normalizeCivilId` `src/server/routes/instructorsRoutes.ts#registerInstructorsRoutes` `tests/role-scope-audit.ts`

### FR-ACD-018 Quick instructor add and department enrolment

The system shall allow creating a faculty member by a holder of the instructors or schedule permission, shall enrol him in the department faculty directory when created from a department context within his scope, shall enrol an existing holder of a registered number instead of refusing, and shall not accept the faculty-placeholder name as a new instructor.

Implemented · Must · Functional · System administrator, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A registered number with an in-scope department returns the existing record with existing=true and enrols it in the department.
2. A registered number with no department context returns 400 naming its holder so he can be searched.
3. The name faculty placeholder returns 400.
4. Edit and delete require the instructors permission (3); the schedule permission is not enough.
5. Editing an instructor accepts only retired or sabbatical as status (anything else means active) and a personal load from 1 to 40 rounded to a whole number, otherwise none; deleting an instructor with a schedule row returns 409.

**EVIDENCE**

`src/server/routes/instructorsRoutes.ts#registerInstructorsRoutes` `src/server/sectionFaculty.ts` `src/utils/placeholderInstructor.ts#isFacultyPlaceholder` `src/server/routes/instructorsRoutes.ts#/api/instructors/:id` `tests/section-faculty-audit.ts` `tests/instructor-apply-atomic-audit.ts`

### FR-ACD-019 Instructor search by name identity

The system shall match instructor names with the single name-identity rule that folds hamza forms, alef maqsura, ta marbuta, diacritics, titles and spaces, shall find in search everyone the import matching finds, and shall match a civil number only when complete (12 digits).

Implemented · Must · Functional · Schedule committee chair, System administrator

**RATIONALE**

> Partial civil-number matching across the university would let anyone complete the number of any employee.

**ACCEPTANCE CRITERIA**

1. Searching for one spelling of a name finds the other, and the joined and split forms of a compound name find each other.
2. Six digits of a civil number return nobody and the full 12 digits return its holder.
3. The faculty placeholder does not appear in the university search, and results are capped at 60 (default 40).

**EVIDENCE**

`src/utils/instructorIdentity.ts#foldInstructorText` `src/utils/instructorIdentity.ts#instructorIdentityKey` `src/utils/instructorPickerChoices.ts` `src/server/routes/instructorsRoutes.ts#registerInstructorsRoutes` `tests/inbox-proposal-pickers-r2-audit.ts`

### NFR-ACD-020 Civil number and phone hidden from non-members

The system shall not reveal the full civil number or the phone except to the department circle (those who taught in the reader's scope or are in his department directory or visiting list), to system administration and to the holder of the instructors screen, and shall show others the name and last four digits only, with no phone.

Implemented · Must · Non-functional · Schedule committee chair, College dean, Department head

**ACCEPTANCE CRITERIA**

1. An instructor of another college who never taught in the reader's scope appears as a masked number ending in 1234 with no phone.
2. Read-only roles never see the civil number, and a full civil number that exactly matches the search is revealed to the searcher.
3. The faculty placeholder's synthetic number is never shown.

**EVIDENCE**

`src/server/routes/instructorsRoutes.ts#instructorCircleFor` `src/utils/placeholderInstructor.ts#withoutFacultyPlaceholderCivil` `tests/role-scope-audit.ts`

### FR-ACD-021 Instructor status and category

The system shall allow marking an instructor retired or on sabbatical or classifying him as TA, shall not assign new work to a retired or sabbatical instructor, and shall make the TA-to-instructor conversion one-directional so an instructor cannot become a TA from the department tools.

Implemented · Must · Functional · System administrator, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. isAssignableInstructor returns false for retired or sabbatical and true otherwise.
2. A section-roster update with category ta for a non-TA instructor returns 400.
3. The TA conversion plan counts the rows of explicitly tagged people only and never infers the category from a course number.

**EVIDENCE**

`src/utils/instructorStatus.ts#isAssignableInstructor` `src/utils/taConversion.ts#planTaConversion` `src/server/routes/instructorsRoutes.ts#registerInstructorsRoutes` `tests/instructor-status-audit.ts` `tests/ta-conversion-audit.ts`

### FR-ACD-022 Rank and teaching load limits

The system shall let the root account define up to 30 academic ranks, each with a name of at most 60 characters, minimum and maximum up to 60 hours and overtime up to 30 hours, all whole hours without fractions, and shall allow a per-member exception with a reason (administrative post, task, sabbatical, other) and an optional end term.

Implemented · Should · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. A rank whose minimum exceeds its maximum, or has a fraction, or repeats a name is refused with one Arabic message.
2. A member exception is capped at 60 hours with overtime 30, and an unknown reason is refused.
3. Precedence is the member's active exception, then his rank; a member with neither is unset, with no invented number.
4. The configuration routes are for the root account with screen 7: GET /api/admin/teaching-load shows each instructor's hours and state in the chosen (or current) term, PUT saves the whole configuration and refuses an unknown member number with 400, and GET and PUT /api/admin/teaching-load/member/:id handle one member (404 if missing, 400 for an unknown rank).

**EVIDENCE**

`src/utils/teachingLoad.ts#teachingLoadProblem` `src/utils/teachingLoad.ts#teachingLoadLimits`
`src/server/routes/referenceRoutes.ts#registerReferenceRoutes` `src/server/routes/referenceRoutes.ts#/api/admin/teaching-load`
`src/server/routes/referenceRoutes.ts#/api/admin/teaching-load/member/:id` `tests/teaching-load-audit.ts`

### FR-ACD-023 Load computation and over-load warning

The system shall compute an instructor's term load as the sum of his courses' hours counted once per section (college, department, course, section code) however many appointments it has, shall classify it as unset, under, within, overtime or over, and shall keep the warning read-only so that it never blocks saving an appointment.

Implemented · Should · Functional · Schedule committee chair, Root administrator

**ACCEPTANCE CRITERIA**

1. A load above the maximum up to the ceiling (maximum plus overtime) is overtime, not an overrun.
2. Anything above the ceiling is over, with excess computed as the difference rounded to two decimals.
3. The feature is off by default: until enabled nothing is computed or sent.
4. GET /api/teaching-load/status for the department and term scope returns enabled:false when the feature is off, otherwise the over-load list sorted by excess descending, the overtime count and the within count.

**EVIDENCE**

`src/utils/teachingLoad.ts#teachingHoursByInstructor` `src/utils/teachingLoad.ts#evaluateTeachingLoad`
`src/server/routes/referenceRoutes.ts#registerReferenceRoutes` `src/server/routes/referenceRoutes.ts#/api/teaching-load/status`
`tests/teaching-load-audit.ts` `tests/instructor-course-load-audit.ts`

### FR-ACD-024 Visiting status through directory and term roster

The system shall treat an instructor as visiting for a department when he is in the department's visiting directory (its family across colleges) and has an instructor record, shall let the term roster decide who teaches in that term, shall show the visiting badge per department and not per person, and shall give all screens one lookup cached for one minute.

Implemented · Must · Functional · Schedule committee chair, Department head, College dean

**ACCEPTANCE CRITERIA**

1. A name in the roster but not in the directory does not appear as visiting, and a directory id with no instructor record is ignored.
2. An instructor visiting in one department is not visiting in another department where he teaches as a member.
3. GET /api/visiting-lookup without termId returns empty scopes and the reader is limited to his departments.

**EVIDENCE**

`src/server/core/visiting.ts#readVisitingStatus` `src/utils/liveVisiting.ts#liveVisitingIds`
`src/utils/visitingLookup.ts#isVisitingIn` `src/components/VisitingBadge.tsx`
`src/server/routes/instructorsRoutes.ts#/api/visiting-lookup` `tests/visiting-lookup-audit.ts`
`tests/visiting-status-permanent-audit.ts` `tests/visiting-badge-group1-audit.ts`

### FR-ACD-025 Visiting roster and copy between terms

The system shall let a holder of the schedule permission add a new visiting instructor (valid civil number and a name of 3 to 100 characters) to the department directory and the term roster, and copy the visitors of one term into another while adding them to the directory, within his scope.

Implemented · Should · Functional · Schedule committee chair, System administrator

**ACCEPTANCE CRITERIA**

1. A copy with no ids takes all visitors of the source term, and an id not in the source is ignored.
2. Copying into a term that already has visitors merges without duplicates.
3. A department outside the scope returns 403.

**EVIDENCE**

`src/server/routes/instructorsRoutes.ts#registerInstructorsRoutes` `src/server/core/visiting.ts#readLiveVisitingRoster`
`src/server/routes/instructorsRoutes.ts#/api/visiting-roster/instructor`
`src/server/routes/instructorsRoutes.ts#/api/visiting-roster/copy` `tests/visiting-lookup-audit.ts`

### FR-ACD-026 Converting an instructor between visiting and appointed

The system shall convert an instructor to visiting for one department in a current or future term, and to appointed by removing him from the directory of the chosen departments and from the rosters of the current and future terms, with a preview that writes nothing, and shall never touch a schedule or a past-term roster.

Implemented · Must · Functional · Schedule committee chair, System administrator

**ACCEPTANCE CRITERIA**

1. Converting to visiting with more than one department returns the one-department-at-a-time error, and with a past term returns the past-roster error.
2. A request with more than 50 departments is cut to 50, and a direction other than toAppointed or toVisiting returns 400.
3. Lifting from a department whose directory does not contain him returns an error, and adding an already-visiting instructor returns already-visiting.
4. Every department in the request is checked against the reader's scope, otherwise 403.

**EVIDENCE**

`src/utils/visitingConversion.ts#planVisitingConversion` `src/db/visitingConversion.ts#runVisitingConversion`
`src/server/routes/instructorsRoutes.ts#registerInstructorsRoutes` `src/components/VisitingConversionPanel.tsx`
`src/server/routes/instructorsRoutes.ts#/api/instructors/:id/visiting-conversion`
`src/server/routes/instructorsRoutes.ts#/api/instructors/:id/visiting-state` `tests/visiting-conversion-audit.ts`

### FR-ACD-027 Visiting instructor becomes faculty placeholder on import

The system shall, on schedule import, reassign every row whose instructor is visiting to the department's faculty-placeholder record without touching the visiting status, shall restore to a retired or sabbatical instructor his row by the full printed name when it matches exactly one record and no active instructor shares it, and shall leave rows unchanged when the department has no placeholder record.

Implemented · Must · Functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A row whose instructor is among the visiting set is switched to the placeholder id and carries replacedVisitingInstructorId.
2. With placeholderId equal to zero or no visitors no row changes and zero is returned.
3. Recovering a retired instructor's name requires two or more tokens and an exact match, and is skipped when an active instructor shares the name.

**EVIDENCE**

`src/utils/visitingToFaculty.ts#applyVisitingToFaculty` `src/utils/instructorIdentity.ts#recoverRetiredFromPrintedName`
`tests/visiting-to-faculty-audit.ts`

### FR-ACD-028 Course offering state per term

The system shall store for each course in a term and department one of four offering states: offered (the default with no entry), closed, future with a level of 100 to 400, or limited sections with a maximum of 0 to 99, shall not store a bare offered entry, and shall apply it to the proposal engines, the card and the inbox.

Implemented · Should · Functional · Schedule committee chair, System administrator

**ACCEPTANCE CRITERIA**

1. A level written as 3 is stored as 300, and a limited course capped at 5 with 3 existing sections has 2 remaining.
2. A closed or future course gets no proposed new section (allowed count zero).
3. An unconfirmed suggestion changes nothing, and the open-for-offering decision persists unless explicitly sent.
4. Save and read for a department outside the scope return 403.
5. PUT /api/course-offering also stores how a non-offered course is displayed: hide or fade; GET returns with it the courses with their levels from the department's approved sheets and section counts, the suggested future courses, and instructors' future interest by name.

**EVIDENCE**

`src/utils/courseOffering.ts#normalizeOfferingEntry` `src/utils/courseOffering.ts#newSectionsAllowed`
`src/server/routes/offeringRoutes.ts#registerOfferingRoutes` `src/server/offeringStates.ts#offeringStatesForTerm`
`src/components/CourseOfferingPanel.tsx` `src/server/routes/offeringRoutes.ts#/api/course-offering`
`tests/prepublish-reach-audit.tsx` `tests/owner-features-2026-10-28-audit.ts`

### IR-ACD-029 Scoped course reads with sheet tags

The system shall return GET /api/courses sorted in Arabic and limited to the reader's scope, and shall accept sectionId for one department, operational=1 for operational courses and plans=1 to add the sheet tag, the sheet side and the departments that need a service course.

Implemented · Should · Interface · Schedule committee chair, Department head, Registration officer

**ACCEPTANCE CRITERIA**

1. A response for one department holds only that department's courses (a fraction of about 1,400 courses university-wide).
2. With plans=1 the course carries curriculum, sheetSide and serviceFor where they apply.
3. The accepted permissions are 6, 7, 8, 9, 10, 14, 16 and 17.

**EVIDENCE**

`src/server/routes/coursesRoutes.ts#registerCoursesRoutes` `src/server/planBadgeShared.ts` `tests/sheet-membership-audit.ts`

### NFR-ACD-030 Reference-data input validation

Inferred

The system shall validate every textual or numeric reference-data input with an explicit bound (text up to 120 characters, code up to 40, numbers whole within a range), shall normalise Arabic-Indic digits, shall never store NaN, an object or an array in place of a name, and shall answer with one Arabic message naming the field.

Implemented · Must · Non-functional · System administrator, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A name sent as an array, a boolean or longer than 120 returns 400.
2. The Arabic-Indic string for 45 is read as 45 in integer fields.
3. An empty capacity field means not stated and takes the default 0.

**EVIDENCE**

`src/server/core/input.ts#cleanText` `src/server/core/input.ts#boundedInt`
`src/server/routes/coursesRoutes.ts#registerCoursesRoutes` `tests/comprehensive-verification.ts`

### FR-ACD-031 Accounts born with a college or a department

Inferred

When a system administrator creates a college the system shall create active College dean and Vice dean accounts scoped to the whole college and prepare a College registrar seat, and when a department is created from a sheet import it shall create Department head, Schedule committee chair and Department advisor accounts scoped to it; each gets a random initial password shown to the administrator once and to be changed at first sign-in.

Implemented · Should · Functional · System administrator, Root administrator, The system (automatic)

#### RATIONALE

> There is no shared password: login names can be guessed from the department name or college code.

#### ACCEPTANCE CRITERIA

1. A college login is its Latin code in lower case followed by dean or vicedean; if that belongs to another college's account, c and the college number are added. A department login is the English prefix from its name followed by head, dept or advisor, then the college code, then its number on a clash.
2. The initial password is 10 characters from 54 symbols without look-alikes, the account is flagged to change it, and the Colleges screen shows the passwords in a window that appears once.
3. An existing account with the same name is not touched: only its missing screens or scope are completed (completed) or it counts as existing (exists), and re-running duplicates nothing.
4. Creating a college from an account without the administrator flag creates no accounts and no seat; a failure preparing the seat is logged and does not undo the college.

#### EVIDENCE

`src/server/sectionUsers.ts#provisionCollegeUsers` `src/server/sectionUsers.ts#provisionSectionUsers` `src/server/routes/referenceRoutes.ts#/api/colleges` `src/components/Colleges.tsx`

### FR-ACD-032 Travel time between a college's buildings

Inferred

Through GET /api/colleges/:id/mobility the system shall show the college's historically used buildings with its profile, and through PUT /api/colleges/:id/mobility store the default travel time, the same-building time and per-pair building times.

Implemented · Could · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. Buildings are derived from the room codes of all the college's rows, cached for 10 minutes, and ordered by building number rather than usage.
2. Pair and default times are between 1 and 120 minutes (default 5) and the same-building time between 0 and 30 (default 3); a pair with no building, a building with itself, or a duplicate pair is dropped.
3. Reading is for any user within the college's scope and saving for a holder of screen 2 within it; an invalid college returns 400 and a missing one 404.

#### EVIDENCE

`src/server/routes/referenceRoutes.ts#/api/colleges/:id/mobility` `src/utils/campusTravel.ts` `src/components/Colleges.tsx`

### FR-ACD-033 Department working hours

Inferred

The system shall let the root account set the working-day start and end for chosen departments of a college through GET and PUT /api/admin/section-schedule-windows within the university day, and give a holder of screen 7 his department's window through GET /api/schedule-day-window.

Implemented · Should · Functional · Root administrator, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. An invalid time or an end not after the start returns 400, a window outside the university day returns 400, and a department outside the college returns 400.
2. The save response states how many appointments in the current term fall outside the new window without blocking the save or changing them.
3. A department window outside the reader's scope returns 403 for anyone but main administration, and a missing department 404.

#### EVIDENCE

`src/server/routes/referenceRoutes.ts#/api/admin/section-schedule-windows`
`src/server/routes/referenceRoutes.ts#/api/schedule-day-window` `src/utils/scheduleTime.ts`

### FR-ACD-034 The university day

Inferred

The system shall let the root account change the university day (default 08:00 to 20:00) through PUT /api/admin/university-day after previewing its effect through GET /api/admin/university-day/impact, stating how many current-term appointments fall outside it.

Implemented · Should · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. Both times are HH:MM between 00:00 and 24:00 in 5-minute steps with the start before the end, otherwise 400 with the reason.
2. Saving empties the department-window cache and records the previous and new values in the audit trail; a damaged stored document is read as the default.

#### EVIDENCE

`src/server/routes/referenceRoutes.ts#/api/admin/university-day`
`src/server/routes/referenceRoutes.ts#/api/admin/university-day/impact` `src/utils/scheduleTime.ts#universityDayIssue`

### FR-ACD-035 University-wide student unit cap in Masari

Inferred

The system shall store one student unit cap in Masari for the whole university, an integer from 3 to 30 (default 15), set by the root administrator in Academic data > Terms through GET and PUT /api/student-unit-cap; old per-department caps stay stored and are ignored.

Implemented · Should · Functional · System administrator

#### ACCEPTANCE CRITERIA

1. A value outside 3-30 or not an integer returns 400; anyone but the root administrator gets 403.
2. Saving writes universityStudentSettings/university with the name and time and records before and after in the audit log; in the demo it stays in the session sandbox and carries over to the demo student through «try as a student».
3. Saving a different value marks saved registration radar runs stale so their tickets regenerate with the new cap on the next read; saving the same value leaves them untouched.

#### EVIDENCE

`src/server/routes/referenceRoutes.ts#/api/student-unit-cap` `src/server/simulationData.ts#saveUniversityUnitCap`
`src/utils/studentUnitCap.ts` `src/components/StudentUnitCapSetting.tsx` `tests/admin-rules-r4-audit.ts`

### IR-ACD-036 Campus travel policy route

Inferred

The system shall offer the campus travel policy through GET and PUT /api/campus-travel-policy to main administration or the University registrar only, returning with the policy the names of the instructors exempted from it.

Implemented · Should · Interface · University registrar, Root administrator

#### ACCEPTANCE CRITERIA

1. Anyone else gets 403 for reading and writing; saving goes through the cleaner and is recorded as a travel-policy edit.
2. The policy's content and its effect on the schedule are described in the LOC travel requirements.

#### EVIDENCE

`src/server/routes/referenceRoutes.ts#/api/campus-travel-policy` `src/utils/campusTravelPolicy.ts#cleanTravelPolicy` `src/server/roleGuard.ts`

### FR-ACD-037 Graduation rules per department

Inferred

Through GET /api/degree-rules the system shall show for each department in the reader's scope its saved graduation rule or a suggestion from the department name marked suggested and not reviewed, and through PUT /api/degree-rules/:sectionId store the degree units, the field-training opening units and the graduate thresholds for regular and summer terms.

Implemented · Should · Functional · Schedule committee chair, System administrator

#### ACCEPTANCE CRITERIA

1. The suggestion is 130 units (102/107/109) in general, 132 (107/109/111) for French, and 134 (107/111/113) for English, special education, giftedness, disability and learning difficulties.
2. Each value is a whole number from 0 to 999 otherwise 400; a missing field-training value keeps the saved or suggested one capped at the regular graduate threshold.
3. A department in transition (with a non-archived sheet) refuses the save with 409 and the code rules-per-plan, and GET shows each sheet's rules instead; saving needs screen 4 within scope and empties the student survey cache.

#### EVIDENCE

`src/server/routes/referenceRoutes.ts#/api/degree-rules` `src/server/routes/referenceRoutes.ts#/api/degree-rules/:sectionId` `src/utils/degreeRules.ts#readDegreeRuleInput` `src/utils/degreeRules.ts#suggestedDegreeRule` `src/components/Sections.tsx`

### FR-ACD-038 Managing room types

The system shall let the root account with screen 7 add, rename, delete and restrict a room type to departments through the /api/admin/location-room-types routes, and give a holder of screen 6 or 7 the types a department sees through GET /api/location-room-types.

Implemented · Should · Functional · Root administrator, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. The list is the union of the stored types (or teaching, laboratory and computer laboratory if none is stored), the types of confirmed active rooms and the course and companion types, sorted in Arabic.
2. A name has 1 to 60 characters; an existing type ignoring case returns 409; renaming updates rooms, courses and the restriction and returns how many changed.
3. Deleting a type linked to a room or course returns 409 with their counts, deleting the last type returns 409, and an unknown type 404; restricting with an empty department list makes it general again, and an unknown department 400.
4. Requesting the list for a department outside scope returns 403 for anyone but main administration; main administration with no department sees every type with its restriction.

#### EVIDENCE

`src/server/routes/coursesRoutes.ts#/api/location-room-types` `src/server/routes/coursesRoutes.ts#/api/admin/location-room-types` `src/server/routes/coursesRoutes.ts#/api/admin/location-room-types/:type` `src/server/routes/coursesRoutes.ts#/api/admin/location-room-types/:type/scope` `src/utils/roomTypeForSection.ts` `tests/course-room-type-sync-audit.ts`

### IR-ACD-039 Academic sheet and transition routes

Inferred

The system shall give a holder of screen 6 within scope the sheet routes: GET /api/curriculum/sections/:sectionId for the overview, POST /api/curriculum/plans and PUT /api/curriculum/plans/:planId, POST /api/curriculum/plans/:planId/courses and DELETE /api/curriculum/plans/:planId/courses/:courseId, POST /api/curriculum/transitions and DELETE /api/curriculum/transitions/:id, GET /api/curriculum/plans/:planId/archive-readiness and POST /api/curriculum/plans/:planId/archive.

Implemented · Should · Interface · Schedule committee chair, System administrator

#### RATIONALE

> The operating rules (transition kinds, refusing removal and archiving) are in FR-PLN-023; this covers what concerns reference data.

#### ACCEPTANCE CRITERIA

1. A department with no sheets is shown with a virtual sheet named current sheet with code CURRENT holding all its courses and taking the department's saved rule.
2. A sheet name repeating another live sheet in the department returns 400; a sheet code cannot be edited; a graduation rule can be saved per sheet with the same bounds (0 to 999).
3. Re-saving a relation for the same old course between the same two sheets replaces the previous one instead of adding a second, and the note is up to 300 characters.
4. Archive readiness returns the number of sections of the sheet's own courses in the newest term, the linked student requests, and the total, own and shared course counts, with ready when the first two are zero.

#### EVIDENCE

`src/server/routes/coursesRoutes.ts#/api/curriculum/sections/:sectionId`
`src/server/routes/coursesRoutes.ts#/api/curriculum/plans` `src/server/routes/coursesRoutes.ts#/api/curriculum/plans/:planId`
`src/server/routes/coursesRoutes.ts#/api/curriculum/plans/:planId/courses`
`src/server/routes/coursesRoutes.ts#/api/curriculum/plans/:planId/courses/:courseId`
`src/server/routes/coursesRoutes.ts#/api/curriculum/transitions`
`src/server/routes/coursesRoutes.ts#/api/curriculum/transitions/:id`
`src/server/routes/coursesRoutes.ts#/api/curriculum/plans/:planId/archive-readiness`
`src/server/routes/coursesRoutes.ts#/api/curriculum/plans/:planId/archive`

### FR-ACD-040 Course-editing window for the committee chair

Inferred

The system shall allow a Schedule committee chair to add, edit or delete a course only while one of his department's sheet rule drafts is in review status, and shall not impose this on a system administrator or other roles.

Implemented · Must · Functional · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Outside review the answer is 409 saying department data can be edited only during the sheet draft review.
2. When aligning room type or teaching mode, a copy in a restricted department is skipped with the reason that editing that department is restricted now.

#### EVIDENCE

`src/server/routes/coursesRoutes.ts#committeeCatalogEditAllowed` `src/server/routes/coursesRoutes.ts#/api/courses`
`src/server/routes/coursesRoutes.ts#/api/courses/:id`

### IR-ACD-041 Visiting directory and instructor affiliation routes

Inferred

The system shall give a holder of screen 7 within scope the department's visiting list with adding, editing and removing visitors, and the term roster with saving it, and shall give an instructor's affiliation (where he teaches and where he is visiting) limited to the reader's scope.

Implemented · Should · Interface · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. PUT /api/visiting-roster accepts only people already in the department directory or the term roster, otherwise 400; GET /api/visiting-roster without college, department or term returns an empty list.
2. POST /api/department-delegates/instructor validates the civil number, a name of at least 3 characters (cut to 100) and an eight-digit mobile starting with 5, 6 or 9 or a full international number, fills an existing person's mobile only if he has none, returns 409 if already listed, and adds him to the term roster when termId is sent.
3. PUT /api/department-delegates/:instructorId lets the department change the mobile, while name and civil number need screen 3 or main administration, otherwise 403; another person's civil number returns 409; an absent mobile field keeps it and an empty one clears it; the load is untouched.
4. DELETE /api/department-delegates/:instructorId removes him from the directory and from the term roster when termId is sent; GET /api/delegates returns every visitor in the university to administration and the visitors of his departments' families to others.
5. GET /api/instructors/:id/affiliation and GET /api/instructor-affiliations (from the newest term) for a holder of screen 3 or 7 name no department outside the reader's scope except for administration.

#### EVIDENCE

`src/server/routes/instructorsRoutes.ts#/api/visiting-roster` `src/server/routes/instructorsRoutes.ts#/api/department-delegates` `src/server/routes/instructorsRoutes.ts#/api/department-delegates/instructor` `src/server/routes/instructorsRoutes.ts#/api/department-delegates/:instructorId` `src/server/routes/instructorsRoutes.ts#/api/delegates` `src/server/routes/instructorsRoutes.ts#/api/instructors/:id/affiliation` `src/server/routes/instructorsRoutes.ts#/api/instructor-affiliations` `src/utils/reachInstructor.ts#storableMobile`

### FR-ACD-042 Not-yet-reached verdict and the open-for-offering decision

Inferred

Through GET /api/course-reach the system shall return the compact reach verdict for every course of the department in its college and term to any user in scope, and through POST /api/course-reach/open store the department's decision to open a course for offering or return it to the rule in the same offering-state document.

Implemented · Should · Functional · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Opening needs screen 7 and a non-read-only role, otherwise 403; no course returns 400; open:false removes the decision.
2. An entry that returns to offered with no decision is removed from the document, the offering-state and reach caches are emptied, and the audit records opened for offering or returned to the rule.

#### EVIDENCE

`src/server/routes/offeringRoutes.ts#/api/course-reach` `src/server/routes/offeringRoutes.ts#/api/course-reach/open` `src/server/courseReachShared.ts`

### FR-ACD-043 Training phase for teaching assistants in waves

Inferred

The system shall let a department open a training phase until a future closing time, sending the chosen teaching assistants their card links in training mode in successive waves separated by hours, showing the vacant sections (whose instructors are all the faculty placeholder), restricting the allowed courses per assistant, and closing the phase.

Implemented · Should · Functional · Schedule committee chair, Faculty member

#### ACCEPTANCE CRITERIA

1. Opening refuses a frozen term, a past or invalid closing time in Kuwait time with 400, and waves without an assistant with 400; only people classified TA are accepted and no assistant repeats across waves.
2. The gap between waves is 0 to 336 hours and the reminder 1 to 168 hours (default 24); due waves are sent when the panel is read and every 10 minutes, and each wave is a line in the send log and a push notification.
3. An assistant with a training request on a live link is not sent again; his earlier unsent request is marked superseded and its keep items carried over; the link expires one day after closing or at term end, whichever is later.
4. An empty allowed-course list means all; GET /api/ta-trainees returns the numbers of those with a training request in the department family to a holder of any read screen.

#### EVIDENCE

`src/server/routes/offeringRoutes.ts#/api/ta-phase` `src/server/routes/offeringRoutes.ts#/api/ta-phase/open` `src/server/routes/offeringRoutes.ts#/api/ta-phase/allowed` `src/server/routes/offeringRoutes.ts#/api/ta-phase/close` `src/server/routes/offeringRoutes.ts#/api/ta-trainees` `src/utils/taPhase.ts#planWaves` `src/utils/taPhase.ts#vacantSections`

### IR-ACD-044 Advisor seat balance routes

Inferred

The system shall offer the advisor seat balance through GET /api/advisor-seats, POST /api/advisor-seats/add and POST /api/advisor-seats/exception to a holder of screen 7 or 14 within scope, and its configuration through PUT /api/advisor-seats/config to a holder of screen 7.

Implemented · Should · Interface · Department advisor, Schedule committee chair

#### RATIONALE

> The cap and atomic-add rules are in FR-STU-024.

#### ACCEPTANCE CRITERIA

1. Sections are grouped by course and section code and the room capacity is the smallest of its rooms; GET returns the latest 50 exception requests and canConfigure for non-advisor, non-read-only roles.
2. Saving the configuration with an old revision stamp returns 409 stale-write; adding to a section not in the department schedule returns 404, with no base capacity 409, and when full up to 3 alternative sections are suggested.
3. An exception request is saved pending with a count of 1 to 50 and a note up to 300 characters, announced in the bell and written to the activity trail.

#### EVIDENCE

`src/server/routes/offeringRoutes.ts#/api/advisor-seats` `src/server/routes/offeringRoutes.ts#/api/advisor-seats/config` `src/server/routes/offeringRoutes.ts#/api/advisor-seats/add` `src/server/routes/offeringRoutes.ts#/api/advisor-seats/exception` `src/utils/advisorSeats.ts`

### FR-ACD-045 How many visiting instructors a department needs

Inferred

The system shall compute per course the sections awaiting a visiting instructor (the extra sections plus those without a real instructor), and the number of visitors needed at a maximum of two sections each after subtracting the free places of the current visitors, without exposing any name.

Implemented · Could · Functional · Schedule committee chair, The system (automatic)

#### ACCEPTANCE CRITERIA

1. Five waiting sections with one current visitor holding one section: (5 – 1) ÷ 2 rounded up = 2.
2. Someone who taught the course before, is still in service and does not teach it now is shown as a returnable count and does not reduce the need; someone who was visiting in that term is not counted.

#### EVIDENCE

`src/utils/visitingNeed.ts#visitingNeed` `src/utils/visitingNeed.ts#staffCourse` `src/utils/visitingNeed.ts#visitorFreeSlots`

### FR-ACD-046 Department instructors in the schedule tools

The system shall list through GET /api/section-roster, for holders of screen 7, the instructors of a department within their scope sorted alphabetically with their hours in the chosen term, rank, load bounds, overtime and exception, without civil ID or phone, and shall allow through PUT /api/section-roster/:id editing an instructor's name, status, category and load assignment for department members only, without deleting the record or touching its civil ID.

● Implemented · Should · Functional · Schedule committee chair, System administrator

#### ACCEPTANCE CRITERIA

1. Membership is the same for read and write: the department's registered faculty and anyone who taught in the department family in any term, excluding a visiting instructor unless retired or TA, and excluding the faculty placeholder; editing a non-member returns 404.
2. A missing college, department or term returns 400, a department outside scope returns 403, and the read is no-store.
3. The name is trimmed to 120 characters and an empty one returns 400; status is retired, sabbatical or active; an unknown load rank returns 400; without a bound override the reason and until-term are dropped.
4. «New instructor» (owner decision 2026-11-14): one form (NewInstructorForm) in the schedule tools and in the appointment panel: name and civil ID, then the academic rank (hours are computed from it) and a «trainee» option (listed with the trainees). It posts to POST /api/instructors with the department scope, which enrols the person in the department directory and writes the rank through one reader (readRosterLoad) validated before creation: an unknown rank is refused with 400 and nobody is created or their civil ID registered, and without scope the rank is not written. Ranks come from GET /api/section-roster/ranks (screen 7, no personal data). Exception, sabbatical and retirement are set from the member card after adding; a sabbatical returns by removing the status; becoming a TA happens at creation only. The academic rank is mandatory for every member without exception (owner decision 2026-11-14): no instructor can be added in a department context without a rank from the teaching-load list (400 «rank-required»), trainee or not, a rank is never cleared from the schedule tools but only changed to another one from it, and members who still have none are completed in a «complete ranks» panel (saved per member with their rank); none of this applies when no ranks are defined yet. With the civil ID of an existing instructor the person is enrolled in the department (a rank must be sent if they had none before) and given the rank if they have none (an existing rank is never replaced and «trainee» is not applied to an existing record), and the reply states what was actually applied (existing and loadApplied).
5. Each save is written to the audit log as an edit from the schedule tools listing what changed (name, status and category, load), and the load assignment is written atomically for one member, not the whole configuration.

#### EVIDENCE

`src/server/routes/instructorsRoutes.ts#/api/section-roster` `src/server/routes/instructorsRoutes.ts#/api/section-roster/:id` `src/server/routes/instructorsRoutes.ts#/api/section-roster/ranks` `src/server/routes/instructorsRoutes.ts#readRosterLoad` `src/server/routes/instructorsRoutes.ts#sectionRosterIds` `src/utils/rosterGroups.ts#rosterMemberIds` `src/components/DepartmentRoster.tsx` `src/components/NewInstructorForm.tsx` `src/components/InstructorPicker.tsx` `tests/admin-screens-r4-audit.ts` `tests/roster-delegates-card-audit.ts` `tests/roster-add-instructor-audit.ts`

### FR-ACD-047 Creating a course in the current sheet from the Courses screen

Inferred

When a course is being created and its department chosen, the Courses screen shall read the department's sheets (GET /api/curriculum/sections/:sectionId) and pick the active sheet that is neither virtual nor track-specific, saying «target sheet: <name>» and that the course is linked to it rather than to the transition sheet, with the save button reading «create in <sheet>»; it shall block saving while checking, when the check fails (with a «check again» button) and when there is no active sheet; when the department has a single sheet only it shall require ticking «the course belongs to the department's current sheet — add it there» or starting the new sheet from the same button; after saving it shall show «<number> — <name> was added to <sheet> successfully» and return to the sheets panel when creation started there.

● Implemented · Should · Functional · Schedule committee chair, System administrator

#### ACCEPTANCE CRITERIA

1. A department with a single sheet and the box unticked ← the create button is disabled, and trying gives «choose first: start the new sheet for this department, or confirm adding the course to its only current sheet».
2. The sheets cannot be read ← saving stays blocked until «check again» succeeds.

#### EVIDENCE

`src/components/Courses.tsx#submit` `src/components/Courses.tsx`

### FR-ACD-048 The course list, its card and its form on the screen

Inferred

The Courses screen shall search by academic number, name, college or department, filter by college and department (per the scope shape) and by sheet (all, new, previous, college requirement) when at least one course carries a sheet tag, with shared and college-requirement courses included under new and previous; it shall order by course number ascending and show 160 cards then «show more · N remaining» in batches of 160; the card shows the teaching mode, room type, credits and hours, and the details add capacity, room type, companion facility and «required in sheets: …»; the form shall accept digits only for the number, credits and capacity and a decimal for hours, suggest existing course names, warn on leaving the number field when it repeats in the department («this academic number is already registered») and refuse to save with the same message while it repeats (the server refuses it too), list room types from GET /api/location-room-types or else «teaching, laboratory, computer laboratory», and after an edit show in how many sites the room type or teaching mode was aligned and how many failed; it shall open the edit or create form prefilled when a correction intent arrives from another screen through sessionStorage (schedule-reference-course-action) and then clear it.

Implemented · Could · Functional · Schedule committee chair, System administrator

#### ACCEPTANCE CRITERIA

1. 400 matching courses ← 160 shown and «show more · 240 remaining».
2. Filtering «previous sheet» ← courses shared by both sheets and college requirements also appear.

#### EVIDENCE

`src/components/Courses.tsx#planTagOf` `src/components/Courses.tsx#validateCourseCode` `src/components/Courses.tsx` `tests/handover-fixes-audit.ts`

### FR-ACD-049 Provisioning a study programme for a partner college

The tool scripts/lib/programProvision.ts (provisionProgram) shall provision a study programme for a new college from its plan-sheet reference with prerequisites, previewing by default with no write at all, and a dedicated runner shall apply it to one specific diploma programme on one specific boys' college only, with options: --apply to execute, --college=<id> for a specific college, --create-college to create it when absent (default name the reference college name with «- Boys» and code the first two digits of the first course code, or --college-name and --college-code), --own-only for the programme department alone, --approve to approve the rules at once, --password=<word> to activate the accounts, --prefix (default tsb) and --dept=<code>=<name> for each missing department; it exits with code 1 and a message on error. The college shall not be guessed: it is chosen by id or by a name containing every required part, the run stops if it is ambiguous or absent, and it is created only with the explicit option when its code is not used by another college; the name of a missing department (the programme's or a supporting course's) shall not be guessed, the run stopping with the list of codes; a missing course is created with capacity 0 and an existing course is not modified, only the programme department's courses are linked to the plan sheet (code <programme>-<year>) and other departments' courses are kept as externals; when this is the first sheet of a department with no courses, the empty «previous» sheet is archived; the rules are written «in review» unless they already exist, in which case they are kept, and with --approve they are approved only if free of blockers and the sheet has no previously approved version with a pending edit; with --own-only other departments' prerequisites are dropped and listed and the number of units missing from the map total is stated; one account is created per role named <prefix><suffix> (dean, vicedean, registrardean, registrarhead, collegeregistrar, registrarstaff, head, advisor, dept, user) on this college only, the department head, advisor and committee chair on the programme department and the rest on the whole college, inactive and passwordless unless --password is given; an existing account only has its missing permissions or scope filled and is activated only if inactive with neither password nor vault copy. This tool relates to the plan-sheet and pathway module for the sheet and rules it writes.

Implemented · Should · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. A missing department without --dept ← an error that a department name is not guessed, and no write.
2. A college name matching two colleges (boys and girls) ← an «ambiguous college» error with the options.
3. --create-college with a used code ← it stops saying the code belongs to another college.
4. --approve on rules with a blocker ← they stay «in review» and the first blocker is reported.
5. Running again ← neither the college nor the courses repeat and the rules are reported approved.

#### EVIDENCE

`scripts/lib/programProvision.ts#provisionProgram` `scripts/lib/programProvision.ts#ROLE_LOGIN_SUFFIX` `scripts/provision-marine-diploma.ts` `tests/program-provision-audit.ts`

### FR-ACD-050 Capacity by course nature for a whole department family

Inferred

The Courses screen shall give the system administrator alone a «Capacity by course nature» tool in which a department is chosen by name, covering every copy of it in every campus branch, with one capacity per nature (theory 50, practical 20, field training 15 by default), then show a preview that writes nothing (the colleges with their course counts and, per nature, the new capacity and how many of its total courses change) before an «Apply» button. The request is POST /api/admin/courses/capacity-by-mode with sectionName, caps and apply; it shall refuse with 400 an unchosen department with a «choose the department» message and a capacity that is not a whole number from 1 to 200 for any of the three natures, and with 404 a name that matches no department. Only a course whose nature is theory, practical or field training is counted and changes when its current capacity differs; an unclassified course or one of any other nature is counted in «untouched» and is left alone. Nothing is written unless apply is exactly true, and then the capacities are written in batches of at most 400 courses, the computed registration results are marked stale, and the server returns the number written together with the same preview. The app sends the very inputs that were previewed rather than the boxes' current values, disables the boxes during the request, and clears the preview when the department or any capacity changes.

● Implemented · Should · Functional · Root administrator

#### RATIONALE

> One department has a copy in every branch, setting capacities course by course is slow and error-prone, and the effect crosses colleges so it is limited to the system administrator.

#### ACCEPTANCE CRITERIA

1. A department with two copies holding 10 theory courses at capacity 50 and one at 40 ← the preview shows 1 of 11 changing and no data changes before Apply.
2. A request with no sectionName ← 400 «اختر القسم العلمي.»; a practical capacity of 0 or 201 ← 400 «السعة لكل طبيعة رقمٌ صحيحٌ بين 1 و200.»; an unknown department name ← 404 «لا قسم بهذا الاسم.».
3. A course with no nature or a nature other than the three ← it is counted among those that «stay as they are» and its capacity does not change after Apply.
4. Apply to 900 changing courses on Firestore ← written in 3 batches (400, 400 and 100) and then the registration results are marked stale.
5. A user who is not the system administrator ← the tool is not shown on the screen and the server refuses the request.
6. Every write call to this route is recorded in the audit log like any write (user, path and status), without per-course detail; it is not one of the activity-trail routes reserved for appointments.

#### EVIDENCE

`src/server/routes/coursesRoutes.ts#/api/admin/courses/capacity-by-mode` `src/db/repository.ts#setCourseCapacityForIds` `src/components/Courses.tsx#CapacityByMode`

### FR-ACD-051 No duplicate college name, term or department code

The system shall refuse with status 400 creating or editing a college whose name is already registered for another college (normalised letters, single spaces) — a shared code is accepted, because the boys' and girls' campuses of one college share its code — a term whose name is held by another term (spacing ignored), and editing a department to a code held by another department of the same college, with a message naming the existing record; the form shall say the same before sending.

● Implemented · Must · Functional · Root administrator, System administrator

**RATIONALE**

> Duplicates were refused only when creating a department, so two colleges could share a name (each with its own dean accounts), two terms a name, and an edited department could copy another's code.

**ACCEPTANCE CRITERIA**

1. Creating a college named «كلية الهندسة» while «كلية الهندسة» exists ← 400 naming the existing college, and no accounts are created; a second campus with the same code and another name (girls) is created.
2. Creating «الفصل الأول 2027/2028» while «الفصل الأول 2027/2028» exists ← 400; saving a term under its own name is not refused.
3. Editing a department to the code of another department in its college ← 400 naming it; a code used in another college is accepted.

**EVIDENCE**

`src/utils/academicGuards.ts#sameReferenceCode` `src/server/routes/referenceRoutes.ts#duplicateCollegeProblem` `src/server/routes/referenceRoutes.ts#duplicateTermProblem` `src/server/routes/referenceRoutes.ts#/api/sections/:id` `src/components/Colleges.tsx#submit` `src/components/Terms.tsx#submit` `src/components/Sections.tsx#submit` `tests/academic-console-audit.ts`

### FR-ACD-052 Deleting a college or department leaves nothing dangling

The system shall refuse with status 409 to delete a college or department while a non-deleted account is scoped to it (the dean, vice dean and registrar seat of a college, the accounts a department got from a sheet import), naming the logins so the administrator handles them from Users, and shall not delete those accounts by itself; deleting a department shall also delete the faculty-placeholder record created for it (its synthetic civil number) unless it is used by an appointment.

● Implemented · Must · Functional · Root administrator, System administrator

**RATIONALE**

> Deleting a college left dean accounts signing into a scope that no longer exists, and deleting a department left a placeholder with no department. Deleting the accounts automatically is riskier than blocking: they may have been used.

**ACCEPTANCE CRITERIA**

1. Deleting a college with no departments while «coedean» is scoped to it ← 409 naming «coedean», and nothing is deleted.
2. Deleting a department with no courses and no accounts ← it is deleted together with its unused faculty placeholder, and the reply carries placeholderRemoved.

**EVIDENCE**

`src/utils/academicGuards.ts#accountsScopedTo` `src/server/routes/referenceRoutes.ts#scopedAccountsProblem` `src/server/routes/referenceRoutes.ts#/api/sections/:id` `tests/academic-console-audit.ts`

### FR-ACD-053 Instructor status and load saved on create, and the load bound

When an instructor is created from the instructors screen (permission 3 or administration) the system shall save the status (retired or sabbatical) and load sent, as an edit does, shall refuse with status 400 a load above 40 or below zero with a message instead of erasing the saved load, shall accept the name as text of up to 120 characters, and shall not rename a real instructor to the faculty-placeholder name.

Implemented · Must · Functional · Root administrator, System administrator

**RATIONALE**

> The form sent status and load on create and the server silently dropped them, and a load typed as 45 erased the existing load without anyone knowing.

**ACCEPTANCE CRITERIA**

1. Creating an instructor as retired with load 12 ← he appears in the retired tab with load 12.
2. An edit with load 45 ← 400 and the saved load stays; an empty or zero load clears it.
3. The quick add from the schedule (permission 7 alone) writes no status and no load.

**EVIDENCE**

`src/utils/academicGuards.ts#readInstructorLoad` `src/server/routes/instructorsRoutes.ts#/api/instructors` `src/server/routes/instructorsRoutes.ts#/api/instructors/:id` `src/components/Instructors.tsx#submit` `tests/academic-console-audit.ts`

### FR-ACD-054 The academic sheets entry and the seven-digit number on the Courses screen

The Courses screen shall carry a permanent «academic sheets» button in its header; a refusal caused by a sheet (deleting a linked course or changing a frozen identity, code curriculum-linked) shall carry an «open academic sheets» button for the course's department, and a button in the Departments graduation-rules card shall open the sheets on that department; opening the sheets from a create form brings the form back with what was typed when they close. The screen shall show the course number as the seven-digit authority number (authorityCourseCode) under one label «academic number» in the list, the details and the form, and search by it.

Implemented · Must · Functional · Root administrator, System administrator, Schedule committee chair

**RATIONALE**

> Messages and the Departments screen pointed to the sheets while the only way in was inside a create form, so a course created by mistake could not be deleted; and the screen showed the stored code under two labels.

**ACCEPTANCE CRITERIA**

1. Deleting a course in a sheet ← 409 with code curriculum-linked, and the message has a button opening the sheets on its department.
2. Course «105» in a department keyed 0109 ← «0109105» is shown in the card and details, and searching «0109105» finds it.

**EVIDENCE**

`src/components/Courses.tsx#headActions` `src/components/Courses.tsx#courseNumberOf` `src/components/Sections.tsx#plansButton` `src/components/AcademicConsole.tsx#plansFor` `src/server/routes/coursesRoutes.ts#curriculum-linked` `tests/academic-console-audit.ts`

### FR-ACD-055 One behaviour across the five academic data tabs

The academic data tabs shall guard save and delete against double submission and dropped connections with an Arabic message, say so with a retry button when loading fails instead of «nothing yet», name the record in every delete confirmation and say what blocks deleting it, ask before closing a form with unsaved input by backdrop, Escape or the close button (optional dirty prop of CatalogFormDrawer), count in the tab rail what the list shows and refresh after every create and delete, show the initial passwords of a new college's accounts inside the screen until the administrator closes them, and limit the capacity tools to the root account as the server does, reloading the list rather than the page after applying.

Implemented · Should · Functional · Root administrator, System administrator

**RATIONALE**

> Colleges and departments had no submit guard or error handling, delete confirmations named nothing, a click closed a form and lost input, the counts disagreed with the lists, and passwords appeared in a browser alert.

**ACCEPTANCE CRITERIA**

1. Two quick clicks on create college ← one request.
2. Editing a course name then pressing Escape ← «discard changes?», and continuing keeps the form as it was.
3. Deleting an instructor ← the instructors count in the rail drops by one, and placeholders are not counted.

**EVIDENCE**

`src/components/ui.tsx#CatalogFormDrawer` `src/components/AcademicConsole.tsx#reporters` `src/components/Colleges.tsx#issued` `src/components/Courses.tsx#rootAdmin` `src/utils/arrowChoice.ts#arrowChoice` `tests/academic-console-audit.ts`

### FR-ACD-056 The term form, term deletion and same-building minutes

Creating a term shall save the ended flag when ticked, the suggested calendar shall follow the term name while creating unless the dates were touched, deleting a term on Firestore shall release its autoTermClaims name claim so it behaves as the data file does, with a warning in the confirmation when it is the term the automatic job creates now; and the same-building time shall accept zero minutes.

Implemented · Could · Functional · Root administrator, System administrator

**RATIONALE**

> The box was shown on create and ignored, a leftover claim stopped the due term from being recreated on Firestore only, and zero fell back to the default.

**ACCEPTANCE CRITERIA**

1. Changing the suggested name to the summer term before touching the dates ← seven weeks.
2. Saving same-building minutes = 0 ← 0 is stored.

**EVIDENCE**

`src/components/Terms.tsx#changeName` `src/db/repository.ts#deleteTerm` `src/utils/academicGuards.ts#sameBuildingMinutesOf` `tests/academic-console-audit.ts`

**FR-ACD-057** **What-if-I-delete map before deleting a term, college, department, instructor or course**

The confirmation dialog of every academic delete shall show a grouped, counted map of what links to the record (appointments in the current, later and past terms, student and instructor requests and study proposals, accounts and their scopes, academic and published sheets…), shall show «cannot delete now» with the blockers, where to fix them and a disabled confirm button, and shall load it from GET /api/delete-impact/:entity/:id under the matching delete route's permission and scope. The blocking verdict is single-sourced: the delete route and the map both call the same deleteBlockers, so the map never promises what the delete refuses nor the reverse. A failed map load is stated and confirmation stays available because the server refuses what is forbidden.

● Implemented · Should · Functional · Root administrator, System administrator

**RATIONALE**

> The confirmation described the effect in one generic sentence, so people learned after pressing that the delete was refused or touched appointments and requests they were never told about.

**ACCEPTANCE CRITERIA**

1. Deleting a term with appointments shows their counts and «cannot delete now» with the confirm button disabled.
2. Deleting a college with departments and scoped accounts lists both blockers, the login names and the destinations.
3. Deleting a course in a sheet shows the curriculum blocker with the same code the server returns.

**EVIDENCE**

`src/server/deleteImpact.ts#deleteBlockers` `src/utils/deleteImpact.ts#blockersFor` `src/components/DeleteImpact.tsx#confirmDeleteWithImpact` `src/server/routes/deleteImpactRoutes.ts#registerDeleteImpactRoutes` `src/components/Terms.tsx#remove` `src/components/Colleges.tsx#remove` `src/components/Sections.tsx#remove` `src/components/Instructors.tsx#remove` `src/components/Courses.tsx#remove` `tests/delete-impact-audit.ts`

## 3.2.6 Algorithms

ALG-ACD-01 · Academic structure and reference data

**Deterministic**

**Duplicate course and spelling-twin detection**

*Which two courses of a department are one course written twice, and which is kept?*

1. Course identity: a short number is expanded with the department code to seven digits (105 → 0109105); same identity with the same name = duplicate.
2. Spelling: the name is normalised (hamza forms, ta marbuta, alef maqsura, the article, spaces) yielding same, spelling, related or different; the first two group twins.
3. The keeper is chosen by usage score: schedule 16, students 8, sheet rules 4, capacity 2, sheet link 1, then shorter code, then id.
4. Only an unused duplicate is offered for deletion, with a rescan before delete; a spelling merge needs explicit confirmation and a course referenced by student data is not merged.

**Inputs**

Department courses, college and department codes, schedules, student data, sheet rules and links.

**Output**

Duplicate groups with a keeper and removable or mergeable duplicates with reasons.

Preview first; no silent delete or merge; root account only.

`src/utils/courseNameRelation.ts#courseNameRelation` `src/utils/courseSpellingTwins.ts#spellingTwinGroups` `src/server/planReviewRoutes.ts` `tests/course-spelling-merge-audit.ts` `tests/course-name-relation-audit.ts`

`FR-ACD-015` `FR-ACD-016`

ALG-ACD-02 · Academic structure and reference data

**Instructor name-identity matching**

Deterministic

*Is this typed or printed name this registry instructor, without ambiguity?*

1. Text is folded (hamza, alef maqsura, ta marbuta, diacritics, titles) and split into tokens; the fragments 'abd/al/abu/bu' are joined to the next token.
2. Match: equal tokens, equal without spaces, family rotated to the front (3+ names), the registry name as the prefix of the printed one, or first and family with the middle names in order.
3. A link is accepted only when exactly one person matches; otherwise candidates are named (exact, or partial sharing two names).

**Inputs**

The written name and the instructor registry.

**Output**

One instructor, or 'unregistered', or 'ambiguous' with candidates.

No containment in the middle or end (a father is not his son) and no choice between two people; a civil number matches only when complete.

`src/utils/instructorIdentity.ts#instructorIdentityTokens` `src/utils/instructorIdentity.ts#sameInstructorIdentity` `src/utils/instructorIdentity.ts#uniqueExactIdentityMatch` `src/utils/instructorIdentity.ts#registryCandidatesFor` `tests/pdf-import-hardening.ts` `tests/pdf-import-regression.ts`

`FR-ACD-019` `FR-IMP-013`

ALG-ACD-03 · Academic structure and reference data

**Teaching-load computation and classification**

Deterministic

*How many hours does a member teach this term, and where does that fall against his load?*

1. Each section (college, department, course, section code) is counted once for its instructor at its course hours, however many appointments it has.
2. Limits: the member's active exception first, then his academic rank; ceiling = maximum + overtime.
3. Classification: above the ceiling = over, between maximum and ceiling = overtime, below minimum = under, otherwise within, and no limits = unset.
4. An exception expires when the computed term is chronologically after its end term.

**Inputs**

Term rows, course hours, rank and exception configuration, and the term list.

**Output**

Hours, state, excess and overtime used.

A read-only warning that never blocks saving; no invented figure when no load is set.

Up to 30 ranks, maximum up to 60 hours, overtime up to 30.

`src/utils/teachingLoad.ts#teachingHoursByInstructor` `src/utils/teachingLoad.ts#teachingLoadLimits` `src/utils/teachingLoad.ts#evaluateTeachingLoad` `tests/teaching-load-audit.ts`

`FR-ACD-022` `FR-ACD-023`

## 3.2.7 Edge cases

### ⚠ Three-digit course tail across similar departments

**Scenario** The authority report prints 0114464 while another department's catalogue holds course 464 under department code 0120.

**Behaviour** It is not linked by the tail alone: the printed name must agree and the file must not print the department's own number with the same tail, so 0114464 stays different from 0120464, and when no link is proven the course is created, after a single confirmation, under its printed number.

### ⚠ Editing the name of a course with history

**Scenario** An administrator corrects the spelling of a course name that has appointments in past terms.

**Behaviour** It is refused with 409 if the code or name changes after presentation-form normalisation, and the administrator is directed to create the new course and link it from the sheets screen; a spelling twin is handled by the confirmed merge, not by editing.

### ⚠ Visiting in one department, member in another

**Scenario** An instructor is seconded to a department in one college and teaches as a member in a different department.

**Behaviour** The visiting badge appears beside his name only in the first department's rows, because a visitor is known by department and term; the department is a family across colleges, so its sister's directory in the other college is read.

### ⚠ Visitor removed from the directory but left in an old roster

**Scenario** A name is removed from the department visiting directory but remains in a past term's roster.

**Behaviour** The old roster stays as historical evidence and is never rewritten, but it does not keep a live visiting badge in today's schedule because the directory is the authority for live membership.

### ⚠ New department without a faculty-placeholder record

**Scenario** A newly created department with no history, and a coordinator opens its instructor list.

**Behaviour** Its record is created when the department is created; if that fails the department is not lost and the record is retried at first import. While it has none, other departments' records are offered for selection, its own college's first and then the university's, and only once.

### ⚠ Member with an explicit zero load

**Scenario** A member with full exemption: maximum 0 and overtime 0.

**Behaviour** An explicit zero is a real limit with ceiling 0, not no limit, so any teaching hour for him is over; the absence of both rank and exception means unset with no warning.

## 3.2.8 Standing owner decisions

- Course numbers are seven digits only: college (2), department (2), course (3), such as 0109105; the stored code and AdCourseId are never shown, the number is built with authorityCourseCode and guarded by test:course-number-seven-digit.
- The page header decides the department in the authority report (SWRSCHA) even when a course number carries another department's code; a missing department or course is created only after one confirmation under its printed number and name with the usual permission, a three-digit tail alone never links, and scans never create.
- Printed reports keep their design: values and data are fixed, not the layout, and any unavoidable layout change reuses the existing print classes and is checked on a Chrome-printed A4 landscape PDF before merging.
- A term whose end date has passed is declared ended automatically (decision of 2026-10-01), and only a genuine re-opening after its end protects it.

↑ Contents

3.3 · LOC

# Locations

One official registry of buildings and halls, hall barter between departments, door pages and occupancy

| 39 | 100% | 38 | 50 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.3.1 Overview

The module keeps the official registry of buildings and halls on which every schedule appointment is built, and decides who may book which hall. It lets a department borrow a free window of another department's hall on the same campus, with the host's approval and for one term only. It publishes a public door page for each hall showing its state now (free, busy or starting soon) and a corridor board for each building, with a printable QR sticker. It also covers occupancy figures, the companion facility of a hall and the travel policy between campuses.

Root administrator · System administrator · Department head · Schedule committee chair · University registrar · Public visitor · Student · Faculty member · The system (automatic)

## 3.3.2 User journeys

**Schedule committee chair** — **Borrowing a hall window from another department**

1. The committee chair opens Hall barter for the department and term; free windows in the college halls are listed per day.
2. She narrows the list by host department, day or building and reads the fit warning if the hall is specialised or smaller than the department's students.
3. She picks a window and requests it; the request goes digitally to the host department and no appointment changes.
4. The host department approves and the window becomes digitally reserved for the requesting department, visible to both.
5. She adds the lecture from the appointments screen inside the approved window only; anything outside is refused with a message naming her windows.

### Department head — Answering a barter request and taking the hall back

1. The host department head sees the number of waiting requests and the age of the oldest in the side bar.
2. He opens incoming requests and approves or rejects; hall usage is re-read inside the lock before approval.
3. He uses his hall freely outside the lent window, but not inside it until the loan is ended.
4. He ends the loan and the window returns to his department, unless the borrower teaches in it, in which case ending is refused until that appointment is moved.

### Root administrator — Adding a building and its halls and printing its door stickers

1. The root administrator picks the campus and enters the building number; the official code is the site prefix plus two digits (for example 012A07).
2. He adds the building's halls by code in one go and links them to one or more departments; a hall linked to several departments is shared.
3. He opens the building links and gets the building board, the corridor screen and a link for each hall.
4. He prints an A4 sheet with four QR stickers and fixes each sticker on its hall door.

### Public visitor — Scanning a hall door sticker

1. A student or visitor scans the QR code on a hall door between lectures.
2. The hall page opens without sign-in and says free until when, busy until when, or starting in a few minutes.
3. He follows the building link to see the board of the other halls and finds a free one nearby.

### 3.3.3 Diagrams

**Barter request lifecycle**

Request states as stored, and the guard on each transition.

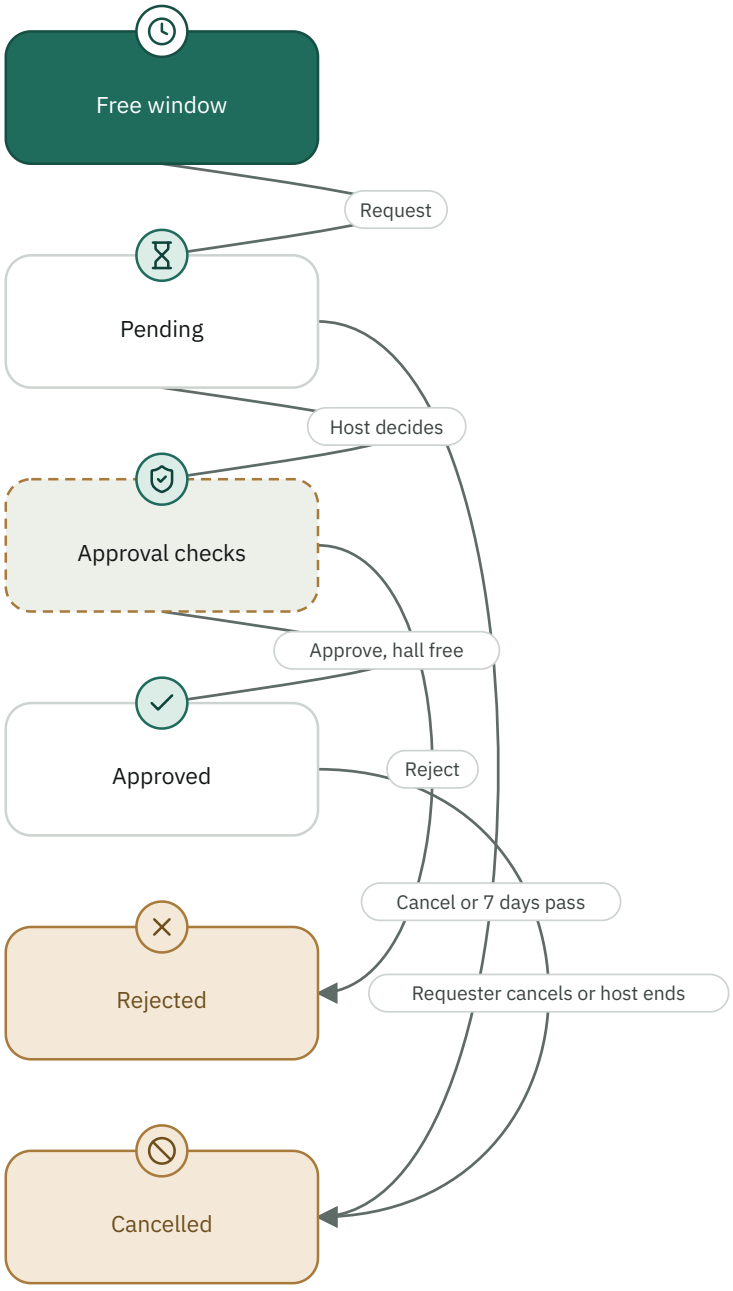

## Hall state on the door

What the door page shows at a given instant in Kuwait time.

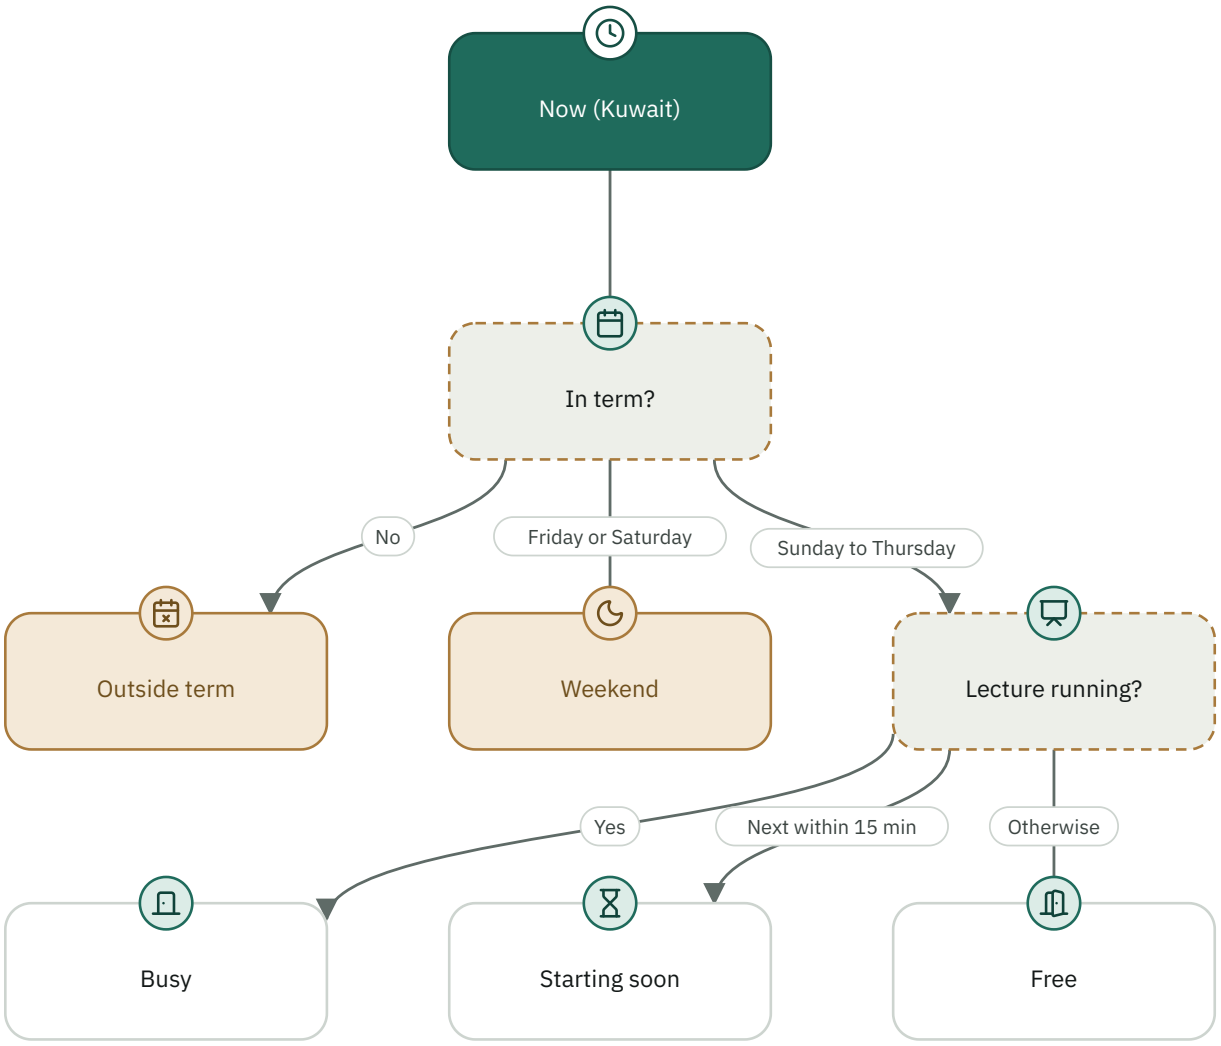

## Location check on save

What an appointment passes before it is saved with a hall.

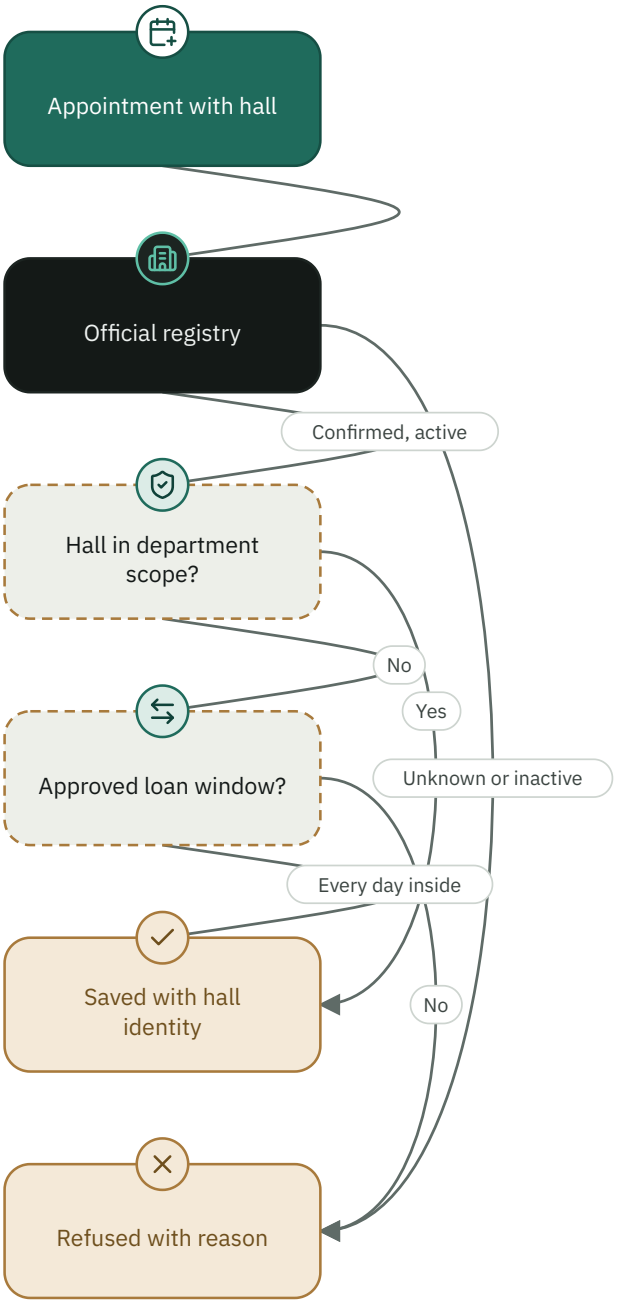

**Permissions in Locations**

| | Read registry | Edit halls and buildings | Add and deactivate (root only) | Request barter | Host response and ending | Door links and stickers | Door pages | Travel policy |
|---|---|---|---|---|---|---|---|---|
| Root administrator | ✎ | ✎ | ✎ | ✎ | ✎ | ✎ | 👁 | ✎ |
| System administrator | ✎ | ✎ | — | ✎ | ✎ | ✎ | 👁 | ✎ |
| University registrar | 👁 | — | — | — | — | — | 👁 | ✎ |
| Department head | 👁 | — | — | ✎ | ✎ | — | 👁 | — |
| Schedule committee chair | 👁 | — | — | ✎ | ✎ | — | 👁 | — |
| Faculty member | 👁 | — | — | — | — | — | 👁 | — |
| Student | — | — | — | — | — | — | 👁 | — |
| Public visitor | — | — | — | — | — | — | 👁 | — |

✎ Write 👁 Read — No access

### 3.3.4 Screens

**Add buildings and halls**
The single registry screen of the root administrator; the old Buildings and halls link opens it. It also carries the door links and stickers.`src/components/LocationQuickSetup.tsx`

**Location picker**
Building and hall choice in the appointment form, naming the sharing departments and the owner of a borrowed hall.`src/components/LocationPicker.tsx`

**Hall barter**
Board of free windows and the department's outgoing and incoming requests, refreshed automatically every minute.`src/components/HallBarterBoard.tsx`

**Loan hours strip**
One weekly drawing of what the department lent and borrowed.`src/components/RoomLoanStrip.tsx`

**Hall types**
Manage hall types and assign a type to departments.`src/components/LocationRoomTypeManager.tsx`

**Door tools**
Door stickers, the corridor screen and a QR code for each hall.`src/components/RoomDoorTools.tsx`

**Occupancy**

**Companion facility**

Day by hour grid with lecture counts and hall occupancy; selecting a cell opens its panel.`src/components/OccupancyHeatGrid.tsx`

Pick a studio or lab booked alongside the main hall, with availability for the appointment time.`src/components/CompanionFacilityPicker.tsx`

**Travel between campuses**

Registrar card inside the submission deadlines.`src/components/CampusTravelPolicyCard.tsx`

### 3.3.5 Requirements

**DR-LOC-001** **Official building identity**

Every building shall carry an official code made of the four-character site prefix followed by a two-digit building number, and the prefix shall be derived from the college name through a fixed official table of twelve sites.

Implemented · Must · Data · Root administrator

**RATIONALE**

> The official code is what imported schedules and past terms match on, so it is never guessed or re-based.

**ACCEPTANCE CRITERIA**

1. A college with site code 012A and building number 7 yields 012A07, and number 0 or more than three digits is rejected.
2. A college with no official site prefix cannot receive a building and the reply says the reference code is missing.

**EVIDENCE**

`src/utils/locationCollegePrefixes.ts` `src/server/routes/locationsRoutes.ts` `tests/location-registry-audit.py`

**DR-LOC-002** **Hall record**

A hall code (1 to 12 Latin letters or digits including at least one digit, never PENDING_ROOM or a placeholder) shall identify the hall inside its building without duplicates, and the hall may carry an integer capacity from 1 to 5000, a type up to 60 characters and one of three booking policies: normal, companion only or blocked.

Implemented · Must · Data · Root administrator, System administrator

**ACCEPTANCE CRITERIA**

1. A code such as ZX901 is accepted; a code with no digit, over 12 characters or a placeholder such as TBA is rejected.
2. A capacity of 0, 5001 or a fraction is rejected with the range message, and a policy outside the three is rejected.
3. A code already in the building returns 409.

**EVIDENCE**

`src/server/routes/locationsRoutes.ts` `src/utils/locationRegistry.ts` `tests/rooms-one-screen-audit.ts` `tests/companion-rooms-audit.ts`

### DR-LOC-003 Registry confidence and seed

Only active and confirmed buildings and halls shall appear in any picker, and the registry seed bundled with the software shall be merged with the stored registry by adding missing rows only, never replacing stored ones, and not merged into the demo sandbox.

● Implemented · Must · Data · The system (automatic), Root administrator

**RATIONALE**

> The seed comes from the real university history and holds 31 buildings (28 confirmed, 3 probable), 355 halls (265 confirmed, 90 probable) and 444 review cases; a probable row stays inactive until a person confirms it.

**ACCEPTANCE CRITERIA**

1. Every building and hall with probable confidence in the seed is inactive.
2. A demo request reads its own sandbox registry without seed rows; the registry cache expires after 60 seconds and is cleared on every edit.

**EVIDENCE**

`src/server/locationRegistryEngine.ts` `src/server/core/locations.ts` `src/generated/locationRegistrySeed.ts` `tests/location-registry-audit.py`

### FR-LOC-004 Add a building

The system shall let only the root administrator add a building by choosing the site, the building number and an optional department, and shall reject a duplicate code or one that does not follow the site prefix.

● Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Adding an existing building returns 409 stating the building already exists.
2. A department that does not belong to the chosen site returns 400.
3. A user other than the root account gets 403.

**EVIDENCE**

`src/server/routes/locationsRoutes.ts` `src/components/LocationQuickSetup.tsx` `src/server/routes/locationsRoutes.ts#/api/admin/location-setup/buildings` `src/server/routes/locationsRoutes.ts#/api/admin/location-registry/buildings` `tests/rooms-one-screen-audit.ts`

### FR-LOC-005 Add halls in bulk

The system shall let the root administrator add 1 to 100 halls to an active building in one request, normalising codes (NFKC, upper case, no spaces) and linking them to at least one department of the same site.

● Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Three codes with a department return 201 and created equals 3.
2. A hall linked to more than one department is saved as shared, and any code already in the building fails the whole request with 409.
3. More than 100 codes or a department from another site is rejected with 400.

**EVIDENCE**

`src/server/routes/locationsRoutes.ts` `src/server/routes/locationsRoutes.ts#/api/admin/location-setup/rooms` `src/server/routes/locationsRoutes.ts#/api/admin/location-registry/rooms` `tests/rooms-one-screen-audit.ts`

### FR-LOC-006 Edit a building

The system shall allow editing a building's site name, branch name, description, active state and departments from one form, an omitted field leaving its value unchanged, and departments outside the building's official site shall not be linked.

Implemented · Must · Functional · Root administrator, System administrator

#### ACCEPTANCE CRITERIA

1. Saving active=false with one department returns the building inactive with one department; a later save of the description alone keeps it inactive.
2. Emptying the departments means all departments.

#### EVIDENCE

`src/server/routes/locationsRoutes.ts` `src/components/LocationQuickSetup.tsx`
`src/server/routes/locationsRoutes.ts#/api/admin/location-setup/buildings/:id`
`src/server/routes/locationsRoutes.ts#/api/admin/location-registry/buildings/:id` `tests/rooms-one-screen-audit.ts`

### FR-LOC-007 Deletion is deactivation

The system shall never remove a building or hall from the registry: deleting a hall marks it inactive, deleting a building archives it and deactivates every active hall in it, with an entry in the row's audit history and past appointments still pointing at them.

Implemented · Must · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. Deleting a hall returns active=false and the row stays with its historical forms.
2. Deleting a building returns the count of deactivated halls and the building row remains.

#### EVIDENCE

`src/server/routes/locationsRoutes.ts` `src/server/routes/locationsRoutes.ts#/api/admin/location-setup/buildings/:id`
`src/server/routes/locationsRoutes.ts#/api/admin/location-setup/rooms/:id` `tests/rooms-one-screen-audit.ts`

### FR-LOC-008 Rename and move a hall

The system shall let the administrator change a hall's code or move it to another building, silently recording the old code once as a historical form with no clash with another hall, updating the hall's appointments (current and future terms on rename, all terms on move), and reverting both hall and appointments if the write fails.

Implemented · Must · Functional · System administrator, Root administrator

#### RATIONALE

> A full system backup used to precede the move and exceeded the request timeout so nothing moved; the undo is now row by row from the values read before the write.

#### ACCEPTANCE CRITERIA

1. Changing ZX901 to ZX911 records ZX901 as a confirmed form and a second save without a code change does not duplicate it.
2. Returning to the original code drops it from the forms, and a code owned by another hall in the building is not recorded as a form.
3. The reply returns updatedScheduleCount.

#### EVIDENCE

`src/server/routes/locationsRoutes.ts` `src/utils/locationAliasHistory.ts`
`src/server/routes/locationsRoutes.ts#/api/admin/location-registry/rooms/:id` `tests/rooms-one-screen-audit.ts`

### FR-LOC-009 The list is the permission

The system shall list for each department only halls registered to it, shared with it, borrowed under an approved window this term, pinned in its directory, or ownerless in its branch sites, shall not allow typing a hall by hand, and shall name the sharing departments on a shared hall and the owner on a borrowed one.

Implemented · Must · Functional · Department head, Schedule committee chair, System administrator

**ACCEPTANCE CRITERIA**

1. A hall registered to another department does not appear for mine until a loan is approved, then borrowedFrom shows its owner.
2. If the department is left with no building at all, its college's buildings open so it can choose one and then Pending hall confirmation.
3. An administrator without a department reads the raw registry with the type scopes.

**EVIDENCE**

`src/server/routes/locationsRoutes.ts` `src/components/LocationPicker.tsx` `src/utils/locationRegistry.ts` `src/server/routes/locationsRoutes.ts#/api/location-registry` `tests/room-types-by-department-audit.ts` `tests/instructor-request-room-universe-audit.ts`

### FR-LOC-010 Location check on every save

On saving any appointment the system shall check that the building and hall are known, active and confirmed, that the hall belongs to the building, that the building is within the appointment's college or its branch (three-digit code root), and that the hall is within the department's scope unless shared or inside an approved loan window, and shall accept Pending hall confirmation with a warning.

Implemented · Must · Functional · Department head, Schedule committee chair, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A branch-site hall on an appointment opened from the main campus is not rejected for a different college, whereas another branch (boys versus girls) is rejected.
2. A Tuesday appointment outside a Sunday loan window is refused with a message naming the department's approved windows, up to four, with days and times.
3. An appointment with a pending hall is saved with a pending_room warning.

**EVIDENCE**

`src/server/locationRegistryEngine.ts` `src/server/core/locations.ts` `tests/location-registry-audit.py` `tests/instructor-request-availability-audit.ts`

### FR-LOC-011 Registry initialisation, migration and health

The system shall let the administrator preview the conversion of historical appointments to hall identities and then apply it with explicit confirmation, with a per-row journal, automatic rollback on failure and a later manual rollback, and shall show registry health counts and open review cases.

Implemented · Should · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. Applying without the initialize-location-registry confirmation header returns 409, and rolling back without rollback-location-registry returns 409.
2. If a completed run exists for this version the reply is alreadyInitialized with no repetition.
3. A probable hall is never promoted to verified by usage alone and goes to review.
4. Closing a review case as resolved with no resolution text is rejected.
5. The routes are GET /api/admin/location-registry (registry with review cases, runs, health and pending appointments), PUT /api/admin/location-registry/review/:id with status open, resolved or ignored, GET .../migration/preview, POST .../migration/apply and POST .../migration/:id/rollback; all need screen 7 with main administration.
6. Initialisation first merges the registry seed and then builds the plan; a run already rolled back answers alreadyRolledBack, and an unknown run 404.

#### EVIDENCE

`src/server/routes/locationsRoutes.ts` `src/server/locationRegistryEngine.ts`
`src/server/routes/locationsRoutes.ts#/api/admin/location-registry`
`src/server/routes/locationsRoutes.ts#/api/admin/location-registry/review/:id`
`src/server/routes/locationsRoutes.ts#/api/admin/location-registry/migration/preview`
`src/server/routes/locationsRoutes.ts#/api/admin/location-registry/migration/apply`
`src/server/routes/locationsRoutes.ts#/api/admin/location-registry/migration/:id/rollback` `tests/location-registry-audit.py`

### FR-LOC-012 Hall type differs by department

The system shall keep for each hall a general type and, where needed, a different type per department, shall restrict a type to chosen departments so that others read it as General hall, and shall treat hall suitability for a course as ranking and warning, never as a ban.

Implemented · Should · Functional · Root administrator, Department head

#### ACCEPTANCE CRITERIA

1. A hall whose general type is a sound studio restricted to a technology department reads as General hall for another department.
2. A hall smaller than the course lowers the rank by 24 points without blocking the save; a matching type raises it by 12.
3. Renaming a type updates the linked halls and courses.

#### EVIDENCE

`src/utils/roomTypeForSection.ts` `src/utils/roomSuitability.ts` `src/components/LocationRoomTypeManager.tsx`
`src/server/routes/coursesRoutes.ts` `tests/room-types-by-department-audit.ts` `tests/course-room-type-sync-audit.ts`

### FR-LOC-013 Free-window board for barter

The system shall compute for the requesting department the free hall windows in its college for this term in 30-minute steps within the working-day window, after subtracting the term's appointments, instructors' request holds and approved windows, shall not show a window shorter than 50 minutes, and shall cap the display at 400 windows shared equally among host departments.

● Implemented · Must · Functional · Department head, Schedule committee chair

**RATIONALE**

> A blind cut at 400 windows used to remove whole departments from the filter, so selection now alternates between them.

**ACCEPTANCE CRITERIA**

1. A hall free from 08:00 to 10:00 gives one window of 120 minutes and a 40-minute gap is not shown.
2. No inactive, unconfirmed or non-normal-policy hall appears, and neither does a hall of the requesting department.
3. When windows exceed 400 the reply returns the full total, truncated=true and the complete filter lists.
4. The owner is the registered department, otherwise the one booking it most this term and then in college history.

**EVIDENCE**

`src/server/routes/hallBarterRoutes.ts` `src/utils/hallBarterFairness.ts` `src/utils/scheduleTime.ts` `src/server/routes/hallBarterRoutes.ts#/api/hall-barter` `tests/first-password-room-loans-audit.ts` `tests/pdf-import-regression.ts`

### FR-LOC-014 Boys and girls campuses stay separate

Inferred

The system shall neither list nor approve a barter between a boys' college and a girls' college, and shall fail closed when a college's campus cannot be told from its name.

● Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Approving a request across the two campuses returns 409 stating the halls are fully separate.
2. A college whose name does not indicate its campus neither borrows nor lends.

**EVIDENCE**

`src/server/routes/hallBarterRoutes.ts`

### FR-LOC-015 Requesting and approving a barter

The system shall create a barter request from an offered window without changing any teaching appointment, shall let only the host department approve or reject, and shall serialise approvals per term and re-read occupancy inside the lock so two overlapping requests are never both approved.

● Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Requesting a window no longer offered returns 409 asking for a refresh, and a department requesting from itself returns 409.
2. Approving while the hall is busy in the window or approved to another returns 409 with the state unchanged.
3. A response from a non-host department returns 403 and an already answered request returns 409.
4. An incomplete request (college, department, term or window) returns 400, a decision other than approve or reject 400, and an unknown request 404; every creation or decision broadcasts a schedule change and empties the board cache.

**EVIDENCE**

`src/server/routes/hallBarterRoutes.ts` `src/server/core/hallBarter.ts` `src/server/routes/hallBarterRoutes.ts#/api/hall-barter/requests` `src/server/routes/hallBarterRoutes.ts#/api/hall-barter/requests/:id/respond` `tests/instructor-request-availability-audit.ts` `tests/first-password-room-loans-audit.ts`

### FR-LOC-016 Cancelling and ending a barter

The system shall let the requesting department cancel its pending or approved request and the host department end a running loan whenever it chooses, and shall refuse either while the borrowing department's schedule uses the hall in that window.

Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Ending a loan carrying a borrower lecture returns 409 asking to move the appointment first.
2. Cancelling an approved request that the requester's schedule uses returns 409; afterwards the request is cancelled and the window is released.
3. Ending writes an audit line naming the building and hall.

**EVIDENCE**

`src/server/routes/hallBarterRoutes.ts` `src/server/routes/hallBarterRoutes.ts#/api/hall-barter/requests/:id/cancel` `src/server/routes/hallBarterRoutes.ts#/api/hall-barter/requests/:id/end` `tests/first-password-room-loans-audit.ts` `tests/instructor-request-availability-audit.ts`

### FR-LOC-017 Request expiry and inbox counter

Inferred

The system shall automatically cancel any pending request older than seven days with the reason that the one-week limit passed without a reply, and shall show in the side bar the count of requests waiting for the user's departments and the age of the oldest, excluding a request the user sent and excluding an administrator with no department.

Implemented · Should · Functional · Department head, Schedule committee chair, The system (automatic)

**ACCEPTANCE CRITERIA**

1. An 8-day-old request shows cancelled with its reason when the board is built or the counter is read.
2. The counter returns pending and oldestDays and does not count the user's own request.

**EVIDENCE**

`src/server/routes/hallBarterRoutes.ts` `src/components/HallBarterBoard.tsx` `src/server/routes/hallBarterRoutes.ts#/api/hall-barter/inbox`

### FR-LOC-018 Enforcing loan windows on save

When writing any official appointment the system shall prevent the borrower from using the hall outside its approved windows, prevent the lender from using a lent window, keep a tombstone of a loan cancelled after approval so an in-flight write cannot reuse it, and check the companion facility as a separate hall.

Implemented · Must · Functional · Department head, Schedule committee chair, The system (automatic)

**ACCEPTANCE CRITERIA**

1. The lender inside the loan is blocked, outside it allowed, and after it ends allowed.
2. An existing appointment occupying a requested window shows as a clash for both sides on the request.
3. No window is offered for a time occupied by an appointment or a held instructor request.

**EVIDENCE**

`src/utils/hallBarterWindow.ts` `src/server/core/hallBarter.ts` `src/server/routes/hallBarterRoutes.ts` `tests/first-password-room-loans-audit.ts` `tests/instructor-request-availability-audit.ts`

### FR-LOC-019 Loan hours drawing

The system shall draw for each department a Sunday-to-Thursday weekly strip of its approved windows only, lent by it or borrowed by it, with the minute total of each kind.

Implemented · Could · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A 60-minute lent and a 90-minute borrowed window give lentMinutes=60, borrowedMinutes=90 and five day strips.
2. A department unrelated to the window sees zero.

**EVIDENCE**

`src/utils/hallBarterWindow.ts` `src/components/RoomLoanStrip.tsx` `tests/first-password-room-loans-audit.ts`

### FR-LOC-020 Hall door page

The system shall show for each active confirmed hall a public read-only page at /d/ with its token that states in Kuwait time (UTC+3) whether it is free until when, busy until when, or starting in a few minutes, with its Sunday-to-Thursday week.

Implemented · Must · Functional · Public visitor, Student, Faculty member

**ACCEPTANCE CRITERIA**

1. Sunday 10:20 with a lecture ending 10:45 reads busy and ends 10:45; Sunday 09:20 with the next at 09:30 reads starting in 10 minutes.
2. The threshold is 15 minutes, Friday and Saturday read weekend, and outside the term it reads outside term with the next term's start date.
3. Two sections of the same course at the same time show one lecture 01 · 02, and a lecture cancelled today does not occupy the hall and is shown with its mark.
4. The page reads the operationally current term, not the upcoming registration term.
5. GET /d/:token/now returns the page data as JSON to refresh it without reloading, screen=1 works for a hall as for a building; an internal error returns 500 saying the hall state could not be loaded.
6. The page clock starts from ROOM_DOOR_FAKE_NOW and then runs on only when DATA_MODE=demo outside production (NODE_ENV not production), for screenshots; it has no effect on any real deployment.

**EVIDENCE**

`src/utils/roomDoor.ts` `src/server/roomDoorData.ts` `src/server/roomDoorPage.ts` `src/server/roomDoorRoutes.ts` `src/server/roomDoorRoutes.ts#/d/:token` `src/server/roomDoorRoutes.ts#/d/:token/now` `tests/room-door-audit.ts`

### FR-LOC-021 Building board and corridor screen

The system shall show for each active building a public board at /b/ with one tile per hall ordered by floor then number, and a screen mode (?screen=1) that fills a corridor TV without scrolling; pages shall refresh about every minute (60 seconds plus up to 7 seconds of jitter) and reload when the system build changes.

Implemented · Should · Functional · Public visitor, Student, Faculty member

**ACCEPTANCE CRITERIA**

1. G01, G02, F01, F10, S01, L01 are ordered ground, first, second then other floors.
2. After two failed pulls the page says not connected with the last update time and recovers automatically.
3. The board carries only time and code for each lecture.
4. GET /b/:token/now returns the board data as JSON in the same way, and a token that points to no building now returns the quiet page with the message.

**EVIDENCE**

`src/server/roomDoorRoutes.ts` `src/server/roomDoorPage.ts` `src/server/roomDoorData.ts` `src/components/room-door.css` `src/server/roomDoorRoutes.ts#/b/:token` `src/server/roomDoorRoutes.ts#/b/:token/now` `tests/room-door-audit.ts`

### NFR-LOC-022 Sticker token is permanent and unguessable

A hall sticker token shall be sixteen base64url characters (96 bits) produced by an HMAC over the hall's permanent registry id with a key derived from the stored shared secret under a door-specific label; it shall not change with a new deployment or with rotation of the calendar secret, and a building token shall differ from a hall token.

Implemented · Must · Non-functional · The system (automatic)

**RATIONALE**

> A sticker stays on a door for years so its token cannot die. The token rests on the registry id, not the printed hall code, so it survives a move or a code correction.

**ACCEPTANCE CRITERIA**

1. The token matches ^[A-Za-z0-9_-]{16}$ and is identical after a restart and after rotating CALENDAR_SECRET.
2. A hall token opens no building or other hall; a demo token carries a ten-character sandbox tag and opens only its owner's sandbox.

**EVIDENCE**

`src/server/roomDoorSecret.ts` `tests/room-door-audit.ts`

### NFR-LOC-023 Public page privacy and limits

Door pages shall expose only the course code, name, section and time, shall be neither indexed by search engines nor cached by browsers, shall give their scripts a per-page nonce (CSP nonce), shall be rate limited to 600 requests per minute per address by default (ROOM_DOOR_PER_IP_PER_MINUTE), and shall answer a wrong token or an inactive hall with 404 and a quiet page.

Implemented · Must · Non-functional · Public visitor, The system (automatic)

#### ACCEPTANCE CRITERIA

1. No instructor name, student count or row or course id appears in the data or the page.
2. The reply carries X-Robots-Tag noindex and Cache-Control no-store, and a request over the limit returns 429.
3. Each hall's and building's data is cached for 60 seconds in the real world only, and the service worker never stores /d/ or /b/ pages.

#### EVIDENCE

`src/server/roomDoorRoutes.ts` `src/server/roomDoorData.ts` `src/server/roomDoorPage.ts` `tests/room-door-audit.ts`

### FR-LOC-024 Door links and stickers

The system shall give only registry administrators the links of the building board, its screen and every hall, and shall print an A4 portrait sheet with four QR stickers drawn in the browser by a local generator with no external service, admitting no unsafe text or SVG into the sheet.

Implemented · Should · Functional · Root administrator, System administrator

#### ACCEPTANCE CRITERIA

1. Requesting /api/room-door/links without sign-in returns 401 and an inactive or unknown building returns 404.
2. Each sticker says scan to know the hall now, stickers are laid four to a sheet, and the short link gives a QR of at most 29 modules per side.
3. In the demo the links carry the visitor's sandbox tag and are forgotten after two hours.

#### EVIDENCE

`src/server/roomDoorRoutes.ts#/api/room-door/links` `src/utils/roomDoorStickers.ts` `src/components/RoomDoorTools.tsx` `tests/room-door-audit.ts`

### FR-LOC-025 Seven-digit course number on the door

The door shall show each course number in seven digits (college 2, department 2, course 3) through authorityCourseCode, not as stored in the catalogue.

Implemented · Must · Functional · Public visitor, Student

#### RATIONALE

> The owner’s standing decision: the official number has seven digits. The catalogue stores most courses with three, so the displayed number is built from the department and course codes at display time only, without changing what is stored.

#### ACCEPTANCE CRITERIA

1. A course stored as 105 in department 0109 appears on the door as 0109105.
2. Neither CourseCode nor AdCourseId is shown raw.
3. The building board shows the same seven-digit number, and sections of one course are still merged by the stored code.

#### EVIDENCE

`src/server/roomDoorData.ts#doorWeek` `src/server/roomDoorRoutes.ts` `src/utils/authorityAcademicCodes.ts#authorityDepartmentKeys` `tests/room-door-audit.ts` `tests/course-number-seven-digit-audit.ts`

### FR-LOC-026 Occupancy rate

The system shall compute for each day and hour the number of lectures occupying it, the number of busy halls and their share of the scope's halls, plus the day and week rates, count a hall once per hour, and let a cell open a panel of its lectures grouped under their campuses with short names and a search appearing from nine rows.

Implemented · Should · Functional · Department head, Schedule committee chair, University registrar

#### ACCEPTANCE CRITERIA

1. A lecture from 9:30 to 10:45 falls in both the nine and ten o'clock hours and two lectures in one hall count as one hall.
2. The colour level runs 1 to 5 for non-empty cells and a lecture with no hall counts as a lecture and occupies no hall.
3. The college name is not repeated on every row and course and instructor names are never cut with ellipses.

#### EVIDENCE

`src/utils/occupancyHeat.ts` `src/utils/occupancySlot.ts` `src/components/OccupancyHeatGrid.tsx` `src/components/OccupancySlotPanel.tsx` `tests/occupancy-heat-audit.ts` `tests/occupancy-slot-panel-audit.ts` `tests/room-occupancy-audit.ts`

### FR-LOC-027 Companion facility of a hall

The system shall list for a course that requires a companion facility the facilities registered with the companion-only policy of the same type on the same site (first four characters of the building code) with their availability for the appointment time, link the first available one automatically, and occupy both the facility and the main hall for the whole appointment.

Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A facility booked by another appointment returns available=false and the edited appointment does not count itself (excludeId).
2. Main and companion use of the same studio clash.
3. The badge shows the registered type of the actually booked facility and none is shown for an appointment without a booking.

#### EVIDENCE

`src/server/routes/locationsRoutes.ts` `src/components/CompanionFacilityPicker.tsx` `src/components/CompanionFacilityBadge.tsx` `src/utils/companionRoomDisplay.ts` `src/utils/locationRegistry.ts` `src/server/routes/locationsRoutes.ts#/api/companion-rooms` `tests/companion-rooms-audit.ts`

### FR-LOC-028 Travel policy between campuses

The registrar general or an administrator shall set the travel time for each pair among the two branch sites and the main campus from 0 to 180 minutes (zero disables it) with an exemption list of up to 500 instructors; defaults are 60 minutes between the two branch sites and 30 for the others; the time applies as a warning in the department appointment and as an obligation in the faculty card.

Implemented · Must · Functional · University registrar, System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. A pair saved at 90 minutes returns a shortfall with need=90 for a 60-minute gap and a 105-minute gap passes.
2. An exempt instructor and zero stop the rule, and the legacy required field is stored but read by no rule.
3. An unauthorised user gets 403 and the policy is cached for 30 seconds.

#### EVIDENCE

`src/utils/campusTravelPolicy.ts` `src/utils/campusTravel.ts` `src/server/core/travelPolicy.ts` `src/server/routes/referenceRoutes.ts` `src/server/core/scheduleConflicts.ts` `src/components/CampusTravelPolicyCard.tsx` `tests/undo-travel-rule-audit.ts`

### FR-LOC-029 Walking time between buildings on a campus

Inferred

The system shall keep for each college a default time between two unconfigured buildings (5 minutes), a time inside one building (3 minutes) and configured pairs between specific buildings of 1 to 120 minutes, editable only by a user with the colleges permission within their scope.

Implemented · Should · Functional · System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. A pair value of 0 or 500 is clamped to 1 or 120 and the same-building time is limited to 0 to 30.
2. A pair from a building to itself is ignored.

**EVIDENCE**

`src/utils/campusTravel.ts` `src/server/routes/referenceRoutes.ts`

### NFR-LOC-030 One identity for a hall

A hall shall be identified in every comparison (occupancy, barter, door page, suggestion) by one key: its registry id, otherwise the normalised building and hall text (NFKC, Latin digits, upper case, no spaces), so that no hall looks free in one place and booked in another.

Implemented · Must · Non-functional · The system (automatic)

**RATIONALE**

> The barter key used lower case while the registry uses upper case, so a reservation never matched any legacy hall and the reserved-digitally warning never fired.

**ACCEPTANCE CRITERIA**

1. A row carrying the building and hall as text occupies the hall just like one linked by id.
2. legacy:012A08|G20 matches legacy:012a08|g20 after normalisation.

**EVIDENCE**

`src/utils/locationRegistry.ts` `src/server/core/hallBarter.ts` `src/server/roomDoorData.ts` `tests/room-occupancy-audit.ts` `tests/companion-rooms-audit.ts`

### FR-LOC-031 Read-only historical room list of a department

Inferred

Through GET /api/department-rooms the system shall return every room the department used historically, ordered by building then room numerically, to a holder of screen 7 within scope, and shall refuse every addition through POST /api/department-rooms.

Implemented · Should · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Without college or department, or outside scope, the answer is 403.
2. POST always returns 403 saying adding rooms is reserved to the system administrator through the official building and room registry.

**EVIDENCE**

`src/server/routes/locationsRoutes.ts#/api/department-rooms`

### FR-LOC-032 List of appointments awaiting room confirmation

Inferred

Through GET /api/location-registry/pending the system shall return the term's appointments whose state is awaiting room confirmation with their count; all of them to main administration, and to others only those of the instructor linked to their account within scope.

Implemented · Could · Functional · Schedule committee chair, System administrator

**ACCEPTANCE CRITERIA**

1. Without a term the answer is 400 asking for the term.
2. An account not linked to an instructor (AdInstructorId zero) sees nothing unless it is main administration.

**EVIDENCE**

`src/server/routes/locationsRoutes.ts#/api/location-registry/pending`

### FR-LOC-033 Who writes to the building and room registry: simple screen and full console

The system shall reserve the simple entry screen (/api/admin/location-setup and below) and creating a building in the full console to the root account, and let any main administration edit buildings and add, edit and move rooms in the full console, always tying a room to the colleges of its building's official code.

Implemented · Must · Functional · Root administrator, System administrator

#### ACCEPTANCE CRITERIA

1. GET /api/admin/location-setup returns only buildings, rooms, colleges and departments, with no appointments, reviews or initialisation history.
2. Creating a building in the full console requires exactly one college (otherwise 400) with an official site prefix (otherwise 409), accepts the full official code such as 022T01 or the building number alone from an older page, and refuses a code from another site with 400.
3. Linking a building to a college whose site prefix differs from its code returns 409, and linking a room to a college its building code does not belong to returns 409; every edit marks the row CONFIRMED and adminVerified and appends a line to its history.
4. Manually edited historical forms are capped at 250, each with up to 12 evidence lines, placeholders are dropped, and a room's primary departments are a subset of its departments.

#### EVIDENCE

`src/server/routes/locationsRoutes.ts#/api/admin/location-setup`
`src/server/routes/locationsRoutes.ts#/api/admin/location-registry/buildings`
`src/server/routes/locationsRoutes.ts#/api/admin/location-registry/buildings/:id`
`src/server/routes/locationsRoutes.ts#/api/admin/location-registry/rooms`
`src/server/routes/locationsRoutes.ts#/api/admin/location-registry/rooms/:id` `src/components/LocationQuickSetup.tsx`
`tests/location-registry-audit.py`

### FR-LOC-034 Hall barter inside the schedule workshop

The schedule workshop shall show the number of barter requests awaiting the department's decision in a fixed strip below the schedule that opens the barter board on the request, shall tell the requester once about approval or rejection, shall draw approved barter windows on the week days, and shall let the appointment editor request a hall for the appointment's days and time without leaving it.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The strip says «N requests await your decision — another department asks for one of your halls» with «open», refreshes with every live-channel change, and does not appear without college, department and term.
2. The decision notice «your borrowing was approved» or «your borrowing was not approved» names the host department, hall, day and time and «and N more», and «done» hides it for good by storing its ids in the browser (schedule-hall-barter-seen-decisions, last 200).
3. The barter board under «more» is not shown for an ended term; a window drawn on the week reads «borrowed» when the department is its requester and «lent» when it is the owner.
4. From the editor: a bridge «found no available hall at this time? borrow one from another department» appears when days or time are set without a hall, and «request» sends POST /api/hall-barter/requests and says the borrowing request was sent and the hall will appear in the hall picker after approval.

#### EVIDENCE

`src/components/Schedules.tsx#barterInbox` `src/components/Schedules.tsx#dismissBarterDecisions`
`src/components/Schedules.tsx#openBorrow` `src/components/Schedules.tsx#requestBorrow` `src/components/HallBarterBoard.tsx`
`src/server/routes/hallBarterRoutes.ts#/api/hall-barter/requests` `tests/location-registry-audit.py`

### FR-LOC-035 Before deactivating a hall or building: how many appointments use it, and reactivation instead of refusal

GET /api/admin/location-setup/usage (roomId or buildingId) shall return to the root account how many appointments stand in the hall, or in the building's halls, in the current term and after it (by id or by the legacy code in the same building), and the «add buildings and rooms» screen shall show it in the visual confirmation dialog before deactivating; DELETE of a hall or building in use shall be refused with 409 (code location-in-use with both counts) unless sent with header x-schedule-confirm=location-in-use, and deactivation stays as in FR-LOC-007 without touching appointments. Creating a building or halls whose code exists inactive shall answer 409 with code inactive-exists and their ids, and the screen shall offer «reactivate» instead of a dead-end refusal; every hall in the list shall have its door QR button.

Implemented · Should · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. A hall with 3 appointments in the current term ← the dialog says so, and DELETE without the header ← 409 location-in-use.
2. Adding a building whose code exists inactive ← «reactivate» then PUT with active=true.

#### EVIDENCE

`src/server/routes/locationsRoutes.ts` `src/components/LocationQuickSetup.tsx` `src/components/RoomDoorTools.tsx` `tests/admin-station-audit.ts` `tests/location-registry-audit.py`

### FR-LOC-036 What-if-I-delete map before stopping a building or room

The building or room delete dialog (a stop that keeps the history) shall show the appointments standing in it in the current, later and past terms, the linked departments and the active rooms that stop with a building, using the very function the stop route counts with (locationUsage); when current or future appointments stand, the button reads as an explicit stop and the confirm header is sent.

Implemented · Should · Functional · Root administrator

#### RATIONALE

> Only current and future counts existed, in a sentence, without past appointments or departments, behind a separate read.

#### ACCEPTANCE CRITERIA

1. Stopping a room with current appointments shows the count and the button becomes the explicit stop.
2. If the map fails, the existing usage route is read and the decision stays correct.

#### EVIDENCE

`src/server/deleteImpact.ts#locationUsage` `src/server/deleteImpact.ts#locationUsageBuckets` `src/components/LocationQuickSetup.tsx#deleteRoom` `src/components/LocationQuickSetup.tsx#deleteBuilding` `src/server/routes/locationsRoutes.ts#registerLocationsRoutes` `tests/delete-impact-audit.ts`

### FR-LOC-037 Rooms without capacity: a completeness ring and per-room capacity entry

The top of the «Add buildings and rooms» screen shall show a panel with the share of active, confirmed rooms that have a capacity, the count still missing, and a card per room without capacity (code, building, type) with a number field and a save button, plus building and type filters and a room-code search. The server computes the figures at GET /api/admin/location-setup/capacity-gaps for the main administrator account only (401 signed out, 403 otherwise); inactive and unconfirmed rooms are not counted, zero rooms means no percentage, and 100% never shows while rooms are missing. Saving goes through the existing room-update path (PUT /api/admin/location-registry/rooms/:id) with its audit trail and validation, and the UI accepts a whole number from 1 to 2000. Saving is optimistic: the card leaves and the ring advances at once, and a server refusal brings it back with its reason. Enter saves and moves focus to the next room.

● Implemented · Should · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. 18 rooms, 8 without capacity ← the ring reads 56% and the counter shows 8 rooms; saving 40 in one ← 61% and its card leaves.
2. A capacity of 0, 2.5 or 2001 ← a reason under the field and no save.

#### EVIDENCE

`src/components/LocationCapacityGaps.tsx` `src/utils/roomCapacityGaps.ts` `src/server/routes/locationsRoutes.ts` `src/styles/60-admin-panels.css` `tests/room-capacity-gaps-audit.ts`

### FR-LOC-038 Capacity import from a file: strict matching and a write-free preview

The «Rooms without capacity» panel shall offer an «Import capacities» button and a «Download the template» button (an xlsx with room code, building (optional) and capacity columns). The server parses the file (xlsx or csv up to 2 MB and 5000 rows; larger is refused with 413 or a message naming the limit) with tolerant headers (room code|room|code and capacity|seats) and Arabic or Latin digits. A room is matched by its official code alone (the room, or building plus room), exactly after normalisation (spaces, dashes, case, digits), never by name or fuzzy match; a code present in several buildings is resolved by the building column, otherwise it is flagged ambiguous and not applied, and an inactive or unconfirmed room is flagged and never touched. The preview writes nothing and shows ✅ will be filled (room without capacity), 🔄 change (old to new), ⚠️ skipped with its reason and ❌ invalid value (non-integer, below 1, above 2000, or duplicated with different values), with a «will reach X%» ring. The routes serve the main administrator account only (401 and 403) and are rate limited.

● Implemented · Should · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. A file with two rooms without capacity and a third with one ← ✅ 2 and 🔄 1, and nothing is written before approval.
2. Code G1 in two buildings without a building column ← ⚠️ ambiguous; with the column ← resolved.

#### EVIDENCE

`src/components/CapacityImportPanel.tsx` `src/utils/capacityImport.ts` `src/server/routes/capacityImportRoutes.ts` `src/styles/capacity-import.css` `tests/capacity-import-audit.ts`

**FR-LOC-039** **Capacity import: a single approval with an audit entry per room, and an exact undo**

POST /api/admin/location-setup/capacity-import/apply shall write the previewed plan (with a signed token bound to the account and the plan, which expires) in one write: by default only rooms without capacity are filled, and 🔁 changes apply only when «include changes» is ticked (off by default). The plan is re-checked against each room's state now, so a room changed after the preview is skipped with its reason, and a forged token or an altered plan writes nothing (409). The approval is idempotent (an identical second one writes nothing), guarded against double submit, limited to 400 rooms at a time, and returns the applied list and each room's result. Each room gets an UPDATE audit entry with before/after, the actor and the batch id, as in the room save path, and the system log gets one batch entry with its counts. POST .../undo restores exactly what that batch wrote, refuses every room edited after it saying «edited after the batch», and GET .../last exposes the latest undoable batch even after a reload.

● Implemented · Should · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. A second approval of the same preview ← no new audit entry.
2. Editing a room after the batch, then undo ← the others return and that one is refused with the reason.

**EVIDENCE**

`src/components/CapacityImportPanel.tsx` `src/utils/capacityImport.ts` `src/server/routes/capacityImportRoutes.ts` `src/styles/capacity-import.css` `tests/capacity-import-audit.ts`

## 3.3.6 Algorithms

ALG-LOC-01 · Locations

**Building and hall resolution against the official registry**

**Deterministic**

*Which official building and hall does this typed or scanned text refer to, or does it need review?*

1. The code is normalised and matched against the official code and aliases within the college/department context; a single candidate is accepted, several go to review.
2. A short code (8 or B08) is recovered only when one confirmed building remains in the college context.
3. The hall is searched only inside the resolved building: name match, then repair of reading confusions (O/I/L to 0/1, 6 to G, a phantom digit) only when one confirmed hall results.
4. A bare number is accepted if it matches one hall, or the department's footprint narrows it to one.

**Inputs**

Building and hall text, the location registry, college, department and branch.

**Output**

A status (confirmed, review required, invalid) with the entity and written evidence.

Never invents a hall or borrows one from another building; every ambiguity stays for human review.

`src/utils/locationRegistry.ts#resolveBuilding` `src/utils/locationRegistry.ts#resolveRoom` `src/utils/locationRegistry.ts#resolveBuildingFromUniqueRoom` `src/server/core/locations.ts#canonicalizeHistoricalLocationForRuntime` `tests/pdf-import-regression.ts` `tests/location-registry-audit.py`

DR-LOC-003 FR-LOC-010 FR-LOC-011 NFR-LOC-030

ALG-LOC-02 · Locations

### Hall barter windows and their enforcement

Deterministic

*Where are free hall windows to borrow, and does an appointment respect the approved barter window?*

1. Opportunity board: for each hall and day, 30-minute steps are walked and free slots (after subtracting appointments, holds and approved windows) are merged into windows.
2. Above the cap, windows are chosen round-robin between owning departments so no department disappears, then restored to reading order.
3. On write: the lender is blocked from a lent window, and the borrower outside its approved window (which must fully contain the appointment on that day).
4. A loan cancelled after approval leaves a tombstone so an in-flight write cannot reuse it; the companion facility is checked as a separate hall.

**Inputs**

Barter requests and their states, term rows, the hall, day and time.

**Output**

A list of windows to borrow, or a block/allow verdict for a write.

The same write guard for every official mutation; a loan is requested and approved, never assumed.

Shortest window 50 minutes, display cap 400 windows.

`src/utils/hallBarterWindow.ts#scheduleViolatesApprovedBarterWindow`
`src/utils/hallBarterWindow.ts#borrowerOutsideApprovedWindow` `src/utils/hallBarterFairness.ts#fairShareByOwner`
`src/server/routes/hallBarterRoutes.ts` `tests/first-password-room-loans-audit.ts`
`tests/instructor-request-review-regressions.ts` `tests/pdf-import-regression.ts`

FR-LOC-013 FR-LOC-018 FR-SCH-012

ALG-LOC-03 · Locations

### Ranking candidate halls for an instructor request

Search and ranking

*Which valid halls best suit this requested appointment?*

1. A hall whose recorded capacity is below the course capacity is dropped (an unrecorded capacity does not drop it).
2. Score: type suitability × 10, hall of the course's department +400, building near the instructor's halls that day +300, a hall where the course was taught +200.
3. Capacity closeness up to +100, least-used in the term +20, minus the hall's meeting count.
4. Sorted descending, ties broken by hall key.

**Inputs**

Free valid halls, the course department, the instructor's buildings, previous halls, course capacity and hall usage.

**Output**

Ranked halls with reason codes (department, near, previous, capacity, fair, facility).

Mandatory conditions (free, eligible, facility) are decided by the verdict engine; this only ranks, stably between two reads.

`src/utils/requestRoomRanking.ts#rankRequestRooms` `src/utils/roomSuitability.ts` `tests/requests-engine-owner-feedback-audit.ts`

FR-LOC-012

## 3.3.7 Edge cases

### ⚠ Barter reservation on a legacy hall held as text

**Scenario** A hall with no registry id holds building and hall as text in different letter case between the request and the appointment.

**Behaviour** Both sides are normalised by the registry's own rule so they match, and the reserved-digitally message and the window-exceeded warning both fire.

#### ⚠ Ending a loan the borrower teaches in

**Scenario** The host department presses End loan while the borrowing department has a lecture in the window.

**Behaviour** Ending is refused with 409 asking to move the appointment first, and the repository guards the same rule when two writes race.

#### ⚠ Renaming a hall then returning to its code

**Scenario** A hall code changes from ZX901 to ZX911, then ZX912, then back to ZX901.

**Behaviour** Each old code is recorded once as a form; on returning, ZX901 drops from the forms while ZX912 and ZX911 remain, and no code owned by another hall is recorded.

#### ⚠ A lecture cancelled today on the door page

**Scenario** A Thursday lecture is cancelled for today's date only, at its current time.

**Behaviour** The hall shows free because of it and it is not counted as next; the following Thursday is busy again, and a merged lecture is cancelled only if all its sections are cancelled.

#### ⚠ A deactivated hall with a sticker on its door

**Scenario** A hall is deactivated in the registry while its sticker is still on the door.

**Behaviour** The token returns 404 with a quiet page revealing nothing; reactivating the hall brings the same sticker back because the token rests on the registry id.

#### ⚠ Two overlapping requests approved at once

**Scenario** Two hosts approve, at the same moment, two different requests for overlapping windows of one hall.

**Behaviour** A per-term lock serialises the two decisions and re-reads approved loans inside it, so the first passes and the second returns 409 saying another overlapping loan is approved.

### 3.3.8 Standing owner decisions

- Course numbers are seven digits only in everything a reader sees, including the door page and building board.
- The boys' and girls' campuses are fully separate, so there is no hall barter between them.
- A loan reserves the hall window only and for one term: no fake lecture and no course change; the lender is free outside the window and barred inside it until the loan is ended.
- Travel time between campuses is an obligation in the faculty card and a warning that does not block in the department appointment (decision of 2026-11-05).
- No typing a hall by hand: what is not in the list cannot be booked, and deleting only deactivates so history is kept.
- Printed reports keep their design; hall values and data are fixed, not the layout.

↑ Contents

3.4 · SCH

# Deterministic scheduling engine

Every appointment passes fixed rules before it is written: conflicts, regulation, teaching day, holds and a rollback version.

| 78 | 100% | 44 | 96 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.4.1 Overview

This module governs appointments (schedule rows) from creation to deletion: field validation, instructor, hall and duplicate-section conflict detection, regulation rules for days, lengths, the pattern library and the weekly-hours ceiling, the university teaching day and the department window, and request holds and colleague holds. Every write is preceded by a rollback snapshot and is pushed live to colleagues. The schedule committee chair and the department head use it daily; registration and the dean read its results. There is one verdict for every path: manual save, proposal approval, batch move and draft checks all run through the same functions.

Schedule committee chair · Department head · Root administrator · System administrator · College registrar · Registration officer · College dean · The system (automatic)

## 3.4.2 User journeys

**Schedule committee chair** — **Adding a new appointment without conflicts**

1. Opens «New appointment» and chooses course, section and instructor; the teacher mini-week shows the instructor's week and free slots.
2. Picks a day and start; the days and end time complete from the course's approved pattern, and an advisory hold is announced to colleagues for two minutes.
3. The live check (POST /api/schedules/check-conflicts) lists blockers in red and soft notes separately.
4. On a hall conflict he uses «suggest time and hall»; up to three options that passed the same gate are returned.
5. On save the schedule is snapshotted, the row is written and the change reaches every screen open on the same board.

**Department head** **Dragging a lecture to a new slot and undoing it**

1. Drags the lecture card to another cell; the drag preview classifies the move before the drop.
2. On drop the request goes to batch move with each row's revision, and every row is checked against the whole term.
3. If refused the card returns, the first message appears with the number of other blockers, and nothing is written.
4. If accepted an undo bar shows for fifteen seconds and the log keeps the last sixty changes; Ctrl+Z restores the appointment.

**Schedule committee chair** **Assigning a faculty-placeholder section to a real instructor**

1. Searches a time and hall for a real instructor and the results list placeholder sections that match exactly as «replaceable».
2. Chooses an action: assign, swap hall, or replace.
3. The server dry-runs every step on the week as it will be, then writes all steps in one transaction.
4. The reply carries the undo steps in order: the new row is removed first, then the section is restored.

### 3.4.3 Diagrams

**Appointment save gate**

Order of checks on create; edit starts by reading the existing row and asking the lock.

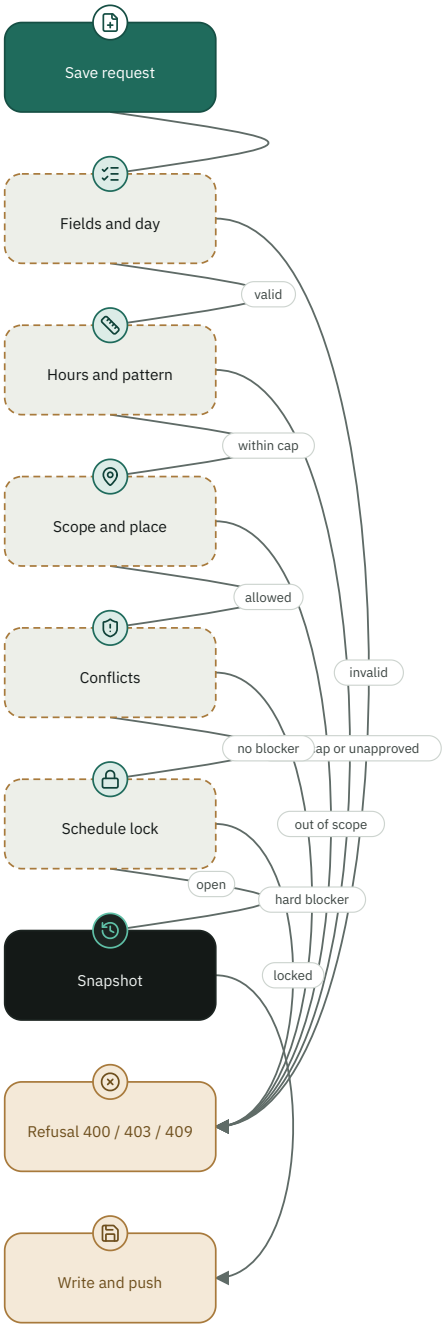

## Conflict verdict

Each pair of appointments yields one verdict, named after its most serious reason.

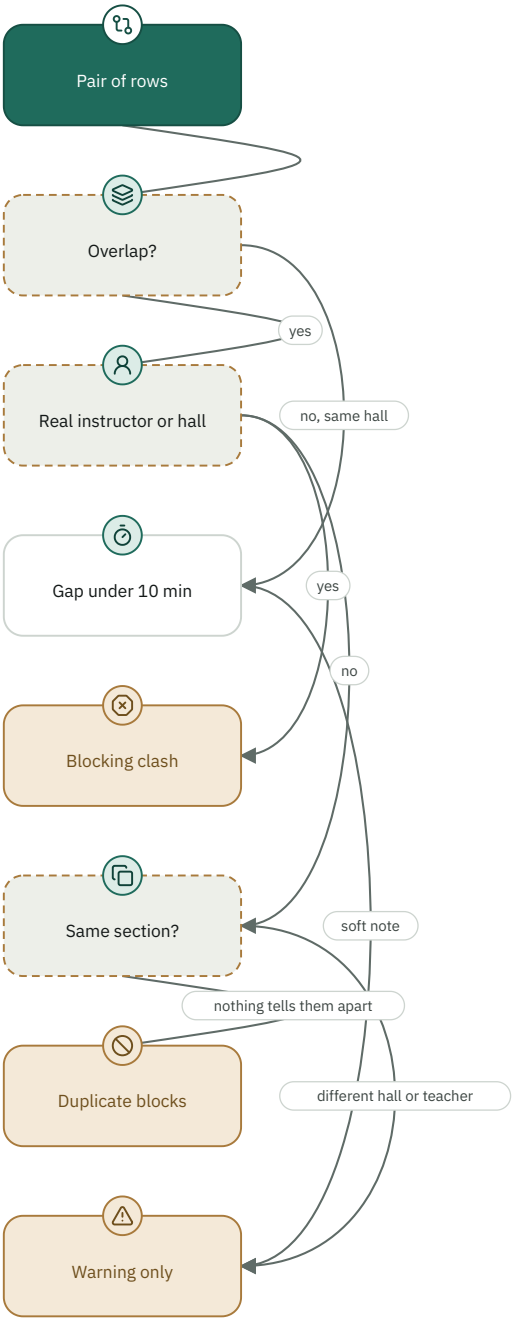

## Proposal approval

A move, swap or section opening is dry-run, then written; written steps are reverted if a step fails.

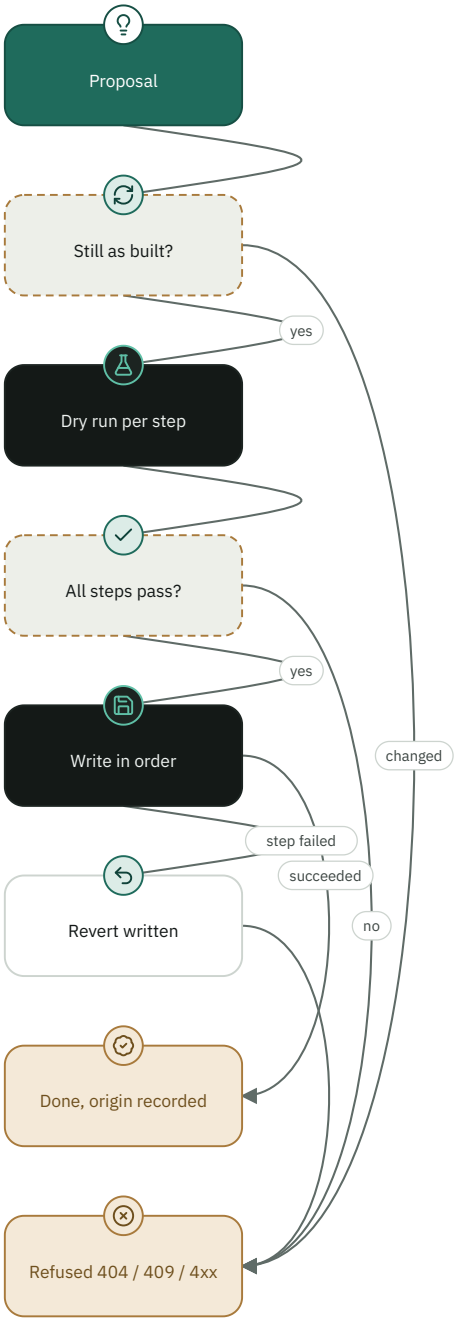

**Who can do what in the schedule**

| | Read appointments | Edit appointments | Cell notes | Wipe schedule | University day |
|---|---|---|---|---|---|
| Root administrator | ✎ | ✎ | ✎ | ✎ | ✎ |
| Schedule committee chair | ✎ | ✎ | ✎ | ✎ | — |
| Department head | ✎ | ✎ | ✎ | — | — |
| College registrar | ✎ | — | ✎ | — | — |
| Registration officer | ✎ | — | ✎ | — | — |
| College dean | 👁 | — | — | — | — |

✎ Write 👁 Read — No access

### 3.4.4 Screens

**Schedule workshop**
Three views: week, list and rooms; list is the default on phones. Appointment form, live checks, command palette Ctrl+K and undo Ctrl+Z.`src/components/Schedules.tsx`

**Teacher mini-week**
The instructor's week in five columns with free slots, before/after placement, a load ring and drag-to-draw.`src/components/TeacherMiniWeek.tsx`

**When can we meet?**
Common free time for chosen instructors across the whole term.`src/components/MeetingSlots.tsx`

**Department teaching hours**
The university teaching day (root administrator) and narrower department exceptions.`src/components/SectionScheduleHours.tsx`

**Wipe schedule**
Double confirmation: typed department name and appointment count.`src/components/WipeScheduleButton.tsx`

**Saved views**
Appears after the first saved view; a dot shows the board differs from the saved state.`src/components/ScheduleViewsMenu.tsx`

**Drag preview**
Classifies a move before the drop: excellent, good, neutral, suboptimal, impossible.`src/components/SchedulePhysics/SchedulePhysicsLayer.tsx`

### 3.4.5 Requirements

**FR-SCH-001** **Create an appointment**

The system shall accept creation of an appointment under the schedule permission (screen 7) when college, department, term, course, section number, instructor, start, end, building and room (or «room pending») are present, the section number is Latin digits only, and at least one day is chosen.

Implemented · Must · Functional · Schedule committee chair, Department head

**RATIONALE**

> A missing field or a lettered section number produces rows that cannot be matched in reports or imports.

**ACCEPTANCE CRITERIA**

1. A request without building or room (and not in the pending-room state) is refused with 400 «please fill the fields marked red» and nothing is written.
2. Section number «5a1» is refused with 400 «write digits in English»; «501» is accepted.
3. An accepted row returns 201 with revision 1 and a source order of at least 1,000,000 (so it is never coloured as an imported row).

**EVIDENCE**

`src/server/core/scheduleWrites.ts#createScheduleHandler` `src/server/routes/schedulesRoutes.ts` `tests/schedule-apply-proposal-audit.ts` `tests/appointment-forms-audit.ts`

**FR-SCH-002** **Edit and delete with revision check**

The system shall compare the submitted revision (rev) with the stored one when editing an appointment, return 409 with both the current row and the user's version when they differ, and delete a row only after a snapshot and the scope and lock checks, removing its entry from the instructor request if the department had added it.

Implemented · Must · Functional · Schedule committee chair, Department head

**RATIONALE**

> So one colleague's save never silently erases another's work.

**ACCEPTANCE CRITERIA**

1. An edit with rev=3 when the stored value is 4 is refused with 409 and body {conflict: revision, current, yours}; the row is unchanged.
2. An edit with no rev is written without comparison and increments rev by one.
3. Deleting a row in a locked schedule returns 409 with code schedule-locked; deleting outside the user's scope returns 403.
4. PUT /api/schedules/:id and DELETE /api/schedules/:id require screen 7.

**EVIDENCE**

`src/server/core/scheduleWrites.ts#updateScheduleHandler` `src/server/core/scheduleWrites.ts#deleteScheduleHandler` `src/db/repository.ts#ScheduleRevisionConflict` `src/server/routes/schedulesRoutes.ts#/api/schedules/:id` `tests/proposal-undo-emulator-audit.ts`

### FR-SCH-003 Schedule lock after submission and term end

The system shall refuse every create, edit, delete, move or replace on a schedule that is with registration awaiting a decision, or in a term declared ended for anyone but the schedule committee chair, with 409 and code schedule-locked, and on edit shall ask about the existing row's lock before validating fields.

● Implemented · Must · Functional · Schedule committee chair, Department head, College registrar

**RATIONALE**

> Editing in a frozen term used to return a field error first and the real reason only afterwards.

**ACCEPTANCE CRITERIA**

1. Editing a row in a schedule in «submitted» state with no amendment round open returns 409 «the schedule is with registration» before any field message.
2. A term with AdTermClosed=true refuses writes for every role except an explicitly written schedule committee chair.
3. A week exception (cancel or cover) ignores the registration lock and obeys only term end.

**EVIDENCE**

`src/server/core/approvals.ts#scheduleLockRefusal` `src/utils/approvalWorkflow.ts#approvalLockReason` `src/server/core/scheduleWrites.ts` `tests/term-freeze-audit.ts` `tests/approval-integrity-audit.ts`

### FR-SCH-004 Scope and course integrity

The system shall limit writes to departments within the user's scope (403 outside, except for administrators), reject a course that does not belong to the stated college and department (400) or is academically archived (409), and block swapping the course of an imported approved-schedule row (source order below 1,000,000) with code COURSE_NAME_LOCKED.

● Implemented · Must · Functional · Schedule committee chair, Department head, System administrator

**ACCEPTANCE CRITERIA**

1. Adding a row for an archived course is refused with 409 «this course is academically archived» and nothing is written.
2. Changing AdCourseId on a row whose source order is 500,000 returns 409 with COURSE_NAME_LOCKED; deleting it and adding a new course remains allowed.
3. A user scoped to another department receives 403 «outside your allowed departments» on create, edit and delete.

**EVIDENCE**

`src/server/core/scheduleWrites.ts` `src/server/core/scope.ts#isScopeAllowed` `tests/role-scope-audit.ts`

### FR-SCH-005 Official place and companion facility

The system shall resolve the building and room to their official registry identities before saving, reject a room that does not accept independent booking, require a course with a companion-facility type to carry a facility of that type at the same site (first four characters of the building code), and reject one for a course that needs none.

● Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A course requiring a «studio» sent without a facility is refused with 400 «the course requires a companion facility of type studio for the whole appointment».
2. A facility at another site is refused with 400 «studio and primary hall must be at the same site».
3. A course with no facility type that arrives with one is refused with 400 «this course needs no companion facility».

**EVIDENCE**

`src/server/core/scheduleWrites.ts#companionBookingFor` `src/server/core/locations.ts` `tests/companion-rooms-audit.ts`

### FR-SCH-006 Instructor, hall and duplicate-section conflict detection

The system shall detect, across the whole term (all colleges), real-instructor conflicts, physical-hall conflicts and exact twins of the same section, count each pair of appointments as one conflict carrying all its reasons and named after the most serious, and treat two rows as overlapping when they share a day and each starts before the other ends.

● Implemented · Must · Functional · Schedule committee chair, Department head, The system (automatic)

**RATIONALE**

> Forty-six real collisions were once reported as 138 because each reason was counted separately.

**ACCEPTANCE CRITERIA**

1. 08:00–09:00 and 09:00–10:00 for one instructor on one day do not overlap; 08:00–09:00 and 08:30–09:30 do.
2. Sections 1 and 2 of one course with the same instructor, hall and hour yield one high-severity conflict with reasons «instructor» and «hall» and are not called a duplicate.
3. Hall written as «G28», «G/G28» or «G-28» counts as one hall and its clash blocks.
4. Two rows with the same course, section, days and time and nothing distinguishing them (no hall, no real instructor) yield «identical appointments for the same section» and block the save.

**EVIDENCE**

`src/utils/scheduleIntelligence.ts#findConflicts` `src/server/core/scheduleConflicts.ts#scheduleConflicts` `src/utils/locationRegistry.ts` `tests/run-tests.ts` `tests/conflict-parity.ts` `tests/companion-rooms-audit.ts`

### FR-SCH-007 Same section in two places: warning, not a block

The system shall classify two rows with the same course, section, days and time as a non-blocking «sectionTwice» warning for save, signature and approval when the normalised hall or building differs or the two real instructors differ, and as a blocking duplicate otherwise.

● Implemented · Must · Functional · Schedule committee chair, Department head

**RATIONALE**

> Owner rule 2026-09-27: only a physical conflict may block signing.

**ACCEPTANCE CRITERIA**

1. Rows in G28 and G31 with different instructors yield a medium soft warning «same section in two places at the same time» and both are saved.
2. A row with no hall (or room pending) does not distinguish itself from its twin and stays a blocking duplicate.
3. Another section of a specialisation course at the same time yields a low regulation note «Art. 7/5» that does not block.

**EVIDENCE**

`src/utils/scheduleIntelligence.ts#twinKind` `src/server/core/scheduleConflicts.ts` `src/utils/scheduleRegulations.ts#sameCourseSectionClash` `tests/blocker-oracle-audit.ts` `tests/run-tests.ts`

### FR-SCH-008 A faculty placeholder is not a person who can be double-booked

The system shall not count an instructor conflict for the instructor record that stands for «faculty staff» (the faculty placeholder, identified by the first word of its name), shall not treat it as a person who distinguishes twin rows, and shall apply the same rule on the server, in the browser check and in the exhaustive engine.

● Implemented · Must · Functional · Schedule committee chair, The system (automatic)

**ACCEPTANCE CRITERIA**

1. Two different sections of the placeholder at the same hour in different halls yield no instructor conflict.
2. A hall double-booking still blocks even when the instructor is the placeholder.
3. A real instructor assigned to such a section is checked in full.

**EVIDENCE**

`src/utils/instructorIdentity.ts#placeholderInstructorIds` `src/utils/scheduleIntelligence.ts` `src/utils/placeholderInstructor.ts` `tests/client-placeholder-conflicts-audit.ts` `tests/one-blocker-number-audit.ts`

### FR-SCH-009 Turnaround gap and student clash: two soft notes

The system shall state but not block when the gap between consecutive lectures in the same hall is below the requirement (ten minutes on every day unless the department declares its own figure from 1 to 60) and when two courses needed together by surveyed students overlap, and shall measure the gap from the end of the first to the start of the second.

● Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. 08:00–09:00 then 09:05 in the same hall yields low-severity soft «gap between lectures is insufficient»; 09:10 yields nothing.
2. Monday 08:00–09:20 then 09:30 in the same hall yields nothing.
3. Two different halls need no gap.
4. A student clash is raised only for two different overlapping courses within the survey pairs, medium severity soft:true, naming the number of shared students.

**EVIDENCE**

`src/utils/scheduleIntelligence.ts` `src/utils/scheduleRegulations.ts#requiredGapForDay` `src/server/core/rhythm.ts#departmentStyle` `tests/run-tests.ts` `tests/room-door-audit.ts`

### FR-SCH-010 What blocks a save and what does not

The system shall refuse a save with 409 and the list of blockers when any non-soft conflict remains, pass soft notes through to the dry run and the reply without blocking, and in the other paths treat as blocking what is not soft and has high severity or type «duplicate» and is not a memory, advice or regulation note.

● Implemented · Must · Functional · Schedule committee chair, Department head, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A 409 carries error with the first message and issues with every blocker; soft notes appear under warnings in a dry run.
2. Gap, student clash, rhythm, travel, memory and same-course section are all soft and never block.
3. The blocker count in the approval bar, in review and in the check panel is read from one list, so the numbers agree.

**EVIDENCE**

`src/utils/scheduleIntelligence.ts#isBlockingConflict` `src/utils/scheduleBlockers.ts` `src/server/core/scheduleWrites.ts` `tests/appointment-entry-parity-audit.ts` `tests/sound-schedule-zero-blockers-audit.ts` `tests/one-blocker-number-audit.ts`

### FR-SCH-011 What is disclosed about another department's appointment

The system shall, on a clash with another department's appointment, name only the department, college, day and hour, never the other course, section or instructor, return rowId=0 for rows outside the user's scope, and let the board learn which rows clash with another department without loading the whole term.

● Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A cross-department clash detail reads «Department X — College Y · Sunday and Tuesday · 11:00 – 11:50» with no course name.
2. GET /api/schedules/outside-clashes?collegeId&termId returns ids, pairs and notes for in-scope rows clashing with out-of-scope rows only, never a pair inside the same scope.
3. A missing collegeId or termId returns 400 «specify college and term»; an unauthorised scope returns 403.

**EVIDENCE**

`src/server/core/scheduleConflicts.ts` `src/server/routes/scheduleReviewRoutes.ts` `src/utils/scheduleIntelligence.ts#outsideScopeClashes` `tests/schedule-blockers-audit.ts` `tests/blocker-oracle-audit.ts` `tests/run-tests.ts`

### FR-SCH-012 Other departments' halls and hall barter

Inferred

The system shall block a save in a hall registered to another department in the official registry unless approved barter windows cover all of the appointment's days and time, block a save over another department's approved barter window, and downgrade the scope notice to a non-blocking note when windows fully cover the appointment.

Implemented · Must · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. Saving in another department's hall without barter is refused with 409 «hall scope notice» naming its owner.
2. An appointment one minute beyond the barter window is refused with «appointment exceeds the approved barter window».
3. An appointment fully inside the approved window saves and shows «borrowed hall with approved window» at low severity, soft:true.

#### EVIDENCE

`src/server/core/scheduleConflicts.ts#scheduleConflicts` `src/server/core/scheduleRules.ts#roomOwnership` `src/utils/hallBarterWindow.ts`

### FR-SCH-013 Instructor-request holds awaiting the department

The system shall treat a slot chosen by an instructor in a request awaiting the department as held, returning 409 with code request-hold carrying the holder and item instead of a silent block, and accept a resend with overrideRequestHolds (up to ten requests visible to the user) so the change proceeds past those requests only, is logged on their timeline and the item is marked fixed.

Implemented · Must · Functional · Schedule committee chair, Department head

#### RATIONALE

> The department stays the decision-maker; a coordinator must not be trapped by a hold with no way out.

#### ACCEPTANCE CRITERIA

1. If every blocker is a hold the answer is request-hold; if a real blocker is mixed in it is an ordinary conflict.
2. A temporary hold with heldUntil does not block the department.
3. A request in state superseded or settled, or outside the user's scope, cannot be overridden.
4. Deleting a department-added row removes its item from the instructor's request; deleting one fixed by his request reopens the item.

#### EVIDENCE

`src/server/core/scheduleConflicts.ts#applyRequestHoldOverride` `src/server/core/scheduleConflicts.ts#requestHoldRefusal` `src/server/core/scheduleConflicts.ts#noteRequestHoldOverride` `tests/holds-patterns-r4-audit.ts` `tests/undo-travel-rule-audit.ts`

### FR-SCH-014 Two-minute advisory colleague hold

The system shall keep one hold per seat announcing what is being built (days Sunday to Thursday, HH:MM start and end, hall, instructor, course, section) that lives 120 seconds from its last renewal, and show colleagues within scope the live holds for the term without account numbers, without ever blocking a save.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. An end at or before the start, a day outside Sunday–Thursday, or text longer than 40 characters is refused with 400.
2. GET /api/schedule-holds?termId= excludes the caller's own hold and any outside scope, and sweeps up to 25 expired holds per read.
3. The client debounces the announcement by 800 ms, renews every 45 s and polls colleagues every 20 s.
4. POST /api/schedule-holds needs screen 7 and a department within the writer's scope (otherwise 403) and answers {ok, expiresAt}; DELETE /api/schedule-holds needs only sign-in and releases the caller's hold even after losing the permission; GET without a numeric termId is refused with 400; all replies are no-store.

#### EVIDENCE

`src/server/scheduleHolds.ts` `src/server/scheduleHoldsRoutes.ts#/api/schedule-holds` `src/utils/scheduleHolds.ts` `tests/colleague-guard-measure-audit.ts`

### FR-SCH-015 University teaching day and department window

The system shall apply one university day to browser and server (default 08:00–20:00, five-minute step, from 00:00 to 24:00) that blocks saves outside it, treat a narrower department exception (itself clipped to the university day) as a note that does not block in the appointment form, and not refuse an edit whose time is unchanged because of this limit.

● Implemented · Must · Functional · Root administrator, Schedule committee chair, Department head

**RATIONALE**

> Owner decision 2026-11-05: the university day blocks; the department exception only warns in the appointment form.

**ACCEPTANCE CRITERIA**

1. Creating 07:50–08:40 is refused with 400 «lecture time must be within the university day (08:00–20:00)»; start 08:00 and end 20:00 are accepted.
2. Time «10:76» or «25:00» is refused with 400 «hour 0–23, minute 0–59»; an end before the start is refused with «end must be after start».
3. A corrupt stored value or start after end falls back to 08:00–20:00; a department window wider than the university day is clipped to it.
4. Only the root administrator changes the university day (PUT /api/admin/university-day); the count of appointments left outside is shown before saving and does not block.
5. Editing a row with an unchanged time is not refused by the day limit (keptTime); changing its time is refused if it falls outside.

**EVIDENCE**

`src/utils/scheduleTime.ts#universityDayIssue` `src/utils/scheduleTime.ts#scheduleDayWindowMinutes` `src/server/core/scheduleRules.ts#schedulePayloadIssues` `src/server/core/universityDay.ts` `src/server/routes/referenceRoutes.ts` `src/components/SectionScheduleHours.tsx` `tests/schedule-time-window-audit.ts` `tests/owner-hours-rule-audit.ts` `tests/full-day-setting-audit.ts` `tests/section-schedule-hours-audit.ts`

### FR-SCH-016 Regulation days, lengths and start ladder

The system shall apply the regulation: Sunday, Tuesday and Thursday lectures are 50 minutes and start on the hour from 08:00; Monday and Wednesday lectures are 80 minutes and start at 08:00 then every 90 minutes (09:30, 11:00…); a 10-minute gap separates consecutive lectures; and shall only warn, without blocking, about a start off the ladder and a non-conforming length.

● Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. 08:00–08:40 on Sun/Tue/Thu for a 3-hour course yields a length note; 08:00–08:50 and 08:00–09:50 (50+10+50) pass.
2. Mon/Wed 08:00–09:20 passes and 08:00–09:00 is noted; the 08:00–10:50 block (five-minute tolerance) is accepted.
3. A Sunday start of 08:55 yields «outside the regulation start ladder» at low severity soft:true; mixed-family days have no ladder.
4. A length the course has used habitually (±5 minutes) is accepted without a length note.
5. Typing an off-ladder start (e.g. 12:00 on Monday) immediately shows, before saving, «start per regulation: 12:30» under the start field in the appointment form, quick create and the proposal workspace; pressing it sets the start and recomputes the end, and saving the typed start stays allowed.

**EVIDENCE**

`src/components/LadderStartHint.tsx#LadderStartHint` `src/utils/scheduleRegulations.ts#lectureLengthProblem` `src/utils/scheduleRegulations.ts#startLadderNote` `src/utils/scheduleRegulations.ts#requiredGapForDays` `src/server/core/scheduleConflicts.ts` `tests/ladder-start-hint-audit.ts` `tests/lecture-length-audit.ts` `tests/approved-patterns-audit.ts`

### FR-SCH-017 Approved pattern library

The system shall refuse on create, and on edit when the row's shape (days or time), its course or its section code changes, and on a batch move (drag, undo, repair chain) judged on the week as it will be, a distribution of the section's days (combined with the course's other meetings in the same department and term) that does not match a pattern in the library of 18 patterns for courses of one to five hours, and list the approved patterns in the message. All rows of the section are read together: once its hours are complete its days must be one whole pattern, and a partial set is accepted only while incomplete and with one pattern's lengths (Sun 80 + Thu 80 in two rows for a 3-hour course is refused); the same rule applies to pinning and the time machine.

● Implemented · Must · Functional · Schedule committee chair, Department head

#### RATIONALE

> Owner decision 2026-10-30: the pattern must be approved; history is a suggestion that never overrides the regulation.

#### ACCEPTANCE CRITERIA

1. A 2-hour course: Sun+Tue, Tue+Thu, Mon+Wed and Tuesday 110 min are accepted; Sun+Mon is refused with 400 listing the approved ones.
2. Single-day blocks are approved with their lengths: 170 for three periods, 230 for four, 290 for five.
3. Re-saving an existing row whose shape is unchanged is not refused by the pattern rule, nor is an exact restore from the time machine.
4. A course with no hours or credits is not pattern-checked.
5. Two one-day rows (Sun 80 and Thu 80) for a 3-hour course are refused; Sun·Tue·Thu from three 50-minute rows is accepted.
6. Dragging the Tuesday of a «Sun 80 + Tue 80» section to Thursday through POST /api/schedules/move-batch is refused with 400 code section-shape and nothing is written; moving all the section's rows together to another approved pattern passes; a move that drops below or exceeds the course hours is refused the same way, and the regulation-exception consent does not allow it.
7. An edit that changes only the section code or the course (shape untouched) is judged again by the pattern and hours of the section it joins, and is refused only when it creates the violation: a compliant row joining a section that then violates is refused, while a row that was already violating in its own section with the same days and time (a legacy 75-minute length) can still have its code changed.

#### EVIDENCE

`src/utils/scheduleRegulations.ts#PATTERN_LIBRARY` `src/utils/scheduleRegulations.ts#daysFitLibrary` `src/server/core/scheduleRules.ts#unapprovedPatternIssue` `src/utils/scheduleRegulations.ts#sectionDaysFitLibrary` `src/server/core/scheduleRules.ts#sectionShapeIssue` `src/server/core/scheduleRules.ts#keepsSectionShape` `src/server/core/scheduleRules.ts#editShapeIssue` `tests/approved-patterns-audit.ts` `tests/new-appointment-pattern-end-audit.ts` `tests/pattern-library-audit.ts` `tests/holds-patterns-r4-audit.ts` `tests/final-audit-gaps-audit.ts`

### FR-SCH-018 Weekly-hours ceiling per section

The system shall refuse an appointment that raises the section's weekly teaching minutes (this row plus its other distinct meetings) above the ceiling round(hours × 50 × 1.1), not double-count a copy identical to the same row, and allow editing a row already over the ceiling when the total does not increase.

● Implemented · Must · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A 3-hour course: ceiling 165 minutes; six 50-minute lectures are refused with 400 «what exceeds the approved hours is not saved».
2. A Wednesday 170-minute block of three periods counts 150 teaching minutes; Mon+Wed 80/80 counts 160.
3. An identical copy (same days and time) does not turn 150 into 300 minutes.
4. Hours come from CourseHours, else CourseCredit; a course with neither is not checked.

#### EVIDENCE

`src/utils/scheduleRegulations.ts#maxWeeklyMinutesFor` `src/utils/scheduleRegulations.ts#sectionWeeklyHours` `src/server/core/scheduleRules.ts#scheduleLengthIssue` `tests/lecture-length-audit.ts` `tests/appointment-forms-r2-audit.ts`

### FR-SCH-019 Inter-campus travel time

The system shall warn, not block, when an instructor's appointment leaves less than the configured travel time to an appointment at another campus (default 30 minutes between main and a branch and 60 between the two branches; registration may set 0 to 180 and exempt up to 500 instructors), with at most three warnings and no repeat per campus pair and day.

● Implemented · Should · Functional · Schedule committee chair, Department head

**RATIONALE**

> Owner decision 2026-11-05: the duration is mandatory in the teacher card and a warning in the appointment form.

**ACCEPTANCE CRITERIA**

1. A 20-minute gap between the two branch sites yields a soft «tight transfer» warning stating need and available; a 60-minute gap yields nothing.
2. An exempt instructor or a pair set to 0 yields no warning.
3. Campus is derived from the college name (either branch-site name, otherwise main).

**EVIDENCE**

`src/utils/campusTravelPolicy.ts#travelShortfalls` `src/utils/campusTravel.ts` `src/server/core/travelPolicy.ts` `src/server/core/scheduleConflicts.ts` `tests/undo-travel-rule-audit.ts` `tests/admin-rules-r4-audit.ts`

### FR-SCH-020 Department rhythm and memory

The system shall read the department's habit from its whole history (every term) and state in one soft note that a start is more than zero and under 20 minutes from a habitual start of the department, or that its length is outside the library, never rank habit above the regulation, and cache the reading per department, answering at once from a reading up to 10 minutes old and refreshing it in the background.

● Implemented · Should · Functional · Schedule committee chair, Department head, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A start of 08:55 where the department habitually starts at 08:50 yields soft «outside the department's usual rhythm»; a start 30 minutes away is a decision and is not noted.
2. A break habit needs at least 6 pairs at 55% agreement, a length habit at least 8 lectures at 35% agreement.
3. A declared room_doorway constraint outranks the learned figure and is capped at 60 minutes.
4. Memory notes: one sentence about the slot and one about the hall, computed only at check time.

**EVIDENCE**

`src/server/core/rhythm.ts#departmentStyle` `src/utils/departmentRhythm.ts#offRhythm` `src/utils/departmentRhythm.ts#learnRhythm` `tests/run-tests.ts` `tests/approved-patterns-audit.ts`

### FR-SCH-021 Live appointment check before saving

The system shall provide POST /api/schedules/check-conflicts running in parallel the same check steps that govern the save gate, returning conflicts, validationIssues (fields, length, pattern, place and companion) and pattern, length and hours notes, and term-start drafts shall use the same functions row by row.

● Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. What the check refuses is refused on save with the same message, and a saved row whose shape is unchanged is not refused.
2. The reply adds patternNotice, lectureNotice and departmentHoursNotice when present.
3. A draft row failing pattern, ceiling or hall appears in rowIssues, a soft note in rowWarnings, and a check that could not run reads as a blocker, not as clean.

**EVIDENCE**

`src/server/routes/scheduleReviewRoutes.ts` `src/server/core/draftChecks.ts#draftAppointmentChecks` `tests/appointment-entry-parity-audit.ts` `tests/import-term-tools-audit.ts`

### FR-SCH-022 Atomic batch move

Inferred

The system shall accept one to sixty appointments in POST /api/schedules/move-batch, change only days, time and place on them, check each row against the term treating the travelling rows as already moved, check the moved rows against each other in their new places, judge every moved row whose shape changed by the same two section blocks as create and edit (course hours and library pattern) on the week as it will be, and write all in one batch or nothing.

Implemented · Must · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A request with none or more than 60 is refused with 400 «select one to sixty appointments per move».
2. A refused move returns 409 «not moved: <first message> (+N more)» with conflicts and writes nothing.
3. Two rows moved to the same hall and hour together are refused with «between two appointments moved together».
4. A stale revision on any row returns 409 conflict=revision and nothing moves; a locked schedule returns schedule-locked.
5. A move that breaks the section's library pattern or its course hours is refused with 400 «not moved: <reason>» code section-shape, and nothing is written.

#### EVIDENCE

`src/server/routes/scheduleReviewRoutes.ts` `src/db/repository.ts#moveSchedulesBatch` `src/server/core/scheduleRules.ts#sectionShapeIssue` `tests/final-audit-gaps-audit.ts`

### FR-SCH-023 Approving a proposal into the live schedule

The system shall execute a proposal (open a section, move a row, swap two rows) from a known source (registration radar, student case, instructor request, Analytics Center, section planning) through the very same create and edit paths, after confirming it is not stale, with a dry run of each step on the week as it will be, and reverting what was written if a later step fails.

Implemented · Must · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A source outside the closed list is refused with 400 code bad-origin; a kind other than move/swap/opening is refused with bad-kind.
2. A row whose day or time changed since the proposal was built is refused with 409 code stale; a deleted row with 404 stale.
3. A swap is checked on a week with both rows moved; failure of the second step restores the first and returns applied=[] and reverted=true.
4. Opening a section with no free instructor is refused with 422 needs-instructor; a proposed section number already used is replaced by highest + 1 (or 501 if none exist).
5. The written row carries origin (kind, reference, note up to 160 characters) and the audit records it as a proposal approval.

#### EVIDENCE

`src/server/core/scheduleWrites.ts#applyProposalCore` `src/server/core/scheduleWrites.ts#runScheduleHandler` `src/server/routes/schedulesRoutes.ts` `src/server/routes/schedulesRoutes.ts#/api/schedules/apply-proposal` `tests/schedule-apply-proposal-audit.ts` `tests/proposal-undo-emulator-audit.ts`

### FR-SCH-024 Assign, swap and replace a faculty-placeholder section

The system shall execute in POST /api/schedules/placeholder-action an «assign» (a real instructor to a section of the same course), a «swap» (move the section to a free hall and add the instructor's row in its hall) or a «replace» (delete the section and add the row) in one transaction after a dry run of each step, and return the undo steps.

Implemented · Should · Functional · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Assign changes the instructor of the same row, creates no row, and requires the same course (400 otherwise).
2. Replace takes the section's days, time and hall as they are, deletes it and adds the new row in the same transaction.
3. An instructor conflict or stale revision returns 409, the section stays and no row is created; a storage failure returns 503.
4. A section no longer assigned to the placeholder is refused with 409, and an instructor who is himself a placeholder with 400.

#### EVIDENCE

`src/server/routes/scheduleToolsRoutes.ts` `src/utils/placeholderMatch.ts#placeholderMatch` `src/db/repository.ts` `tests/placeholder-action-audit.ts` `tests/appointment-forms-r2-audit.ts`

### FR-SCH-025 Replace an instructor across a term

Inferred

The system shall show in a preview the effect of handing all of an instructor's appointments in a department and term to a replacement or to «no instructor», and execute it on commit=true when no conflict arises with the replacement's schedule, after a snapshot labelled from ← to, without deleting any teaching.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. from equal to to is refused with 400 «choose a different replacement»; a clash with the replacement returns 409 with up to 20 conflicts.
2. The preview returns affected, compatible and reasons with no write; the commit returns moved and undoVersionId.
3. GET /api/schedules/replace-instructor/history lists up to 20 snapshots whose label starts «before replacing the instructor».
4. Both routes require screen 7 and a department within the user's scope (otherwise 403); a missing instructor, college, department or term in POST /api/schedules/replace-instructor is refused with 400, a commit on a locked schedule returns 409 schedule-locked, and the preview does not check the lock.
5. The replacement's consecutive lectures on the week as it will be (Art. 6/2, 6/3) are refused on commit with 409 code regulation-exception and nothing written; the commit proceeds with regulationException=true and the exception is recorded in the audit log; the preview returns the violations in regulation.

#### EVIDENCE

`src/server/routes/scheduleToolsRoutes.ts#/api/schedules/replace-instructor`
`src/server/routes/scheduleToolsRoutes.ts#/api/schedules/replace-instructor/history`
`src/server/core/scheduleRules.ts#reassignmentExceptions` `tests/final-audit-gaps-audit.ts`

### FR-SCH-026 Convert TA staff to the faculty placeholder or a department member

The system shall convert the appointments of explicitly classified TA staff to the department's single «faculty» placeholder record, or to a member the coordinator picks for each name from the department family (department faculty and this term's visiting teachers, as in the course instructor picker), with a preview carrying a fingerprint (previewKey) of the rows and their revisions, an explicit confirmation in the x-schedule-confirm header, a limit of 400 appointments, within one department and term, in an atomic batch under a serial lock.

Implemented · Could · Functional · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A run without the token ta-conversion is refused with 409 «conversion needs explicit confirmation».
2. A schedule or classification change after the preview is refused with 409 «reopen the preview»; more than 400 appointments or more than one placeholder record blocks.
3. A frozen term or locked schedule blocks the conversion.
4. GET /api/schedules/ta-conversion returns the preview (people, affected appointment count, sections, previewKey, whether it is allowed and why, term and department names) uncached; without college, department or term it returns 400 and outside scope 403.
5. Each TA may be given a target from the instructor picker's own list (department faculty and this term's visiting teachers), defaulting to the placeholder; a target outside the department family is refused with 400 in Arabic, and a clash or load excess is a soft warning that never blocks.
6. A conversion that leaves the receiving member with consecutive lectures breaking Art. 6/2 or 6/3 is refused with 409 code regulation-exception and nothing written; it proceeds with regulationException=true and is recorded in the audit log.

#### EVIDENCE

`src/server/routes/scheduleToolsRoutes.ts` `src/utils/taConversion.ts`
`src/server/routes/scheduleToolsRoutes.ts#/api/schedules/ta-conversion`
`src/server/core/departmentPickerFamily.ts#departmentPickerFamily` `src/components/TAConversionPanel.tsx`
`src/server/core/scheduleRules.ts#reassignmentExceptions` `tests/ta-conversion-audit.ts`
`tests/ta-conversion-family-http-audit.ts` `tests/final-audit-gaps-audit.ts`

### FR-SCH-027 Time and hall suggestions

The system shall suggest in POST /api/schedules/suggest-slots times and halls on a 30-minute step within the department window, from official, pinned and approved-barter halls, pass each ranked candidate through the same conflict gate (up to 48 candidates) and return three (six for «suggest a hall»), and write nothing.

● Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The requested duration is clamped between 30 and 300 minutes (60 by default); with no days an empty slots list is returned with reason days.
2. What the gate rejects is counted in rejectedByScheduleGate and not shown; if nothing remains a named reason is returned.
3. Up to four exactly matching faculty-placeholder sections are returned as replaceable; a course needing a companion facility gets no slot without a free one.
4. If the approved-hours ceiling is exceeded the result is empty with reason hours.
5. A time where every section combination clashes with a co-requisite ranks after all other times and at most one is shown; a course with no co-requisite is unaffected.
6. When the term has an actual-demand report, «suggest a time and hall» puts first what serves graduates and then students most (the golden time): three bands (85% and above, then 60%, then the rest) with a stable sort keeping the old order within a band, and each suggestion carries its share chip with the graduate or student icon; with no report nothing changes.
7. Inside the appointment (full editor and «new appointment») a «swap the two rooms» card sits beside the room suggestions. It appears only when the appointment's room is a poor fit (different type, or capacity below the course seats) or no suitable free room exists: a swap with one other section of the same department, up to two, each landing in a room that suits it. Capacity is a hard condition (no room below the course seats, and no unknown-capacity room for a course with seats), the type matches the course's type, a course with no type is never sent to a specialised room, and a section with a companion facility never leaves its building. The server judges both sections with the same save guard (scheduleConflicts) before showing anything, and nothing runs automatically: a before/after confirmation, then an atomic move through /api/schedules/move-batch with an undo button, then the draft takes the room and is saved with the usual save button. Department side only (no teacher path, so room names never reach teachers).

#### EVIDENCE

`src/server/routes/scheduleToolsRoutes.ts` `src/utils/suggestionEngine.ts` `src/utils/slotSuggestionScope.ts` `src/utils/coreqSections.ts` `src/utils/studentFit.ts#rankByFitBand` `src/server/actualDemand.ts#fitScoresFor` `src/components/RoomSuggestionCards.tsx#FitPill` `src/utils/appointmentRoomSwap.ts#appointmentRoomSwaps` `src/components/RoomSwapCard.tsx` `src/components/useRoomSwaps.ts` `src/components/Schedules.tsx#applyRoomSwapMove` `tests/slot-suggestion-recovery-audit.ts` `tests/appointment-forms-audit.ts` `tests/placeholder-action-audit.ts` `tests/coreq-sections-audit.ts` `tests/appointment-ideas-1114-audit.ts` `tests/appointment-room-swap-audit.ts`

### FR-SCH-028 Common meeting time

The system shall compute common free time for two or more instructors (duration 30 to 180 minutes) from the whole term's schedule across all colleges on a 30-minute step, drop on the server the faculty placeholder, visiting instructors and anyone with a non-empty status, and return only busy/free per chosen name.

● Implemented · Could · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. Fewer than two instructors is refused with 400 «choose at least two instructors».
2. A department head (permission 14) may choose only instructors of his own department (403 otherwise).
3. The reply carries busyScope=allColleges, and the best window is ordered by fewest busy, then longest run, then nearest to 10:00.
4. Inspecting a specific time outside the university day is refused with 400.
5. GET /api/schedules/meeting-participants returns the excluded numbers (faculty placeholder and visitors) and, with sectionId, the department's instructors from all its colleges by name and number only; a department head without sectionId gets 403 and a missing term 400.
6. If fewer than two instructors remain after the exclusions the answer is 400 asking for at least two non-visiting instructors.

#### EVIDENCE

`src/utils/meetingSlots.ts` `src/server/routes/scheduleToolsRoutes.ts` `src/components/MeetingSlots.tsx` `src/server/routes/scheduleToolsRoutes.ts#/api/schedules/meeting-slots` `src/server/routes/scheduleToolsRoutes.ts#/api/schedules/meeting-participants` `tests/meeting-slots-audit.ts`

### FR-SCH-029 Cancel or cover one date, and rank substitutes

The system shall record against an appointment a dated exception YYYY-MM-DD (cancel, or cover by another instructor) that never touches the row or its revision, refuse a second exception for the same date, and rank up to 12 substitutes free in that hour.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A date on a day the appointment does not meet is refused with 400 «this appointment does not meet on the chosen day»; a repeated date returns 409.
2. Covering with the same instructor is refused with 400; with an instructor busy at that hour or already covering returns 409 (cover-busy or cover-double-booked).
3. The note is cut to 240 characters. Substitutes score: taught the course 50 + min(12, 2×terms), same department 20, same building that day 10 or same day 6, plus 10 minus load hours.
4. A mobile number is withheld from anyone outside the circle of departments and the reply says «contact via his department».
5. A dated exception is guarded by the ended-term rule and not by the registration lock, so cancelling or covering tomorrow's lecture does not wait for a registration decision; GET returns the appointment's exceptions and DELETE removes one.
6. The schedule workshop does not show the «day substitute» door today: its button in the appointment context panel depends on a flag that is off (DAY_SUBSTITUTE_ENABLED = false), so its sheet cannot be opened from the interface; the four routes and the calendar's EXDATE support remain working for direct callers.

#### EVIDENCE

`src/server/routes/schedulesRoutes.ts` `src/server/core/scheduleRules.ts#weekExceptionDayKey` `src/components/Schedules.tsx#DAY_SUBSTITUTE_ENABLED` `src/utils/coverAvailability.ts` `src/server/routes/schedulesRoutes.ts#/api/schedules/:id/exceptions` `src/server/routes/schedulesRoutes.ts#/api/schedules/:id/exceptions/:exceptionId` `src/server/routes/schedulesRoutes.ts#/api/schedules/:id/substitutes` `tests/doctor-journey-audit.ts` `tests/term-freeze-audit.ts`

### FR-SCH-030 Cell notes, department rebuttal and registration verdict

The system shall let registration and the department attach a note to a specific cell (time, days, hall, instructor, section number, course, or whole row), compute its state (open, changed, answered, resolved, removed) from the cell's present value rather than a flag, and require a rebuttal reason of at least three characters.

Implemented · Should · Functional · College registrar, Registration officer, Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Note text is cut to 600 characters and optional, defaulting to «review <field>»; a second click on the same cell corrects the text and clears the rebuttal and verdict.
2. A registration note belongs to the current approval round (at least 1); each department author keeps their own note on the same cell.
3. A rebuttal under 3 characters is refused with 400; verdict «accepted» resolves the note, «insisted» reopens it and archives the argument, escalating on the third insistence.
4. Writing is refused in an ended term; deletion is limited to the author or the administrator.

#### EVIDENCE

`src/server/routes/scheduleNotesRoutes.ts` `src/server/core/notes.ts#noteState` `src/server/core/notes.ts#noteFieldValue` `src/server/routes/scheduleNotesRoutes.ts#/api/schedule-notes` `src/server/routes/scheduleNotesRoutes.ts#/api/schedule-notes/:id/rebut` `src/server/routes/scheduleNotesRoutes.ts#/api/schedule-notes/:id/verdict` `src/server/routes/scheduleNotesRoutes.ts#/api/schedule-notes/:id` `tests/schedule-changes-audit.ts` `tests/approval-integrity-audit.ts` `tests/relay-fixes-audit.ts`

### FR-SCH-031 Live push and colleague presence

The system shall push every schedule change to each open screen within about 350 ms (and across all instances), show the presence of colleagues on the same board (cell under pointer, card in the air, row open) scoped so that nobody learns who works in a college outside their own, and replace the open stream with a short pulse when the user is alone.

● Implemented · Should · Functional · Schedule committee chair, Department head, The system (automatic)

#### ACCEPTANCE CRITERIA

1. The stream (GET /api/schedules/events) closes once 400 connections are open, sends a ping every 25 s and retries after 4000 ms.
2. A presence mark counts as stale after 45 seconds and a silent connection leaves the roster after 90 seconds.
3. A stream cannot claim a board outside its holder's scope and registers with an empty scope; the pulse returns company, changedAt and notifiedAt from memory with no database read.
4. A pulse from a demo sandbox wakes only that sandbox's screens.
5. GET /api/schedules/pulse with team=1 returns to an advising or registration team its colleagues present on the same work (screen and item) within scope; POST /api/schedules/pulse retires a closed tab at once with 204, and only the same account's tab.

#### EVIDENCE

`src/server/routes/scheduleLiveRoutes.ts` `src/server/core/liveChannel.ts` `src/server/livePulse.ts` `src/components/schedulePresence.ts` `src/server/routes/scheduleLiveRoutes.ts#/api/schedules/pulse` `tests/live-pulse-audit.ts` `tests/live-pulse-http-audit.ts`

### FR-SCH-032 Snapshot before every write and no silent overwrite

The system shall capture a snapshot of the stored schedule (not the cache) before every add, edit, delete, move, copy, wipe and replace, record the after-state from the operation's own rows, and refuse to restore a version over a schedule that changed after its base unless «overwrite-newer» is confirmed, listing what would be lost.

● Implemented · Must · Functional · Schedule committee chair, Department head, The system (automatic)

#### ACCEPTANCE CRITERIA

1. Each snapshot is labelled by what precedes it: «before adding an appointment», «before editing an appointment», «before deleting an appointment».
2. Moving a row between scopes captures two snapshots: «before editing…» for the source and «before moving an appointment into this schedule» for the destination.
3. A restore over a changed schedule returns 409 code scope-changed-since-base with up to 40 changes and the total.
4. In Firestore the version list carries no rows; whoever needs the snapshot fetches it by id.

#### EVIDENCE

`src/server/core/versions.ts#captureScopeVersion` `src/server/core/versions.ts#scopeOverwriteRefusal` `src/server/core/versions.ts#hydrateVersionRows` `tests/schedule-versions-list-audit.ts` `tests/schedule-wipe-audit.ts`

### FR-SCH-033 Wipe and restore a department schedule

The system shall allow wiping a department's schedule only in a term being prepared, only for the system administrator and the schedule committee chair, after explicit confirmation, a typed department name, a matching appointment count, a limit of 450 appointments and a full backup, and allow restoring the last wipe into an empty schedule.

● Implemented · Must · Functional · Root administrator, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. The current, ended or non-planning term is refused with its reason; a signed schedule can be wiped only by the administrator.
2. A mismatched department name returns 409 wipe-name, a changed count wipe-count, an empty schedule wipe-empty, over 450 wipe-too-large.
3. If the backup cannot be saved the answer is 500 and nothing is wiped; after the wipe old instructor requests are closed and the schedule generation advances.
4. Restore requires an empty schedule (wipe-not-empty), a backup with all rows and the same version id, and validates the rows before writing.
5. GET /api/schedules/wipe-scope returns before the request whether wiping is allowed and why, the appointment count, the department and term names, the last wipe, and whether restoring is possible (allowed, a previous wipe exists and the schedule is empty); POST .../wipe-scope and POST .../wipe-scope/restore require screen 7.

#### EVIDENCE

`src/utils/scheduleWipePolicy.ts#wipeDecision` `src/server/routes/schedulesRoutes.ts` `src/components/WipeScheduleButton.tsx` `src/server/routes/schedulesRoutes.ts#/api/schedules/wipe-scope` `src/server/routes/schedulesRoutes.ts#/api/schedules/wipe-scope/restore` `tests/schedule-wipe-audit.ts`

### FR-SCH-034 Copy a term's schedule into another term

The system shall allow copying a department's schedule from one term to another for the main administrator (SystemUserId = 1) only, provided the target term is empty, the rows hold no archived courses and the copied rows pass the import validation, with a snapshot before it.

● Implemented · Should · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. Anyone but the main administrator is refused with 403; a target term with appointments is refused with 409 «a schedule already exists in the target term».
2. Rows with archived courses are refused with 409 stating their number; rows failing validation are refused with 400 with issues.
3. The preview GET /api/schedules/copy-preview returns canCopy only when a source exists, the target is empty and there are no issues.
4. The preview returns the source and target row counts, the source's time issues and its first 12 rows; the commit POST /api/schedules/copy answers 409 schedule-locked when the target term is with registration and 409 deadline-wholesale outside the wholesale-replacement deadline, labels its snapshot «before copying the term», and returns count and undoVersion.

#### EVIDENCE

`src/server/routes/schedulesRoutes.ts#/api/schedules/copy` `src/server/routes/schedulesRoutes.ts#/api/schedules/copy-preview` `tests/approval-integrity-audit.ts` `tests/term-freeze-audit.ts`

### FR-SCH-035 Read boundaries by role and scope

The system shall read an appointment reader's rows only from departments within their scope, restrict the dean and vice dean to each department's final schedule (live if approved, from the last-accepted version if returned to registration, nothing if never accepted), and, with no explicit term, read the newest term rather than all terms.

Implemented · Must · Functional · College dean, Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. GET /api/schedules with no termId reads the newest term; it filters by instructorId, building, hall, a start/end window and days sun..thr combined with OR.
2. The X-Schedule-Finality response header carries «accepted» or «historical» per department for those who see the final view only.
3. GET /api/schedules/workspace returns colleges, departments, terms, appointments, instructors and courses in one request, and is confined to the account's scope for non-administrators.
4. The workspace requires screen 7; an unknown term is replaced by the newest one; a non-administrator's department is coerced into their own scope whatever was asked; for the administrator resolve=1 opens the first college and department instead of «all»; instructors are the union of the department's instructors in the term, in its history and the live visiting roster, sorted alphabetically, returned with visitingInstructorIds and visitingStatusIds.

**EVIDENCE**

`src/server/core/scheduleReads.ts` `src/server/routes/schedulesRoutes.ts`
`src/server/routes/schedulesRoutes.ts#/api/schedules/workspace` `tests/role-scope-audit.ts` `tests/dean-notify-audit.ts`

### FR-SCH-036 Arabic ordering of terms, names and courses

The system shall order terms newest to oldest by the key start-year × 10 + term order (first 1, second 2, summer 3), falling back to the term id, order reference lists alphabetically in Arabic (numeric comparison, ignoring case and punctuation), and order appointments by course code, then section number, then course name, then id.

Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. «Summer term 2025/2026» precedes «Second term 2025/2026», which precedes «First term 2025/2026» in a newest-first list.
2. A term name without two years is ordered by AdTermId.
3. Two sections of one course order by section number, then by id on a tie.

**EVIDENCE**

`src/server/core/ordering.ts#termChronologyServer` `src/server/core/ordering.ts#arabicUiCollator`
`src/utils/scheduleOrder.ts#compareCourseSection` `tests/dashboard-home-term-audit.ts`

### FR-SCH-037 Teacher mini-week and week window

The system shall show in the appointment form the chosen instructor's week in five columns on a compact axis (at least six hours), free slots fitting the course pattern with the required gap, «before/after» options adjacent to each lecture's edges on start-ladder steps (0, 30 and 60 minutes where no ladder applies), and a header with load (now → after), attendance days and gaps.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. Free slots stop at the 10-minute gap from each lecture and snap to a 60- or 90-minute ladder from 08:00 for a single family.
2. «Before/after» skips the anchor that is the appointment's own course and section, and returns the anchor's hall if free, otherwise its building.
3. A drawn appointment starts on the five-minute grid and lasts at least half an hour if no regulation length is known; an edited row is not counted as an addition to the load.
4. When an actual-demand report exists the free slots of the instructor's week are tinted (green ≥85%, amber ≥60%, red below) by the share of those the time suits — graduates first — with the percentage where the slot is wide enough, and one «student pulse» legend; through one deferred read per set of slots, and with no report no slot is tinted.
5. A tinted slot shows the percentage alone (the time in its tooltip and «+» on hover); on the phone the collapsed instructor sheet shows load and days only, with the gap shown once it is opened.

#### EVIDENCE

`src/utils/teacherMiniWeek.ts` `src/utils/lectureStick.ts` `src/components/TeacherMiniWeek.tsx` `src/components/LectureStickChips.tsx` `src/components/useFitGrid.ts` `src/server/routes/scheduleToolsRoutes.ts#fit-grid` `src/styles/58-appt-ideas.css` `src/components/TeacherMiniWeek.tsx#onBestFit` `tests/teacher-mini-week-audit.ts` `tests/week-window-audit.ts` `tests/lecture-stick-own-audit.ts` `tests/appointment-ideas-1114-audit.ts` `tests/appointment-ideas2-1114-audit.ts`

### DR-SCH-001 Appointment (schedule row) data model

The system shall store an appointment with a numeric id, a revision rev starting at 1, college, department, term, course, section number, instructor, five day flags (Sunday to Thursday), start and end in normalised HH:MM, building and hall with their official identities, a snapshot of the course name and code, the legacy fdetail day encoding, a source order sourceOrder, and a change origin when approved from a proposal.

Implemented · Must · Data · The system (automatic)

#### ACCEPTANCE CRITERIA

1. «9:00» is stored as «09:00»; anything that is not a valid clock is not stored.
2. A manually added row carries sourceOrder ≥ 1,000,000; an imported row is below it.
3. origin.kind comes from the closed list (registration radar, student case, instructor request, Analytics Center, section planning), refId up to 64 characters and note up to 160.

#### EVIDENCE

`src/types.ts` `src/utils/scheduleTime.ts#normalizeClock` `src/server/core/scheduleWrites.ts` `tests/schedule-time-window-audit.ts`

### NFR-SCH-001 Indexed conflict detection with identical results

The system shall detect conflicts by lookup in indexes (day + instructor, day + hall, day + paired course, course + section) instead of comparing every appointment with every other, and return exactly the result of the original exhaustive sweep kept as reference — pairs, reasons, severity, wording and order.

Implemented · Must · Non-functional · The system (automatic)

**RATIONALE**

> A single reading held the production server for 2.5 seconds; a missed conflict is worse than a slow schedule.

**ACCEPTANCE CRITERIA**

1. The parity test compares both paths on random whole-term schedules and fails on the first difference in pair, reason or order.
2. One cached current-term read is used, so a full decade is never scanned during interactive use.
3. Heavy reads are cached: department habit 10 minutes, department window 30 seconds, university day 30 seconds with a maximum 2-second wait.

**EVIDENCE**

`src/utils/scheduleIntelligence.ts#findConflicts` `src/utils/scheduleIntelligence.ts#findConflictsExhaustive` `src/server/core/rhythm.ts` `src/server/core/universityDay.ts` `tests/conflict-parity.ts`

### IR-SCH-001 Drag preview before the drop

Inferred

The schedule interface shall classify the effect of moving a lecture before the drop into five classes (excellent, good, neutral, suboptimal, impossible), never count soft notes as a blocker that sends the card home, and reserve «impossible» for a move with a blocking conflict.

Implemented · Should · Interface · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A move creating a high-severity blocker is «impossible»; one that adds conflicts, 90 or more minutes of gap, or 20% or more day pressure is «suboptimal».
2. A one-day row shorter than 100 minutes takes the target day's length (50 or 80) when moved.
3. The reduced-motion preference is honoured and the animated preview stops when requested.

**EVIDENCE**

`src/components/SchedulePhysics/physics.ts#classifyDecision` `src/components/SchedulePhysics/physics.ts#buildMoveCandidate` `src/components/SchedulePhysics/useReducedMotion.ts`

### IR-SCH-002 Saved views, undo and offline work

Inferred

The schedule interface shall keep named saved views (at most three favourites) with a dot signalling that the state differs from them, offer undo (Ctrl+Z) with a log of sixty changes and a fifteen-second bar, and defer row edit, delete and batch move when the connection drops (up to 120 operations), showing later server refusals for review instead of discarding them.

Implemented · Should · Interface · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. Saving a fourth favourite is refused; the views menu does not appear until the first view is saved.
2. Creating a new appointment offline is not deferred (a POST other than batch move); repeated PUTs of the same row are coalesced into the last one.
3. What the server refuses after reconnecting moves to the review shelf and can be retried or discarded.
4. The default view on phones is «list»; on desktop it is the saved choice of week, list or rooms.

**EVIDENCE**

`src/utils/scheduleViews.ts` `src/components/ScheduleViewsMenu.tsx` `src/utils/offlineScheduleQueue.ts` `src/components/Schedules.tsx` `tests/run-tests.ts`

### FR-SCH-038 Review readiness report

Inferred

Through GET /api/schedules/review-readiness the system shall return one list of what blocks approval in a department schedule: instructor or room double booking, an identical appointment for the same course and section, a hall booked by another department through barter, and an appointment beyond its barter window, together with warnings that are not counted.

Implemented · Must · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The other appointment outside the reader's scope is shown as outside the current view without its course or time; both members of a pair inside the department are counted.
2. family=1 gathers the rows of every member of the department family the reader may see and adds the previous term's rows and the learned course nature, so the report is the same whichever member is opened.
3. A section recorded twice in two halls or with two instructors arrives as a review warning outside the blocker count; without college, department or term it returns 400, outside scope 403.

#### EVIDENCE

`src/server/routes/scheduleReviewRoutes.ts#/api/schedules/review-readiness` `src/utils/scheduleBlockers.ts`

### FR-SCH-039 Instructor's week across the department's colleges

Inferred

Through GET /api/schedules/teacher-family-week the system shall return the instructor's term appointments in every college of the department family with their courses' hours and credits and the number of sites, hiding the hall, building and companion facility of any appointment outside the reader's scope.

Implemented · Should · Functional · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Term, instructor, college and department are positive integers otherwise 400; outside scope 403; the reply is uncached.

#### EVIDENCE

`src/server/routes/schedulesRoutes.ts#/api/schedules/teacher-family-week` `src/components/TeacherMiniWeek.tsx`

### FR-SCH-040 Course nature from history and hall owner

Inferred

Through GET /api/courses/nature the system shall return what it learned from the history of the department's operational courses (how each course is taught) with the number of terms and observations, and through GET /api/rooms/owner the department owning a hall from its code alone, with no day or time.

Implemented · Could · Functional · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Course nature without sectionId returns an empty object, and a department outside scope returns 403 so another department's habits cannot be read by changing a number.
2. Asking a hall's owner from a college and department outside scope returns 403.

#### EVIDENCE

`src/server/routes/scheduleToolsRoutes.ts#/api/courses/nature` `src/server/routes/scheduleToolsRoutes.ts#/api/rooms/owner` `src/server/core/scheduleRules.ts#roomOwnership`

### FR-SCH-041 Plan facts and the co-requisite note

The system shall read, from the rules of every running plan sheet of the department (active and transitional together, each with its own rules, excluding virtual and archived sheets), the co-requisite pairs, the level groups and the «unlocks» groups, and return them through GET /api/schedules/coreq-pairs (pairs, levelGroups and unlockGroups), and shall add to the appointment check a soft note «overlaps its co-requisite: <course name>» when the appointment overlaps a section of its co-requisite and every combination of the two courses' sections in the appointment's department and term overlaps.

● Implemented · Should · Functional · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. If one section combination has no overlap there is no note; an alternative is a section with a number and a real meeting (a day and a readable time), otherwise there is none. Request holds count as real rows on the server and practice-mode rows do not, and a co-requisite taught by another department is not counted; the note is low and never blocks the save, and failing to read it does not break the check.
2. The facts are cached 30 seconds per department (the key separates the demo sandbox from the real store), and a next course owned by another department has its name fetched by id; the browser fetches them once per department and keeps them 30 seconds, never keeps a failure, and clears them on sign-in and sign-out; without a department 400, outside scope 403.
3. Section numbers compare in one form («01», «1» and the same number in Arabic-Indic digits are one section) without changing what is stored or shown.

#### EVIDENCE

`src/server/routes/scheduleToolsRoutes.ts#/api/schedules/coreq-pairs` `src/server/core/coreqPairs.ts#sectionPlanFacts` `src/server/core/coreqPairs.ts#coreqPairsOfSection` `src/utils/coreqSections.ts#coreqFindings` `src/utils/coreqSections.ts#coreqScopeRows` `src/utils/planFactsCache.ts#loadPlanFacts` `src/utils/sameSlot.ts#sectionCodeKey` `src/server/core/scheduleConflicts.ts` `tests/coreq-sections-audit.ts` `tests/plan-peers-audit.ts` `tests/same-slot-audit.ts` `tests/demo-showcase-audit.ts`

### IR-SCH-042 The three board views, the phone gate and remembered preferences

Inferred

The schedule workshop shall present the scope's appointments in three views («list», «week» and «buildings and halls») that render from the same filtered row set, shall keep per user in the browser the view, the colour meaning, the last hall and the last save under the key schedule-workspace-prefs-<user id>, and shall make the phone work on «list» alone: the week and halls buttons are hidden, and touching their canvas is intercepted by a sheet explaining that reading is complete there, dragging is done from a computer and editing from «list».

● Implemented · Should · Interface · Schedule committee chair, Department head, System administrator

#### ACCEPTANCE CRITERIA

1. On a phone (isPhoneDevice) «list» is forced, focus and presentation modes are switched off, and the palette hides the week, halls, «today», clash, focus, presentation, keyboard pick-up and repair commands; the list itself stays editable and deletable from its «⋯» menu.
2. Switching view resets the previous view's filters: the matrix day, pinned buildings and halls, the hall search, the colour focus and folded layers, the legend search, the quick search, the «pending hall» and «visiting» filters, the expanded day and the active saved view.
3. Blocked storage or a corrupt value under the key does not take the screen down: it opens on «list» and on colouring by course.

#### EVIDENCE

`src/components/Schedules.tsx#changeView` `src/components/Schedules.tsx#showMobileReadOnlyGate` `src/components/Schedules.tsx#prefsKey` `src/utils/workspaceSize.ts#isPhoneDevice`

### FR-SCH-043 The scope applies itself and the board never shows another term

The workshop shall read the scope's schedule as soon as a college and a term are chosen (no «search» button, a 90 ms debounce) in one request carrying the catalogues, rows, instructors, courses and visiting roster, shall follow the scope shared between screens, shall fill the current term automatically whenever the college and department are known from the account's scope, shall hide rows (behind a skeleton) whenever they were read for a scope other than the one selected, and shall never write rows from a read older than the latest request.

● Implemented · Must · Functional · Schedule committee chair, Department head, System administrator

**RATIONALE**

> A reader who misses «reading the schedule…» could drag an appointment believing it is in the new term, and the edit would land on the term they had left.

**ACCEPTANCE CRITERIA**

1. When the scope changes the rows are emptied at once so the «shown appointments», «halls used» and «instructors» counters go with them, unless the scope was seen this session, in which case it paints from a shelf holding the last 12 boards per reader and the live read then silently replaces it.
2. Once a board settles, its two chronological neighbour terms are read at idle time (within 900 ms) and shelved, skipping any already shelved and never fetching the neighbours of a neighbour.
3. A failed read empties the rows and stamps the scope so the board honestly says «no appointments» instead of keeping another term's board; if the one workspace request fails the parts are read separately (catalogues, rows, department instructors, courses, visiting roster).
4. A non-administrator's college and department are coerced back into scope without writing that into the shared scope; an empty board for someone with more than one scope reads the term without the department filter and lists up to 6 departments that have appointments, ordered by count, each a button that switches to it.

**EVIDENCE**

`src/components/Schedules.tsx#loadWorkspace` `src/components/Schedules.tsx#loadRows` `src/components/Schedules.tsx#boardShelf` `src/components/Schedules.tsx#rowsForeign` `src/utils/sharedScope.ts` `src/utils/warmStart.ts` `tests/shared-scope-audit.ts`

### IR-SCH-044 List view: ordering, search, paging and the empty state

«List» shall show the department's appointments ordered by course code, then section, then name, then id, then start time, sixty rows per page with a «show more» button; the quick search shall match course name and code, section, instructor name and civil number, building, hall and days; and each row shall carry its running number, course code, name and hall type, section, instructor with the «visiting» badge, days, time, place and companion facility, credits and hours.

● Implemented · Should · Interface · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. On a narrow screen (up to 760 px) the first 6 rows are shown, then a folded «show the rest (N)».
2. Today's ongoing appointment is tagged «running now» and the next one «next» (nothing on Friday or Saturday), and nothing is tagged unless the displayed term is the running one, as with the week's «now» line; a clashing row writes the reason for its ring as a visible line, and a clash with something outside scope is stated in the row's tooltip.
3. An appointment with an unverified historical place carries «unverified historical place data»; a click opens its context, a double click opens the editor, and Enter opens the context.
4. The «pending hall» filter keeps PENDING_ROOM rows only (of the account's own instructor if any), and that instructor sees once per session and term the notice «halls of N of your sections are not fixed yet» with «complete the halls»; the «visiting» filter appears only when a visiting instructor is scheduled.
5. The empty state «no appointments in the current selection» offers «add appointment» (disabled with a written reason when the schedule is locked), «start of term from the previous term» and «import from the schedule tools».

**EVIDENCE**

`src/components/Schedules.tsx#filteredRows` `src/components/Schedules.tsx#AGENDA_PAGE_SIZE` `src/components/Schedules.tsx#AGENDA_PHONE_HEAD` `src/utils/weekVisual.ts#pickLive` `src/utils/scheduleBlockers.ts#rowClashReasons` `src/utils/scheduleOrder.ts#compareCourseSection` `tests/run-tests.ts` `tests/schedule-board-fixes-audit.ts`

### IR-SCH-045 Colour legend: meaning, focus and folding

Inferred

The view shall colour every appointment with a stable hue derived from its identity according to the reader's choice (course, instructor or hall), never using red for anything but a conflict, and shall show a legend of every visible identity with its count in alphabetical order, pressed to light one identity or folded per identity, without removing anything from any count or conflict scan.

● Implemented · Could · Interface · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The legend search appears when there are more than 12 identities and matches ignoring diacritics, hamza forms, alif maqsura and ta marbuta («الاذاعة» finds «الإذاعة»), with «no match» when nothing matches.
2. Focus is a single identity: choosing another replaces it and pressing it again clears it; folding wins over focus; «restore folded N» and «show all» undo them; changing the colour basis or the scope clears focus, folds and search.
3. A folded identity leaves «list» entirely and is dimmed in week and halls; a course chip carries «+N» when «Masari» students require more sections than exist.
4. The legend rail remembers its scroll position per view and basis, shows its two arrows only when it overflows, and a vertical mouse wheel scrolls it horizontally.

#### EVIDENCE

`src/components/Schedules.tsx#hueLegend` `src/components/Schedules.tsx#toggleHueFocus` `src/components/Schedules.tsx#toggleHueHidden` `src/components/Schedules.tsx#ScheduleLegendScroller` `src/utils/weekVisual.ts#courseHue`

### IR-SCH-046 Week grid: day strip, density, unplaced rows and the now line

The week grid shall show five days (Sunday–Thursday) over a window that is the union of the department window and what the rows actually hold, snapped to the slot, so an old appointment outside 08:00–20:00 is never clipped; shall split concurrent hours into lanes where each appointment widens over whatever is free beside it; and shall gather in an «unplaced» column every appointment with no day or no valid time, from which it can be dragged onto a square.

● Implemented · Should · Interface · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The day strip states each day's appointment count and marks today, with teaching hours in its tooltip; pressing one shows that day alone and «today» returns to the week; a day with 4 or more lectures in one hour carries an expand mark.
2. When days get dense the projection turns into horizontal strips (time across, days as rows) without shrinking type, unless the previous-term ghost is on; the three scrollers (top bar, ruler and grid) move together.
3. The «now» line is drawn in today's column only, not on Friday or Saturday nor in any term other than the running one, and advances at the start of every minute.
4. Approved barter windows are drawn in the days as «borrowed» or «lent» blocks with hall and time; a moved appointment leaves a «moved from here» trace for seven seconds, a changed one glows for six seconds; the hover card shows course, instructor, section, days, time, hall and last edit without being clipped at the column edge.

#### EVIDENCE

`src/components/Schedules.tsx#gridWindow` `src/components/Schedules.tsx#weekLayout` `src/components/Schedules.tsx#unplaced` `src/components/Schedules.tsx#nowOffset` `src/components/Schedules.tsx#WeekPeek` `src/utils/weekVisual.ts#buildWeekDensityPlan` `src/utils/weekVisual.ts#shouldUseWeekStrips` `tests/run-tests.ts`

### IR-SCH-047 Buildings and halls board

The «buildings and halls» board shall show every hall used in scope as a row of five day lanes on one hour line (or one chosen day), ordered by building then hall numerically, with a «no hall» row, shall grow a hall's lane vertically when two appointments overlap in it instead of stacking them, and shall allow filtering buildings and halls with several picks.

Implemented · Should · Interface · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. Dropping a card on a lane computes the start from the drop position (from the right) snapped to half an hour and moves the appointment to that hall and day through the atomic batch move; the target hall is sent with its verified identity when another row knows it, otherwise it is cleared for the server to resolve from the name.
2. The «filter halls…» search matches code, building and hall number, with «no matching hall.» when nothing matches; choosing a building drops picked halls from other buildings.
3. A scope with no halls shows «no halls registered in this scope yet», and pressing an empty square starts painting a new appointment in that hall.

#### EVIDENCE

`src/components/Schedules.tsx#roomsMatrix` `src/components/Schedules.tsx#commitRoomMove` `src/components/Schedules.tsx#trackDrop` `tests/blockers-stream-audit.ts`

### FR-SCH-048 Drag-and-drop move without a confirmation, and its refusal

A drag-and-drop move shall be written directly (without a confirmation dialog) through the atomic batch move with each row's revision, after an optimistic paint of the card in its new place, shall join the day's log with the moved card wearing an «undo» button for a full minute, and shall restore everything if the server refuses, with a «move refused» card naming at most three walls, of hall, instructor or student type only.

Implemented · Must · Functional · Schedule committee chair, Standard user, System administrator

#### ACCEPTANCE CRITERIA

1. A drop on a start that differs from that day's usual start minute (learned from at least three samples at 55%, else :00 on Sunday, Tuesday and Thursday and :30 on Monday and Wednesday) asks «unusual time» between «keep» the dragged time and «use» the suggested one, and Esc cancels the move.
2. Moving a multi-day appointment to a day outside its days asks «convert pattern», then switches all its days to the target day's pattern (Sun·Tue·Thu ⇄ Mon·Wed) and sets a length of at most 100 minutes to 50 or 80.
3. A position outside the grid hours is refused with «this position leaves the day's hours; nothing changed.»; if a colleague is holding or editing the appointment their name is said without blocking; an appointment whose previous move is still pending cannot be dragged.
4. The refusal card disappears after 9 seconds or at any new attempt, the square the server refused stays «impossible» for that appointment for the rest of the session, and «this position failed — here is the nearest alternative» is offered at once if a repair chain exists.
5. With the schedule at registration (approval lock) dragging does not start and pressing a card states the lock reason instead of looking disabled; a revision conflict opens the two-versions sheet.
6. A «group move» button on the week toolbar (and in the command palette) appears to editors off the phone: after it a press picks and unpicks appointments, dragging any picked one carries the set with the same offset in one atomic move, and «clear selection» empties it; the board has no dimming lens and no texture switch.

#### EVIDENCE

`src/components/Schedules.tsx#commitMove` `src/components/Schedules.tsx#chooseHistoricalDropTime` `src/components/Schedules.tsx#rhythmSwitchForTarget` `src/components/Schedules.tsx#condenseRefusalReasons` `src/components/Schedules.tsx#presentMoveRefusal` `src/components/Schedules.tsx#warnIfHeldElsewhere` `src/utils/repairChain.ts#findRepairChain` `tests/blockers-stream-audit.ts` `tests/run-tests.ts` `tests/schedule-board-fixes-audit.ts`

### IR-SCH-049 Placement reading before and during a drag

Inferred

The grid shall judge every square the moment a card is lifted with an instant local reading that refuses only what is certain from visible rows (the same instructor or the same hall busy, or a lecture longer than what remains of the day), shall rank the best three squares, and shall then complete the verdict from the server at the square under the pointer, never painting a square green before the server confirms it.

Implemented · Should · Interface · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The ranking score is 100 minus min(40, 4 per 15 minutes of gap to the instructor's nearest lecture that day) or minus 12 for a new day for the instructor, minus 18 for a length other than 50 (Sun, Tue, Thu) or 80 (Mon, Wed), and minus 8 for a start before 08:00 or from 14:00.
2. In week view a square whose hall is busy is shaded as «hall» rather than «blocked», while the halls board blocks it; the server verdict combines the projected ripple, the reason for preference and the conflict check, and asks «why not here» when the square is less preferred.
3. Opening an appointment's context in week view shades every empty square «excellent» (88 or more), «good» (70 or more), «possible with a compromise» or «unavailable», with its reason in the tooltip, and the reading disappears when a real drag starts.
4. The surface auto-scrolls when the pointer comes within 48 px of its edge during a drag; a drag that stopped without ending (a tab switch) is cleaned after 500 ms so live updates do not stall.
5. The square reading shown when a context opens and the keyboard move take the expected length from the regulation's own function (50 on Sunday, Tuesday and Thursday, 80 on Monday and Wednesday), so a lecture of regulation length is never read as «unusual length».
6. At the slot under the pointer while dragging, the reading panel and the decision preview show a fourth «graduates» line: a new unavoidable clash («unavoidable for 3 graduates» with at most two course pairs) in red, otherwise the share the position suits (green ≥85%, amber ≥60%, red below) and what it blocks from them; graduates first then students; from the appointment check's own reply so no second request, a note that never blocks the move, and with no actual-demand report it does not appear.

#### EVIDENCE

`src/components/Schedules.tsx#dragField` `src/components/Schedules.tsx#previewPhysicsTarget`
`src/components/Schedules.tsx#confirmPhysicsTarget` `src/components/Schedules.tsx#evaluatePhysicsTarget`
`src/components/Schedules.tsx#readPlacement` `src/components/Schedules.tsx#decisionField`
`src/components/SchedulePhysics/GraduateRead.tsx` `tests/schedule-board-fixes-audit.ts` `tests/graduate-drag-1114-audit.ts`

### FR-SCH-050 Keyboard move and keyboard shortcuts

Inferred

In week view the workshop shall let the focused lecture be picked up with Space, moved with the arrows (one time slot or one day, respecting writing direction), committed with Enter through the very move function the drag uses and cancelled with Esc or Space, announcing every step for screen readers, and shall decide the screen's shortcuts in one listener: Ctrl/⌘+K for the command palette, Ctrl+Z to undo the latest change, «/» for quick search and «?» for the shortcuts sheet.

Implemented · Could · Functional · Schedule committee chair, Standard user, System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. Space pick-up is available to anyone who edits the schedule (the administration, or a holder of screen 7 with a non-read-only role within their scope, the server still deciding) and in week view only, and does not work while a pointer holds a card; committing on a square judged «unavailable» states the reason and does not move.
2. Shortcuts do not work inside text fields, while the editor is open, during a drag or under a dialog; the first Ctrl/⌘+K is taken ahead of the application-wide search, and a second one passes through to it.
3. The shortcuts sheet lists Ctrl K, /, Ctrl Z, Tab to move between lectures, Space to pick up, the arrows, Enter, Esc and ?.

#### EVIDENCE

`src/components/Schedules.tsx#pickUpWithKeyboard` `src/components/Schedules.tsx#stepKeyboardMove`
`src/components/Schedules.tsx#commitKeyboardMove` `src/components/Schedules.tsx#shortcutsBlocked`
`tests/schedule-board-fixes-audit.ts`

### FR-SCH-051 Command palette and the one-line appointment

The command palette shall gather the screen's existing commands by name and group (navigation, schedule, view, saved views, guide) without re-implementing any behaviour, and shall read a typed line (a section number, part of an instructor's name, day letters and an hour) against the department's courses and available instructors to offer one command «create this appointment» with its preview, which opens the editor filled with what was understood without saving anything.

Implemented · Could · Functional · Schedule committee chair, Department head, System administrator

#### ACCEPTANCE CRITERIA

1. «Add appointment», «undo the latest change», «go to the clash», «group move», the keyboard move and the repair appear to anyone who edits the schedule (the administration, or a holder of screen 7 with a non-read-only role) and are hidden from read-only roles, and a command impossible right now is shown dimmed; for the same reason the one-line appointment is not offered to anyone who does not see «add appointment».
2. A retired or sabbatical member is never read as the instructor, nor a visitor outside this term's roster; a typed section stays as typed and an untyped one is the course's next suggested section.
3. The hall is matched from the department's official hall registry: if it is not found the editor says it was not found among the department's halls and asks to pick building and hall from the list; if the building is found but not the hall, the building is chosen and that is said.
4. An end typed in the line that does not fit the course pattern is treated as a deliberate override and is not recalculated, and the editor blocks saving it until «apply the pattern» is pressed.

#### EVIDENCE

`src/components/Schedules.tsx#commands` `src/components/Schedules.tsx#oneLineCommands` `src/components/Schedules.tsx#openOneLine` `src/utils/oneLineAppointment.ts#parseOneLineAppointment` `src/components/CommandPalette.tsx` `tests/one-line-appointment-audit.ts` `tests/schedule-board-fixes-audit.ts`

### FR-SCH-052 The day's change log: undo and print

The workshop shall keep the inverse of every addition, edit, deletion and move as written requests (not a function) in the user's browser under schedule-undo-log-<user id>, kept until the end of the day and removed when a new day starts, shall allow undoing any of them from a log opened by a «today's log» button, and shall print a «change report».

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. Undoing an entry that is not the newest asks «undo an older change» first; an entry whose steps are all placement only (days, time and hall) is restored through the atomic batch move without strict mode, otherwise it is restored step by step against the current revision, and a failure midway says «partial undo: N of M restored».
2. Each entry carries its time, the instructor's name and the «visiting» badge, an undone one reads «undone at HH:MM»; the log prunes yesterday's entries every minute and keeps the latest 60.
3. The log button shows its name the first time on this browser for six seconds (schedule-log-named), then only the icon and count (99+ above that); the printed report is a table of time, change, instructor and state («standing» or «undone at HH:MM»), and nothing is printed when there are no changes.

#### EVIDENCE

`src/components/Schedules.tsx#runUndoEntry` `src/components/Schedules.tsx#offerUndo` `src/components/Schedules.tsx#undoStepIsPlacementOnly` `src/components/Schedules.tsx#printUndoReport` `src/components/Schedules.tsx#UNDO_LOG_LIMIT` `tests/blockers-stream-audit.ts` `tests/undo-travel-rule-audit.ts`

### FR-SCH-053 Network failure, the offline queue and changes the server refused

A workshop read shall wait 20 seconds then retry once with a 35-second limit, a write shall wait 35 seconds without retry, a deferrable write during a disconnection shall go to a local queue pumped every 900 ms while online, and what the server refused after reconnection shall be listed under «changes the server refused» with two choices: «resend» or «ignore».

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A non-deferrable write while offline is refused with «you are offline; you can keep arranging existing appointments, but creating a new one needs the connection back.», and a deferred one says «the edit was saved locally and will sync when the connection returns.».
2. A non-JSON reply says «an unexpected reply arrived from the server» or «the server is busy now (code)», and a read timeout says it was retried automatically.
3. Status pills say «offline · safe changes are local», «N awaiting sync» and «N changes the server refused»; each refused item states what it was (delete, group move, edit), course and section, the server's reason and time; «ignore» asks first because it cannot be recovered.

#### EVIDENCE

`src/components/Schedules.tsx#fetchJson` `src/utils/offlineScheduleQueue.ts#flushOfflineScheduleQueue` `src/utils/offlineScheduleQueue.ts#retryParkedMutation` `src/utils/offlineScheduleQueue.ts#discardParkedMutation` `tests/run-tests.ts`

### FR-SCH-054 Appointment editor: four ordered questions, save and continue

The «new appointment» and «edit appointment» editor shall ask its questions in a mandatory order: scope → «what? course» → «who? instructor» → «when? days and time» → «where? building and hall», each step locked until the previous one is answered and an answered step folding into a line with a «change» button; a new appointment shall open clean, carrying the scope only, and after a successful creation shall stay open on the same run with the next section and an empty time.

● Implemented · Must · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. After a creation the college, department, term, course, instructor, hall and days stay, the section becomes max(suggested, saved + 1), the time is cleared and its field focused, and «appointment created · next section ready» is said.
2. The section is digits only (Arabic digits converted, up to 20 characters) and is filled with the course's next section unless typed by hand, with «registered sections: N — suggested section: X»; saving with a required field missing says «please fill the fields marked red».
3. The save bar summarises course, instructor, days, time and hall («awaiting hall») and marks what changed when editing; its status button says «cannot save now», «N blockers», «checking…», «start with the course»/«next: X»/«missing: X», «N notes» or «ready to save»; «save appointment» stays disabled until the fields are complete and the verdict allows it.
4. When the schedule is locked at registration the editor opens neither to add from any door (button, empty square, commands) nor to edit an existing appointment, and the lock reason is said in the same words, and «add appointment» is disabled with the same reason; Esc closes the checks drawer first, then the editor.
5. The scope is always a one-line capsule: the icon, then «college · department · term» (or «choose the college, department and term») truncated with «…» with the full text in its tooltip, then «change/done», which never wraps.
6. Changing the course of a row imported from the approved PDF (source order below 1,000,000) asks «the course name is protected by the schedule regulation» and offers deleting the course instead of swapping it; a revision clash shows both versions: «take the newer version» or «keep mine» (saved against the current revision after review).
7. A form that differs from its snapshot at opening (or after the last continued save) is not closed by Esc, «✕» or «back» before asking «close the appointment without saving?» with «close without saving» and «keep editing»; an «edit appointment» with nothing changed keeps «save appointment» disabled and says «nothing changed»; changing the college or department clears the course, section, instructor and hall together.
8. After «next section ready» the start field empties at once even while focused, and its value is selected so the first digit typed replaces it; a shortened hour from 1 to 7 («2», «130») is read as afternoon (14:00, 13:30) when that falls inside the teaching day, while four digits with an explicit zero («0730») are read as written; «fill as usual» writes the usual hall with its official identifiers or not at all.
9. The time wheel (in the editor and the quick card) shows the pattern library's lengths only: a single day with that day's lengths (including the 170 block), a pattern's days with its length alone, and with no days all the course's lengths; with no hours or patterns it keeps its default list. Clearing the start clears the derived end with it, except an end typed deliberately.
10. An appointment ending after the university day blocks the save with its line, beside a «start HH:MM» button giving the last regulation-ladder start that fits its length; an «edit» with nothing changed says «nothing changed» even when it carries notes.
11. What is typed into «new appointment» is kept on the device per user while typing; if lost (browser closed or disconnect), the next opening, in an editor with no course chosen, shows a «draft · N min ago» chip with «restore» and «dismiss»; a successful save and a confirmed «close without saving» clear it, and it expires after 24 hours.

#### EVIDENCE

`src/components/Schedules.tsx#openCreate` `src/components/Schedules.tsx#openEdit` `src/components/Schedules.tsx#continueCreating` `src/components/Schedules.tsx#save` `src/components/Schedules.tsx#editorView` `src/utils/nextCourseSectionCode.ts` `src/utils/appointmentVerdict.ts#appointmentVerdict` `src/components/TimeField.tsx#afternoonClock` `src/utils/appointmentRegulation.ts#wheelLengths` `src/components/TimeCounter.tsx` `src/components/Schedules.tsx#editorFitStart` `tests/appointment-entry-parity-audit.ts` `tests/appointment-forms-audit.ts` `tests/schedule-board-fixes-audit.ts` `tests/appointment-review-1114-audit.ts` `tests/appointment-ideas-1114-audit.ts`

### FR-SCH-055 Regulation auto-completion and historical timing in the editor

The editor shall complete the course's days and end time with an approved pattern from the pattern library whenever the course, days or start change, briefly highlighting what changed, shall treat an end typed by hand, a duration from the time wheel or days outside the pattern as a deliberate override kept until a new start is typed (which recomputes the end from the pattern), and shall block the save while the length or days are outside the pattern with one line and an «apply the pattern» button (FR-SCH-068); it shall also warn without blocking when the time departs from what the course itself established over ten years.

● Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. An appointment opened for editing is not completed until its time or days are touched, nor one that came from an instructor request; a start with no day completes the course's observed habitual days and its existing sections unless the user cleared them.
2. With no pattern the end comes from the department's repeated duration that day, else 50 minutes on Sunday, Tuesday and Thursday and 80 on Monday and Wednesday (typing 09:00 with Sun·Tue·Thu becomes 09:50).
3. A start or duration is historically accepted if it recurred 4 times, or twice at a share of at least 6%; otherwise the note lists the established starts (up to five) or repeated durations (up to four), given 8 samples for starts and 6 for durations; the card groups this under «historically unusual».
4. «fill as usual» appears when the course-nature confidence is not low and its usual days are an approved pattern for its hours; it fills days, time (with the regulation length if the habit differs), hall and instructor if none is chosen, and says «this time belongs to section X» when taken.

#### EVIDENCE

`src/components/Schedules.tsx#chooseFormDay` `src/components/Schedules.tsx#applyApprovedPattern`
`src/components/Schedules.tsx#historicalTimingNote` `src/components/Schedules.tsx#expectedDurationForDay`
`src/utils/appointmentRegulation.ts#completeRegulation` `src/components/RegulationPatternChips.tsx`
`tests/appointment-forms-r2-audit.ts` `tests/appointment-forms-r3-audit.ts`

### FR-SCH-056 Live check panel in the editor

The editor shall check the appointment while it is being written: answering at once from the loaded rows, then replacing that with the server's verdict from the appointment-check route, and shall show each conflict as a card with its type and status («blocker», «warning» or «request hold») and a timeline showing the overlap with the other appointment by course, section, instructor and hour, painting red only what blocks the save.

● Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The check is sent 160 ms after the form changes, or 600 ms after a live refresh of the schedule (silently); an answer is cached for 20 seconds per value set (up to 40) and dropped when rows change; nothing is checked until days and a valid start and end are chosen.
2. Card types: hall clash, hall scope, instructor clash, duplicate, same section twice, co-requisite, inter-site travel, gap between lectures, student clash, department rhythm, department memory, note; a group holding a blocker opens itself and wears its colour, and a repeated gap note is said once.
3. The browser checks for at least one day, an end after the start, and a time inside the university day unless it is an edit that left the time untouched; the department window is a warning «— warning only».
4. Non-blocking cards: «lecture length» (set → usual and gap), «more sections than planned» when the course would have more sections after the save than planning asked for, «not reached yet» with «open it for offering», and «regulation blockers» under decision 1913/2016 with a current/usual/difference strip.
5. A single booking clashing on both instructor and hall marks «clash» on both the instructor and the hall cards from the first check; the «section hours over/under» figures and «new section N» are read by the message's own writer for every count (one hour, two hours, 12 hours).

#### EVIDENCE

`src/components/Schedules.tsx#editorConflictCards` `src/components/Schedules.tsx#checkPayloadKey`
`src/components/Schedules.tsx#validationIssues` `src/components/Schedules.tsx#planningSectionCountNotice`
`src/components/AppointmentChecksPanel.tsx` `src/utils/appointmentVerdict.ts` `src/utils/hoursIssue.ts`
`tests/appointment-forms-audit.ts` `tests/appointment-review-1114-audit.ts`

### FR-SCH-057 Hall helpers in the editor: occupancy, owner, borrowing and suggestions

The editor shall order the chosen building's halls free first then numerically, keeping busy ones inspectable to reveal what occupies them, shall warn when the hall belongs to another department, shall show a borrowing bridge when days or time are set and no hall is chosen, and shall suggest on request a time and hall, an available hall or a «safe alternative» from the single suggestion engine without saving anything.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The hall-owner question is sent 320 ms after typing and says the hall belongs to department X with N% of its recorded bookings for that department, with «change hall», as a warning not a block; revealing the occupant switches to week, lights its card and opens its context.
2. The borrowing bridge reads the scope's barter opportunities and keeps those covering the chosen days and the whole time without duplicate halls, shows up to 5 with «and N more», plus a search and linked filters (day, building, department) when there are more than 5, and «request» sends the request and says the hall appears in the picker after approval.
3. The suggestion duration is the typed one, else the regulation pattern minutes for the days, else the department habit, else 50; suggestions are cleared when any value changes; choosing one fills time, official hall (VERIFIED) and companion facility together.
4. When creating for a real instructor, matching «faculty staff» sections are offered with three actions confirmed by a before/after: «take its slot», «swap the slot» (after finding a free hall) and «delete it and take its place», executed atomically with an undo, the confirmation naming the affected registration-radar students.

#### EVIDENCE

`src/components/Schedules.tsx#hallAvailability` `src/components/Schedules.tsx#revealHallOccupant` `src/components/Schedules.tsx#openBorrow` `src/components/Schedules.tsx#requestBorrow` `src/components/Schedules.tsx#askForSlots` `src/components/Schedules.tsx#askForRooms` `src/components/Schedules.tsx#placeholderAction` `src/utils/suggestionClient.ts` `tests/appointment-forms-audit.ts`

### FR-SCH-058 Quick «new appointment» card painted on the board

Pressing or dragging over empty squares in a day column (or a hall lane) shall open a quick card with the painted day and time (at least half an hour) and its hall when painted in a hall, asking course and section, then instructor, then hall in the editor's order, and saving through the same creation door after the server check; nothing is written by the painting itself.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. If the department has no loaded courses or instructors the full editor opens instead of the card; without college, department and term it says «choose college, department and term from the bar above the schedule first.».
2. The server check is sent after 180 ms once the course and an instructor or hall are known, shows a row of checks (instructor, hall, section, facility, time, college) as sound/warning/blocker, and before it states what the browser knows for certain (instructor or hall busy on screen, outside the university day).
3. «save appointment» is disabled until course, section in English digits, instructor and hall (or «awaiting fix») are complete and the check ends without a blocker; «more details» moves the whole draft into the editor; Esc or a press outside closes it without saving.
4. An instructor request with different times locks days and time, says each group is saved at its original time, and disables «more details»; the instructor on a request card is locked.

#### EVIDENCE

`src/components/QuickCreatePopover.tsx` `src/components/Schedules.tsx#createQuick` `src/components/Schedules.tsx#expandQuick` `src/components/Schedules.tsx#quickConflict` `src/components/Schedules.tsx#paintOpen` `tests/quick-studio-family-audit.ts`

### FR-SCH-059 Appointment context panel

Inferred

Pressing an appointment shall open a context panel showing course, section, instructor, place, last edit and row history, the facts «no conflict / instructor free / hall free» or the conflicts (up to four), under «overview», «analysis» and «context» tabs, with navigation to the previous and next appointment and «edit», without the panel changing the schedule.

Implemented · Could · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. Next and previous follow the visible rows: first day, then course and section, then start; a conflict with an appointment the reader cannot see says «the other appointment is outside your departments.».
2. After two seconds of idle the appointment's history is read; if the archive explains its last move a «moved … · reason» line appears that opens the «decision anatomy» with no second request, otherwise no line; the anatomy read has a 6.5-second limit with «retry».
3. «best alternatives now» (up to three) open the editor prefilled with time and hall without saving, nothing being saved before «save appointment» as the panel says; instructor, course and hall relations are not drawn when zero; «department memory» appears when history has something to say; team notes are hidden (TEAM_NOTES_ENABLED = false).

#### EVIDENCE

`src/components/Schedules.tsx#openContext` `src/components/Schedules.tsx#loadReplay` `src/components/Schedules.tsx#contextSequence` `src/components/Schedules.tsx#TEAM_NOTES_ENABLED` `src/components/RowHistory.tsx` `src/components/trail/TrailStamp.tsx` `tests/schedule-board-fixes-audit.ts`

### FR-SCH-060 Opening the editor from an instructor or section request, and the request-hold prompt

The editor shall open half-filled when it comes from the instructor inbox (course, instructor, days and time from the request; hall and section are the department's decision and stay empty unless the request carries them) or from an advising «section request» (course, college, department and term), with a line saying where it came from, shall record the decision on the request after the save and not before, and shall ask, when the server answers «request hold», between fixing the request, rejecting it and overriding it.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A creation matching the request (course, instructor, term, college and department) goes through the request's own apply, otherwise it is saved normally and the item is then recorded «fixed» with the row id; a recording failure says the appointment was saved but the request decision could not be recorded, and the row stays.
2. The advising-request section is linked to the request after creation if course and term match, a linking failure invites linking it from the request card; closing the editor without saving drops both handoffs so no other appointment is linked to them.
3. In the request-hold prompt: «fix the request» for a change item moves the existing appointment instead of creating a second row and says the existing appointment was moved and the request fixed; «reject» records the item rejected with reason «department» and the note «the department used this time.» then retries; cancelling says nothing changed and the slot is still held for the request.
4. Undoing a save that fixed request items reopens them too («· and the request reopens»).

#### EVIDENCE

`src/components/Schedules.tsx#withRequestHoldPrompt` `src/components/Schedules.tsx#pendingHandoff` `src/components/Schedules.tsx#pendingSectionRequest` `src/utils/requestHandoff.ts#takeHandoff` `src/utils/sectionRequestHandoff.ts` `src/components/RequestHoldSheet.tsx` `tests/undo-travel-rule-audit.ts`

### FR-SCH-061 Collaboration and notices on the board

The board shall show the live connection state and who else is on the same schedule, shall silently re-read rows when a colleague changes something without interrupting a drag, an edit or a save, shall ring rows clashing with an appointment outside scope, and shall show the department instructors' messages and settled-term drift in two reading sheets.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The live stream opens when someone is with the reader and closes 30 seconds after they are alone, and sleeps with the tab; a refresh is deferred by 1200 ms while hands are busy and happens 250 ms after the event; waking from sleep brings one catch-up read.
2. The connection dot says «live stream», «connected … within seconds» or «not connected»; the presence strip draws up to five colleagues by initial with a «holding/editing/with you» tooltip then «+N», and never claims you are alone.
3. Outside-scope clashes are asked 400 ms after a scope change and whenever rows change, and failure is silent; «sound» appears when there is no overlap and no regulation note (period balance excepted).
4. «N from instructors» opens «instructor messages»: «open appointment» goes to it, «handled» resolves the message, and a message never changes the schedule; the settled-term chip appears when drift is observed and lists course, time, hall and source or «source outside your view».

#### EVIDENCE

`src/components/Schedules.tsx#liveShared` `src/components/Schedules.tsx#outsideClash` `src/components/Schedules.tsx#inboxTray` `src/components/Schedules.tsx#driftSheet` `src/components/schedulePresence.ts` `src/utils/livePulse.ts` `tests/role-scope-audit.ts`

### FR-SCH-062 Presentation and focus modes, and printing the schedule

Inferred

«Presentation mode» shall show the schedule full screen day by day for a meeting, with a «needs checking» filter for conflicting appointments only, «focus mode» shall show a board without tools, and the workshop shall print «the study schedule» on a wide sheet with the official letterhead.

Implemented · Could · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The print sheet has columns no., course (code — name), section, instructor (with «visiting»), days, time, building/hall (with «unverified historical place data»), ordered by first day, then course and section, then start, and is not printed while the approval review is open.
2. Esc ends presentation mode and requests leaving focus, which happens only after pending writes and the two-versions sheet are settled; presentation mode requests full screen and leaves it.
3. Both work from the toolbar, from the command palette and from sessionStorage «schedule-command» (new, focus or presentation) when the screen opens.

#### EVIDENCE

`src/components/Schedules.tsx#CinemaView` `src/components/Schedules.tsx#schedulePrintRows` `src/components/Schedules.tsx#presentConflictsOnly`

### FR-SCH-063 The «copy a term's schedule» screen

Inferred

The copy screen shall show college, department, source term and target term, shall read the preview automatically 250 ms after they are complete, shall suggest the source term (the same term of the previous year) when the target is chosen and the source is empty, and shall offer «run the copy» to the main administrator only and «undo the last copy».

Implemented · Could · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. A source the user chose by hand is not replaced when the target is chosen.
2. The preview shows the source record count, the count already in the target and the source's issues, with an optional record list without instructor names; the button is disabled for anyone but account number 1 or when the preview does not allow it.
3. «undo the last copy» asks «restore before the copy», then restores the earlier version through the overwrite-newer question and says the last copy was undone and N records restored.
4. A target that has appointments is stated as the server rules it: copying into a term with appointments is not possible, choose an empty target term or empty this one first, and the button is disabled; the screen never promises to add the new rows beside the existing ones.

#### EVIDENCE

`src/components/Schedules.tsx#copyView` `src/components/Schedules.tsx#copySchedule` `src/components/Schedules.tsx#undoCopy` `src/utils/termSequence.ts#previousYearSameTermName` `src/utils/scopeOverwrite.ts#applyWithOverwriteConfirm` `tests/schedule-board-fixes-audit.ts`

### IR-SCH-064 Teacher mini-week: visibility, folding, floating and the form's hall

The teacher mini-week shall remember being shown or hidden per user on the device and synchronise that across open editors, shall read the instructor's week across the whole term and across the department family's colleges, shall overlay the form's chosen hall so squares free for both instructor and hall light up («suits both»), and shall compute the load now → after this appointment against the load and overtime.

Implemented · Could · Interface · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. Storage keys: teacher-mini-week:enabled:<user id> for visibility, teacher-mini-week:<variant>[:sheet]:<user id> for open/folded, and teacher-mini-week:float:<user id> for the floating window position; dragging the header floats it and a double click returns it.
2. Up to 639 px it becomes a bottom sheet folded by default, and drag-drawing works only with a fine pointer that supports hover; Esc cancels an ongoing drawing, otherwise folds the week.
3. The load ring turns «overtime» above the load but within overtime and «over» beyond both, naming the number of family colleges when teaching in more than one, with attendance days and gap hours and their change; the week folds itself when the checks drawer opens.
4. The «teacher's week» key is not shown when the chosen instructor is the «faculty» placeholder record (which has no schedule), neither in the folded nor the open instructor row of the appointment studio nor in the quick card, and it is shown for every real instructor.

#### EVIDENCE

`src/components/Schedules.tsx` `src/components/QuickCreatePopover.tsx` `src/components/TeacherMiniWeek.tsx#useMiniWeekEnabled` `src/components/TeacherMiniWeek.tsx#useFamilyWeek` `src/components/TeacherMiniWeek.tsx#useRoomWeek` `src/components/TeacherMiniWeek.tsx#LoadRing` `src/utils/teacherMiniWeek.ts#goldenTargets` `tests/teacher-mini-week-audit.ts` `tests/week-window-audit.ts` `tests/quick-studio-family-audit.ts`

### FR-SCH-065 «Fix the overlap with the least impact»

The command shall search for a chain of moves that untangles the first overlap in scope without creating a new conflict, show it whole before any write with its cost (number of moves, overlap before → after, affected instructors and halls) and the reason for each step, and on «run the chain» execute it as one atomic batch, all or nothing, with an undo entry.

● Implemented · Could · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. With no overlap it says «there is no overlap in this scope.», with no chain «I found no repair chain that creates no new conflict; try freeing a hall or an hour first.».
2. After running it says the chain ran with N moves and the overlap went from a to b; a server refusal shows the refusal card and re-reads.
3. A single-day meeting of a multi-row section is never offered a day that takes the whole section's days outside a library pattern (the Tuesday of «Sun 80 + Tue 80» is not moved to Thursday); when the course hours are unknown the meeting keeps its day and only its time or room moves.

#### EVIDENCE

`src/components/Schedules.tsx#proposeRepair` `src/components/Schedules.tsx#applyRepair` `src/utils/repairChain.ts#findRepairChain` `tests/run-tests.ts` `tests/final-audit-gaps-audit.ts`

### FR-SCH-066 The «at the same time» sheet in the appointment form

The full editor and the quick card shall show beside the time a quiet badge that never blocks the save and never opens by itself, when on the appointment's days another appointment has exactly the same start and end, or a plan peer of the appointment's course partially overlaps it, or another section of the same course overlaps or is near; touching it opens a sheet listing the courses in the groups «same course», then «unlocks», then «taken together», then «at the same time», from the rows already loaded and never showing a hall.

● Implemented · Should · Functional · Schedule committee chair, Department head

#### RATIONALE

> Whoever enters an appointment quickly forgets what already holds that hour and what students want to take together.

#### ACCEPTANCE CRITERIA

1. Peers come from one plan sheet with no guess from the course number: «unlocks» is two courses among 2 to 5 required prerequisites (prereq.all) of a next course, each compulsory or elective with a rule in that sheet (no university or college requirement, no alternatives); «taken together» is two compulsory courses of the same level in the sheet (a legacy level 2 equals 200); a course that is a prerequisite of the other in that sheet, directly or through a chain, is not its peer; missing data is silence.
2. Non-peers count only on an exact match; peers count on a partial overlap within the appointment's named department, term and college, and touching times do not count; another section of the same course counts on an overlap or a gap of at most half the longer session clamped between 60 and 120 minutes (one or two hours 60, three 90, four or five 120); a row from another department or college, the current section's own rows, practice-mode rows, a row with no term and anything an explicit conflict already named are excluded; a soft note does not hide an «unlocks» peer.
3. One course's sections in a group form one row: section numbers as chips and a thin bar per section up to 3 then «+n», the time from the earliest to the latest, and every non-exact row shows its own time; within each group exact matches come first, then the longest overlap, then course number, then section.
4. With more than one kind, «all» chips appear plus one per group with icon and count (arrow-key navigation); «all» shows one row per group and «+n» on a group line opens its chip; a single kind shows 4 rows then «+n» expanding in place; the badge counts course rows, and Escape folds the sheet alone, not the form.

#### EVIDENCE

`src/utils/sameSlot.ts#sameSlotOf` `src/utils/sameSlot.ts#nearSectionWindow` `src/utils/sameSlot.ts#sameSlotGroups` `src/utils/sameSlot.ts#sameSlotSheet` `src/utils/sameSlot.ts#visibleSections` `src/utils/planPeers.ts#levelGroupsOfPlans` `src/utils/planPeers.ts#unlockGroupsOfPlans` `src/utils/planPeers.ts#prereqChainPairs` `src/components/SameSlotHint.tsx` `src/components/QuickCreatePopover.tsx` `src/components/Schedules.tsx` `tests/same-slot-audit.ts` `tests/plan-peers-audit.ts`

### FR-SCH-067 The co-requisite card: where the appointment is free

The «at the same time» sheet shall show, for each co-requisite the appointment overlaps, a card with the two courses linked and two bars on one axis (time, overlap and the free place), stating «no alternative» when no section combination is free of overlap, and marking the free place: the co-requisite's section that is free at the current time, else the nearest time of the same length inside the department's day «before» or «after» a given hour, else another section of the same course that is free.

Implemented · Could · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. «After» only needs to be free of one whole co-requisite section, «before» precedes all its sections where possible and otherwise one, touching counts as free, and on an equal distance «after» wins.
2. A co-requisite section clashing with the appointment's sibling meetings does not count, so when no open section remains no time is suggested; the full text is given to screen readers so meaning does not rest on colour.

#### EVIDENCE

`src/utils/coreqSections.ts#coreqFreeTime` `src/components/SameSlotHint.tsx#TwinNode` `tests/coreq-sections-audit.ts`

### FR-SCH-068 The end from the approved pattern, and a wrong length blocks

The system shall compute an appointment's end from the course hours, days and start using the pattern library alone in the editor, the quick card, dragging, the server, the study proposal and the faculty card, and shall block saving an appointment whose days are approved but whose end does not match the pattern's length, with one line «the appointment length N min does not match the approved pattern (…): the end is HH:MM.» and an «apply the pattern» button, unless the existing appointment's shape (days, start and end) is unchanged.

Implemented · Must · Functional · Schedule committee chair, Department head, Faculty member

#### RATIONALE

> Owner decision 2026-11-08: no old unapproved length (30 or 75 minutes) survives a change of start.

#### ACCEPTANCE CRITERIA

1. Typing a start always computes the end from the pattern, even after an override: a single day keeps its length when approved for that day, otherwise the block («Mon · 170 min» with 08:00 → 10:50); days forming a uniform pattern take its minutes.
2. Moving an existing single-day appointment (by dragging, or by an internal write through the shared save path: accepting a suggestion, a swap, section building, committing a proposal or pinning a faculty card) takes the approved length nearest its old one (Thursday 75 min → 50 min), while moving only the hall or the instructor, and a literal restore, keep the length.
3. Hours with no pattern in the library are not length-checked and are not called off-regulation; the study proposal is not exempted from the hours ceiling by the course's history.

#### EVIDENCE

`src/utils/appointmentRegulation.ts#patternMinutes` `src/utils/appointmentRegulation.ts#patternLengthIssue`
`src/utils/appointmentRegulation.ts#sameScheduleShape` `src/utils/appointmentRegulation.ts#regulationFit`
`src/server/core/scheduleRules.ts#unapprovedPatternIssue` `src/server/core/scheduleRules.ts#fitPatternEnd`
`src/server/core/scheduleWrites.ts#runScheduleHandler` `src/utils/appointmentVerdict.ts#appointmentVerdict`
`src/components/Schedules.tsx#patternedMove` `src/server/studyProposalEngine.ts` `src/utils/studyProposal.ts`
`tests/new-appointment-pattern-end-audit.ts` `tests/study-proposal-flow-audit.ts` `tests/teacher-card-logic-audit.ts`

### FR-SCH-069 The new section number and «new section N»

«New appointment» shall propose the next section number from the form's own scope schedule (college, department and term) read when it opens and merged with the board, correcting a number it proposed itself once that schedule arrives; and when the hours ceiling blocks an appointment that alone fits the course hours because its section is already full, the server shall name the next free number («— for a new section: N») and the form shall say «section X has taken its approved hours» with a «new section N» button.

● Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The button changes the section number only and saves nothing; whoever means to add to the existing section stays blocked; an appointment with a text id (a draft) is not counted against itself in its section's hours.

#### EVIDENCE

`src/components/Schedules.tsx#nextSectionCode` `src/components/Schedules.tsx#useFreshSection` `src/server/core/scheduleRules.ts#scheduleLengthIssue` `src/server/core/scheduleRules.ts#isSameRow` `src/utils/nextCourseSectionCode.ts` `tests/new-appointment-pattern-end-audit.ts`

### FR-SCH-070 «Class schedule» from the appointment actions

The system shall place beside «Edit» and «Delete» on every appointment (and in the ⋯ menu on a phone) a small «Class schedule» button that opens the appointment's instructor's whole week across every college of the department family, on the same teacher mini-week card (load, attendance days and gaps), read-only, closing with the close button, Esc or a click outside.

● Implemented · Could · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The view is read-only: no «+» slots, no «before/after» and no drag-to-draw, and nothing is saved.
2. The button does not appear on a placeholder-instructor appointment or in practice mode.

#### EVIDENCE

`src/components/TeacherWeekPeek.tsx` `src/components/TeacherMiniWeek.tsx#readOnly` `src/components/Schedules.tsx#weekPeekOk` `src/components/ui.tsx#IconAction` `tests/teacher-mini-week-audit.ts`

### FR-SCH-071 No stale read after a schedule write

After every successful schedule write (create, edit or delete) the system shall forget previously stored reads before painting the screen again: the /api/schedules snapshot in the service-worker cache, the board's warm-start read, the in-memory board shelf and the instructor-week cache, so no load or appointment from before the write is shown.

● Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. Deleting an appointment lowers its instructor's load on screen at once and when the screen is entered again, without waiting for the network read.

#### EVIDENCE

`src/utils/scheduleReadFreshness.ts` `src/components/Schedules.tsx#fetchJson` `src/components/TeacherMiniWeek.tsx#forgetMiniWeekRows` `tests/schedule-stale-read-audit.ts` `tests/teacher-mini-week-audit.ts`

### FR-SCH-072 Explicit regulation-exception confirmation before saving

A new or edited appointment saved by the department (full form, quick card, drag, proposed move, study proposal, applying suggestions on every screen (radar, section planning, student cases…), applying a time-machine scenario, the department approving a teacher request, a faculty-placeholder section, replacing an instructor, converting training staff, and committing a study proposal) that breaks a non-blocking rule of decision 1913/2016 shall be saved only after a confirmation sheet listing every rule with its article and a «continue as an exception» button; «back» keeps the form and writes nothing, and the excepted save is recorded in the audit log. The rules are the meeting length and start ladder (Art. 7/8), a fixed section start (Art. 7/9), more than two consecutive long sections (Art. 6/2) and more than three consecutive one-hour sections (Art. 6/3). What blocks today (hours, pattern end, days outside the library) stays a block, and the teacher's card blocks on its own.

● Implemented · Must · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A save breaking one of these rules gets 409 with code regulation-exception and the list of violations, and proceeds only when the request carries regulationException=true. A staff save through the internal path (/api/schedules/apply-proposal, /api/section-build/apply, /api/time-machine/scenarios/:id/apply, /api/instructor-requests/:id/apply, /api/schedules/placeholder-action) gathers the violations of all its steps and asks once before any write; imports, migrations and time-machine restore are not asked.
2. The start picker offers the ladder of the chosen days: Mon/Wed 08:00, 09:30, 11:00, 12:30, 14:00…, and Sun/Tue/Thu on the hour.
3. The quick card and the form do not say «ready to save» while a violation needs confirmation.
4. The instructor picker offers «vacant · faculty placeholder» first, then members, then delegates, then «training staff» with the 🎓 tag as in the study proposal.
5. POST /api/schedules/replace-instructor (on commit), POST /api/schedules/ta-conversion and POST /api/study-proposals/:id/commit (with confirm=true) ask the same gate on the server before any write: 409 regulation-exception without consent, and with regulationException=true they write and the exception is recorded in the audit log.

#### EVIDENCE

`src/utils/regulationException.ts` `src/components/RegulationExceptionSheet.tsx` `src/server/core/scheduleWrites.ts` `src/server/core/scheduleRules.ts#regulationExceptionsFor` `src/utils/scheduleRegulations.ts#ladderStartsForDays` `src/components/InstructorPicker.tsx` `src/server/core/scheduleRules.ts#reassignmentExceptions` `tests/regulation-exception.ts` `tests/regulation-exception-paths-audit.ts` `tests/final-audit-gaps-audit.ts` `tests/study-proposal-flow-audit.ts`

### FR-SCH-073 Regulation-compliant candidates from one generator

Every engine that proposes an appointment (section planning, the time machine, the repair chain, «suggest a time and room», study-proposal alternatives, pattern conversion, emergency plans, the autopilot and teacher-request alternatives) shall take its days and lengths from the pattern library only and its starts from the art. 7/8 ladder through one shared generator, so it never proposes a placement the save would question with the regulation-exception sheet.

● Implemented · Must · Functional · Department head, Schedule committee chair

#### RATIONALE

> Owner decision: the library only, and a suggestion complies with the regulation from the start.

#### ACCEPTANCE CRITERIA

1. Sun/Tue/Thu start on the hour (8:00, 9:00…); Mon/Wed start 8:00 then 9:30, 11:00, 12:30, 14:00…; no start before 8:00.
2. Mon+Thu and Sun+Thu are never proposed; a single-day block may sit on any day; the length is the pattern's (never 80 minutes where 50 is required).
3. A multi-day row is repaired by moving its hour with its days kept; moving it off a day takes a pattern and a length from the library.
4. An approved pattern's length on its own days (Sun+Tue 80/80 for three hours, Mon+Wed 50/50 for two and 110/110 for four) is not questioned as an exception.

#### EVIDENCE

`src/utils/regulationCandidates.ts` `src/utils/timeMachine.ts#changedRowsFollowRegulation` `src/utils/repairChain.ts` `src/utils/sectionOpening.ts` `src/server/routes/scheduleToolsRoutes.ts` `src/server/studyProposalEngine.ts` `src/utils/scheduleRegulations.ts#lectureLengthProblem` `tests/engine-regulation-candidates-audit.ts` `tests/time-machine-audit.ts` `tests/section-build-audit.ts` `tests/smart-suggestions-audit.ts`

### FR-SCH-074 «Student pulse»: who the appointment time suits before saving

The appointment editor shall, once days and time are set and the term has an actual-demand report, show a «student pulse» card telling, for the appointment's track (boys/girls), how many of those who need the course this time suits — graduates first, then students — which courses it blocks them from, and the course's section count in the track before and after the appointment, and shall state in a red line any new unavoidable clash for graduates; a note that never blocks the save.

● Implemented · Should · Functional · Schedule committee chair, Department head

#### RATIONALE

> Owner decision 2026-11-14: a time's effect on students is seen before saving, graduates first.

#### ACCEPTANCE CRITERIA

1. The student-pulse card is collapsed by default: one line with its title, the graduates and students chips (and the graduate alarm if any) and the best-time button; whoever wants the detail (rings, blocked courses) opens it, and the device remembers the choice.
2. A section blocks a student from another course they need when it overlaps every section of that course in the same track; per programme blocked = min(its students in this course, the largest number of them in a blocked course), and the share = (need − blocked) ÷ need.
3. A non-overlapping alternative section removes the block, editing an existing appointment reads the new one in its place, and with no report or an unmatched course there is no card; a report without programme detail states the need alone.
4. The two rings: graduates brass and students green, turning red below 60%; each blocked course is a chip with its code, name and blocked count, all labelled «an estimate from actual demand».
5. When the instructor's week holds a free slot at least five points better than the current time, one «best time HH:MM · N%» button appears in the card header, setting days, start and end through the same path the slots use (so the appointment is checked like any choice); it does not appear when the current time is the best or with no report.
6. After a successful save one line «suits graduates N% → M%» (or students when there are no graduates) shows for nine seconds: who finds a suitable section in the whole course before and after this appointment, so a student blocked from one section takes another and counts as unserved only if blocked from all its sections, and a course with no section serves 0%; it does not show when the figure did not change.
7. The quick card (from painting a slot on the board) shows, once the appointment check has finished and the term has an actual-demand report, a small strip of chips: a red «unavoidable N» when the time creates an unavoidable clash for graduates, then «graduates N%» and «students N%» coloured by band (85 and 60); detail in the tooltip, a note that never blocks the save.
8. The «best time» button searches for the hall too: it sets days, start and end, then asks the «suggest a hall» engine for a free hall at that time (hall, instructor, facility and transit) and sets the first; the chosen hall stays if it is free then, and if no hall exists the time alone stays; the button says the time and the share only — no hall and no building — and the hall shows in the «where?» step.
9. The estimate of those needing both courses follows the report type: for graduates the minimum of the two counts (the largest possible overlap), and for students in general an expected overlap assuming independent enrolment within the programme — the share taking the other course out of the programme cohort (its largest course) — so a course everyone takes blocks everyone and one taking a fifth of the cohort blocks a fifth of those needing this one; so slots are not all saturated at 0% on a real report.

#### EVIDENCE

`src/utils/studentFit.ts` `src/server/actualDemand.ts#appointmentDemandFor` `src/server/routes/scheduleReviewRoutes.ts` `src/components/StudentPulse.tsx` `src/styles/57-student-pulse.css` `src/components/StudentPulse.tsx#FitImpact` `src/utils/studentFit.ts#coverage` `src/components/StudentPulse.tsx#FitStrip` `src/components/Schedules.tsx#pickBestTime` `tests/appointment-review-1114-audit.ts` `tests/appointment-ideas2-1114-audit.ts` `tests/quick-best-1114-audit.ts`

## 3.4.6 Algorithms

ALG-SCH-01 · Deterministic scheduling engine

**Deterministic**

### Indexed conflict detection

*Does this appointment collide with any other appointment in the whole term, and what is the most serious reason?*

1. Four indexes are built from the term's rows across all colleges: day+instructor, day+hall, day+student-paired course, and course+section.
2. For each checked row only the rows found in those indexes become candidates, walked in ascending original order.
3. Two rows overlap when they share a day and each starts before the other ends; the faculty placeholder is never treated as a person who can be double-booked.
4. All reasons for the pair (instructor, hall, duplicate, same section in two places, student clash, short turnaround) are collected and the pair is reported once, named after the most serious.
5. The result is classified: a double booking or an indistinguishable duplicate blocks; same section in two places, short turnaround and student clash are non-blocking notes.

**Inputs**

The candidate row, all rows of the term, the department's declared turnaround, course pairs from the student survey, and the placeholder instructor ids.

**Output**

A list of conflicting pairs, each with a type, severity and written reason.

Fully deterministic: the indexed path returns exactly the same pairs, reasons, order and wording as the exhaustive reference sweep kept beside it, and this equality is tested automatically.

Required turnaround in the same hall: 10 minutes on every day unless the department declares 1 to 60.

`src/server/core/scheduleConflicts.ts#scheduleConflicts` `src/utils/scheduleRegulations.ts#requiredGapForDays` `src/utils/locationRegistry.ts#sharePhysicalRoom` `src/utils/scheduleBlockers.ts` `tests/conflict-parity.ts` `tests/client-placeholder-conflicts-audit.ts` `tests/blocker-oracle-audit.ts`

FR-SCH-006 FR-SCH-007 FR-SCH-008 FR-SCH-009 FR-SCH-010 NFR-SCH-001

ALG-SCH-02 · Deterministic scheduling engine

Deterministic

## Regulation rules: length, start ladder, patterns and hours ceiling

*Does the appointment's shape comply with the regulation and the approved pattern library without exceeding the section's hours?*

1. A length is accepted when it equals k lectures of the day's length with 10-minute gaps, k not exceeding the course hours, or equals a library block length.
2. The start is compared with the regulation ladder: 60-minute steps on Sun/Tue/Thu and 90-minute steps on Mon/Wed from 08:00; a start off the ladder is a non-blocking note.
3. The section's days must match a library pattern for the course hours: its exact days, or a one-day block on any day. Only the library counts on every path (review, save, teacher pin, import, suggestions), through one shared check.
4. When the days match a pattern, the appointment length must equal that pattern's length for those days, otherwise it is refused with a line naming the correct end; an existing appointment whose shape is unchanged, and hours with no library pattern, are exempt.
5. The section's weekly minutes (this row plus its other distinct meetings, never counting an identical copy twice) are summed and compared with the ceiling.

**Inputs**

The appointment's days and times, the course hours, and the section's other meetings.

**Output**

A refusal message for length, pattern or ceiling, a note for the ladder, or nothing.

Fixed rules using the regulation's figures; department history never overrides them.

50 minutes on Sun/Tue/Thu, 80 minutes on Mon/Wed, 10-minute gap.

Weekly-minutes ceiling = round(hours × 50 × 1.1).

The Mon/Wed double block is accepted 5 minutes short (08:00–10:50).

`src/utils/scheduleRegulations.ts#lectureLengthProblem`
`src/utils/scheduleRegulations.ts#startLadderNote`
`src/utils/scheduleRegulations.ts#meetingsMatchApprovedPattern`
`src/utils/scheduleRegulations.ts#sectionWeeklyHours`
`src/server/core/scheduleRules.ts#scheduleLengthIssue`
`src/utils/appointmentRegulation.ts#patternLengthIssue`
`tests/lecture-length-audit.ts`
`tests/approved-patterns-audit.ts`
`tests/section-schedule-hours-audit.ts`
`tests/pattern-library-audit.ts`
`tests/new-appointment-pattern-end-audit.ts`

FR-SCH-016 FR-SCH-017 FR-SCH-018 FR-SCH-068

ALG-SCH-03 · Deterministic scheduling engine

Statistics from history

### Department rhythm and memory from history

*What do the department's past terms say about this time and hall, and does the appointment break its habit?*

1. All the department's terms are read and lectures are split into two day families (Sun/Tue/Thu, Mon/Wed); a lecture spanning both is left out.
2. Gaps between consecutive lectures are measured within one term and one day; the mode and its agreement share are computed, and likewise the length mode with its 5th–95th percentile range.
3. The department's start ladder = starts used at least twice, top 12.
4. The memory counts, per day, hour and hall, how many terms used it, and speaks one sentence only when it is notable (never used, rare, or abandoned).
5. On save: the regulation ladder first; then a start more than 0 and up to 20 minutes from a habitual start (for mixed-family days), then a length outside the library — as a soft note.

**Inputs**

All historical rows of the department, courses and instructors, and the candidate row.

**Output**

A rhythm reading per day family, and at most one note about habit and one about the hall.

Deterministic descriptive statistics with no trained model; silent when the sample is small or agreement weak, never blocks a save and never outranks the regulation. The learned gap does not set the enforced turnaround rule.

Gap habit: at least 6 pairs at 55% agreement, gaps capped at 45 minutes.

Length habit: at least 8 lectures at 35% agreement.

Memory: at least 3 terms; a habit at 70%, rare at 12% or less.

The reading is cached per department and refreshed in the background after 10 minutes.

`src/utils/departmentRhythm.ts#learnRhythm` `src/utils/departmentRhythm.ts#offRhythm` `src/utils/departmentMemory.ts#readDepartmentMemory` `src/server/core/rhythm.ts#departmentStyle` `tests/run-tests.ts` `tests/approved-patterns-audit.ts`

`FR-SCH-020`

ALG-SCH-04 · Deterministic scheduling engine

Deterministic

### Travel time between campuses and buildings

*Does the appointment leave the instructor enough time to travel from an adjacent appointment at another campus?*

1. Each college's campus (main or one of the two branch sites) is identified and the time for each pair is read from the registrar's policy with its exemption list.
2. For each day of the appointment and each other appointment of the instructor at a different campus, the gap between the adjacent end and start is measured; overlaps are ignored (they have their own rule).
3. If the gap is below the configured time a shortfall is recorded; duplicates by day and pair are removed.
4. Within one campus the walking time between two buildings is read from the college's settings.

**Inputs**

The candidate appointment, the instructor's appointments across the term, the travel policy and college campuses.

**Output**

Up to three 'tight transfer' warnings stating the minutes needed and available.

A non-blocking warning in the department form; zero disables a pair and exempt instructors are not checked.

60 minutes between the two branch sites and 30 for other pairs by default; range 0–180 with up to 500 exemptions.

3 minutes inside a building, 5 between unconfigured buildings, configured pairs 1–120.

`src/utils/campusTravelPolicy.ts#travelShortfalls` `src/utils/campusTravel.ts#interCampusMinutes` `src/server/core/travelPolicy.ts#readTravelPolicy` `src/server/core/scheduleRules.ts#travelMinutesFor` `tests/undo-travel-rule-audit.ts`

`FR-SCH-019` `FR-LOC-028` `FR-LOC-029`

ALG-SCH-05 · Deterministic scheduling engine

Search and ranking

### Time and hall suggestion engine

*Which available times and halls are best for this appointment, and why is there no option when none remains?*

1. Every start on a 30-minute step within the department window is combined with every official, pinned or approved-barter hall.
2. A candidate is dropped if the instructor is busy, the hall is taken, it is outside the barter window, travel time is insufficient, or no companion facility is free; each rejection reason is counted.
3. Score = 100 – instructor idle/3 – walking/2 – spread of the department day/6 (per day), plus the hall-suitability adjustment, clamped to 0–100.
4. Candidates are sorted by score, then start and hall, keeping one option per time in 'time and hall' mode.
5. The ranked list is passed through the same save gate until the requested count is reached.

**Inputs**

Days and duration, eligible halls, hall/instructor/department rows, travel times, barter windows, suitability and companion facility.

**Output**

Three suggestions (six for 'suggest a hall') with reasons, or the dominant reason for emptiness.

Writes nothing; every suggestion passes the same conflict gate that governs saving; ordering is stable on ties.

A day with no lecture for the instructor costs 90 idle minutes; up to 48 candidates are sent through the gate.

`src/utils/suggestionEngine.ts#rankSuggestionCandidates` `src/utils/suggestionEngine.ts#orderSuggestionCandidates` `src/utils/suggestionEngine.ts#emptySuggestionReason` `src/server/routes/scheduleToolsRoutes.ts#registerScheduleToolsRoutes` `tests/slot-suggestion-recovery-audit.ts` `tests/appointment-forms-audit.ts`

`FR-SCH-027`

ALG-SCH-06 · Deterministic scheduling engine

Search and ranking

### Least-impact repair chain (domino)

*What is the shortest chain of moves that removes a conflict without creating another?*

1. For each row alternative placements are generated (day × 30-minute start × department hall) and ranked by acceptability: keep the hall, the instructor's days, the same day, closeness to his lectures, morning.
2. Depth-first search with iterative deepening: depth 1 is exhausted before depth 2 opens, so the first chain found is the shortest.
3. A placement that displaces exactly one row makes that row the next card; a row already moved in the chain is never displaced again, and never more than one at a step.
4. A chain is accepted when the conflict count drops by at least one; for a closed hall the hall is forbidden and the board must be no worse.

**Inputs**

The target row, the term's rows, forbidden halls and placeholder ids.

**Output**

A list of moves with conflict counts before and after and the number of instructors and halls affected, or nothing.

Proposes, never writes; never returns a chain that leaves more conflicts than it found; the chain is committed whole through the atomic batch move or not at all; with no honest plan it returns none rather than a partial one.

Maximum depth 5 moves (3 for a hall closure), branching 6 out of the best 24 placements.

Ranking weights: same hall +30, a day the instructor teaches +24, same day +18, proximity up to +20, start 08:00–14:00 +8.

`src/utils/repairChain.ts#findRepairChain` `src/utils/repairChain.ts#planDisruption` `src/components/Schedules.tsx` `tests/run-tests.ts`

`FR-SCH-022` `FR-DRF-020`

ALG-SCH-07 · Deterministic scheduling engine

**Cover availability and substitute ranking**

Search and ranking

*Who can cover this lecture on this date, and who fits best?*

1. An instructor is busy if a weekly lecture overlaps the hour on that day, unless it is cancelled on that date or covered by someone else.
2. He is also busy if another cover is recorded for him on the same date overlapping the hour.
3. The lecture's own instructor, anyone with a non-empty status, and anyone neither teaching this term nor with history on the course are excluded.
4. Score: taught the course 50 + min(12, 2 × terms), same department +20, same building that day +10 (or lectures that day +6), + max(0, 10 − load hours).

**Inputs**

The appointment and date, all term rows, the college's history of the course, and week exceptions.

**Output**

Up to 12 ranked substitutes with reasons.

The same rule guards recording a cover and the ranking; nothing is sent automatically; an exception never touches the row or its revision.

`src/utils/coverAvailability.ts#coverConflict` `src/server/routes/schedulesRoutes.ts` `tests/doctor-journey-audit.ts`

`FR-SCH-029`

ALG-SCH-08 · Deterministic scheduling engine

**Common meeting time**

Search and ranking

*When are selected members free together for a meeting of a given length?*

1. For every day and every start on a 30-minute step, the set of busy members is computed from the whole term across colleges.
2. Consecutive starts with the same busy set are merged into one window.
3. Windows are ranked by fewest busy, then longest, then closest to 10:00.
4. At most two windows per day enter the ranked list.

**Inputs**

Term rows, selected members and duration.

**Output**

Free windows per day, near misses, a ranked list of up to 6, and the best time when everyone is free.

Deterministic; the server drops the placeholder, visiting instructors and anyone with a status, and reveals only free/busy per name.

Duration 30 to 180 minutes.

`src/utils/meetingSlots.ts#computeMeetingSlots` `src/server/routes/scheduleToolsRoutes.ts` `tests/meeting-slots-audit.ts`

`FR-SCH-028`

## 3.4.7 Edge cases

### ⚠ Two combined sections with one instructor, hall and hour

**Scenario** Sections 501 and 502 of one course with the same instructor in the same hall at 11:00.

**Behaviour** One high-severity conflict with instructor and hall reasons is raised and blocks the save; combined delivery is no exemption, because an unreported double booking is a decision nobody made.

### ⚠ The same section in two halls with two instructors

**Scenario** Two rows with the same course, section, days and time: one in G28 and one in G31 with different instructors.

**Behaviour** A medium «same section in two places» warning blocks no save, signature or approval; if either row has no hall it returns to a blocking duplicate.

### ⚠ Two simultaneous edits of one appointment

**Scenario** Two colleagues open a row at revision 3; the first saves making it 4, then the second saves.

**Behaviour** The second is refused with 409 carrying the current row and their own version to choose from, and nothing is written; without rev it is written without comparison.

### ⚠ An existing row left outside a narrowed university day

**Scenario** The administrator narrows the day to 08:00–18:00 while the schedule holds a 18:30–19:20 row.

**Behaviour** The row stays and an edit that does not touch its time is not blocked; changing its time or creating a similar one is refused with 400. The administrator is told how many rows fall outside before saving.

### ⚠ A slot held by an instructor request awaiting the department

**Scenario** An instructor chose Sunday 10:00 in his request and a coordinator tries to place another lecture for him at the same hour.

**Behaviour** A 409 request-hold is returned with the holder and item; the coordinator confirms or cancels; confirming resends with overrideRequestHolds and passes only that request while other instructors' holds keep guarding.

### ⚠ Second step of a two-row swap fails

**Scenario** A swap of two rows passes its dry run, then one row changes at the same instant and the second write is refused.

**Behaviour** What was written is restored and applied=[] with reverted=true is returned; if the first step cannot be restored a message names the course for manual review.

### ⚠ Appointment count changes while confirming a wipe

**Scenario** A user saw a warning to wipe 120 appointments, then a colleague added one before «wipe» was pressed.

**Behaviour** A 409 wipe-count with the new number is returned and nothing is wiped; even if the count changes inside the lock the repository throws ScopeChangedError and nothing is wiped.

### ⚠ A term declared ended

**Scenario** A department tries to edit an appointment in a term flagged AdTermClosed.

**Behaviour** 409 schedule-locked is returned before any field message, and only the schedule committee chair with an explicitly written role can work in it; to reopen, the flag is lifted in the terms screen.

### 3.4.8 Standing owner decisions

- Only a physical conflict blocks signing and approval: a real instructor in two places, a hall booked twice, or an indistinguishable duplicate (rule 2026-09-27).
- The pattern must be approved from the library; history is a suggestion that never overrides the regulation, and department habit does not lift the hours ceiling (2026-10-30).
- The university day blocks everywhere; a narrower department exception warns but does not block in the appointment form (2026-11-05).
- Inter-campus travel time is mandatory in the teacher card and a non-blocking warning in the department's appointment form (2026-11-05).
- Two sections of a specialisation course at the same time: a warning, not a block, in the appointment form and in the teacher card, for specialisation courses only (owner note 8, and the 2026-11-08 decision that lifted the block on the card).
- An appointment's end comes from the approved pattern for the course hours, and a wrong length blocks the save at every entry point unless an existing appointment's shape is unchanged (2026-11-08).
- A non-blocking regulation violation is saved by the department only after an explicit exception confirmation listing the articles (owner notes 10 and 20).
- Every course number a reader sees is seven digits; printed reports keep their design.

↑ Contents

3.5 · DRF

# Drafts, scenarios and the time machine

Try on a copy, compare the effect, apply in one piece and go back with one click.

| 31 | 100% | 29 | 21 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.5.1 Overview

This module holds everything that is tried before the live schedule is touched: schedule drafts and start-of-term drafts with publishing behind a safety point, the version log with restore and term comparison, the time machine with its scenarios, solutions, atomic apply and restore point, what-if simulation on the registration radar, and ending the previous plan sheet. It serves the schedule committee chair who writes, and the department head and dean who read and simulate. Nothing is written to the live schedule without explicit confirmation, and nothing changed after a draft's base is erased without being named.

Schedule committee chair · Department head · College dean · System administrator · Root administrator · The system (automatic)

## 3.5.2 User journeys

**Schedule committee chair** — **Starting a new term from the previous one**

1. Opens the living layer and picks the previous term as the source for the department.
2. Reads the summary of what will be copied (read only), then builds the «بداية الفصل» draft.
3. Sections appear numbered from 501 with each row's issues and soft warnings beneath it.
4. Edits the instructor, time or room of a flagged row and the check reruns, showing N issues remaining.
5. When the draft is ready, publishes with explicit confirmation and sees the number of appointments and how many had their time adjusted.
6. If it was a mistake, presses undo and the version captured before publishing comes back.

**Schedule committee chair** — **Emergency: a room is down on Sunday**

1. Opens the time machine and writes «قاعة G23 تعطلت الأحد», or picks an example taken from the department's own schedule.
2. Sees up to three solutions of different philosophies, the best one marked, and a comparison table.
3. Checks the chosen solution's effect on instructors, rooms and students (from the radar) and its indicator.
4. Saves the scenario under a name and presses «اعتمد الكل»; the sheet shows what changes and who is notified.
5. After applying, sends the affected instructors their cards by WhatsApp himself.
6. If something is wrong, presses restore and the schedule goes back as it was, unless it was edited after.

**College dean** **The dean reviews a shared scenario**

1. Opens the time machine for a department in the college and picks it from the selector.
2. Sees only the scenarios the coordinator shared for viewing.
3. Simulates and reads the before/after effect, and sees «عرض ومحاكاة — الاعتماد لمن يكتب الجدول».
4. Any attempt to save or apply is refused by the server with 403.

### 3.5.3 Diagrams

**Publishing a draft**

Every gate is checked before the first write; the publish happens entirely or not at all.

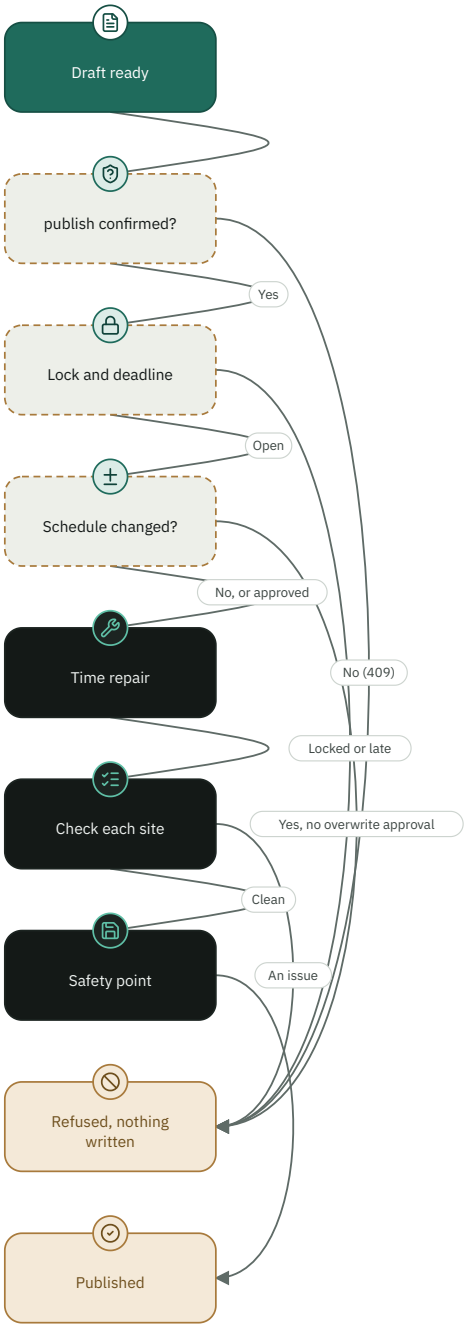

## Scenario lifecycle

Applying is one transaction and the restore point is written in it.

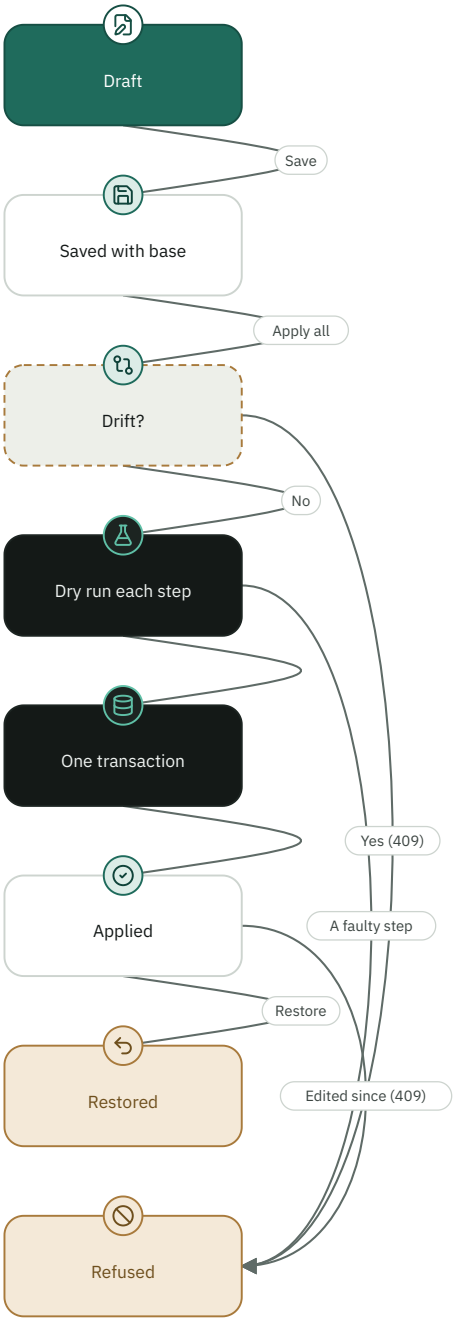

**Who can do what in the time machine**

| | Read and simulate | Save and share | Apply and restore |
|---|---|---|---|
| Schedule committee chair | ✎ | ✎ | ✎ |
| Department head | 👁 | — | — |
| College dean | 👁 | — | — |

✎ Write 👁 Read — No access

### 3.5.4 Screens

**What if (time machine)**
The «what if» desk (formerly «time machine»): suggestions, emergency (a sentence, a goal or an alternative for one appointment → solutions), sections, course removal and pattern; no standalone page and no menu button: it opens from «Analytics Center → try → what if» for schedule builders and from «try an alternative» on any changed appointment in «schedule changes» for reviewers.`src/components/TimeMachine.tsx`

**Scenario workbench**
Impact indicator, before/after, time slider, domino chain, student impact, save, share, copy, apply, restore and instructor notice cards.`src/components/ScenarioWorkbench.tsx`

**Section simulator**
Section cards with remove, add, merge and split in a basket measured together.`src/components/SectionSimulator.tsx`

**Move decision preview**
«لم يُحفظ شيء بعد»: from and to, effect on blockers, gap, quality and pressure, then confirm or cancel.`src/components/SchedulePhysics/ScheduleDecisionPreview.tsx`

**End the previous plan sheet**
For the main account: pick departments and press end or restore.`src/components/PreviousPlansPanel.tsx`

### 3.5.5 Requirements

**FR-DRF-001** **Create a schedule draft**

The system shall create a schedule draft for a given department and term from rows supplied by the user, and store its base (the fingerprint of the live schedule at creation time) without changing the live schedule.

Implemented · Must · Functional · Schedule committee chair, System administrator

**ACCEPTANCE CRITERIA**

1. A create request for a department outside the user's scope is refused with 403 and no draft is created.
2. An empty name is stored as «سيناريو جديد», and a name longer than 100 characters is cut to 100.
3. A draft source outside the list (what-if, auto, import, manual) is stored as what-if.
4. After a successful create (201) no appointment of the live schedule has changed.

**EVIDENCE**

`src/server/routes/draftsRoutes.ts` `src/server/routes/draftsRoutes.ts#/api/intelligence/drafts` `tests/role-guard-audit.ts` `tests/intelligence-scope-api.mjs` `tests/blockers-stream-audit.ts`

**FR-DRF-002** **Validate a draft before saving and cap its size** Inferred

The system shall refuse to save a draft while preview issues remain, required fields are missing, or the stored size of its rows exceeds 960,000 bytes, and shall state the reason before any write.

Implemented · Must · Functional · Schedule committee chair

**RATIONALE**

> A draft is a single database document limited to 1 MiB; the case is reported with the row count before writing instead of a generic failure.

**ACCEPTANCE CRITERIA**

1. A non-empty preview-issue list (cut at 80 distinct items) yields 400 and no draft is saved.
2. A row missing required fields yields 400 with the list of issues.
3. Rows exceeding 960,000 bytes of JSON yield 413 with code DRAFT_TOO_LARGE and nothing is written.

**EVIDENCE**

`src/server/routes/draftsRoutes.ts`

**FR-DRF-003** **Edit and delete draft rows**

The system shall allow editing only specific fields of a draft row (instructor, time, days, location), deleting one row or all rows, and shall re-check the draft after each change and return issues per row.

Implemented · Must · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Editing a row's course or section number through the edit route changes nothing (only 15 fields are allowed).
2. The reply carries issues, issueRowIds, rowIssues, rowWarnings and ready, and ready is true only when there are no issues.
3. Deleting all rows without the header x-schedule-confirm: delete-all-draft-rows yields 409.
4. A row that is not in the draft yields 404.

**EVIDENCE**

`src/server/routes/draftsRoutes.ts` `src/server/routes/draftsRoutes.ts#/api/intelligence/drafts/:id/rows/:rowId` `src/server/routes/draftsRoutes.ts#/api/intelligence/drafts/:id/rows` `tests/import-term-tools-audit.ts`

### FR-DRF-004 Start-of-term draft from the previous term

The system shall build a draft for a department in a new term from the schedule of a different, earlier term, without writing any live appointment, renumbering the sections of each course from 501 upwards and skipping appointments of archived courses while stating their number.

Implemented · Must · Functional · Schedule committee chair

**RATIONALE**

> The result is a draft that is reviewed and edited before publishing; the live schedule does not change.

**ACCEPTANCE CRITERIA**

1. A source term equal to the target term yields 400, and a source with no schedule for this department yields 400.
2. Sections of a copied course numbered 1, 10 and 11 become 501, 502 and 503.
3. A missing instructor is replaced by the instructor of a sibling section of the same course when one exists, and an empty room is taken from a sibling section.
4. The reply is 201 with coverage (sourceRows, archivedSkipped, copiedRows, skippedRows, adjustedRows) and the count of items needing review.

**EVIDENCE**

`src/server/routes/intelligenceInsightRoutes.ts` `tests/import-term-tools-audit.ts` `tests/blockers-stream-audit.ts`

### FR-DRF-005 Appointment gate for start-of-term drafts

The system shall ask every row of a start-of-term draft the same questions a new appointment is asked (fields and location, approved hours, approved pattern, conflicts) against the term as it will become, and a soft warning shall not block.

Implemented · Must · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The check calls schedulePayloadIssues, scheduleLengthIssue, unapprovedPatternIssue and scheduleConflicts for every row.
2. A soft conflict appears in rowWarnings, not in issues, and does not block publishing.
3. A check that fails internally adds «تعذّر فحص هذا الموعد. أعد المحاولة قبل النشر.» and counts as an issue.
4. The check runs on create, edit, delete and publish, and rows are checked in batches of 8.

**EVIDENCE**

`src/server/core/draftChecks.ts` `src/server/routes/draftsRoutes.ts` `tests/import-term-tools-audit.ts`

### FR-DRF-006 Publish a draft with explicit confirmation, lock and deadline gates

The system shall publish a draft only with explicit confirmation in the header, and shall refuse to publish when the site schedule is locked or a wholesale replacement falls outside its allowed deadline, the deadline being measured at publish time and not at save time.

Implemented · Must · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A publish request without the token publish in x-schedule-confirm yields 409.
2. A locked schedule yields 409 with code schedule-locked and nothing is written.
3. An imported or start-of-term draft outside the wholesale-replacement deadline yields 409 with code deadline-wholesale.
4. A draft outside the user's scope yields 403, and a missing draft yields 404.

**EVIDENCE**

`src/server/routes/draftsRoutes.ts` `src/server/core/versions.ts`
`src/server/routes/draftsRoutes.ts#/api/intelligence/drafts/:id/publish` `tests/approval-integrity-audit.ts`
`tests/blockers-stream-audit.ts`

### FR-DRF-007 Never erase changes made after the draft's base

The system shall, when publishing a draft that has not been published yet, compare the live schedule with its base and refuse once with a list of what would be erased if the schedule changed, proceeding only with the overwrite-newer approval.

Implemented · Must · Functional · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A draft saved on Sunday and published on Tuesday after a colleague's Monday edit yields 409 with code scope-changed-since-base.
2. The list is cut at 40 lines and the full count is sent in total.
3. Repeating the request with the header «publish, overwrite-newer» publishes after the user agrees.
4. A difference only in identifiers of the very same appointments, with nothing erased, does not cause a refusal.

#### EVIDENCE

`src/server/core/versions.ts` `src/utils/scopeFingerprint.ts` `src/utils/scopeOverwrite.ts` `src/server/routes/draftsRoutes.ts` `tests/blockers-stream-audit.ts`

### FR-DRF-008 Repair time collisions when publishing a start-of-term draft

Inferred

The system shall, when time collisions in the new term block a start-of-term draft, run the optimiser up to 4 passes moving time only (never course, instructor, day or room), then re-check and report how many rows had their time changed.

Implemented · Should · Functional · Schedule committee chair, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A successful reply carries adjusted = the number of rows whose time differs from the stored one.
2. Issues remaining after repair yield 400 with issues, issueRowIds and rowIssues and nothing is written.

#### EVIDENCE

`src/server/routes/draftsRoutes.ts` `src/server/routes/intelligenceInsightRoutes.ts`

### FR-DRF-009 Publish every site or nothing

The system shall, when publishing a draft that carries branch sites, place every row in the department of its site according to its building, and check permission, lock, deadline and validation for every site before the first write, so that the publish either succeeds on all sites or writes nothing.

Implemented · Must · Functional · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A row whose site cannot be resolved yields 400 with code BRANCH_SCOPE_UNRESOLVED and no row is published.
2. A site outside the user's scope yields 403 with code BRANCH_SCOPE_FORBIDDEN.
3. A course with no twin in the other site's department is copied from the home catalogue with the same code and listed in plantedCourses; an unknown course yields 400 with code BRANCH_COURSE_MISSING.
4. A sibling site's lock or deadline yields 409 naming the site and no row is published.

#### EVIDENCE

`src/server/routes/draftsRoutes.ts` `tests/approval-integrity-audit.ts`

### FR-DRF-010 Safety point before publish and approval-cycle notice

The system shall capture a version of every site before replacing it, mark the draft as published with its time, notify the approval cycle for each site separately, and return the version identifiers so the publish can be undone.

Implemented · Must · Functional · Schedule committee chair, The system (automatic)

#### ACCEPTANCE CRITERIA

1. The version is labelled «قبل نشر: <draft name>» with source publish.
2. The reply carries count, scopes (siteLabel and count), undoVersions, adjusted and plantedCourses.
3. An accepted schedule that is replaced returns to a new approval round at its own site, not at the draft's site.

#### EVIDENCE

`src/server/routes/draftsRoutes.ts` `src/server/core/versions.ts` `tests/blockers-stream-audit.ts` `tests/approval-integrity-audit.ts`

### FR-DRF-011 Version list and two-version comparison

Inferred

The system shall list the latest 80 versions of a department and term scope without row snapshots, and compare two versions of the same scope, counting what was added, removed and unchanged.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A failure reading the log returns an empty list with the header X-Reading-Partial: versions instead of a 500 error.
2. Two versions from different scopes yield 403, and a missing version yields 404.
3. The comparison key is course, section, instructor, days, start, end and room.

#### EVIDENCE

`src/server/routes/draftsRoutes.ts` `src/utils/scheduleVersionList.ts` `src/server/routes/draftsRoutes.ts#/api/intelligence/versions` `src/server/routes/draftsRoutes.ts#/api/intelligence/versions/compare` `tests/intelligence-scope-api.mjs`

### FR-DRF-012 Restore a previous version

The system shall restore a version only with explicit confirmation, after checking lock, deadline, overwrite and validation, and shall capture a version of the current state before replacing so the restore can itself be undone.

Implemented · Must · Functional · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Without the token restore in x-schedule-confirm the result is 409.
2. A version holding invalid times or conflicts yields 400 with issues (historical values are tolerated through resolveHistorical).
3. A change to the schedule after the version's base yields 409 with code scope-changed-since-base before any write.
4. The version captured before restoring is labelled «قبل استرجاع: <version label>».

#### EVIDENCE

`src/server/routes/draftsRoutes.ts` `src/server/core/versions.ts` `src/server/routes/draftsRoutes.ts#/api/intelligence/versions/:id/restore` `tests/blockers-stream-audit.ts`

### FR-DRF-013 Compare two terms of a department

The system shall compare a department's schedule in two terms, listing appeared, disappeared and moved appointments (up to 80 per group) with each term's score and the visiting-instructor mark according to each side's own term.

Implemented · Should · Functional · Schedule committee chair, Department head, College dean

#### ACCEPTANCE CRITERIA

1. The reply carries appeared, disappeared, moved, fromTermName, toTermName, fromScore and toScore.
2. Each moved row carries fields, before and after; rooms are shown with a slash, not a pipe.
3. A missing one of the four identifiers or a scope that is not allowed yields 403.
4. Comparing a term with itself at department scope reads a single college in perCollege.

#### EVIDENCE

`src/server/routes/draftsRoutes.ts` `src/utils/previousTermRequest.ts` `src/server/routes/draftsRoutes.ts#/api/intelligence/compare-terms` `tests/intelligence-scope-api.mjs` `tests/visiting-badge-group3-audit.ts`

### DR-DRF-014 Scenario record

The system shall store a scenario as one record holding its name (up to 80 characters), mode (emergency, lab, goal, sections), problem (up to 200 characters), list of changes (up to 80), the revision of every row it touches, status (draft, applied, restored), share flag, revision number and the last 40 history entries.

Implemented · Must · Data · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Saving stamps the revision of every row a change touches (base[rowId] = the row's rev).
2. Saving with a stale revision number yields 409 with code revision, and saving an applied scenario yields 409 with code applied.
3. A change pointing to an appointment outside the scope or no longer present yields 409 with code stale.
4. There are four change types: move, assign, remove and add; remove and assign are cut at 12 rows, add at 4 rows, and an unknown mode becomes lab.

#### EVIDENCE

`src/server/timeMachineRoutes.ts` `src/utils/timeMachine.ts` `src/server/timeMachineRoutes.ts#/api/time-machine/scenarios` `tests/time-machine-audit.ts`

### FR-DRF-015 Who may read and simulate, and who may save and apply

The system shall let everyone who reads the schedule within their scope read and simulate the time-machine context, restrict save, share, copy, apply, restore and delete to those who write the schedule (permission 7 and a non-read-only role), and show a non-writer only what has been shared with them.

Implemented · Must · Functional · Schedule committee chair, Department head, College dean

#### ACCEPTANCE CRITERIA

1. The dean reads the context (canWrite=false) and sees the shared scenario.
2. A save or apply by the dean or department head yields 403 from the server, not from hiding the button.
3. Reading a frozen term returns frozen and canWrite=false.
4. GET /api/time-machine/scopes returns the reader's colleges and departments by name from his scope alone; GET /api/time-machine/context without a department or term returns 400 with the code scope.
5. POST /api/time-machine/scenarios/:id/share shares the scenario for viewing or stops sharing (shared:false) and records it in its history; saving with the identifier of another scope's scenario returns 409.
6. Sharing a missing scenario returns 404, and one outside scope or by a non-writer returns 403; any body not carrying shared:false counts as sharing, and the history gains a «for viewing» or «stop» entry, keeping the last 40 entries.

#### EVIDENCE

`src/server/timeMachineRoutes.ts` `src/server/timeMachineRoutes.ts#/api/time-machine/scopes` `src/server/timeMachineRoutes.ts#/api/time-machine/context` `src/server/timeMachineRoutes.ts#/api/time-machine/scenarios` `src/server/timeMachineRoutes.ts#/api/time-machine/scenarios/:id/share` `tests/time-machine-audit.ts`

### FR-DRF-029 «Try an alternative» on a changed appointment

The «schedule changes» report shall show on every edited or added appointment, in «what moved» and in «full schedule» for what moved, a «try an alternative» button that opens a sheet holding the «what if» desk on that appointment alone: alternatives for its place and time (the same time in another room, the nearest permitted slot, the instructor's own days), each measured by its effect and never adding approval blockers, on a virtual copy that does not touch the schedule; the button shall not appear on a deleted appointment nor in an archived or frozen term, no standalone time-machine page or menu button shall remain, and its old link shall redirect those who do not build the schedule to «schedule changes» and those who do to «Analytics Center → try → what if».

● Implemented · Should · Functional · Department head, Schedule committee chair, Registration officer, System administrator

#### ACCEPTANCE CRITERIA

1. A non-writer sees «view and simulate — approval is for whoever writes the schedule» and no save or apply; the server is the guard (apply by a non-writer is 403).
2. An appointment with no safe alternative → «no safe solution without a new conflict», not an error.
3. The /FSchedule/TimeMachine link for someone without permission 7 who opens schedule changes is replaced in history by /FSchedule/Changes, adding no step to go back.

#### EVIDENCE

`src/components/TryAlternativeSheet.tsx` `src/components/ScheduleChanges.tsx#rowExtras` `src/components/TimeMachine.tsx#WhatIfDesk` `src/utils/timeMachine.ts#solveProblem` `src/App.tsx` `tests/whatif-in-changes-audit.ts`

### FR-DRF-016 Mask the rest of the term outside the scope

The system shall send the appointments of other departments to the simulator masked: time and room without course or department name, keeping the instructor only when they belong to the scope's instructors, so double booking can be detected without revealing another department's data.

● Implemented · Must · Functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. Every row outside the scope carries the course name «موعد قسمٍ آخر», department 0, college 0 and a section code x1 onwards.
2. An instructor from outside the scope's instructors is replaced by a negative number.

#### EVIDENCE

`src/server/timeMachineRoutes.ts` `tests/time-machine-audit.ts`

### FR-DRF-017 Apply a scenario atomically

The system shall apply a scenario in one piece or not at all: refuse a frozen term, take the term lock, refuse if the live schedule has drifted from the scenario's base, dry-run every step through the same two save handlers against the final week, then write the rows and the scenario record in one transaction.

● Implemented · Must · Functional · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A frozen term yields 409 with code term-frozen, and a concurrent apply in the same term yields 409 with code apply-busy.
2. A row edited or deleted after the scenario was built yields 409 with code drift and the list of rows.
3. One faulty step voids everything: the reply carries applied=[] and reverted=true and no row or revision number changes.
4. An applied scenario cannot be applied twice (409).
5. A row at a locked site is not deleted; the result is 409 with code schedule-locked and the step number.

#### EVIDENCE

`src/server/timeMachineRoutes.ts` `src/server/timeMachineRoutes.ts#/api/time-machine/scenarios/:id/apply` `tests/time-machine-audit.ts`

### FR-DRF-018 One-click restore point

The system shall store at apply time a restore point (images of the rows before the change, ids of created rows and post-apply revisions) in the same transaction, put the schedule back with one click, and refuse the restore if any row was edited after applying.

● Implemented · Must · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Restoring a scenario that is not applied yields 409 with code not-applied.
2. A manual edit of a row after applying makes the restore yield 409 with code revision and nothing is written.
3. A successful restore sets the status to restored, clears the restore point and deletes the rows the apply created.
4. An applied scenario cannot be deleted (409), and copying it builds its base on the live schedule now and yields an unshared draft.
5. A copy is named «<name> (copy)» cut to 80 characters, deleting a non-applied scenario returns ok:true, and an unknown scenario 404.

**EVIDENCE**

`src/server/timeMachineRoutes.ts` `src/server/timeMachineRoutes.ts#/api/time-machine/scenarios/:id/restore` `src/server/timeMachineRoutes.ts#/api/time-machine/scenarios/:id/copy` `src/server/timeMachineRoutes.ts#/api/time-machine/scenarios/:id` `tests/time-machine-audit.ts`

### FR-DRF-019 Green, yellow and red impact indicator

The system shall compare the schedule before and after a scenario using the schedule's own measures and give an indicator: red if approval blockers rise, instructors over their load rise or students without a seat rise; yellow if not red and a time or instructor changed, gaps grew by more than 30 minutes or regulation notes rose; otherwise green.

● Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. Changing two rows of an instructor gives a non-green indicator and names the affected instructor.
2. Affected instructors do not include placeholder names such as «هيئة تدريسية».
3. The «اعتمد الكل» button is disabled when there are no changes, or when the indicator is red and blockers increased.

**EVIDENCE**

`src/utils/timeMachine.ts` `src/components/ScenarioWorkbench.tsx` `tests/time-machine-audit.ts`

### FR-DRF-020 Problem reading and three ranked solutions

The system shall read a written problem sentence (room down, instructor unavailable, demand up on a course, clear a day, reduce gaps, free rooms) and propose up to 3 solutions of different philosophies (minimal change, students first, instructor comfort, fewer rooms, placeholder-instructor flexibility), none of which raises approval blockers, with the best one marked.

● Implemented · Must · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A sentence that is not understood returns nothing, not an invented solution.
2. Every solution in every mode has approval blockers after applying that are less than or equal to those before.
3. Every solution in the answer has a different philosophy, and only one carries the best mark.
4. A link sentence is cut at 200 characters, run once and then removed from the address; a long course number is matched in full, not by its last digits.

**EVIDENCE**

`src/utils/timeMachine.ts` `src/utils/timeMachineLink.ts` `tests/time-machine-audit.ts` `tests/time-machine-links-audit.ts`

### FR-DRF-021 Student impact of a scenario from the radar only

The system shall measure a scenario's impact on students as counts, not names, from the registration radar alone and for the radar term only, and shall leave the figure empty when there is no radar instead of inventing zero.

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A term other than the radar term returns available=false with the reason, and an internal error returns available=false too.
2. Changes pointing to rows outside the scenario's scope are dropped before measuring.
3. With no radar: shortfall and studentsMoved are null, not 0.
4. The impact verdict is apply, caution, avoid or neutral: harm to any student makes it avoid unless those helped outnumber those harmed, in which case it is caution.

**EVIDENCE**

`src/server/timeMachineRoutes.ts` `src/server/simulationData.ts` `src/server/timeMachineRoutes.ts#/api/time-machine/students` `tests/time-machine-audit.ts`

### FR-DRF-022 Notify only the affected instructors

The system shall, after applying, show every instructor whose schedule changed a before → after card with their personal link (an existing link is reused) and a ready WhatsApp message that is sent only when the coordinator presses the button.

Implemented · Should · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Cards cover the affected instructors only, and each card has at least one before or after line.
2. The instructor's message does not mention the room name.
3. When no staff card is published the screen shows «انشر بطاقات الأساتذة أولاً من أداة النشر».
4. The server sends nothing automatically.

**EVIDENCE**

`src/components/ScenarioWorkbench.tsx` `src/server/routes/shareRoutes.ts` `tests/time-machine-audit.ts` `tests/import-term-tools-audit.ts`

### FR-DRF-023 What-if on a proposal's impact before approval

The system shall measure the effect of moving an appointment, swapping two appointments, opening a section or a batch of sections on the radar term's students without writing anything, and shall refuse any term other than the radar term.

Implemented · Should · Functional · Schedule committee chair, Department head, System administrator

**ACCEPTANCE CRITERIA**

1. kind accepts move, swap, opening and openings; swap needs exactly two moves, a batch holds up to 60 items, and a move holds up to two appointments.
2. A frozen term yields 409 with code term-frozen, and a term other than the radar term yields 409 with code other-term.
3. An appointment no longer present yields 409 with code stale, and one outside the scope for a non-administrator yields 403.
4. The reply carries impact, basis and stale and does not write to the schedule.

**EVIDENCE**

`src/server/simulationRoutes.ts` `src/server/simulationData.ts` `src/server/simulationRoutes.ts#/api/schedules/what-if` `tests/radar-insight-audit.ts`

### FR-DRF-024 Refresh and read the registration radar within scope

The system shall let the radar summary be read within the reader's scope, restrict running to the system administrator with one run at a time, and refresh it automatically once every 24 hours while student wishes are open and once more after they close.

Implemented · Should · Functional · System administrator, Root administrator, The system (automatic), Department head

**ACCEPTANCE CRITERIA**

1. A run by a non-administrator yields 403, and a second run while one is running yields 409 with code busy.
2. RADAR_AUTO_HOURS is 1 or more, otherwise 24, and RADAR_AUTO=false stops the automatic refresh.
3. After a schedule change the radar refreshes after at least 120 seconds of quiet and at least 10 minutes between two runs.
4. A frozen earlier term is readable for reference and not recalculated, and running it by name yields 409 with code term-frozen.
5. GET /api/simulation/summary returns the overall figures to main administration without narrowing, and to others only the sum of their scope's departments (scoped:true); a term with no run returns run:null with canRun for main administration.

**EVIDENCE**

`src/server/simulationRoutes.ts` `src/server/simulationData.ts` `src/server/simulationRoutes.ts#/api/simulation/summary` `src/server/simulationRoutes.ts#/api/simulation/run` `tests/registration-flow-audit.ts` `tests/radar-insight-audit.ts`

### FR-DRF-025 End the previous plan sheet for departments

The system shall let the main account alone end the previous plan sheet for chosen departments (up to 400) so only the new sheet's courses appear in the schedule, and bring it back with a counter command.

Implemented · Should · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Reading the list or executing as anyone but the main account yields 403.
2. Ending archives transition sheets only when their track has an active new sheet containing courses, otherwise the department is skipped and appears in skipped.
3. Restoring brings back only what this action archived.
4. The screen shows each department's state: running, ended, or no new sheet yet.

**EVIDENCE**

`src/components/PreviousPlansPanel.tsx` `src/server/planReviewRoutes.ts` `tests/plan-sheet-import-route-audit.ts`

### IR-DRF-026 The «before apply» sheet

The interface shall not write when «Apply all» is pressed, but open a sheet showing the number of affected appointments, instructors and students, the first 6 changes by name, who is notified and how to go back, and write only on «Apply now».

Implemented · Should · Interface · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The back button and Escape close the sheet without writing, and inside the «schedule tools» dialog Escape closes only the topmost sheet.
2. More than 6 changes show 6 and say «و N أخرى».
3. After switching college or department the previous department's context is not shown and «اعتمد» is not active on it.

**EVIDENCE**

`src/components/ScenarioWorkbench.tsx` `src/components/TimeMachine.tsx` `src/components/timeMachineShared.tsx` `src/utils/timeMachineScope.ts` `tests/time-machine-scope-escape-audit.ts`

### NFR-DRF-027 Seven-digit course number on time-machine screens

The time-machine and section-simulator screens shall display the course number in seven digits (college, department, course) in examples, labels and section cards, not the three digits stored in the catalogue.

Implemented · Must · Non-functional · Schedule committee chair

**RATIONALE**

> The official number has seven digits wherever the user reads it; the stored value stays as is, and the parser accepts both the long and the short form.

**ACCEPTANCE CRITERIA**

1. The demand example reads «زاد الطلب على 0109468», not «زاد الطلب على 468».
2. The section card, the add label and the course option in the section simulator show the number built with authorityCourseCode.
3. Typing «demand rose for 0109468» resolves to the stored course 468, and the stored code itself is still accepted.

**EVIDENCE**

`src/utils/timeMachine.ts#tmCourseNumber` `src/components/TimeMachine.tsx` `src/components/SectionSimulator.tsx` `src/components/AllCourses.tsx` `src/server/timeMachineRoutes.ts` `tests/time-machine-links-audit.ts` `tests/course-number-seven-digit-audit.ts`

### FR-DRF-028 Draft list and editing a whole draft

Inferred

Through the draft-list route (GET) the system shall return the department and term drafts to a holder of screen 7 within scope, and restrict editing a whole draft (name and rows) through the single-draft route (PUT) to main administration, re-validating the rows.

Implemented · Should · Functional · Schedule committee chair, System administrator

**ACCEPTANCE CRITERIA**

1. A request without college, department or term, or outside scope, returns 403; an unknown draft returns 404.
2. The name is cut to 100 characters, and incomplete rows are refused with 400 and the list of issues.
3. In a draft copied from an approved PDF a row's course name or number cannot be changed from its original row: 409 with the code COURSE_NAME_LOCKED; the whole row may still be deleted.

**EVIDENCE**

`src/server/routes/draftsRoutes.ts#/api/intelligence/drafts` `src/server/routes/draftsRoutes.ts#/api/intelligence/drafts/:id`

### IR-DRF-029 Difference report between the approved PDF and the live schedule

Inferred

Through the draft import-report route (GET import-report) the system shall return, for a draft copied from an approved PDF, the comparison of the stored original reading with the live schedule now, with the file and branch names, to a holder of screen 7 within the draft's scope.

Implemented · Should · Interface · Schedule committee chair

**RATIONALE**

> The import rules themselves are in the import module (FR-IMP-007 and DR-IMP-021).

**ACCEPTANCE CRITERIA**

1. A draft that is not from an approved PDF or has no original reading returns 400; a missing one 404; outside scope 403.
2. A missing file name is shown as the approved schedule PDF, and course numbers and instructor names are shown rather than identifiers.

**EVIDENCE**

`src/server/routes/draftsRoutes.ts#/api/intelligence/drafts/:id/import-report`

**IR-DRF-030** **Additional radar readings within scope** Inferred

The system shall offer any signed-in user the following radar readings within his scope and without browser caching: GET /api/simulation/insight for shortfall causes and offering quality, GET /api/simulation/predictive and GET /api/simulation/predictive-summary for next-term need, and GET /api/simulation/outcome for what students said after registration; their content is described in FR-INT-018 and FR-INT-020.

Implemented · Should · Interface · Schedule committee chair, University registrar, Department advisor

#### ACCEPTANCE CRITERIA

1. The college and department selector narrows the scope and never widens it, and main administration without narrowing reads the totals; a term with no run returns ready:false.
2. Insight returns up to 300 quality items with qualityTruncated, and the need reading is kept for 5 minutes under a key that includes the requester and his scope so no reader shares another's memory.
3. Post-registration outcomes are ordered by stuck students descending; the overall respondent count is given only to main administration without narrowing (null for others), who get the count of answers about their own courses.
4. A computation failure returns 500 with an Arabic message asking to retry shortly.

#### EVIDENCE

`src/server/simulationRoutes.ts#/api/simulation/insight` `src/server/simulationRoutes.ts#/api/simulation/predictive` `src/server/simulationRoutes.ts#/api/simulation/predictive-summary` `src/server/simulationRoutes.ts#/api/simulation/outcome`

## 3.5.6 Algorithms

ALG-DRF-01 · Drafts, scenarios and the time machine

**Scenario overlay: apply, drift and write plan** Deterministic

*What does the schedule look like after these changes, and has the live schedule moved since the scenario was built?*

1. Changes (move, assign, remove, add) are applied in order to a copy of the schedule without touching the original.
2. The revision of every live row the scenario touches is stored at build time.
3. Drift: a missing row is 'gone', a row whose revision changed is 'edited'.
4. Write plan: update only changed fields with the expected revision, delete, or create; all are dry-run before one atomic write.

**Inputs**

The live schedule, the change list, and base revisions.

**Output**

The resulting schedule, the drift list and write operations.

Pure functions; never writes over a colleague's edit; applies all or nothing.

`src/utils/timeMachine.ts#applyChanges` `src/utils/timeMachine.ts#driftOf` `src/utils/timeMachine.ts#planOperations` `src/server/timeMachineRoutes.ts` `tests/time-machine-audit.ts`

`FR-DRF-017`

ALG-DRF-02 · Drafts, scenarios and the time machine

**Deterministic**

### Green, yellow and red impact indicator

*Does this scenario make the schedule worse, or only change someone's week?*

1. Both boards are measured with the same measures: blocking conflicts, over-load instructors, students without a seat, gap minutes and regulation notes.
2. Changed rows, affected instructors and halls, and time and hall changes are counted.
3. Red if blockers, over-load or seatless students increase.
4. Yellow if not red and a time or instructor changed, gaps grew by more than 30 minutes or regulation notes rose; otherwise green.

**Inputs**

Schedule before and after, courses, instructors and load limits, registration radar data when present.

**Output**

A level (green/yellow/red), short reasons and impact counts.

Student counts come only from the radar, otherwise left empty; no invented number.

Gap threshold 30 minutes.

`src/utils/timeMachine.ts#compareBoards` `src/utils/timeMachine.ts#measure` `tests/time-machine-audit.ts`

`FR-DRF-019` `FR-DRF-021`

ALG-DRF-03 · Drafts, scenarios and the time machine

**Search and ranking**

### Problem reading and three ranked solutions

*What are the three best solutions of different philosophies for a written problem (hall down, instructor absent, demand up, clear a day, gaps, halls)?*

1. The sentence is read with fixed word rules into a problem kind and its parties.
2. Drafts are built under different philosophies: minimal change (domino chain), students first, instructor comfort, fewer halls, placeholder flexibility.
3. Duplicate drafts are removed, as is any draft that raises blocking conflicts, leaves the patterns or introduces a clash.
4. Cost = 5000 if unsolved + 1000×added blockers + 400×over-load + 60×seatless students + 10×changes + 6×instructors + 5×time changes + 2×hall changes + gaps/30 + 8×regulation.
5. Sorted ascending by cost; the best three are returned and the first is marked.

**Inputs**

The problem text, live schedule, courses, instructors, halls and radar.

**Output**

Up to three solutions, each with its changes, impact indicator and cost.

No solution raises approval blockers; proposes without writing, application goes through the atomic scenario path.

`src/utils/timeMachine.ts#parseProblem` `src/utils/timeMachine.ts#solveProblem` `src/utils/timeMachine.ts#compareScenarios` `tests/time-machine-audit.ts` `tests/review-1105-audit.ts`

`FR-DRF-020`

ALG-DRF-04 · Drafts, scenarios and the time machine

**Time-collision repair for a start-of-term draft**

Search and ranking

*Can a schedule copied from an earlier term be published by moving times only?*

1. Rows are ordered by instructor then id, and each is tried at every 30-minute start in the university day with its own duration.
2. Any alternative that raises the row's conflicts above their current number is rejected.
3. Cost = 10000×conflicts + 0.38×distance from the original time (−18 for staying) + a penalty after 16:00 + 0.16×gaps to the instructor's lectures (capped at 180 minutes each).
4. Repeated up to 4 passes or until nothing changes, then re-checked and the number of rows whose time changed is reported.

**Inputs**

Draft rows and the rest of the new term's rows.

**Output**

Rows with adjusted times and the changed count, or the remaining blockers.

Safety-first greedy: never changes course, instructor, day or hall, and never trades a clean row for a new conflict.

At most 4 passes, 30-minute step.

`src/server/routes/draftsRoutes.ts` `src/server/core/draftChecks.ts#draftAppointmentChecks`

`FR-DRF-008`

## 3.5.7 Edge cases

### ⚠ An old draft published after a colleague's edit

**Scenario** A draft was saved on Sunday, a colleague edited the live schedule on Monday, then «publish» was pressed on Tuesday.

**Behaviour** The server refuses once with 409 scope-changed-since-base and names what would be erased (up to 40 lines plus the full count); if the user agrees the request is repeated with «publish, overwrite-newer». A draft that was already published skips this comparison.

### ⚠ A start-of-term draft collides with other departments

**Scenario** Copied appointments clash on room or instructor with other departments' schedules in the new term.

**Behaviour** The optimiser moves time only, up to 4 passes at creation and at publish; if issues remain they are returned per row and nothing is written. A soft warning is shown under the row and does not block.

### ⚠ The live schedule moved after the scenario was built

**Scenario** A colleague edited an appointment the scenario touches before «اعتمد الكل» was pressed.

**Behaviour** The apply is refused with 409 drift naming the changed row (gone or edited), and the workbench shows the notice that the live schedule changed. No row is written.

### ⚠ Restore after a manual edit

**Scenario** A scenario was applied, someone then edited by hand a row it changed, and a restore was requested.

**Behaviour** The restore is refused with 409 revision because it would overwrite the edit; nothing is written and the scenario stays applied.

**⚠ A file carrying branch sites where one site fails**

**Scenario** A draft with rows for the main site and both branch sites, where one site is locked or a row has no known site.

**Behaviour** Every site is checked before the first write; the server returns 409 or 400 naming the site and no row is published at any site.

### 3.5.8 Standing owner decisions

- A course number is always seven digits (college 2 + department 2 + course 3, such as 0109105); the stored three-digit code is never displayed.
- Printed reports keep their design; fixes go in values and data, not layout.

↑ Contents

3.6 · VIW

# Viewing, sharing, copying and transferring schedules

The department schedule to read, a link for whoever needs it, copying from term to term, and an export that keeps the whole picture.

| 30 | 100% | 7 | 16 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.6.1 Overview

This module covers everything about looking at a schedule and handing it on: the read-only department schedule screen, saved views, the living-schedule layer with its six scenes including start of term and copying from the previous term, the previous-term ghost and the decision panel, the transfer dialog (export, instructor replacement, publish), share links with faculty cards, personal links and their lifetimes, and the journey screen. It serves the schedule committee chair, department head, instructors, students and the public visitor. What reaches people who are not signed in is aggregate and without names, and the link alone is the permission.

Schedule committee chair · Department head · College dean · Faculty member · Student · Public visitor · The system (automatic)

## 3.6.2 User journeys

### Schedule committee chair — Publishing faculty cards, then notifying whoever's schedule changed

1. Opens «schedule tools» → «publish» and issues the department's faculty card with a last date for requests.
2. Picks the instructors, a personal link is minted for each and WhatsApp opens with a ready message.
3. Each link records the send time and the fingerprint of its owner's schedule.
4. The schedule is later edited and the panel marks «changed since sent» next to whoever the edit touched.
5. Resends to them alone, and if a new department card is issued it replaces the old one while personal links stay alive.

### Department head — Reading and printing the department schedule

1. Opens «department schedule» from an account bound to one department.
2. Sees the current term's appointments sorted by days then time, with the visiting-instructor mark.
3. Reads the notice that the schedule may be a draft and checks approval status in «schedule changes».
4. Prints the page with the print button.

**Schedule committee chair** — **Retiring an instructor with all their appointments**

1. Opens «replacement» and chooses the instructor, then a replacement or «leave without an instructor».
2. Sees the number of appointments and the compatibility verdict before any change.
3. If there is a conflict, reads its reasons and chooses another replacement.
4. Executes; a version «قبل استبدال الأستاذ» is captured and the decision appears in the replacement log.
5. If it was a mistake, undoes it from the log.

**Public visitor** — **A visitor opens the SCHEDULE journey before login**

1. Presses the journey button on the login page.
2. A full-screen sheet opens and the memory is read from the server as aggregate counts without names.
3. Browses the impact, the scale, the path and the philosophy; numbers move once, or show at once when reduced motion is preferred.
4. Closes it with Escape and focus returns to the button.

### 3.6.3 Diagrams

**Life of a share link**

Reading follows the link's kind; the written requests deadline governs writing only.

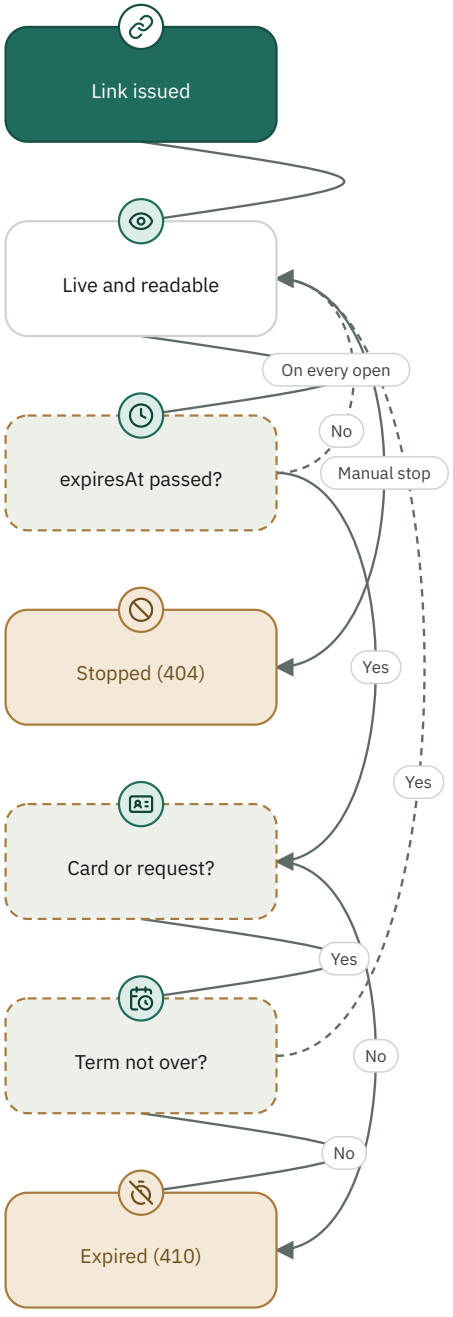

## Copying the previous term

The reading and the draft never touch the live schedule; only publishing writes, and it has an undo point.

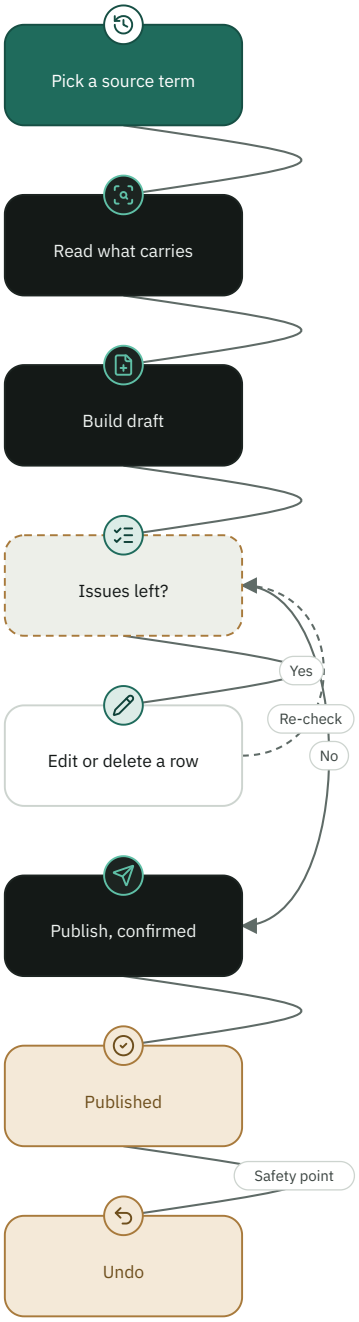

**Who reaches what**

| | Department schedule | Issue links | Export and replace | Own card by personal link |
|---|---|---|---|---|
| Schedule committee chair | ✎ | ✎ | ✎ | — |
| Department head | 👁 | — | — | — |
| Faculty member | — | — | — | 👁 |

✎ Write 👁 Read — No access

### 3.6.4 Screens

**Department schedule**
Read only: table and cards, print, and the visiting-instructor mark.`src/components/DepartmentSchedule.tsx`

**Schedule tools (schedule transfer)**
The export, publish and replacement tabs are covered here; import belongs to its own module.`src/components/ScheduleTransfer.tsx`

**Publish the schedule**
The department schedule for whoever holds the link, or a card for every instructor with a personal link, and the send log.`src/components/SchedulePublish.tsx`

**Living schedule**
The three rings above the timetable open «schedule health» in the Analytics Center; the decision-centre scenes became cards there.`src/components/LivingScheduleLayer.tsx`

**Previous-term ghost and decision panel**
A comparison with the previous term over the schedule, and the decision-now panel.`src/components/ScheduleExperienceLayer.tsx`

**Saved views**
A menu that appears after the first saved view, and a naming dialog with one field.`src/components/ScheduleViewsMenu.tsx`

**The SCHEDULE journey**
Four narrative acts on a dark canvas with a fixed palette.`src/components/ScheduleJourney.tsx`

### 3.6.5 Requirements

**FR-VIW-001** **Read-only department schedule**

The system shall show an account bound to a single department that department's schedule for the current term, read only, as a table on wide screens and cards on phones, sorted by days then time, with the visiting-instructor mark and course tags, a print button, and a notice that the schedule may be a draft.

Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. An account without a single-department scope sees «هذا الحساب لا يملك نطاق قسم واحد لعرض جدوله.» and no rows.
2. The displayed term is the current term, or the first term in the list when it cannot be determined.
3. Columns: course, section, instructor, days, time and room, and every appointment appears both in the table and in the card.
4. The screen has no edit button, and an empty term shows «لا توجد شعب لهذا الفصل».
5. A visiting instructor carries the mark according to the row's own college and department.

**EVIDENCE**

`src/components/DepartmentSchedule.tsx` `tests/visiting-badge-group2-audit.ts`

**FR-VIW-002** **Export the term to a file**

The system shall export a department's schedule for a given term to an Excel or JSON file carrying the appointments, courses, staff, halls and the term's visiting roster, and refuse the export outside the user's scope.

Implemented · Must · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A request without college or term yields 400 «حدد الكلية والفصل قبل التصدير.», and a scope that is not allowed yields 403.
2. The Excel file has a sheet «الجدول الدراسي» with nine columns (course code, course, section, instructor, civil number, days, time, building, hall) and a sheet «معلومات الملف» carrying the term name.
3. The file name is «جدول_<department>_<term>.xlsx» with forbidden characters replaced by an underscore.
4. An export by college with no department from a department account does not carry the courses of the college's other departments.
5. The «export» tab has two buttons, «export to an Excel file (.xlsx)» and «download a JSON file» named schedule-<term id>.json, both disabled until college, department and term are chosen; a server error is shown as given, otherwise «could not export the schedule data».

**EVIDENCE**

`src/components/ScheduleTransfer.tsx` `src/server/routes/scheduleImportRoutes.ts` `tests/role-scope-audit.ts`

**FR-VIW-003** **An ended term is read and export only** Inferred

The schedule-transfer dialog shall limit an ended term to the export and publish tabs only, hiding import, section planning, replacement and visiting instructors, and shall return any other open tab to export, so nothing is written into an archive.

Implemented · Must · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Opening an ended term on a tab other than export or publish returns it to export.
2. The publish control does not issue a link for an archived term.

**EVIDENCE**

`src/components/ScheduleTransfer.tsx` `src/utils/termSequence.ts`

### FR-VIW-004 Replace an instructor in a term in two steps

The system shall hand all of an instructor's appointments in a term to a named replacement or leave them without an instructor, in two steps: a preview showing the number of appointments and the replacement's compatibility, then execution with an explicit commit request, and shall never delete any appointment.

● Implemented · Must · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The preview returns preview=true, affected, compatible and reasons and writes nothing.
2. A replacement whose own appointments conflict yields 409 at execution with the reasons (up to 20 conflicts) and nothing changes.
3. A replacement equal to the instructor handed from yields 400, and execution on a locked schedule yields 409 with code schedule-locked.
4. Before executing a version «قبل استبدال الأستاذ: A ← B» is captured and undoVersionId is returned, and the approval log is notified of an edit.
5. The replacement log shows the last 20 decisions drawn from the last 80 versions, and they are reversed through restore.
6. In the «replace» tab, «from» lists the department's instructors in the term and «to» the assignable instructors (no retired or sabbatical member) or «leave without an instructor»; choosing «from» requests the preview automatically after 220 ms, showing «checking appointments…», then «compatible with all appointments» or «there is a conflict» with up to four reasons and the number of appointments affected; «run the replacement» appears only when at least one appointment is affected and is disabled on a conflict.
7. The on-screen replacement log shows up to 8 decisions with names, time, actor and the «visiting» mark, and «undo» restores the earlier version through the overwrite-newer question.

**EVIDENCE**

`src/server/routes/scheduleToolsRoutes.ts` `src/components/ScheduleTransfer.tsx` `tests/term-freeze-audit.ts` `tests/approval-integrity-audit.ts`

### FR-VIW-005 Read what will carry over before copying a term

The system shall, before a start-of-term draft is built, read the source term read-only and say what carries over with confidence and what carries a decision: a course no longer in the catalogue, a course whose hours or credits changed, an unavailable instructor, a room no longer used, listing up to 40 concerning appointments and up to 6 notes on the department's pattern.

● Implemented · Should · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The reply carries sentence, concerns (up to 40), concernCount, style and guardrail «قراءة فقط. لم يُنشأ شيء ولم يتغيّر شيء.»
2. Each concern carries one or more flags: course-gone, course-changed, instructor-away and room-retired.
3. An empty source term says so plainly («لا جدول»).
4. A missing department or source term, or a scope not allowed, yields 403.

**EVIDENCE**

`src/server/routes/intelligenceInsightRoutes.ts` `src/utils/termRollover.ts` `tests/run-tests.ts`

### FR-VIW-006 Start-of-term screen: build, review, publish and undo

The screen shall build a start-of-term draft from the chosen previous term, show its rows with each row's issues and warnings, allow editing a row, deleting it or deleting all with confirmation, publish with explicit confirmation that asks before erasing anything that changed, and then allow undoing the publish.

Implemented · Must · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Rows with issues are marked and scrolled to automatically, and after every edit or delete the issues are refreshed and the screen says «ملاحظة N بقيت» or «المسودة جاهزة للنشر».
2. «حذف جميع المواعيد» asks first and sends x-schedule-confirm: delete-all-draft-rows, and its message is «لم يُنشر أي تغيير على الجدول الرسمي».
3. Publishing goes through the overwrite question (publish then overwrite-newer), and after success the number of appointments and the number whose time was adjusted are shown.
4. Undo goes through the safety point with the token decision-undo and captures a version of the current state before restoring.
5. When reduced motion is preferred the visual choreography is skipped and only the plain result remains.

**EVIDENCE**

`src/components/LivingScheduleLayer.tsx` `src/components/GenesisChoreography.tsx` `tests/safety-net-restore-audit.ts` `tests/blockers-stream-audit.ts` `tests/import-term-tools-audit.ts`

### FR-VIW-007 Living-schedule scenes in Analytics Center cards

The living layer's scenes shall be shown in Analytics Center cards: overview, health and fairness in «schedule health», the pressure map in «pressure and density», the one-minute brief in «attention», start of term in «try», and the safety net in «version history», from one reading carrying the schedule pulse, quality, flexibility, fairness, fragility, rooms, topology and brief indicators, within the reader's scope.

Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. The reading returns pulse, health, fairness, fragility, roomIntelligence, topology, brief, memory, constraints.count and capabilities.
2. A missing department or term yields 400, and a scope that is not allowed yields 403.
3. analysisScope=department restricts the analysis to the department, otherwise it covers the college.
4. Every scene carries the visiting-instructor mark wherever an instructor is named.

**EVIDENCE**

`src/components/LivingScheduleLayer.tsx` `src/components/LivingScheduleScenes.tsx` `src/server/routes/intelligenceInsightRoutes.ts` `tests/blockers-stream-audit.ts` `tests/visiting-badge-group3-audit.ts`

### FR-VIW-008 One approval-blocker number everywhere

The living-schedule reading shall count approval blockers with the approval bar's own options (placeholder exemption and the same room identity), so the number never differs between the two screens.

Implemented · Must · Functional · Schedule committee chair, The system (automatic)

**ACCEPTANCE CRITERIA**

1. The living route calls approvalBlockerOptions once and passes the same object to every memoised reading.
2. «مانع اعتماد N — حالة الجدول» equals the approval bar's number.

**EVIDENCE**

`src/server/routes/intelligenceInsightRoutes.ts` `tests/one-blocker-number-audit.ts`

### NFR-VIW-009 The living reading is computed once, not once per asker

Inferred

The server shall cache the living-reading reply per scope for 120 seconds and clear it on any schedule write, and the interface shall share the in-flight request between components within an 8-second window and at most 8 scopes, without one component's abort cancelling another's request.

Implemented · Should · Non-functional · The system (automatic)

#### RATIONALE

> A cold reading was measured on production at up to 27 seconds on the single-threaded server.

#### ACCEPTANCE CRITERIA

1. Two consecutive requests for one scope within 120 seconds are served from memory, and demo sessions are never cached.
2. In the interface the oldest reading is dropped when more than 8 scopes are held.
3. Changing scope does not cancel a reading in flight; its result is only discarded.

#### EVIDENCE

`src/utils/livingCache.ts` `src/server/routes/intelligenceInsightRoutes.ts` `src/components/ScheduleExperienceLayer.tsx`

### FR-VIW-010 Last reading of the three indicators

Inferred

The interface shall keep in the browser the last quality, resilience and fairness values per scope and show them dimmed and labelled as the last reading as soon as the layer opens, until the real reading arrives and replaces them.

Implemented · Could · Functional · Schedule committee chair

#### ACCEPTANCE CRITERIA

1. The key schedule.lastScores.v1 in browser storage.
2. Blocked storage or an old value makes the rings wait as before, and decides nothing.

#### EVIDENCE

`src/utils/livingCache.ts` `src/components/LivingScheduleLayer.tsx`

### FR-VIW-011 Previous-term ghost over the schedule

Inferred

The interface shall let a user turn on a previous-term ghost over the current schedule for one department or for all, marking each earlier appointment as unchanged, changed or removed, and summarising how many are unchanged, how many changed instructor, room or day, and how many are missing.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The previous term is the first term in the genome history, otherwise the term next after the current one from newest to oldest.
2. With no previous term the screen shows «لا يوجد فصل سابق محفوظ لهذا القسم بعد.» and requests nothing.
3. An appointment is compared by identity (course and section) and by placement (days, time, instructor and room).
4. Turning the ghost on needs no college or department: with none chosen the whole term is read, and changing scope switches the ghost off.

#### EVIDENCE

`src/components/ScheduleExperienceLayer.tsx`

### FR-VIW-012 The «decision now» panel

Inferred

The interface shall open a decision panel that asks the server for the decision room of the department and term scope, shall end every reading within a 35-second ceiling with a clear Arabic reason for any failure, and shall show an empty term as guidance, not as a panel.

● Implemented · Should · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. No reply within 35 seconds gives «استغرقت القراءة وقتاً أطول من المتوقع. حاول مرة أخرى.»
2. The statuses 429, 401, 403 and 500 and above each give a specific Arabic message, and no English server text reaches the screen.
3. An empty room shows its message as guidance.
4. The panel shows «the problem worth deciding» (course, section, number of positions, instructor and hall) or «the schedule is stable», then the verdict and up to three options, each with a quality score, blocker count, average gap, whether the hall changes and its effect on the instructor's gaps; it is a reading that neither saves nor executes.
5. «open the original appointment» opens the editor on it followed, in sequence, by every appointment on its day that overlaps it and shares its instructor, hall or identity, so each save says «saved · next n of m» and finally that all appointments linked to the problem were handled.

**EVIDENCE**

`src/components/ScheduleExperienceLayer.tsx` `src/server/routes/intelligenceRoutes.ts`

### NFR-VIW-013 Analysis reads are deferred and quiet on failure

Inferred

Reads of genome, constraints and the living reading in the experience layer shall be deferred to browser idle time (at most 6 seconds), and a soft failure (timeout or interruption) shall be ignored without an error banner while the last reading is kept, because the schedule works fully without them.

● Implemented · Should · Non-functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. Nothing is requested on every click in the schedule, only once after idle time.
2. An error marked soft raises no banner, and a non-soft one shows its Arabic text.

**EVIDENCE**

`src/components/ScheduleExperienceLayer.tsx`

### FR-VIW-014 Issue a share link

The system shall issue a share link for a department and term of four kinds (department schedule, faculty cards, course survey, students' schedule), with a lifetime computed on the server, and restrict issuing to those who own the department.

● Implemented · Must · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Without college, department or term the result is 400, and a scope that is not allowed yields 403.
2. The lifetime of a department or survey link is 1 to 180 days (30 by default), and a students' link lasts 365 days.
3. A live students' link is returned and no second one is issued, so the printed QR sticker does not change.
4. A survey for an ended term yields 409 with code term-ended.
5. Hiding instructor names is stored in showInstructors (on unless false is sent).
6. Issuing, listing and stopping require permission 7, and every link token is 24 random bytes encoded base64url (32 characters) used as its document id in scheduleShareLinks, stored with the scope key 'college:section:term'.
7. The publish panel no longer issues survey links: its «Masari» kind shows only the «Masari» (student portal) code with no create button, and an old survey link is listed as «old link · opens Masari» on the /q/ path with no calendar link.

**EVIDENCE**

`src/server/routes/shareRoutes.ts` `src/server/core/shareLinks.ts` `src/db/repository.ts#createShareLink` `src/server/routes/shareRoutes.ts#/api/share` `tests/teacher-card-flow-audit.ts` `tests/publish-pick-teachers-audit.ts` `tests/student-journey-audit.ts`

### FR-VIW-015 One live department card per term

The system shall make a new faculty card for a department (and its family of sites) replace the earlier one: old department cards are stopped, personal links stay alive and take the new requests deadline, and issuing is protected by a serial lock.

Implemented · Must · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The issue reply carries replaced = the number of old cards stopped.
2. The link list shows only the single newest live card of the family.
3. The requests deadline requestsCloseAt is stored separately and carried to personal links.

**EVIDENCE**

`src/server/routes/shareRoutes.ts` `src/server/core/staffCard.ts` `src/server/routes/shareRoutes.ts#/api/share` `tests/teacher-card-flow-audit.ts` `tests/publish-pick-teachers-audit.ts`

### FR-VIW-016 Link lifetime: reading until the end of the term

Faculty cards (department link and personal link) and the request link shall stay readable until the end of their term, not until the requests deadline, with the end of life computed from the term's dates, else from its name, else after 150 days; the requests deadline governs writing only.

Implemented · Must · Functional · Schedule committee chair, Faculty member

**ACCEPTANCE CRITERIA**

1. A link for a term ending on 31 December ends with the declared end of the term, and a link for a past term is not born expired.
2. A term of unknown date gives +150 days (TERM_LINK_FALLBACK_DAYS).
3. A department-schedule or survey link is readable only until expiresAt.
4. The requests deadline is written at the end of the Kuwait day (23:59:59+03:00), the same instant as the approval deadline.

**EVIDENCE**

`src/utils/shareLinkLifetime.ts` `src/server/core/shareLinks.ts` `tests/doctor-journey-audit.ts`

### FR-VIW-017 Opening and stopping a link

Inferred

The system shall, when a link token is opened, answer 404 if it is missing or stopped and 410 if it expired, and build the public payload without civil number, phone or account, sorted by start time, and without instructor names when they are hidden.

Implemented · Must · Functional · Public visitor, Student, Faculty member

**ACCEPTANCE CRITERIA**

1. A stopped token: «(404) «الرابط غير موجود أو تم إيقافه»; an expired one: «(410) «انتهت صلاحية هذا الرابط».
2. The public row carries code, name, section, start, end, days, room, the revision rev, instructor and the visiting flag.
3. showInstructors=false empties the instructor name and drops the visiting mark.

**EVIDENCE**

`src/server/core/shareLinks.ts` `tests/doctor-journey-audit.ts`

### FR-VIW-018 Revoke a link

The system shall stop a link on a delete request, and stopping a department card shall stop the whole department family together with unsent request links, leaving sent or signed requests and their reading links untouched.

Implemented · Must · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Stopping a department card by a user who owns none of the family's sites yields 403.
2. Stopping a personal link is allowed to anyone who owns the department at any of its sites.
3. A missing link yields 404.

**EVIDENCE**

`src/server/routes/shareRoutes.ts` `src/server/routes/shareRoutes.ts#/api/share/:id` `tests/teacher-card-flow-audit.ts`

### FR-VIW-019 Personal instructor links and send tracking

The system shall mint a personal link for every eligible instructor from the department card (up to 300 per request), reused when a live one exists, living until the end of the term and without names, and shall record for each link the send time and the fingerprint of the instructor's schedule, so it later knows whose schedule changed since they were notified.

● Implemented · Must · Functional · Schedule committee chair, Faculty member

**ACCEPTANCE CRITERIA**

1. Eligible are those who teach in the department family this term, delegates or faculty of the department; others are skipped silently.
2. The reply links carries instructorId, id, expiresAt and reused.
3. GET /api/share-personal returns, for each link, changedSinceSent true when the schedule fingerprint differs from the fingerprint at sending.
4. GET /api/share-personal requires screen 7, the college, department and term (otherwise 400) and a department within scope (otherwise 403), and returns for each personal link in the department family the instructor's name, the link's expiry, revocation, view count, last sent time and last seen time.
5. The delivery list returns only the identifier, name and mobile, never the civil number.

**EVIDENCE**

`src/server/routes/shareRoutes.ts` `src/server/routes/shareRoutes.ts#/api/share/:id/personal` `src/server/routes/shareRoutes.ts#/api/share/:id/sent` `src/server/routes/shareRoutes.ts#/api/share/:id/faculty` `src/server/routes/shareRoutes.ts#/api/share-personal` `tests/doctor-journey-audit.ts` `tests/publish-requests-audit.ts`

### FR-VIW-020 The calendar subscription lives while a card link lives

A fixed calendar subscription of an instructor shall keep showing their lectures as long as they hold at least one live card link (personal, their request link, or a department card of a department they teach in) readable now by the same lifetime rule, and when none is left it shall answer a valid empty calendar.

● Implemented · Should · Functional · Faculty member, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A stopped link, or an expired one whose term has ended, does not keep the calendar alive.
2. Department-schedule, survey and students' links do not count as card links.
3. An instructor with no identifier (0) gets no subscription.

**EVIDENCE**

`src/utils/shareLinkLifetime.ts` `tests/calendar-ics-audit.ts`

### FR-VIW-021 Saved views

Inferred

The schedule screen shall let a user save a way of looking at the schedule (department and term, view mode, what colour means, legend folds, quick search and the rooms matrix) under a name of up to 40 characters, with up to 3 favourites, in the user's own browser, and opening a view changes nothing in the schedule.

● Implemented · Could · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. The storage key is schedule-views-<user id>, and a corrupted or old record is ignored and does not take the screen down.
2. A fourth favourite arrives unfavourited, and toggling a fourth is not carried out.
3. The menu is not in the toolbar before a first view is saved; the first save comes from the «حفظ العرض الحالي» command.
4. A dot after the name means the board no longer matches what was saved, with «تحديث العرض الحالي» and «العودة إلى المحفوظ».

**EVIDENCE**

`src/utils/scheduleViews.ts` `src/components/ScheduleViewsMenu.tsx`

### FR-VIW-022 Warn when a saved view lost its scope

Inferred

The interface shall, when opening a saved view that names a college, department or term that is no longer available, say which one was lost and open what is possible instead of an empty board with no explanation.

Implemented · Could · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A view naming a merged department shows «القسم في هذا العرض لم تعد متاحة — فُتح ما أمكن منه.»
2. A view with an intact scope shows no message.

#### EVIDENCE

`src/utils/scheduleViews.ts`

### FR-VIW-023 The journey screen

The SCHEDULE journey screen shall show a live reading of aggregate counts, not names (the number of appointments as the headline figure, then courses, instructors, departments, colleges and terms), in four narrative acts, to anyone who opens it before or after login.

Implemented · Could · Functional · Public visitor, Standard user, System administrator

#### ACCEPTANCE CRITERIA

1. The route /api/journey is public on purpose and returns scoped=false and counts without names or civil numbers.
2. Zero terms shows «الرحلة تبدأ من هنا.», and a failed reading shows «تعذّرت قراءة الذاكرة الآن».
3. Escape closes the sheet, tabbing is trapped inside it, and focus returns to the button that opened it.
4. The sheet is rendered into body so nothing in the sidebar paints over it, and when reduced motion is preferred the content shows at once.

#### EVIDENCE

`src/components/ScheduleJourney.tsx` `src/server/routes/dashboardRoutes.ts` `src/styles/10-journey.css` `tests/role-scope-audit.ts` `tests/presentation-coverage-audit.ts`

### NFR-VIW-024 Seven-digit course number on viewing and transfer screens

The department schedule, the start-of-term preview, the appointment picker in the scenes and the export file shall show the course number in seven digits (college, department, course), not the code stored in the catalogue.

Implemented · Must · Non-functional · Schedule committee chair, Department head

#### RATIONALE

> The official number has seven digits in everything the user reads or exports; the stored value stays as is.

#### ACCEPTANCE CRITERIA

1. The course column of the department schedule shows a seven-digit number built with authorityCourseCode.
2. The «رمز المقرر» column of the exported Excel file and the preview line in start of term show the same number.
3. The exported Excel file re-imports as is: the seven-digit number matches the course without replacing the stored code.

#### EVIDENCE

`src/components/DepartmentSchedule.tsx` `src/components/LivingScheduleLayer.tsx` `src/components/LivingScheduleScenes.tsx#ContextPicker` `src/components/ScheduleTransfer.tsx` `src/server/routes/scheduleImportRoutes.ts` `src/server/routes/smartImportRoutes.ts` `tests/course-number-seven-digit-audit.ts`

### IR-VIW-025 «Schedule tools»: three groups

Inferred

The dialog and its button shall be named «schedule tools», and shall show its tabs in three folded groups (owner decision 2026-11-14): a segmented bar of three buttons with their titles and tool counts, and beneath it only the row of the chosen group, in this order: «planning» (section planning from the registrar report, all courses) first and most prominent, then «instructors» (instructors, visiting instructors, replace, trainee conversion), then «files» (import, export, publish); it shall open on section planning or on the requested tab; the group of the current tool opens automatically, and if another group is opened a dot stays on the current tool's group while the content does not change; for an ended term it shall keep only export and publish; and it shall hide all tabs while a publish receipt is shown until it is closed.

Implemented · Should · Interface · Schedule committee chair, Department head, System administrator

#### ACCEPTANCE CRITERIA

1. The group bar is three buttons (tablist) with one open row beneath it (tabpanel) and two rows kept in the page as hidden so the guide tour can find «publish» and press it programmatically, which opens its group; the tabs of the row share its width so no tab is left alone, and counters are hidden under 560 pixels.
2. An ended term shows the «files» group with only export and publish, and any other open tab returns to export.
3. «Trainee conversion» is a panel inside «instructors» (moved from «more») with its preview, safety snapshot and undo.
4. «Curriculum sheet» is a fourth link type in «publish» for the schedule committee chair and admins; it is not term-bound and stays in an ended term.
5. «Save current view» and «focus» live only in the saved-views menu (present even with no views), «safe trial» stays a visible switch with its «trial mode» badge, and the command palette is unchanged.

#### EVIDENCE

`src/components/ScheduleTransfer.tsx#Tab` `src/components/ScheduleTransfer.tsx` `src/components/TAConversionPanel.tsx` `src/components/ScheduleViewsMenu.tsx` `tests/schedule-tools-groups-audit.ts`

### FR-VIW-026 Visiting tab: term roster and department directory

The visiting tab shall let the user set the term's visiting instructors from the department's delegate directory, add a new delegate with a name, a valid civil ID and an optional mobile so they join both the directory and the open term (linked to the same person if the civil ID already exists in another department), edit the name (at least three characters), civil ID and mobile, remove a delegate from the department directory after confirmation without deleting them from the system or changing earlier terms, and copy another term's visiting instructors after choosing whom to copy, who then also join the directory, restoring the previous list when saving fails.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. Adding without a name or civil ID shows «اكتب اسم المنتدب ورقمه المدني.», and an invalid civil ID shows the validator's message with nothing sent.
2. Removal asks «حذف المنتدب من قائمة منتدبي هذا القسم؟ لن يُحذف من النظام، ولن تتغير سجلات الفصول السابقة.» before acting.
3. Copying selects all of the source term's visiting instructors by default and sends nothing when no one is selected.
4. The civil number is 12 digits (digits only, checked on leaving the field) and the mobile up to 15 digits; a delegate with no mobile carries «no mobile — will not receive their card»; the search matches the name ignoring diacritics and hamza forms, or the civil number; each delegate's button reads «teaches this term» or «add to this term».

#### EVIDENCE

`src/components/ScheduleTransfer.tsx#addNewDelegate` `src/components/ScheduleTransfer.tsx#copyRoster` `src/components/ScheduleTransfer.tsx#saveRoster` `src/server/routes/instructorsRoutes.ts` `tests/visiting-family-audit.ts` `tests/review-audit-2026-10-28.ts`

### FR-VIW-027 Delivery tools in the publish panel

The publish panel shall offer for every link copying its address (with a fallback when the clipboard is unavailable), a QR code of the same address from a generator loaded only on demand, and the calendar subscription link /api/public/ics/:id. For the department card it shall offer delivery that reads the family's member list (GET /api/share/:id/faculty) and mints their personal links (POST /api/share/:id/personal), then opens for each member with a valid mobile a WhatsApp conversation with a prewritten message carrying their personal link, so sending is done by the coordinator and the system sends nothing, records each opened conversation as a send with the member's schedule fingerprint (POST /api/share/:id/sent), and shows a list to notify those whose schedule changed with the message 'your schedule has changed', the members with no valid number (first six names), and the read-only send log.

● Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. An 8-digit mobile starting with 5, 6 or 9 is addressed with 965 prefixed, and an unusable number appears in the no-valid-mobile list with no button.
2. A failure generating the code shows «تعذّر توليد رمز QR.», and pressing the open code closes it.
3. POST /api/share/:id/sent on a link that is not personal returns 404, outside the family 403, and delivery for a stopped card returns 404.

#### EVIDENCE

`src/components/SchedulePublish.tsx` `src/components/PublishSendLog.tsx` `src/utils/reachInstructor.ts#whatsappNumber` `src/utils/reachInstructor.ts#reachAboutCard` `src/server/routes/shareRoutes.ts#/api/share/:id/faculty` `src/server/routes/shareRoutes.ts#/api/share/:id/personal` `src/server/routes/shareRoutes.ts#/api/share/:id/sent` `tests/doctor-journey-audit.ts` `tests/publish-pick-teachers-audit.ts`

### IR-VIW-028 The publish panel: three steps and the link list

The «publish the schedule» panel shall show three steps («link type», then «validity», then «links») navigable by pressing, shall list on the links step the live links first with their kind, state, expiry, open count and actions, the stopped and expired ones folded under «earlier (N)», and shall translate server errors into Arabic sentences by status code.

● Implemented · Should · Interface · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The opening button «publish the schedule» carries «N active» and is disabled without college, department and term; a department-schedule link takes 7, 30 (default), 90 or 180 days, a «show instructor names» option and a summary of kind, validity and instructors.
2. 429 or a «Rate exceeded» body says too many requests in a short time, 401 says the session ended, 403 says the action is outside your permissions, 404 says the item does not exist, and 500 or above says the service is temporarily down — each as an Arabic sentence.
3. A link's state is «active», «expired» or «revoked»; a faculty card says «last date to send wishes: …» (with «— wishes closed» after it) and «readable until the end of the term: …», others say «ends …» in Kuwait time; request links and personal links are not listed here.
4. A live link's actions: QR code, copy, for a faculty card «open edit requests or retry» (refused if it has no stored deadline) and «deliver the card to instructors», for a department schedule «add to calendar», then «stop the link»; stopping a department card re-reads the list from the server.
5. Creating a new card says the link was created and is ready to copy, and that it replaced the earlier card(s), showing the old cards as stopped without reloading; closing the panel or changing scope or kind clears earlier issue notices.

#### EVIDENCE

`src/components/SchedulePublish.tsx#readReply` `src/components/SchedulePublish.tsx#PUBLISH_STEPS` `src/components/SchedulePublish.tsx#DAY_CHOICES` `src/components/SchedulePublish.tsx#create` `src/components/SchedulePublish.tsx#revoke` `src/server/routes/shareRoutes.ts#/api/share` `tests/publish-requests-audit.ts`

### FR-VIW-029 Faculty-card options in the publish panel

The publish panel shall offer for the faculty card a send mode (edit, view only or training phase), an audience (everyone or chosen instructors) and a last date for edit requests as a date and hour in Kuwait time, shall check before sending for courses «not reached yet», and after publishing shall manage the edit window: reopening for everyone, an exception for one instructor with a reason, revoking the exception, and following personal links.

● Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. «edit» mode requires the date (hour 23:59 by default) or says to write the last date for edit requests; «view only» asks no date and sends a technical deadline of the next day at 23:59; a failure to open requests after creating the card says the card was created but edit requests were not opened, and keeps the card.
2. «chosen instructors» sends to those chosen only (creating a card if none exists) and mints each a personal link, showing «sent to ... only» with copy and WhatsApp; the button reads «choose instructors first» until someone is chosen.
3. The issue notice separates: requests opened for N (or the view schedule sent to N), deadline renewed for N, and N whose requests are with the department; an empty schedule or one with no assigned instructors says no requests were opened and why.
4. Courses carrying registrar notes are listed (up to 12) with «republish only what carries notes», sent to their owners only; before an «edit» or «training phase» send, locked courses («not reached yet») are checked and a sheet offers «send as is», «review the courses» or opening the course for offering, while a failed check sends as before.
5. «edit management» shows the general deadline and its state (open/closed); «open for everyone» reopens without replacing links; «exception for an instructor» needs the instructor, a reason (up to 400 characters), a date and an hour; «active exceptions (N)» list each with its deadline and reason and «cancel the exception», which keeps the card readable.
6. The «personal links» list says per instructor «sent .../not sent yet», «opened .../not opened yet» and «schedule changed after sending», or «stopped»/«expired», with stopping that link alone.

#### EVIDENCE

`src/components/SchedulePublish.tsx#issueRequests` `src/components/SchedulePublish.tsx#sendPicked`
`src/components/SchedulePublish.tsx#sendNoted` `src/components/SchedulePublish.tsx#guardSend`
`src/components/SchedulePublish.tsx#applyManagement` `src/components/SchedulePublish.tsx#revokeException`
`src/components/SendModePicker.tsx` `src/components/PublishRecipientPicker.tsx` `src/components/PrepublishReachSheet.tsx`
`src/utils/prepublishReach.ts#gatePublish` `tests/publish-pick-teachers-audit.ts` `tests/publish-requests-audit.ts`
`tests/publish-notes-r4-audit.ts` `tests/prepublish-reach-audit.tsx`

### FR-VIW-030 The «department fingerprint» card

Inferred

The «department fingerprint» card in «Analytics Center → understand» (which replaced the sheet that opened from the timetable layer) shall show how close the current term is to the department's fingerprint accumulated over previous terms, the day rhythm, peak window, pivotal rooms, the most constrained instructor, historical deviations and the list of previous terms, with the analysis scope switch, as a reading that changes nothing.

● Implemented · Could · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. With no fingerprint available it says the department fingerprint will start being built from this term and shows «—»; the day bars are scaled to the busiest day, not to 100%.
2. The most constrained instructor is ranked by number of enabled constraints, then by weekly meetings, and carries the «visiting» badge when applicable; the pivotal halls are the top three and the peak window the three most repeated cells.
3. It closes with Esc or «all cards» like any card, and the browser Back button returns to the card grid.

#### EVIDENCE

`src/components/ScheduleExperienceLayer.tsx#ScheduleExperienceLayer`
`src/components/ScheduleExperienceLayer.tsx#useScheduleExperience` `src/components/LivingScheduleLayer.tsx`
`src/components/IntelligenceScopeSwitch.tsx`

### 3.6.6 Algorithms

ALG-VIW-01 · Viewing, sharing, copying and transferring schedules

**Two-snapshot diff and instructor schedule fingerprint**

Deterministic

*What changed since the last review, and has this instructor's schedule changed since it was sent?*

1. Rows are matched by their stable id: absent before = added, absent after = removed, otherwise six fields are compared (time, days, hall, instructor, section, course).
2. The report is ordered removed first, then added, then changed, then by course and section.
3. Fingerprint: one line per row (id, course, section, days, time, hall and facility), sorted and hashed with 32-bit FNV-1a, prefixed with the row count.
4. The fingerprint is stored at send time and compared with the current one.

**Inputs**

Two saved schedule snapshots, or an instructor's rows.

**Output**

Added/removed/changed entries with counts, or a text fingerprint.

Deterministic and independent of row order; the fingerprint carries nothing readable from the schedule.

`src/utils/scheduleDiff.ts#diffSchedules` `src/utils/scheduleFingerprint.ts#instructorScheduleFingerprint` `src/server/routes/shareRoutes.ts` `tests/schedule-changes-audit.ts` `tests/doctor-journey-audit.ts`

`FR-VIW-019` `FR-APR-026` `FR-DRF-022`

### 3.6.7 Edge cases

**⚠ An faculty card after the requests deadline**

**Scenario** The department closed the request window on a date, and an instructor opens their card after that date.

**Behaviour** The card stays readable until the end of the term (schedule and calendar) and only the request door closes at the requests deadline; the card does not say «permanent subscription».

**⚠ A survey for an ended term**

**Scenario** The coordinator asks for a survey link for a term that ended or closed.

**Behaviour** The server refuses with 409 term-ended and says to choose the next term, because answers nobody can act on are of no use. Other link kinds are unaffected.

**⚠ A conflicting replacement instructor**

**Scenario** The coordinator picks a replacement for a retired instructor who has an appointment overlapping one of the moved appointments.

**Behaviour** The preview says «يوجد تعارض» and names the reason, execution yields 409 and no appointment changes; the «no instructor» option is not checked because there is no replacement.

**⚠ The previous-term ghost on «All»**

**Scenario** The reader chose «All», so no college or department is set, and presses the previous-term ghost.

**Behaviour** The whole previous term is read without scope restriction and the ghost appears; the press used to return silently with no effect or message, and was fixed so the only condition is the term.

> ⚠ **A saved view for a merged department**
>
> **Scenario** A view saved a year ago names a department that was merged or a term that was archived.
>
> **Behaviour** What can be opened is opened and the message «فُتح ما أمكن منه — القسم في هذا العرض لم تعد متاحة.» appears, instead of an empty board with no explanation.

### 3.6.8 Standing owner decisions

- A course number is always seven digits (college 2 + department 2 + course 3, such as 0109105); the stored code and AdCourseId are never displayed.
- Printed reports keep their design; fix values and data, not layout, and any unavoidable change reuses the existing print classes and is checked on A4 landscape.

↑ Contents

3.7 · APR

# Approval cycle

From committee signature to registrar acceptance: rounds, notes, deadlines, term freeze and verifiable stamps.

| 46 | 100% | 18 | 31 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.7.1 Overview

The module governs how each department's schedule for a given term moves through six statuses: in preparation, signed by the committee, signed by the department head, with the registrar, returned with notes, and accepted. The schedule committee chair signs, then the department head, and the schedule reaches the registrar as a new round; the registrar writes notes on cells and either returns or accepts, and no schedule with a material conflict can be accepted. After acceptance every edit opens an amendment round automatically. The module also covers the term submission deadline, department exceptions and extension requests, freezing of past terms, the registrar inbox, the department balance and the council bulletin for the dean, the approval dossier, and printed-report stamps with public verification pages.

Schedule committee chair · Department head · University registrar · College registrar · Registration officer · Dean of Admission and Registration · College dean · Vice dean for academic affairs · System administrator · Public visitor · Faculty member · The system (automatic)

## 3.7.2 User journeys

**Schedule committee chair** — **From signature to acceptance**

1. The committee chair opens the approval bar and signs once the schedule has no material conflict and every course has a registered capacity.
2. The department head signs next, and the schedule is sent to the registrar automatically as round 1.
3. A registration officer clicks the offending room or time to write a cell note, then returns the schedule.
4. The committee edits the flagged cell so the note becomes 'changed', or replies with a reason for keeping it.
5. The schedule is resent, opening a new round without a new signature; the registrar then accepts and any remaining notes are closed.

### University registrar — Setting the deadline and granting an extension

1. The university registrar sets the term's last submission date in the Submission deadlines panel.
2. A department nearing its deadline sends an extension request with a reason and a number of days from its approval bar.
3. The request reaches the inbox with a suggested date; the registrar grants it or rejects it with a reason the department can read.
4. The exception stays specific to that department and its new date is counted from the later of the term deadline and its exception.

### Department head — Amending an accepted schedule

1. The committee finds a room error after acceptance and edits the appointment directly.
2. The schedule returns automatically to 'with the registrar' in an amendment round whose baseline is the last accepted version.
3. Further edits accumulate in the same round as long as the registrar has not written a note in it.
4. If a section is added after the department head signed and nothing was ever accepted, sending waits for his one-click acknowledgement.

### Public visitor — Verifying a printed sheet

1. Someone holding a comprehensive or change report scans the QR code in its footer or types the eight-character code.
2. The page compares the sheet's rows with the live schedule field by field, without sign-in.
3. It states either 'the sheet matches the schedule now' or 'the schedule changed after this sheet was printed', listing the affected course lines.

### 3.7.3 Diagrams

**Approval states**

The six statuses of APPROVAL_STATUS_LABEL and the transitions the server enforces.

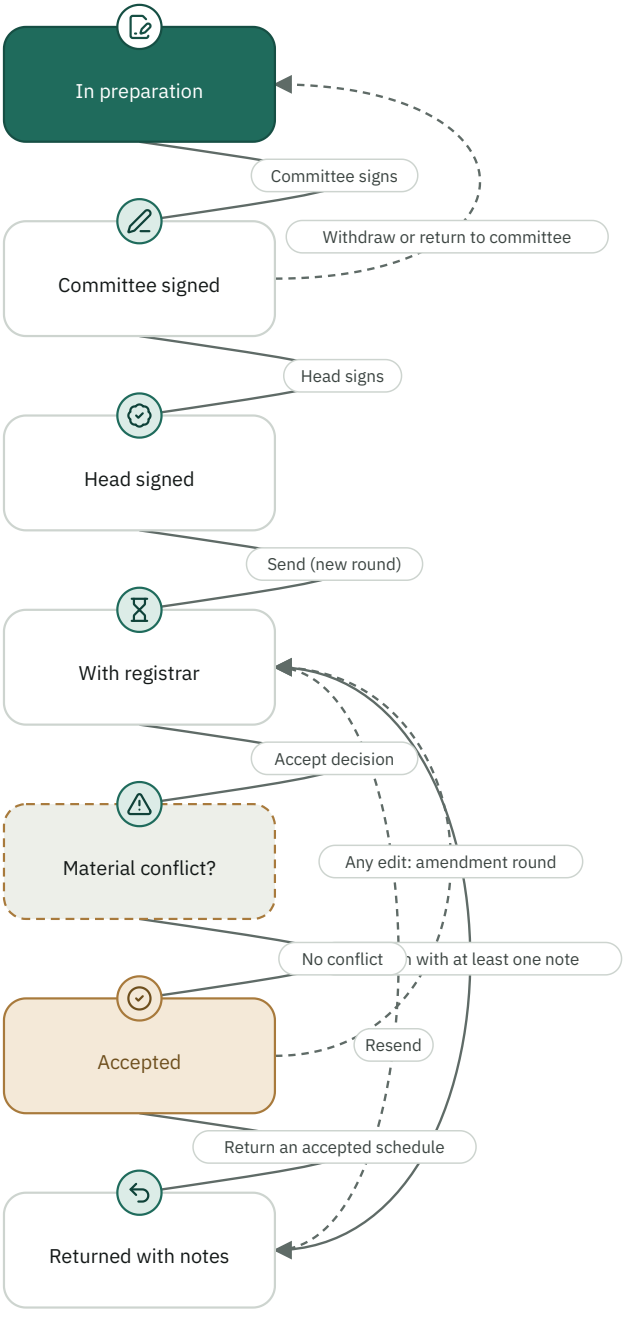

## Cell note lifecycle

A note's state is computed from the cell's current value, never stored.

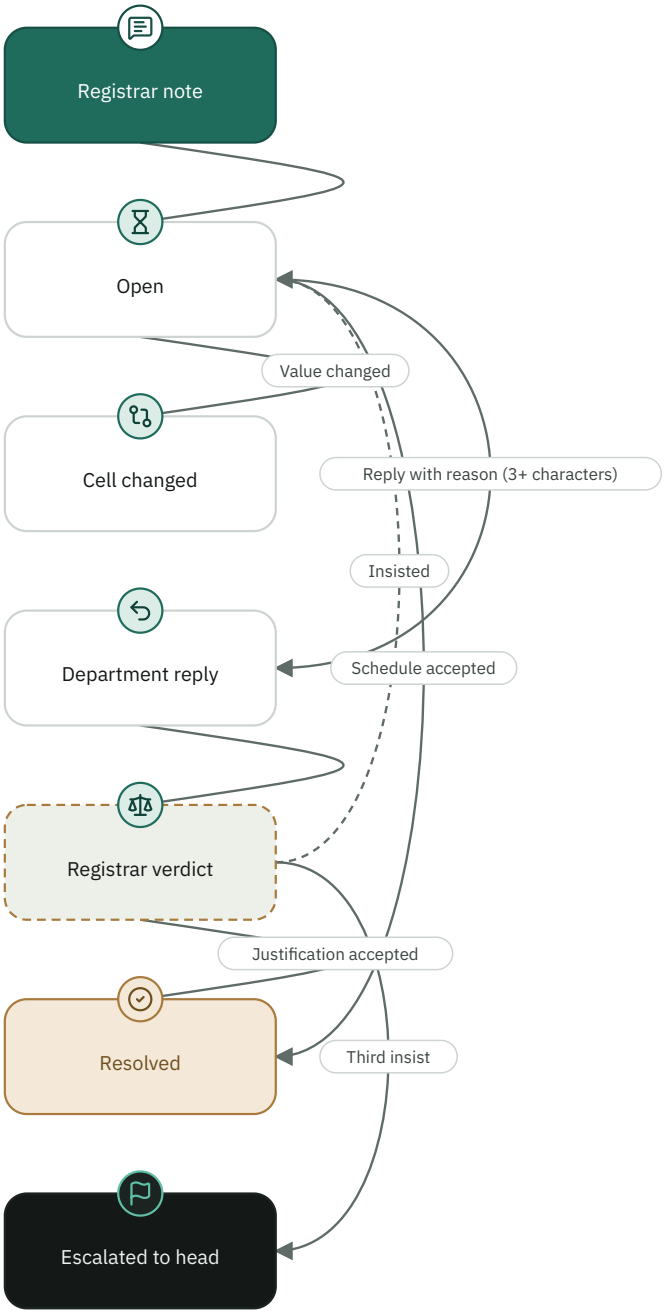

## Deadline calculation and effect

The date is a full day in Kuwait time, and an exception never shortens a deadline.

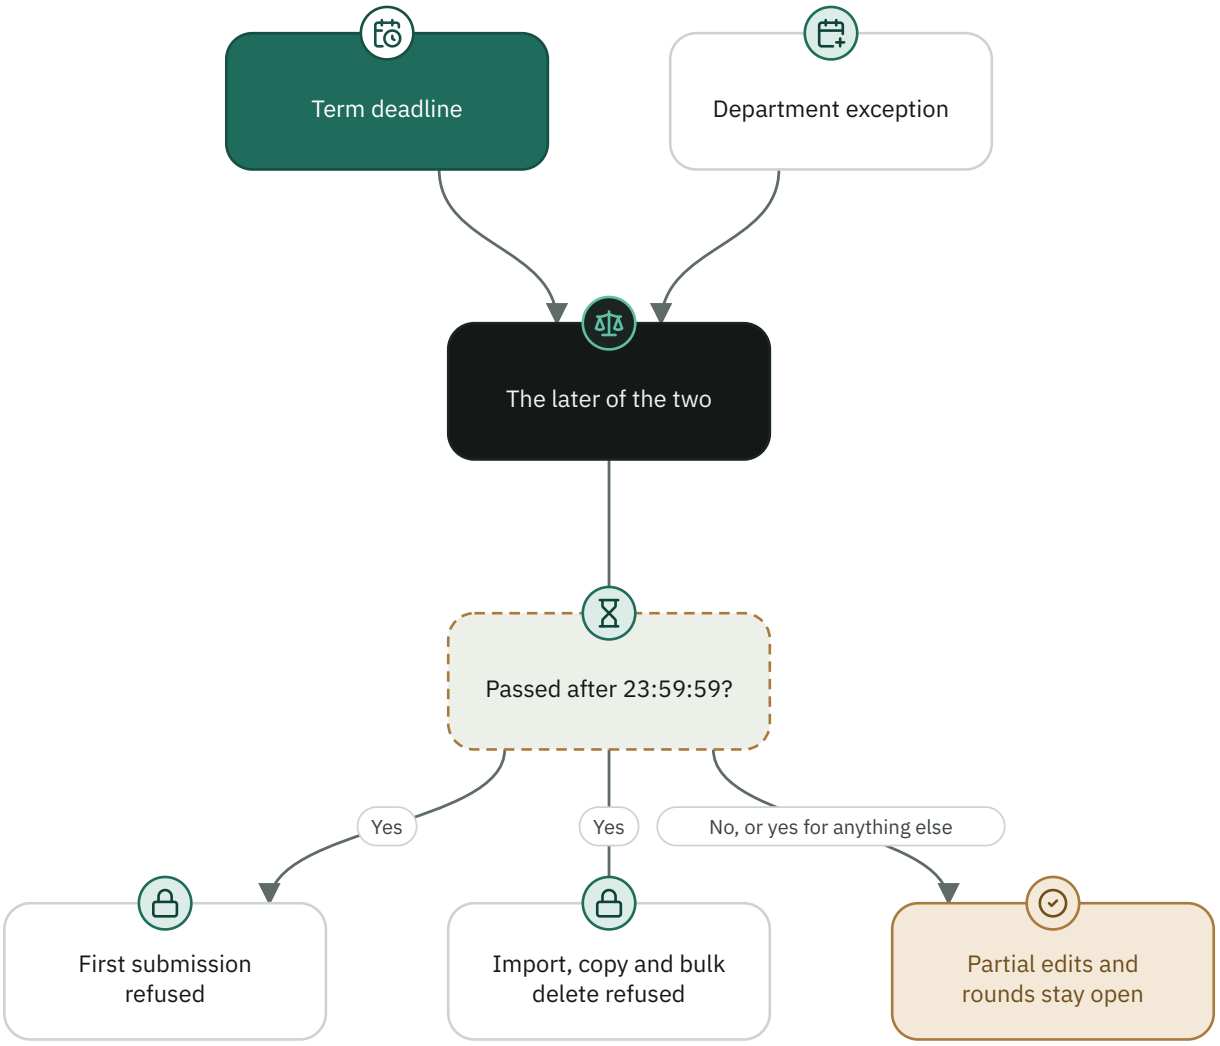

## Printed sheet stamp

The code is derived from the sheet's rows, registered after the print command, and compared with the live schedule when scanned.

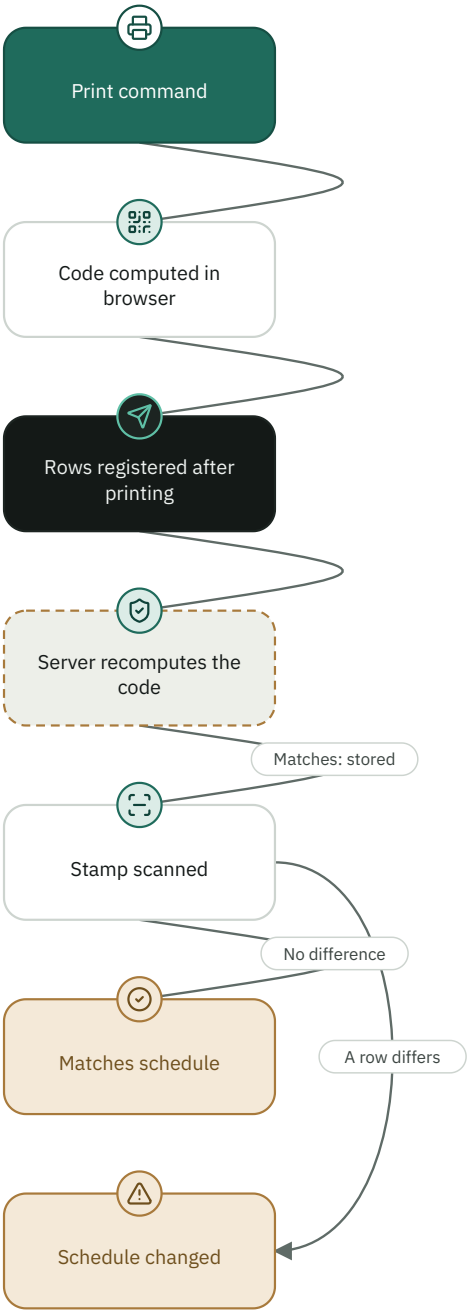

**Who can do what in the approval cycle**

| | Sign and send | Cell notes | Return and accept | Request extension | Grant extension | Set term deadline | Balance and inbox |
|---|---|---|---|---|---|---|---|
| Schedule committee chair | ✎ | ✎ | — | ✎ | — | — | — |
| Department head | ✎ | ✎ | — | ✎ | — | — | — |
| Registration officer | — | ✎ | ✎ | — | — | — | 👁 |
| College registrar | — | ✎ | ✎ | — | ✎ | — | 👁 |
| University registrar | — | ✎ | ✎ | — | ✎ | ✎ | 👁 |
| Dean of Admission and Registration | — | — | — | — | — | — | 👁 |
| College dean | — | — | — | — | — | — | 👁 |
| Vice dean for academic affairs | — | — | — | — | — | — | 👁 |

✎ Write 👁 Read — No access

### 3.7.4 Screens

**Approval bar**
Sits above the department schedule and shows only what the viewer must do now: sign, send, acknowledge added sections, return to the committee, request an extension.`src/components/ApprovalBar.tsx`

**Schedule changes (registrar inbox)**
The registrar's workplace: one row per department, cell notes, return and accept; the department sees the registrar's notes in place.`src/components/ScheduleChanges.tsx`

**Submission deadlines**
Panel for the term deadline, exceptions, department requests and the submission progress bar.`src/components/SubmissionDeadlines.tsx`

**Approval dossier**
A preview-and-print A4 sheet: what changed, blockers, signatures and department status.`src/components/ApprovalDossier.tsx`

**Approval review**
The last reading before approval: blockers, regulation findings and the approval score.`src/components/ScheduleReview.tsx`

**Past term, read-only ribbon**
Announces a frozen term and disables write buttons on the three screens that use it.`src/components/TermFrozenRibbon.tsx`

**Department balance and council bulletin**

A table with one row per department including approval status and deadline; printable as a council bulletin.`src/components/Reports.tsx`

### 3.7.5 Requirements

**DR-APR-001** **Approval record and its event log**

The system shall keep exactly one approval record per college, department and term combination, keyed 'college:section:term', in one of six statuses (in preparation, committee signed, head signed, with the registrar, returned with notes, accepted), and shall not write the record before the first action occurs. It shall also record every action (sign, withdraw, send, return, accept, extension, extension request, amendment round opened) in the approval document as an event carrying actor, role, round and time, keeping only the latest 200 events.

● Implemented · Must · Data · The system (automatic)

**RATIONALE**

> A department that has not started is shown with an empty record built at read time, so storage is not filled with 'not started' records.

**ACCEPTANCE CRITERIA**

1. Reading a scope with no record returns status 'in preparation', round 0 and no signatures.
2. The record key for scope (1, 5, 20) is '1:5:20', and exactly six named statuses exist.
3. Appending 250 events leaves only the 200 most recent.
4. Each event carries the actor's name, role and the round number.

**EVIDENCE**

`src/utils/approvalWorkflow.ts#emptyApproval` `src/server/core/approvals.ts#readApproval` `src/utils/approvalWorkflow.ts#appendApprovalEvent` `src/server/core/approvals.ts#withEvent` `tests/approval-workflow-audit.ts` `tests/relay-fixes-audit.ts`

**DR-APR-002** **Signature and captured version**

The system shall capture a version of the scope's schedule at each signature and store on the signature its stage, the signer's role label, the appointment count, the regulation-notice count, the version id and a six-character uppercase verification code derived from the version id, the signer and the signing instant.

● Implemented · Must · Data · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. The code matches [0-9A-Z]{6}, is stable for the same version, signer and instant, and differs when any of them changes.
2. A code computed from empty input is still 6 characters long.

**EVIDENCE**

`src/utils/approvalWorkflow.ts#verificationCode` `src/server/routes/approvalsRoutes.ts` `tests/approval-workflow-audit.ts`

### FR-APR-001 Signing order and who may sign

The system shall let the schedule committee chair sign first and the department head second, and shall refuse signing on an empty schedule, on a schedule with the registrar, or when the same stage is already signed, and shall refuse the head's signature before the committee's. It shall also restrict signing and withdrawing to accounts of the schedule committee chair (committee stage) and the department head (head stage) that are not seat team members, and shall refuse with code same-person-both-stages when the same person, identified by the instructor id on the seat, signs both stages of the same schedule.

● Implemented · Must · Functional · Schedule committee chair, Department head, System administrator

#### ACCEPTANCE CRITERIA

1. A head signature before the committee returns code wrong-order, and a repeated signature returns already-signed.
2. A schedule with no appointments returns empty, and one with status 'with the registrar' returns locked.
3. An administrator or registrar account attempting to sign receives 403.
4. A person occupying both seats who signs the second stage receives 409 naming the capacity of the first signature.

#### EVIDENCE

`src/utils/approvalWorkflow.ts#canSign` `src/server/routes/approvalsRoutes.ts` `src/utils/academicRoles.ts#signatureStage` `src/utils/seats.ts#actorMaySign` `src/server/routes/approvalsRoutes.ts#/api/approvals/sign` `tests/approval-workflow-audit.ts` `tests/role-scope-audit.ts`

### FR-APR-002 Material conflict blocks signing, sending and acceptance

The system shall refuse signing, sending and acceptance while the scope's schedule contains a material conflict, meaning an instructor or room double booking in overlapping appointments or an indistinguishable duplicate entry, evaluated against the whole term and counted once per pair, and shall not let the 'same section recorded twice' warning block them.

● Implemented · Must · Functional · Schedule committee chair, Department head, University registrar, College registrar, Registration officer

#### RATIONALE

> Owner rule 2026-09-27: only a material conflict prevents signing; and one blocker number is used on every screen.

#### ACCEPTANCE CRITERIA

1. Accepting a schedule with a material conflict returns 409 with code blocking-conflicts and tells the registrar to return it to the department.
2. A clash with another department's appointment counts in both departments and is described generically, without naming that department or instructor.

#### EVIDENCE

`src/utils/scheduleBlockers.ts#readScopeConflicts` `src/server/routes/approvalsRoutes.ts#blockingSummaryFor` `tests/blocker-oracle-audit.ts` `tests/one-blocker-number-audit.ts` `tests/approval-workflow-audit.ts`

### FR-APR-003 Other signing gates: capacity, academic rank, requirements, regulation

The system shall refuse signing if the schedule contains a course with no registered capacity (code missing-capacity), or an instructor with appointments in the schedule who has no academic rank in the teaching-load settings (code missing-ranks, owner decision 2026-11-14; visiting instructors, retired ones and the faculty placeholder are not counted, and nothing is counted when no ranks are defined), or a course lacking its suitable room type or teaching nature (code course-requirements-missing), and shall name the incomplete courses in the message. It shall also refuse signing and sending with code regulation-blockers whenever the regulation review reports a decision 1913/2016 finding whose approval effect is 'block' within the scope's rows (theoretical-course pattern art. 7/8, fixed section time art. 7/9, consecutive teaching limits), and shall not require this check when the registrar accepts.

● Implemented · Must · Functional · Schedule committee chair, Department head

#### RATIONALE

> This behaviour is narrower than the code comments' statement that the regulation is displayed and does not block; it is documented as implemented.

#### ACCEPTANCE CRITERIA

1. A course with no capacity blocks signing with a message to register the capacity first.
2. An instructor in the schedule with no academic rank blocks signing with a message to pick the rank from the instructors screen first (counted once however many appointments they have), and the «rank missing» badge opens the instructors screen and the rank-completion panel, with no «ready to sign» shown; capacity comes before it in the message and a material conflict before both.
3. Other data gaps are shown as notices and do not block signing.
4. A schedule containing a section whose meetings start at two different times is refused signing with a 'resolve before signing' message.
5. Regulation findings with effect 'note' or 'review' do not block.

#### EVIDENCE

`src/utils/approvalWorkflow.ts#canSign` `src/server/routes/approvalsRoutes.ts` `src/utils/scheduleDataReadiness.ts` `src/server/core/approvals.ts#regulationNoticesForScope` `src/utils/scheduleRegulations.ts` `tests/approval-workflow-audit.ts` `tests/decision-1913-audit.ts` `tests/rank-gap-sign-audit.ts`

### FR-APR-004 Head signature, sending and its conditions

The system shall send the schedule to the registrar automatically in the same save that records the department head's signature, and if a blocker prevents sending (passed deadline, pending note, conflict) the signature shall stay and the response shall carry submitted=false with the blocking reason. It shall also refuse sending unless both the committee and department head signatures exist, and while sections added after the head's signature await his acknowledgement, a material conflict exists or a registrar note is open, shall refuse the first submission after the deadline has passed (code deadline) while allowing later rounds, and shall refuse sending a schedule that is already sent or accepted and unchanged.

● Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A successful signature returns submitted=true and the round number, and the status becomes 'with the registrar'.
2. A signature with an open registrar note keeps the signature and returns submitBlocked with the reason.
3. A single signature returns not-signed, a repeated send returns already-submitted, and an unchanged accepted schedule returns already-accepted.
4. The first submission after the deadline is refused while a second-round submission after it passes.

#### EVIDENCE

`src/server/routes/approvalsRoutes.ts#submitToRegistrar` `src/utils/approvalWorkflow.ts#canSubmit` `src/server/routes/approvalsRoutes.ts#/api/approvals/submit` `tests/relay-fixes-audit.ts` `tests/approval-workflow-audit.ts`

### FR-APR-005 A new round for every send

The system shall open a sequentially numbered round at every send carrying the send time, the sender and the captured version id, shall write on the closing round the number of rows that actually moved since the registrar last saw it, and shall clear any pending extension request on sending.

Implemented · Must · Functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. The current round is the one numbered with the current number, and the comparison baseline is the last version the registrar saw.
2. The first review has no earlier baseline: the whole schedule counts as new.

#### EVIDENCE

`src/utils/approvalWorkflow.ts#openRound` `src/utils/approvalWorkflow.ts#roundBaselineVersionId` `src/server/routes/approvalsRoutes.ts#submitToRegistrar` `tests/approval-workflow-audit.ts` `tests/relay-fixes-audit.ts`

### FR-APR-006 Signature withdrawal and head return to committee

The system shall let only the signer withdraw a signature, shall drop the department head's signature and its pending additions when the committee's signature is withdrawn, shall refuse withdrawal from a schedule with the registrar (locked), accepted (accepted) or with no signature by the requester (not-signed), and shall keep a returned schedule 'returned' after a withdrawal. It shall also let the department head return a schedule the committee signed and he has not signed, with a written reason of at least three characters (up to 400), dropping signatures, returning status to 'in preparation' and storing the reason in headReturn, which is cleared when the committee signs again.

Implemented · Must · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The committee withdrawing its signature leaves the schedule with no signatures and status 'in preparation'.
2. The department head cannot withdraw the committee's signature.
3. A reason shorter than three characters returns 400, and a return after the head has signed returns 409 wrong-status.
4. The reason is shown in the committee's bar until it signs again.

#### EVIDENCE

`src/utils/approvalWorkflow.ts#canWithdraw` `src/utils/approvalWorkflow.ts#withRemainingSignatures` `src/utils/approvalWorkflow.ts#canHeadReturn` `src/server/routes/approvalsRoutes.ts` `src/server/routes/approvalsRoutes.ts#/api/approvals/withdraw` `src/server/routes/approvalsRoutes.ts#/api/approvals/head-return` `tests/relay-fixes-audit.ts`

### FR-APR-007 Sections added after the head's signature

Unless the registrar has already accepted once, the system shall record a section added (or whose course or section number was swapped) after the department head signed in a queue awaiting his acknowledgement, naming at most 60 and counting the overflow, and shall block sending until the head acknowledges with one click limited to the ids shown to him.

Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Importing 300 rows after signing names 60, counts 240 overflow and blocks the whole send.
2. Whatever was added between opening the screen and clicking approve stays awaiting acknowledgement.

#### EVIDENCE

`src/utils/approvalWorkflow.ts#mergePendingAdditions` `src/utils/approvalWorkflow.ts#acknowledgeAdditions` `src/server/core/approvals.ts#noteScheduleMutation` `src/server/routes/approvalsRoutes.ts` `src/server/routes/approvalsRoutes.ts#/api/approvals/acknowledge-additions` `tests/relay-fixes-audit.ts` `tests/approval-workflow-audit.ts`

### FR-APR-008 Cell notes and their computed state

The system shall let the registrar and the department write a note with one click on any of seven cells (time, days, room, instructor, section number, course, whole appointment) with optional text up to 600 characters, shall derive the origin from the author's role (registrar or department), shall tag the note with the current round and the cell value at writing time, and shall make a second click on the same cell replace the first note and clear its reply and verdict. It shall also derive a note's state from the cell's current value: 'resolved' if closed or its justification was accepted, 'answered' if a reply exists, 'changed' if the value differs from writing time, 'removed' if the row was deleted, otherwise 'open', and shall count as open only registrar notes whose state is 'open' in any round.

● Implemented · Must · Functional ·

Registration officer, College registrar, University registrar, Department head, Schedule committee chair, The system (automatic)

#### ACCEPTANCE CRITERIA

1. An empty text defaults to a 'review the time' style message naming the cell.
2. The department head and the committee chair write two independent notes on the same cell while the registrar speaks with one voice.
3. A note from an earlier round that the registrar insisted on is counted and the schedule is returned with it.
4. The department head's internal note does not inflate the registrar counter and does not block sending.

#### EVIDENCE

`src/server/routes/scheduleNotesRoutes.ts` `src/server/core/notes.ts#noteFieldValue` `src/server/core/notes.ts#noteState` `src/utils/approvalWorkflow.ts#countOpenRegistrarNotes` `src/server/routes/scheduleNotesRoutes.ts#/api/schedule-notes` `tests/schedule-changes-audit.ts` `tests/approval-integrity-audit.ts` `tests/relay-fixes-audit.ts`

### FR-APR-009 Department reply, registrar verdict and escalation

The system shall let the department reply to a registrar note with a reason of at least three characters (up to 600), shall let the registrar either accept the justification, ending the note, or insist, returning it to 'open' and moving the reply to the reply history, and shall record at the third insist the moment the dispute is escalated so the department head sees it in his bar.

● Implemented · Should · Functional · Schedule committee chair, Department head, Registration officer, College registrar, University registrar

#### ACCEPTANCE CRITERIA

1. A reply shorter than three characters returns 400.
2. The third insist sets escalatedAt once and is counted in escalatedNotes in the department bar.

#### EVIDENCE

`src/server/routes/scheduleNotesRoutes.ts` `src/utils/approvalWorkflow.ts#insistOutcome` `src/server/routes/scheduleNotesRoutes.ts#/api/schedule-notes/:id/rebut` `src/server/routes/scheduleNotesRoutes.ts#/api/schedule-notes/:id/verdict` `tests/relay-fixes-audit.ts` `tests/approval-integrity-audit.ts`

### FR-APR-010 Returning a schedule with notes

The system shall let a registration officer, college registrar or university registrar return a schedule that is 'with the registrar' or 'accepted' to the department provided at least one registrar note is open, shall record on the round the return time, the returner and the note count, shall keep both signatures in place, and shall open a new round for a returned accepted schedule based on what the registrar sees now.

● Implemented · Must · Functional · Registration officer, College registrar, University registrar

#### ACCEPTANCE CRITERIA

1. A return with no open note returns 409 with code no-notes, and an unsuitable status returns not-reviewable.
2. The dean of registration and the deans cannot return (403).

#### EVIDENCE

`src/utils/approvalWorkflow.ts#canReturn` `src/server/routes/approvalsRoutes.ts` `src/server/routes/approvalsRoutes.ts#/api/approvals/return` `tests/relay-fixes-audit.ts` `tests/term-freeze-readonly-audit.ts`

### FR-APR-011 Final acceptance by the registrar

The system shall let the registrar accept only a schedule whose status is 'with the registrar' and which has no material conflict, capturing an accepted version, writing acceptedAt, acceptedBy and acceptedVersionId on the current round, emptying the additions queue, and, after the save succeeds, closing remaining open and answered registrar notes as 'closed by acceptance' while keeping their text.

● Implemented · Must · Functional · Registration officer, College registrar, University registrar

**ACCEPTANCE CRITERIA**

1. Accepting a schedule that is not with the registrar returns 409, and an acceptance that loses a revision race closes no note.
2. The log's accept event states the number of notes closed 'closed by acceptance'.

**EVIDENCE**

`src/server/routes/approvalsRoutes.ts` `src/utils/approvalWorkflow.ts#CLOSED_BY_ACCEPTANCE_LABEL` `src/server/routes/approvalsRoutes.ts#/api/approvals/accept` `tests/relay-fixes-audit.ts` `tests/approval-workflow-audit.ts`

### FR-APR-012 Decision serialisation and binding to what was seen

The system shall accept from the client the round, appointment count and status as the decider saw them, shall refuse the decision with code stale-view and 409 if any changed, and shall not check what the client did not send. It shall also run every decision that writes the approval document on a scope lock queue 'approval:college:section:term' with a revision number, shall retry the decision once if another decision reached the document first, and if the conflict repeats shall answer 409 with code approval-revision, shall not repeat what must not repeat (version capture runs once across both attempts), and shall write no side effect before the save succeeds.

● Implemented · Must · Functional ·

Schedule committee chair, Department head, Registration officer, College registrar, University registrar, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A signature after the appointment count rose since the screen was opened is refused with the 'the schedule changed since you opened the screen — refresh' message.
2. A request without expected* fields passes unchecked for backward compatibility.
3. Two attempts by default, and both failing returns 'conflict', not 'done'.
4. Bulk exceptions write each department on its own queue without a single response for all.

**EVIDENCE**

`src/utils/approvalWorkflow.ts#staleViewRefusal` `src/server/routes/approvalsRoutes.ts#refuseIfStale` `src/server/approvalAttempts.ts#runApprovalAttempts` `src/server/routes/approvalsRoutes.ts#approvalTransaction` `tests/relay-fixes-audit.ts`

### FR-APR-013 Amendment round after acceptance

The system shall, on the first edit (add, edit or delete) to an accepted schedule, open an amendment round based on the last accepted version and return the status to 'with the registrar', shall keep editing open in that round unless the registrar writes a note in it, and shall mark the document amendmentPending and send the X-Approval-Amendment header when the record cannot be written, so the round opens on the next read or decision.

● Implemented · Must · Functional · Schedule committee chair, The system (automatic)

**RATIONALE**

> So a department does not have to ask for manual unlocking each time and end up fixing errors outside the system.

**ACCEPTANCE CRITERIA**

1. Two consecutive edits after acceptance fall in one round, then the schedule locks at the first registrar note.
2. An addition through any write door (entry, import, term copy, batch move, study proposal) passes through the same function.

**EVIDENCE**

`src/server/core/approvals.ts#noteScheduleMutation` `src/server/core/approvals.ts#amendmentAfterEdit` `src/utils/approvalWorkflow.ts#amendmentStillOpen` `tests/relay-fixes-audit.ts` `tests/approval-integrity-audit.ts`

### FR-APR-014 Schedule lock after sending

The system shall refuse, at every schedule write door (add, edit, delete, import, term copy, batch move, study proposal), edits to a schedule whose status is 'with the registrar' unless an amendment round is open, and shall exempt week exceptions, instructor-request decisions and issuing their links from the registrar lock, leaving only the ended-term rule on them.

Implemented · Must · Functional · Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. Trying to edit an appointment in a schedule with the registrar returns 409 with the 'the schedule is with the registrar and awaits his decision' message.
2. The same message appears on screen before the user acts, through lockReason.

**EVIDENCE**

`src/server/core/approvals.ts#scheduleLockRefusal` `src/utils/approvalWorkflow.ts#approvalLockReason` `tests/approval-workflow-audit.ts` `tests/term-freeze-audit.ts` `tests/approval-integrity-audit.ts`

### FR-APR-015 Ended term: the cycle is closed

The system shall, when a term carries an explicit 'ended' flag, refuse signing, withdrawing, sending, returning, accepting, notes and extensions with code term-closed and 409, shall allow its schedule to be edited only by an account whose written role is schedule committee chair, and shall record a committee edit of an accepted schedule as a closed-term-edit event without opening a round.

Implemented · Must · Functional · Schedule committee chair, System administrator

**RATIONALE**

> Only the explicit flag is read, not one derived from term order, so ten years of terms are not frozen at once.

**ACCEPTANCE CRITERIA**

1. An account without a written role (such as the root administrator) does not bypass the lock.
2. Clearing the 'ended' flag on the terms screen is the only visible way to reopen.

**EVIDENCE**

`src/server/core/approvals.ts#scheduleLockRefusal` `src/server/core/approvals.ts#refuseIfTermClosed` `src/utils/approvalWorkflow.ts#TERM_CLOSED_APPROVAL_MESSAGE` `tests/term-freeze-audit.ts`

### FR-APR-016 Past terms frozen read-only

The system shall treat a term as frozen if it was explicitly closed, or its window has passed and it is not the current term, or it is chronologically older than the current term, shall not freeze the next term or an unknown term, shall refuse with code term-frozen and the 'past term: view only' message every write door in registration status, instructor wishes, section requests, schedule changes and proposals, and the screen shall show the 'Past term · view only' ribbon and disable write buttons.

Implemented · Must · Functional · Registration officer, Schedule committee chair, Department head, Faculty member

**ACCEPTANCE CRITERIA**

1. With current term 12 and next term 13: term 11 is frozen, 12 and 13 are open, and id 0 or an unknown id is not frozen.
2. The server door and the client read the same termIsFrozen function.

**EVIDENCE**

`src/utils/termSequence.ts#termIsFrozen` `src/server/core/approvals.ts#refuseIfTermFrozen` `src/components/TermFrozenRibbon.tsx` `tests/term-freeze-readonly-audit.ts` `tests/term-freeze-audit.ts`

### FR-APR-017 Term deadline and its effect after it passes

The system shall let only the university registrar set the schedule submission date as YYYY-MM-DD or clear it with an empty value, shall refuse setting a date for an ended term, shall treat a deadline as passed after 23:59:59 of its day in Kuwait time (UTC+3), shall compute a department's effective deadline as the later of the term deadline and its exception, and shall call it 'near' when seven days or fewer remain. It shall also The system shall, after the department's effective deadline has passed, refuse importing a schedule from a file, copying a schedule from another term, and bulk deletion exceeding 30% of the scope's appointments, while keeping partial edits (adding a section, changing a room, instructor or time) and rounds after the first open.

● Implemented · Must · Functional · University registrar, System administrator, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A malformed date returns 400 and an ended term returns 409 term-closed.
2. A deadline 4 days ago has passed with daysLeft = -4; one in 4 days has tone = near.
3. Deleting 40 of 100 is wholesale, deleting 30 of 100 is exactly the limit and is not, and an empty schedule has no ratio.
4. The refusal names the passed date and says an extension from the university registrar is the remedy.

#### EVIDENCE

`src/server/routes/approvalsRoutes.ts` `src/utils/approvalWorkflow.ts#readDeadline` `src/utils/approvalWorkflow.ts#effectiveSubmissionDate` `src/utils/approvalWorkflow.ts#isWholesaleChange` `src/server/core/approvals.ts#wholesaleRefusal` `src/server/routes/scheduleImportRoutes.ts` `src/server/routes/schedulesRoutes.ts` `src/server/routes/approvalsRoutes.ts#/api/approvals/deadline` `tests/approval-workflow-audit.ts` `tests/deadlines-panel-audit.ts`

### FR-APR-018 Bulk exception grants

The system shall let the university registrar and the college registrar grant or lift a submission exception, or reject an extension request, for all departments, one college or named departments (up to 500) within their scope, using 1 to 60 days or an explicit date, with a reason of at least three characters (240 maximum), never before the term deadline and never in a term with no deadline or an ended term, shall count days from the later of the term deadline and the department's existing exception, and shall write each department on its own queue and revision and report to each what happened to it.

● Implemented · Must · Functional · University registrar, College registrar

#### ACCEPTANCE CRITERIA

1. A registration officer receives 403 on the route; a department outside the grantor's scope is reported as outside the allowed departments.
2. Lifting an exception returns the department to the term deadline, granting folds away the department's request, and rejecting a request needs a reason the department sees.

#### EVIDENCE

`src/server/routes/approvalsRoutes.ts` `src/utils/submissionDeadlines.ts#decideException` `src/utils/submissionDeadlines.ts#resolveExceptionTargets` `src/server/routes/approvalsRoutes.ts#/api/approvals/extensions` `tests/deadlines-panel-audit.ts`

### FR-APR-019 Extension request from a department

The system shall let the schedule committee or department head request an extension with a reason of at least three characters (240 maximum) and a number of days from 1 to 60 (default 7), shall accept it only for a schedule that has not reached the registrar and is not accepted (in preparation, signed or returned), with an existing effective deadline that is three days or fewer away or has passed, and with no earlier request pending, and the same rule shall govern the request button in the bar.

● Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A request for an accepted schedule or one with the registrar returns 409 with code extension-request-refused and its reason.
2. The request reaches the inbox with a suggested date equal to the later of the effective deadline and today plus the days.

**EVIDENCE**

`src/utils/approvalWorkflow.ts#extensionRequestRefusal` `src/server/routes/approvalsRoutes.ts` `src/server/routes/approvalsRoutes.ts#/api/approvals/extension-request` `tests/relay-fixes-audit.ts` `tests/deadlines-panel-audit.ts`

### FR-APR-020 Term student dates

The system shall let only the university registrar save the term's student-journey dates (wishes, registration rounds with a maximum of 8 rounds, and request closing) after validating them with the same rule the client shows, shall refuse inconsistent ordering or an ended term, and shall clear all dates when an empty value is sent.

● Implemented · Could · Functional · University registrar, System administrator

**ACCEPTANCE CRITERIA**

1. Wishes that start before the schedule submission deadline are refused with 400 and a message per issue.
2. An empty value clears the student dates and returns phases = null.

**EVIDENCE**

`src/server/routes/approvalsRoutes.ts` `src/utils/termStudentPhases.ts#checkStudentPhases` `src/components/StudentPhasesBlock.tsx` `src/server/routes/approvalsRoutes.ts#/api/approvals/student-phases` `tests/term-student-phases-audit.ts`

### FR-APR-021 Registrar inbox, lateness and counter

The system shall show, for each department in the reader's scope, one row with status, round, appointment count, conflicts, open and answered notes, pending sections, deadline, lateness and extension request, shall order rows by priority: new arrival (0), returned after a return (1), has blockers (2), returned (3), other (4), accepted (5), then by blocker count and name, and shall include departments that have not started. It shall also treat a department as late if its effective deadline has passed in Kuwait time and it never sent a round and is not with the registrar, returned or accepted, shall compute lateness at read time without storing it, and shall make /api/approvals/badge show the registrar the number of schedules 'with the registrar', the department head what awaits his signature, additions acknowledgement and open registrar notes, and the committee the open registrar notes, summed over the current term and the planning term.

● Implemented · Must · Functional ·

Registration officer, College registrar, University registrar, Dean of Admission and Registration, Department head, Schedule committee chair, The system (automatic)

**ACCEPTANCE CRITERIA**

1. New before returning, returned before accepted, and accepted at the bottom.
2. The whole term is read with three fixed reads (appointments, notes, options) however many departments exist.
3. A sent, returned or accepted department is not late even if the deadline passed.
4. Notes of a schedule with the registrar are not counted in the department's counter because it cannot act on them.

**EVIDENCE**

`src/server/routes/approvalsRoutes.ts` `src/utils/approvalWorkflow.ts#inboxPriority` `src/utils/lateness.ts#isLate` `src/server/routes/approvalsRoutes.ts#approvalBadgeForTerm` `src/server/routes/approvalsRoutes.ts#/api/approvals/inbox` `tests/approval-workflow-audit.ts` `tests/approval-integrity-audit.ts` `tests/deadlines-panel-audit.ts` `tests/dean-notify-audit.ts`

### FR-APR-022 Term-wide status and department balance

The system shall return from /api/approvals/term each department's status in the term within the reader's scope together with departments that have not started, shall distinguish a department with appointments but no record ('in preparation') from one with no appointments ('not started'), and the department balance shall show one row per department with an approval column ordered by priority: late, not started, in preparation, committee signed, head signed, returned, with the registrar, accepted.

Implemented · Should · Functional · College dean, Vice dean for academic affairs, Dean of Admission and Registration, University registrar

**ACCEPTANCE CRITERIA**

1. A department that wrote six appointments and did not sign appears as 'in preparation', not 'not started'.
2. A department in the reader's scope with no data appears with explicit zeros rather than a silent absence.

**EVIDENCE**

`src/server/routes/approvalsRoutes.ts` `src/server/routes/reportsRoutes.ts` `src/components/Reports.tsx#BalancePanel` `src/utils/submissionDeadlines.ts#progressSegment` `tests/deadlines-panel-audit.ts` `tests/role-scope-audit.ts`

### FR-APR-023 Dean sees the final schedule only; council bulletin

The system shall read for the dean and vice dean each department as the registrar last accepted it (live if accepted, from the last accepted version if it returned to the registrar, and never shown if never accepted except in an ended term), and shall allow printing the 'Council bulletin — department balance' at any time even before the first acceptance, in pages of 14 departments, with approval and deadline columns, in the approved printed-report design.

Implemented · Should · Functional · College dean, Vice dean for academic affairs

**ACCEPTANCE CRITERIA**

1. Draft appointments and the 'heaviest instructor' of a department not yet accepted are excluded from the dean's balance.
2. Main administration reads drafts as they are, the dean sees his college and the dean of registration sees all.

**EVIDENCE**

`src/server/core/scheduleReads.ts#readsFinalSchedulesOnly` `src/utils/finality.ts#finalSourceFor` `src/server/routes/reportsRoutes.ts` `src/components/Reports.tsx` `tests/dean-notify-audit.ts` `tests/role-scope-audit.ts` `tests/report-approval-audit.ts`

### FR-APR-024 Review readiness and detailed blockers

The system shall return from /api/schedules/review-readiness the blockers with the department's appointment details and the warnings (the same section recorded twice in two halls or with two instructors) separate from the count, the two numbers for blockers and the appointments they touch, shall gather in family=1 mode the rows of the department family allowed to the reader, shall describe a clash with another department generically without names, and shall add blockers from approved hall barter windows.

Implemented · Must · Functional · Schedule committee chair, Department head, Registration officer

**ACCEPTANCE CRITERIA**

1. The blockers list length equals blockingConflicts, and blockingRows is the number of distinct appointments in its pairs.
2. A counterpart appointment outside the reader's scope is described as an appointment outside the current view.

**EVIDENCE**

`src/server/routes/scheduleReviewRoutes.ts` `src/utils/scheduleBlockers.ts#approvalBlockers` `src/utils/scheduleBlockers.ts#approvalWarnings` `tests/one-blocker-number-audit.ts` `tests/blockers-stream-audit.ts`

### FR-APR-025 Approval score as an explicit formula

The system shall compute the approval score = sound appointments ÷ all scope appointments × 100 rounded to a whole number, shall count each appointment once at the first category touching it in severity order (blockers, then regulation), shall show per category the projected score if it alone is fixed, and shall display the formula as a sentence the reader can check by hand.

● Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. The ring's slices plus the sound appointments equal all appointments, and a scope with no appointments shows 'no appointments in scope' and a score of 100.
2. 'If you fix this → N' counts the appointments touched only by that category.

**EVIDENCE**

`src/utils/approvalScore.ts#approvalScoreBreakdown` `src/components/ScheduleReview.tsx` `tests/approval-review-audit.ts`

### FR-APR-026 Approval dossier

The system shall build an approval dossier from the approval record, the change report and the review readiness, showing counts of added, modified and removed appointments as percentages summing to 100, the changed courses (up to 12 lines then 'and N more'), blockers (up to 4), and the timeline of rounds and signatures with their codes, shall drop anything received for another scope, shall not present an unavailable value (it says 'not available'), and shall print on A4 as previewed.

● Implemented · Should · Functional · Registration officer, College registrar, University registrar, Department head

**ACCEPTANCE CRITERIA**

1. A sibling department's approval record is not shown even if it arrives under this scope's key (scopeMismatch).
2. No reasons for changes are shown: the record carries what changed, not why.

**EVIDENCE**

`src/utils/approvalDossier.ts#buildApprovalDossier` `src/components/ApprovalDossier.tsx` `src/utils/approvalScope.ts` `tests/approval-dossier-audit.ts` `tests/approval-scope-audit.ts`

### FR-APR-027 Printed sheet stamp and its verification page

The system shall draw in the footer of the comprehensive department report (both kinds) and the change report a QR code and an eight-character code (Crockford alphabet) derived from the sheet kind, term, sites and its rows' fingerprints (up to 3000 rows and 12 sites), shall register it after the print command rather than before, and the server shall recompute the code from the sent rows and refuse with 409 any that does not match, count a new print for an existing stamp, and flag rows that differ from the system (a stale screen). It shall also provide a public page with no sign-in and no script at /v/:code that accepts the code in lower case or with a dash (and O for 0, I or L for 1) and redirects it to its single canonical link, compares the sheet's rows with the live schedule row by row and states 'matches the schedule now' or 'the schedule changed after this sheet was printed' with the changed, removed and added rows (up to 60 lines per list), and the approval status for a single-department sheet, without any name or civil id.

● Implemented · Should · Functional · Registration officer, Department head, Schedule committee chair, The system (automatic), Public visitor

**ACCEPTANCE CRITERIA**

1. The same rows give the same code and any edit before printing gives a different code.
2. A registration that failed on a network drop is queued and retried when the query screens open (up to 12 queued).
3. An unknown code returns 404 with state 'unknown', a malformed one 404 with state 'invalid', and a read failure 503.
4. The page is limited to 40 requests per minute per address and is not indexed (noindex).
5. Course numbers shown are seven digits.

**EVIDENCE**

`src/utils/reportStamp.ts#reportStampCode` `src/utils/reportStampClient.ts` `src/components/PrintStamp.tsx` `src/server/routes/reportsRoutes.ts` `src/server/reportStampPage.ts#reportStampPage` `src/utils/reportStamp.ts#compareReportStamp` `tests/report-stamp-audit.ts`

### FR-APR-028 Instructor request signature check by civil id

The system shall provide at /verify and /verify/:code a public page where an instructor enters his civil id (12 valid digits) and optionally the signature code (6 characters) and sees his signatures (up to 20 requests) and what was signed at the time, without storing the number, answering identically for a number with no signature and a code that does not match, and limiting requests to 30 per minute plus a per-address attempt quota.

Implemented · Should · Functional · Faculty member, Public visitor

**RATIONALE**

> This check is specific to instructor request signatures; the codes of the committee and head signatures appear in the approval dossier and have no public page.

**ACCEPTANCE CRITERIA**

1. A malformed civil id returns 400 and is not counted as an attempt, and a number with no signature returns 404 with one message.
2. A code that was typed and did not match does not close the door: the signatures are shown and the mismatch is stated.

**EVIDENCE**

`src/server/routes/verifyRoutes.ts` `src/server/signatureVerifyPage.ts#signatureVerifyPage` `src/server/routes/verifyRoutes.ts#/api/public/verify` `tests/request-signature-audit.ts`

### NFR-APR-001 Scope on every route and inbox performance

The system shall verify on every approval route that the requested college and department are within the user's scope (403 'outside the departments allowed to you'), shall apply the same scope to inbox rows, the counter and the balance, and shall require college, department and term together (400 with one Arabic sentence). It shall also build the term inbox with a fixed number of reads (term appointments, term notes, blocker options) distributed to departments in memory, shall not read the term schedule once per department, and shall measure a note's state against the department's own rows rather than the term's rows.

Implemented · Must · Non-functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A request for a department outside the user's scope returns 403 and nothing is read from it.
2. A request without a term or department returns 400 asking to choose the term, college and department first.
3. The inbox route contains no per-department read loop.
4. A row that moved between departments does not make its note appear 'open' in the new department.

**EVIDENCE**

`src/server/routes/approvalsRoutes.ts#approvalScopeFromBody` `src/server/routes/scheduleReviewRoutes.ts` `src/server/routes/approvalsRoutes.ts` `src/server/core/approvals.ts#countBlockingConflicts` `tests/role-scope-audit.ts` `tests/approval-scope-audit.ts` `tests/approval-integrity-audit.ts`

### NFR-APR-002 Kuwait-time dates with a single rule

The system shall read 'today' in every deadline, extension and lateness calculation in Kuwait time (UTC+3) rather than universal time, shall have the client and server use the same functions (readDeadline, kuwaitDateISO, isLate), and shall count days by calendar rather than hours.

Implemented · Must · Non-functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. Between midnight and 03:00 Kuwait time a deadline's day counts as passed, not still running.
2. The difference between 2024-02-28 and 2024-03-01 is two days (leap year).

**EVIDENCE**

`src/utils/approvalWorkflow.ts#kuwaitDateISO` `src/utils/approvalWorkflow.ts#deadlineEndsAt` `src/utils/lateness.ts` `tests/approval-workflow-audit.ts` `tests/relay-fixes-audit.ts`

### NFR-APR-003 Privacy and attempt limits on public pages

The public verification pages shall not store a civil id nor show a name or civil id on the stamp page, shall send Cache-Control: no-store and a noindex marker, shall limit requests (stamp page 40 per minute, signature check 30 per minute, stamp registration 60 per minute), and shall not distinguish in the answer between a number with no signature and a number that belongs to no one.

Implemented · Must · Non-functional · Public visitor, The system (automatic)

**ACCEPTANCE CRITERIA**

1. The civil id is sent once for matching, cleared from the field and not kept in the browser.
2. Both pages send no-store and contain robots noindex.

**EVIDENCE**

`src/server/routes/verifyRoutes.ts` `src/server/reportStampPage.ts` `src/server/signatureVerifyPage.ts` `tests/request-signature-audit.ts` `tests/report-stamp-audit.ts`

### IR-APR-001 Approval bar shows only what awaits the viewer

The approval bar shall order what it shows in the order of action: returned with notes, then sections awaiting the head's acknowledgement, then signing, then sending, then 'with the registrar' as quiet news, shall show nothing to someone with nothing waiting, and shall phrase the conflict sentence in correct Arabic number forms (one, dual, few, many) together with the number of appointments it touches.

Implemented · Should · Interface · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A department at the start of preparation with nothing waiting sees no bar.
2. The phrase for 1, 2, 5 and 11 follows the counted noun: singular, dual, plural for few, accusative for many.

**EVIDENCE**

`src/components/ApprovalBar.tsx` `src/utils/approvalBarPresence.ts` `src/utils/approvalWorkflow.ts#blockingConflictPhrase` `tests/approval-bar-visual-audit.ts` `tests/approval-workflow-audit.ts`

### IR-APR-002 Submission deadlines panel

The interface shall show in the header of 'Schedule changes' one panel that is the only place the term deadline and its exceptions are written: the date with the days left, three ready dates (in one, two and three weeks) for a term with no deadline, day chips of 1, 2, 3, 5 and 7, a preview 'N departments will become: ...' before applying, the term submission progress bar, and department requests with grant and reject buttons, collapsing to a strip once the deadline is set and nothing waits.

Implemented · Should · Interface · University registrar, College registrar, Registration officer

**ACCEPTANCE CRITERIA**

1. The university registrar sees the deadline field and extension actions, the college registrar sees the deadline read-only plus extension actions, and a registration officer sees the panel read-only.
2. 'Late' in the panel is the single isLate rule, not a second calculation.

**EVIDENCE**

`src/components/SubmissionDeadlines.tsx` `src/utils/inboxAudience.ts` `src/utils/submissionDeadlines.ts` `tests/deadlines-panel-audit.ts`

### FR-APR-029 Granting or lifting one department's submission exception

The system shall let the head of registration and the college registrar (or a power user) grant a single department an exception to the submission deadline with a date YYYY-MM-DD and a reason of up to 240 characters, or lift it by sending an empty date so the department returns to the term deadline, shall refuse a date earlier than the term deadline or an ended term, and shall write it on the same approval queue with an extension event and an audit line naming the department, the date and the reason.

● Implemented · Should · Functional · University registrar, College registrar

**ACCEPTANCE CRITERIA**

1. An account that is neither head of registration nor college registrar receives 403, and a malformed date receives 400 with the date-format message.
2. A date before the term deadline is refused with 400 and code extension-before-deadline, and an ended term with 409 term-closed.
3. Sending an empty until lifts the exception and records an event 'extension cancelled'.

**EVIDENCE**

`src/server/routes/approvalsRoutes.ts#/api/approvals/extension` `src/utils/approvalWorkflow.ts#extensionRefusal` `src/utils/academicRoles.ts#canExtendDeadline` `tests/relay-fixes-audit.ts`

### FR-APR-030 Reading notes with their state and deleting a note

The system shall return the department's notes for the term with their computed state and the counts of open, changed and answered notes to anyone with the scope, shall restrict writing a note to the registrar and department roles allowed by the same function the screen uses, replying to registrar notes and to the department's signing roles, and the verdict on a reply to the registrar, and shall allow deleting a note only to its author (or a power user) as an undo of a click, with an audit line for every write, reply, verdict and deletion.

● Implemented · Should · Functional · Registration officer, College registrar, University registrar, Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. Deleting a note by someone other than its author is refused with 403 'the note is deleted by its author', and a missing note with 404.
2. An unknown cell is refused with 400, a reply on a department note with 409, and a verdict with no prior reply with 409.
3. GET without college, section or term is refused with 400, and the reply carries notes, open, changed and answered.

**EVIDENCE**

`src/server/routes/scheduleNotesRoutes.ts#/api/schedule-notes` `src/server/routes/scheduleNotesRoutes.ts#/api/schedule-notes/:id` `src/server/core/notes.ts` `tests/schedule-changes-audit.ts` `tests/relay-fixes-audit.ts`

### IR-APR-031 Single department approval read

Inferred

From GET /api/approvals for a department and term in the reader's scope the system shall return the approval record (after opening a pending amendment round if any), the effective deadline, the number of material conflicts with the appointments they touch and how many are duplicates, the number of courses with no registered capacity, the regulation-notice count, open registrar notes and escalated disputes, the appointment count, the edit-lock reason for this reader, data readiness, whether an extension request is allowed, the status label and the last version the registrar reviewed, and shall withhold room fit from readiness for anyone without permission 7.

● Implemented · Must · Interface ·

Schedule committee chair, Department head, Registration officer, College registrar, University registrar, College dean

**ACCEPTANCE CRITERIA**

1. A reader without permission 7 receives dataReadiness without roomFit, and a reader outside the scope receives 403.
2. canRequestExtension equals the verdict of the extension-request rule itself, and a rowCount of zero shows no sign button.

**EVIDENCE**

`src/server/routes/approvalsRoutes.ts#/api/approvals` `src/components/ApprovalBar.tsx` `tests/data-gaps-nonblocking-audit.ts` `tests/approval-workflow-audit.ts`

### IR-APR-032 Review routes shared with the schedule editor

From the review routes file, with permission 7 and within the user's scope, the system shall provide three routes read by approval and the editor alike under the Schedule module's rules: POST /api/schedules/check-conflicts checking one appointment with the save gate's own steps in parallel, GET /api/schedules/outside-clashes for in-scope appointments clashing with something off screen, with a sentence naming the department, day and hour but never the other course, its section or its lecturer, and POST /api/schedules/move-batch moving one to sixty appointments together or none, after which an accepted schedule counts as edited and opens a new round.

● Implemented · Must · Interface · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. move-batch with no appointments or more than sixty is refused with 400, and one of them changing meanwhile is refused with 409 conflict revision with nothing moved.
2. outside-clashes without college or term is refused with 400, and does not count a clash between two rows of the same scope.

#### EVIDENCE

`src/server/routes/scheduleReviewRoutes.ts#/api/schedules/check-conflicts`
`src/server/routes/scheduleReviewRoutes.ts#/api/schedules/outside-clashes`
`src/server/routes/scheduleReviewRoutes.ts#/api/schedules/move-batch` `tests/blockers-stream-audit.ts`
`tests/approval-integrity-audit.ts` `tests/term-freeze-audit.ts`

### IR-APR-033 The «schedule changes» inbox: question, filters and rows

The «schedule changes» screen shall show a reviewer an inbox with one department per row, with an Arabic question bar («late and blocked» or a department name) read on submit rather than per keystroke, college, department and term pickers built from the inbox itself and following the shared scope, and status and signal filters under «more»; for a department (single scope, not a reviewer) it shall open its own report directly with no inbox.

● Implemented · Should · Interface · Registration officer, College registrar, University registrar, Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Status chips: «all», «awaiting review», «with the department» and «accepted» with counts; signal chips: «late», «blocked», «open notes», «replies awaiting your decision» (registrar only) and «sections awaiting the head»; any chip with a zero count is hidden unless selected.
2. A question not understood says so and suggests «late and blocked» or a department name; the question adds to filters chosen by hand and does not erase them; «clear filters» resets everything.
3. Each row carries the material-conflict count, open notes, replies awaiting a decision (registrar), pending sections, the cycle stepper, the deadline ring unless sent or accepted, the status chip or «late», «round N» when above 1, and an extension request with its days, reason and requester.
4. The row's «extend», «exception» or «review request» button opens the exception sheet in the deadlines panel prefilled with what was asked, and is not drawn when the panel is not; a department across several sites is named once at the top and its rows are named by site.
5. An empty inbox says «no inbox» with no schedule needing your review this term (or no schedule for your department this term yet), filters with no result say «no results»; a notification opening the screen moves to its term, then to the department or to the deadlines panel.

#### EVIDENCE

`src/components/ScheduleChanges.tsx#Inbox_` `src/components/ScheduleChanges.tsx#ScheduleChanges`
`src/utils/inboxAsk.ts#parseInboxAsk` `src/utils/inboxAudience.ts#inboxAudience` `src/components/ScopeAskBar.tsx`
`src/utils/notifyFocus.ts#takeNotifyFocus` `tests/schedule-changes-audit.ts` `tests/shared-scope-audit.ts`

### IR-APR-034 The department report in «schedule changes»: what moved, the full schedule and the decision

The department report shall show «what moved» since the last review (added, changed, removed) or «the full schedule» in the same row shape as the schedule workshop, marking a change inside its own cell (the old value struck through and the new after it), shall say where the comparison starts, shall allow a note on a cell, a reply to it and a verdict on it, and shall place the decision buttons at the bottom of the report for the current round only.

● Implemented · Must · Interface · Registration officer, College registrar, University registrar, Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Ordering is by first day, then start, then (added, changed, removed), then course and section; the baseline line says: the authority's version, «first review … every appointment shows as added», «nothing moved since registration last reviewed», the round's version, or the last snapshot; when the authority version is available the baseline can be chosen between «since the last review» and the authority version.
2. The reference number (CRN) from the original registration file shows first in every row of the screen, before the course code, in a chip distinct from the course-number chip (and beside the section in the review list), and is absent for what was added and was not in the file; a section deleted then recreated, or one whose number alone changed, shows as one changed row and not as «deleted» plus «added».
3. «earlier rounds (N)» is a timeline per round: sent (or amendment round opened), returned with N notes «and N rows moved» or «and no row moved», accepted; «show its changes» shows the round as it ended with «back to the current round», and decision buttons are not shown on a past round.
4. «note on a cell» for annotators (registration and department) opens a sheet choosing one of seven cells and prefilling the text with the writer's own note or the server's suggestion for that cell; text is optional and «record the note» saves; a department note belongs to its writer and is not opened for a colleague.
5. On an open registrar note the committee and head see «keep it as is» with a reason of at least 3 characters (not deans or readers); on a pending reply registration sees «accepted» and «I still ask for the change»; the note's state is shown (handled — the cell changed, resolved), the escalation line after the third insistence, and earlier replies folded.
6. The registrar decision bar says «N from registration will go with the return», «handled» and «awaiting your decision»; «return to the department» (or «reopen and return» for an accepted one) is disabled with no open note, and «final acceptance» shows for a submitted schedule only and is disabled with a material conflict; every decision carries the round, status and appointment count that were seen.
7. A report whose read failed is not left on screen, and changing department empties the previous one at once; in a frozen term every write action is disabled; «approval dossier» opens the dossier print preview.

#### EVIDENCE

`src/components/ScheduleChanges.tsx#Report` `src/components/ScheduleChanges.tsx#ScheduleRowCard` `src/components/ScheduleChanges.tsx#ChangesReviewOverview` `src/server/routes/reportsRoutes.ts#/api/reports/schedule-changes` `src/utils/approvalScope.ts#createScopeGuard` `tests/schedule-changes-audit.ts` `tests/changes-baseline-audit.ts` `tests/authority-recreated-section-audit.ts`

### IR-APR-035 Approval bar: stepper, ring, badges and actions

The approval bar shall be a single line folded by default (its opening remembered in the browser under schedule-approval-bar-open) carrying the status icon and headline, the stepper «schedule committee → department head → registration → accepted» with signature stamps, the submission-deadline ring, badges with counts, the first action as one button and secondary actions as icons with tooltips, and shall tell the schedule workshop the edit-lock reason whenever it changes.

● Implemented · Should · Interface · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A stamp's tooltip gives role, name, date and «verification code»; the registration node carries «rN» for the round; the ring is «past» after the deadline and «near» with 7 days or fewer left, with a badge for a pending extension request, its rejection or an existing exception.
2. The first action by state: «agree» to acknowledge added sections (sending only the ids shown), or «sign» for the committee and «approve and send» for the head (disabled with a material conflict, missing capacity or missing hall type/teaching mode), or «send»/«send again» when both signatures exist and nothing blocks; in place of a blocked button stands a «blocker» badge with its reason.
3. Secondary actions: «open the notes» (to the changes screen), «return to the committee» for the head and the extension request (two sheets with a reason of at least 3 characters, the extension with 1–60 days, 7 by default), «withdraw my signature» (not after sending or acceptance), and «history» as a timeline with an icon per event.
4. An approval saved but blocked from sending says your approval was saved but not sent yet, with the reason; an acknowledgement after which more sections arrived says what was shown was acknowledged and N more sections await your review.
5. The «insisted three times by registration» badge shows to the head only; the opened details quote the head's return reason and list added sections with «and N more»; the first opening animation plays once per scope per session unless reduced motion is preferred.

#### EVIDENCE

`src/components/ApprovalBar.tsx` `src/components/ApprovalBar.tsx#Stepper` `src/components/ApprovalBar.tsx#InfoTip` `src/utils/approvalBarPresence.ts#approvalBarPresence` `src/utils/submissionDeadlines.ts#departmentDeadlineLine` `tests/approval-bar-visual-audit.ts`

### FR-APR-036 Completing missing data from the approval bar

The «missing data» button in the approval bar shall open a list of every item with its fix in place: missing course fields (credits, hours, capacity, suitable hall type, teaching mode) are typed and saved on the course, an appointment without a hall is linked to an approved hall from the building and hall pickers, and what is tangled with a conflict opens the appointment editor; it shall also show hall fitness for the plan as advice that does not block approval.

● Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The first 8 items are shown, then «+N more»; missing capacity alone blocks signing (a red «capacity missing» badge opens the list), other gaps are amber «do not block signing»; a missing hall type or teaching mode disables signing with a notice to complete them for every course first.
2. Saving a course reads its row fresh, then sends the full body; anyone without course-edit permission (permission 6), or refused it, sees a lock instead of the fields, not an error; teaching mode is chosen from theoretical, applied, practical and field training.
3. Linking a hall reads the appointment fresh and saves it with the approved hall, showing the server's first refusal reason; hall fitness names the preferred → actual hall type, or the seats available against required and the shortfall, and the number of halls whose capacity is unrecorded «left without a verdict».

#### EVIDENCE

`src/components/ApprovalBar.tsx#saveCourseFix` `src/components/ApprovalBar.tsx#saveRoomLink` `src/utils/readinessFix.ts#readinessFixMode` `src/utils/scheduleDataReadiness.ts` `tests/readiness-inline-fix-audit.ts`

### IR-APR-037 The «approval review» sheet and its print

The «approval review» sheet shall read the family's blockers from the server (otherwise a local check, saying so), group similar findings into one card with its status, article, number of affected appointments and what the score would become if fixed, fold non-blocking notes when there are three or more, show the period balance, and print a signed report across continuation pages.

Implemented · Should · Interface · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. The review is one screen for the department family: whichever member is opened (boys, girls, a branch campus…) shows the same score, title, keys and cards over all the family's appointments in the reader's scope, saying «the department in all its campuses» with a tag per campus; signing stays per college; a failed server read says decision 1913/2016 was reviewed locally but conflicting bookings outside the department could not be confirmed now.
2. Finding statuses: «approval blocker», «needs treatment», «regulation review», «regulation note», «historical context», «department policy»; «same section recorded twice» warnings are shown as «review» cards beside the blockers under «does not block approval» and printed with them, entering neither the blockers nor the score; courses of three or four hours without a teaching mode are counted as «article 7/8 pattern not checked».
3. One card for every finding type, as a bar folded by default: title, article, status, counts and campus tags, the projected score when fixing raises it, and «fix»; opening it shows «explain» and the instructors' names one row each (with their section count), and opening a name shows their appointments beneath (course · section · campus tag · day · time), paged by 8 with a search; «graduate course clashes» is a bar with its count that opens to its pairs; «open all / fold all»; nothing is remembered between openings, and the printed sheet prints everything expanded; «fix» highlights the item's loaded appointments on the week board (a 20-second glow) and closes the sheet, and is disabled when they all belong to another campus.
4. One rule for the title, keys and score on screen and paper: a blocker gives «something blocks approval» and «appointments that block», a needs-fix item «no bar to signing · items to fix» and «appointments to fix» and lowers the score, a note (off the regulation ladder, a section recorded twice) «no bar to signing · notes» and «appointments to note» without lowering it, and «sound» is what nothing touches; a note is outside the regulation so it enters the score neither in the numerator nor the denominator (owner decision 2026-11-14): the formula reads «sound ÷ (sound + to fix) × 100», and «appointments to note» stays visible in the bar and title marked «outside the score» with no slice in the ring.
5. «period balance» (decision 1913/2016 · art. 7/2): morning 08:00–14:00 at 50–70% and evening 14:00–20:00 at 30–50%; the chart appears after the minimum number of appointments, otherwise the reading is stated in text.
6. The printed report is headed «approval review · decision 1913/2016»: the ring, the bar and the findings spread over pages titled «continues/continued (n of m)» and «notes follow-up» pages, ending with «schedule coordinator», «head of the academic department» and «date» lines.
7. The review is one screen in «study schedule» and «schedule changes»: the same screen embedded in the page (not a dialog), with one score from the same approval formula, readable by registrar roles and the department head through the changes report's gate (read-only within their scope; edit routes stay on permission 7); there, appointments deleted in the report's diff are named, and «fix» jumps to the appointment in «full schedule»; «approval blockers» in the term story and the folded bar are material blockers only, with regulation items «to fix».

#### EVIDENCE

`src/components/ScheduleReview.tsx` `src/utils/printFindingPages.ts#packPrintFindings`
`src/utils/scheduleRegulations.ts#periodBalanceSnapshot` `src/utils/approvalScore.ts#approvalScoreBreakdown`
`src/server/routes/scheduleReviewRoutes.ts#/api/schedules/review-readiness`
`src/server/routes/reportsRoutes.ts#/api/reports/schedule-changes/review`
`src/server/routes/scheduleReviewRoutes.ts#reviewReadinessReading` `src/utils/changesReviewHeadline.ts#changesReviewHeadline`
`src/components/ScheduleChanges.tsx#ChangesReviewOverview` `tests/approval-review-audit.ts` `tests/review-1105-audit.ts`
`tests/schedule-board-fixes-audit.ts` `tests/changes-unified-review-audit.ts`

### IR-APR-038 Submission deadlines panel: folding, setting and the exception sheet

The «submission deadlines» panel shall fold by default into a strip (remembered under schedule:deadlines-panel:collapsed) stating the deadline, «N of M handed in», late departments, exceptions, extension requests and the students' phase, shall open by itself when there is no deadline for whoever sets it or when requests are waiting, and shall make an exception a three-step sheet — for whom? how much? why? — with a preview before applying.

● Implemented · Should · Interface · University registrar, College registrar, Registration officer

#### ACCEPTANCE CRITERIA

1. With no deadline: three ready dates (in one, two and three weeks) and «another date», all ending 23:59 Kuwait time; changing the deadline so that some exceptions fall earlier says those departments take the new deadline automatically; «remove the deadline» clears it; the term list shows no ended or closed term other than the selected one, and labels «current» and «upcoming».
2. The exception sheet: scope «all departments (N)», «a college» or «chosen departments» with a search and whole-college selection; amount «extra days» with chips +1 +2 +3 +5 +7 or typed up to 60, or «a specific date» not earlier than the term deadline; a required reason the department sees; the preview states the outcome and how many departments count from their existing, later exception.
3. A partial apply says it was applied to N departments and failed for M, listing the failures' reasons; an extension request is granted with its requested days (up to 60) or rejected with a reason of at least 3 characters; exceptions are grouped by date with their difference from the term deadline (red if earlier), with edit and remove returning the department to the term deadline.
4. An «extend» button from the inbox in a term with no deadline opens the panel on the deadline field and says to set the term deadline first because the exception is computed from it; for its editor the panel also shows the inter-site travel policy card and the students' phase block.

#### EVIDENCE

`src/components/SubmissionDeadlines.tsx#ExceptionSheet` `src/components/SubmissionDeadlines.tsx#SubmissionDeadlines` `src/utils/submissionDeadlines.ts#previewExceptions` `src/utils/submissionDeadlines.ts#EXCEPTION_DAY_CHIPS` `src/utils/submissionDeadlines.ts#DEADLINE_PRESET_WEEKS` `src/server/routes/approvalsRoutes.ts#/api/approvals/extensions` `tests/deadlines-panel-audit.ts`

### FR-APR-039 Three approval-review notes that do not lower the score

The approval review shall show sections of one course at the same hour (art. 7/5), rotation (art. 6/4) and the department meeting window (department decision) as notes on the unified finding card (finding → teacher once → appointments with campus tags), count them in «appointments to note» and in the title, never lower the score with them, and print them as data in the frozen sheet design.

● Implemented · Must · Functional · Department head, College dean

#### ACCEPTANCE CRITERIA

1. Score = clean ÷ (clean + to fix) × 100, with notes entering neither numerator nor denominator (outside the regulation); with no blocker or treatment item the title reads «no obstacle to signing · notes».
2. The printed sheet (A4 landscape) adds them as cards after the others with no design change.

#### EVIDENCE

`src/utils/approvalScore.ts#reviewNotesOf` `src/components/ScheduleReview.tsx` `tests/approval-review-audit.ts`

## 3.7.6 Algorithms

ALG-APR-01 · Approval cycle

**Approval state machine and guards**

Deterministic

*Is this action (sign, withdraw, submit, return, accept) allowed now, and what is the state after it?*

1. States: drafting → committee-signed → head-signed → submitted → accepted, or returned with notes.
2. Signing is refused for a submitted or empty schedule, a material conflict, a course without capacity, a repeated signature, or head before committee.
3. Submission requires both signatures, acknowledgement of sections added after the head signed, zero conflicts, zero open notes, and the deadline not passed in the first round.
4. A return requires at least one open note; every submission opens a new round.
5. Every decision carries the round, appointment count and status as seen, and is refused if any changed.

**Inputs**

The approval record, blocking conflict count, open notes, deadline state, and what the decider saw.

**Output**

An allowed/refused verdict with a reason code, and the next state.

Pure functions read by both server and interface; decisions are serialised on a scope lock so two cannot race.

Pending additions list names up to 60 and counts the rest; event log up to 200.

`src/utils/approvalWorkflow.ts#canSign` `src/utils/approvalWorkflow.ts#canSubmit` `src/utils/approvalWorkflow.ts#canWithdraw` `src/utils/approvalWorkflow.ts#canReturn` `src/utils/approvalWorkflow.ts#staleViewRefusal` `src/utils/approvalWorkflow.ts#openRound` `tests/approval-workflow-audit.ts` `tests/relay-fixes-audit.ts`

FR-APR-001 FR-APR-002 FR-APR-004 FR-APR-005 FR-APR-006 FR-APR-007 FR-APR-010 FR-APR-012

ALG-APR-02 · Approval cycle

**Effective deadline and wholesale-change detection**

Deterministic

*Which deadline is the department held to, and is this action a wholesale change refused after it passes?*

1. Effective deadline = the later of the term deadline and the department's extension.
2. Today is read in Kuwait time and a deadline passes after 23:59:59 of its day; days left are counted in days, not hours.
3. Tone: past, near when 7 days or fewer remain, or ok.
4. Import and term copy are always wholesale; a bulk delete is wholesale when it exceeds 30% of the department's appointments.
5. An extension request is offered at 3 days or fewer, or after the deadline, for a schedule not at the registrar and not accepted.

**Inputs**

Term deadline, department extension, current instant, action kind and how many of the total are deleted.

**Output**

Deadline state (effective, days left, tone) and the wholesale refusal verdict.

One rule for server and interface; partial edits stay open after the deadline; a term without a deadline is never locked retroactively.

Wholesale delete ratio 0.3, near window 7 days, extension-request window 3 days, UTC+3.

`src/utils/approvalWorkflow.ts#readDeadline` `src/utils/approvalWorkflow.ts#effectiveSubmissionDate` `src/utils/approvalWorkflow.ts#isWholesaleChange` `src/utils/approvalWorkflow.ts#extensionRequestRefusal` `tests/approval-workflow-audit.ts` `tests/deadlines-panel-audit.ts`

FR-APR-017 FR-APR-019 NFR-APR-002

ALG-APR-03 · Approval cycle

**Registrar inbox priority and insistence escalation**

Deterministic

*Which department should the registrar start with, and when is a note escalated?*

1. Submitted in round 1 = 0, submitted after a return = 1, has blockers = 2, returned = 3, other = 4, accepted = 5.
2. Rows are ordered ascending by this priority.
3. Each registrar insistence on a note increments a counter, and the escalation instant is recorded once at the third insistence.

**Inputs**

Approval status, round, blocking conflict count and insistence counter.

**Output**

A priority number per department and an escalation stamp for the note.

A fixed explicit rule independent of alphabet or timing.

Escalation after 3 insistences.

`src/utils/approvalWorkflow.ts#inboxPriority` `src/utils/approvalWorkflow.ts#insistOutcome` `src/server/routes/approvalsRoutes.ts` `tests/approval-workflow-audit.ts` `tests/relay-fixes-audit.ts`

`FR-APR-021` `FR-APR-009`

### 3.7.7 Edge cases

#### ⚠ Head signature with a sending blocker

**Scenario** The department head signs while a registrar note is open or the deadline passed before the first send.

**Behaviour** The signature is kept and the schedule is not sent; the response carries submitted=false with submitBlocked giving the reason, and the status remains 'head signed' until the cause is resolved and the schedule is sent.

#### ⚠ Approval record write fails after an accepted edit

**Scenario** An appointment edit is saved on an accepted schedule and then writing the amendment round fails.

**Behaviour** The appointment save is not undone; an amendmentPending marker is written over the last revision and X-Approval-Amendment: pending is sent, and the first later reader or decision opens the round attributed to the original actor, so no amended schedule stays accepted without a round.

#### ⚠ Term deadline moved after an exception was granted

**Scenario** A department was granted an exception until a day, then the term deadline was moved later than that day.

**Behaviour** The department is held to the later of the two so it is not penalised by an earlier grant, and a new exception counts its days from the later date as well.

### ⚠ Two simultaneous decisions on one schedule

**Scenario** The head clicks approve on added sections while someone else imports or the registrar accepts at the same moment.

**Behaviour** The losing decision is retried once on the document's new state; if it loses again it is refused 409 approval-revision with a request to refresh, and no notes are closed for an acceptance that was not saved.

### ⚠ Accepting a schedule with outstanding notes

**Scenario** The registrar accepts a schedule that still has registrar notes open or answered.

**Behaviour** After the acceptance save succeeds those notes are closed as 'closed by acceptance' and their text stays, so they do not block the first later resend; a failure to close a note is logged and does not undo the acceptance.

### ⚠ Swapping the course or section number after signing

**Scenario** The committee edits a row after the head signed, changing its course or section number, or moving it to another department.

**Behaviour** The swap is treated as an addition rather than an edit and enters the acknowledgement queue, unlike a change of room or time; a row deleted before being acknowledged is removed from the queue.

### ⚠ Editing an accepted schedule in an ended term

**Scenario** The schedule committee applies a correction to an accepted schedule in an explicitly closed term.

**Behaviour** The edit passes because only the committee works in an ended term, and a closed-term-edit event (add, edit or delete) is recorded instead of opening a round that would send the schedule to an inbox that is not expecting it.

## 3.7.8 Standing owner decisions

- Owner rule (2026-09-27): only a material conflict prevents signing; the same section recorded twice at the same time is stated and is not counted as a blocker.
- After the deadline wholesale hand-over (import, term copy, deletion above 30%) is refused while partial edits remain open.
- System owner's rule: an ended term has no signing, sending or surveys, and editing the schedule is the schedule committee's matter alone.
- A past term is view-only: reading stays open and writing is closed, with the owner's two texts 'Past term · view only' and 'This is a past term: shown for reference only and not edited'.
- An unapproved pattern blocks (owner decision 2026-10-30): history does not exempt a non-standard shape from the hour pattern.
- Printed reports (comprehensive, change report and council bulletin) keep their approved design, and course numbers in them and on the verification page are seven digits.

↑ Contents

3.8 · IMP

# Import

From authority documents, scans and spreadsheets to a reviewed and confirmed schedule.

| 45 | 98% | 8 | 31 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.8.1 Overview

The module imports the official authority timetable (SWRSCHA) as text or as a scan read by Tesseract in Arabic and English, decides the department, branch and term from the header before any row, and shows the result in a preview with evidence for each cell and a pre-publish check against the whole term. The Gemini service optionally reads pages that still have unread cells and only proposes; nothing is written except through the deterministic validators and with explicit confirmation by the user. The module also covers comparing the live schedule with the document, spreadsheet and JSON import, creating a missing department and courses after one confirmation, and reconciling courses with plan sheets.

Schedule committee chair · Department head · System administrator · Root administrator · College registrar · The system (automatic) · External service

## 3.8.2 User journeys

**Schedule committee chair** — **Copying the authority timetable into an empty term**

1. Chooses college, department and term and uploads the authority timetable PDF.
2. Follows the four-station reading progress while the server proves the header before reading rows.
3. The preview shows cell evidence and row notes; he edits an instructor or room or deletes a row.
4. Confirms scanned pages with missing lines using the page-reviewed button.
5. The bar says the check is complete after the whole-term conflict check.
6. Presses apply, the draft is saved with its baseline and published, and the comparison report can then be opened.

### Department head — A scanned file with an assisted reading

1. Uploads a black-and-white scan which is read by optical recognition.
2. The preview shows cells the scan could not read on two pages.
3. The button offers the assisted reading for those two pages only and he presses it by choice.
4. Proposed cells for empty cells only are shown and he approves those he accepts.
5. The validators run again and he completes applying like any import.

### Department head — Importing a spreadsheet

1. Downloads the template and fills its rows under the Arabic headers.
2. Uploads the file; the first sheet is read and codes and instructors are matched.
3. Sees notes on unmatched lines and fixes them in the preview.
4. The bar checks conflicts, then he applies, or runs a trial if the term already has a schedule.

### System administrator — A new department from the file header

1. Uploads a file of a department absent from the college and gets PDF_DEPARTMENT_MISMATCH with canBootstrapSection.
2. Confirms creation once; the server re-reads the header and creates the department under its printed number and name.
3. The file is read again into the new department and the usual path continues.

### 3.8.3 Diagrams

#### Import pipeline and its gates

The Gemini service is optional and outside the main path: it only reads and proposes, and nothing reaches the schedule except through the deterministic validators and the user's confirmation.

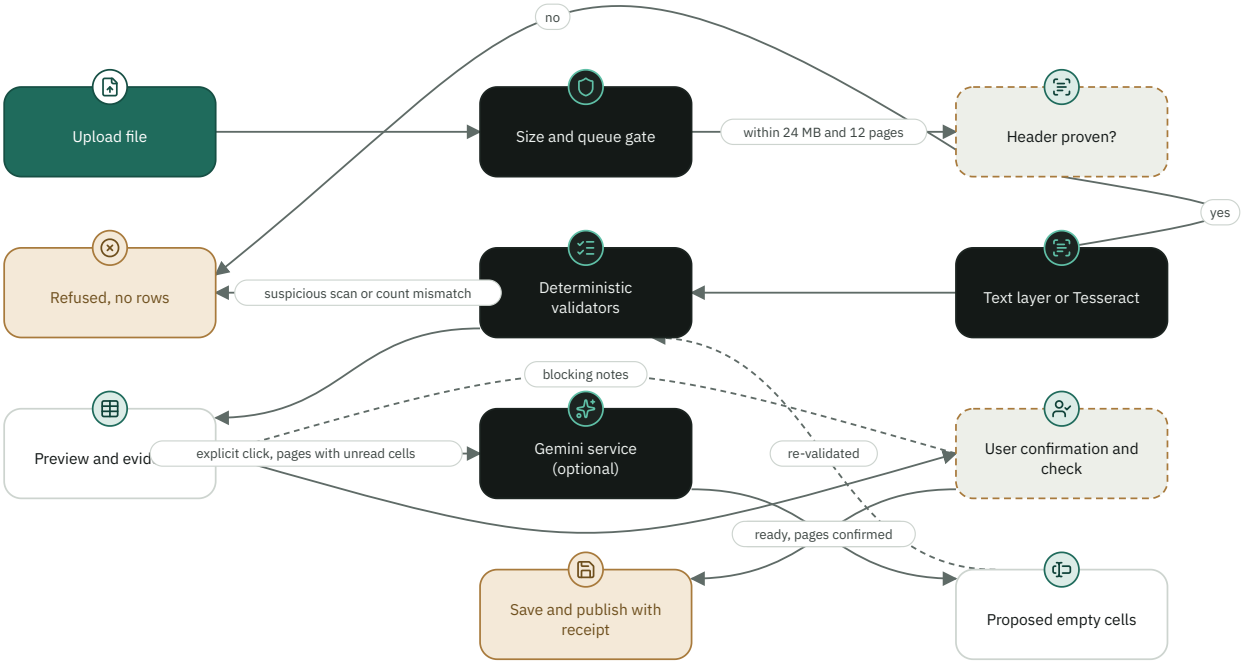


#### Creating missing departments and courses

Nothing is created by the reading itself: the server re-reads or signs a receipt and creates only after one confirmation with the usual permission, and scans never create.

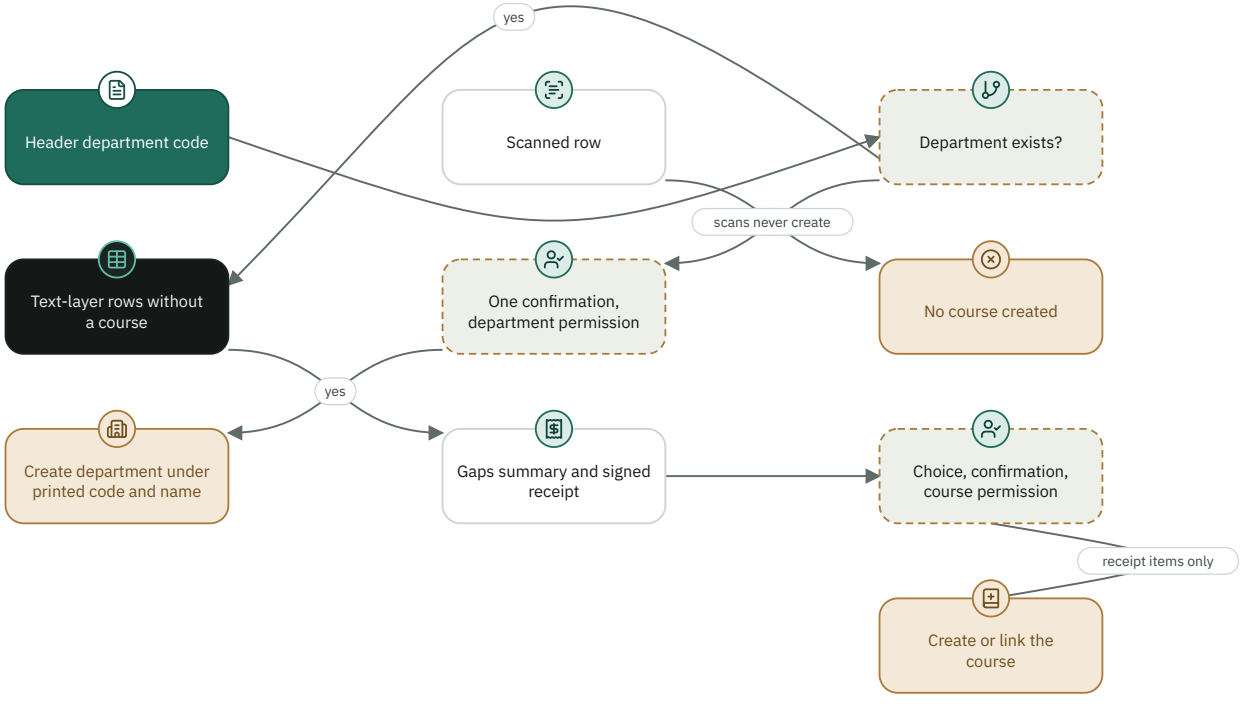

### Comparing the schedule with the authority file

The baseline never changes, the comparison is against the live schedule and not the draft, and the report is read-only.

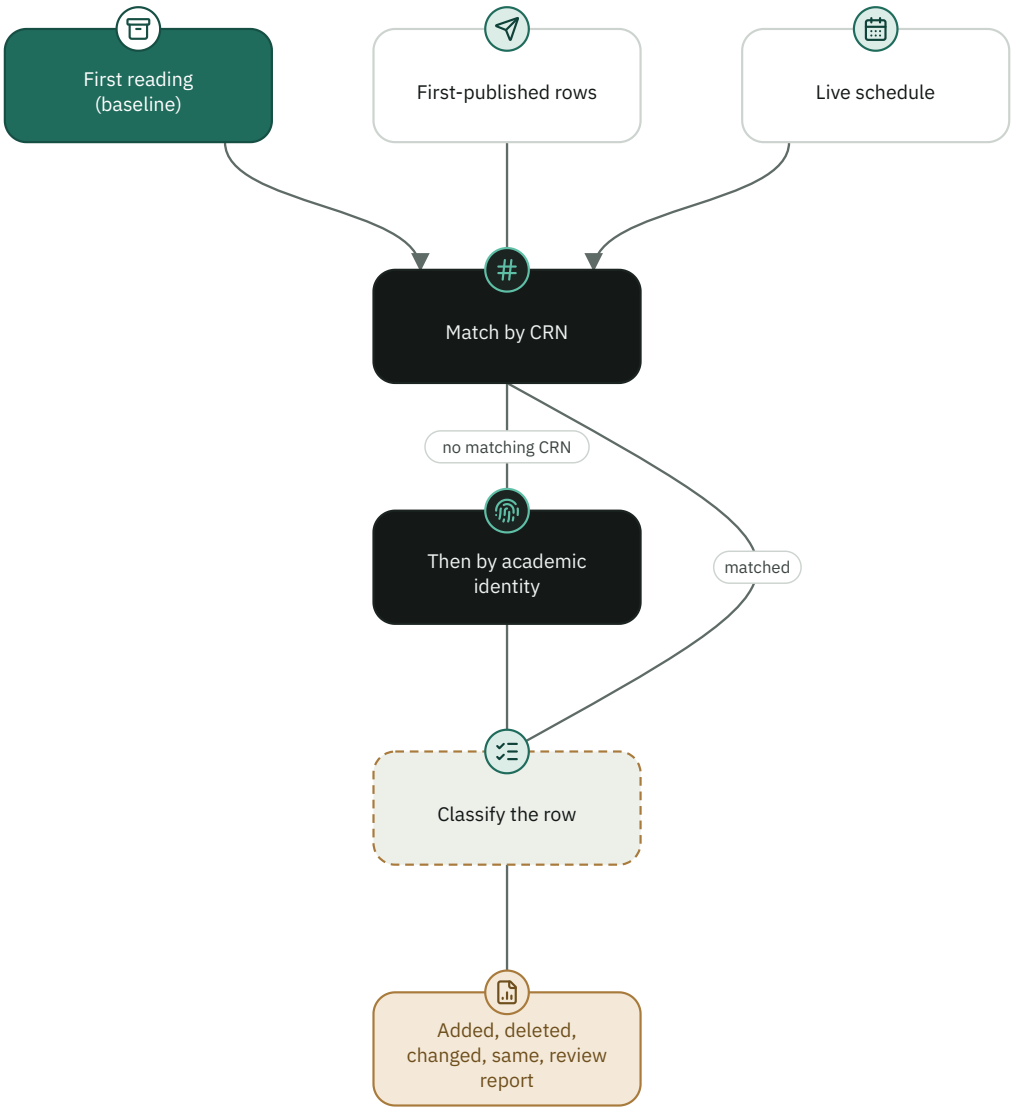


## 3.8.4 Screens

**Schedule transfer: import**

Upload of PDF, spreadsheet or JSON, progress reading, preview and status bar.`src/components/ScheduleTransfer.tsx`

**Import preview**

Editable table with per-cell evidence and row notes.`src/components/ImportPreviewTable.tsx`

**Paged preview**

Page by page, with the page-reviewed button for scans.`src/components/PagedImportPreview.tsx`

**Import status bar**

One state and one apply button: checking, blocking notes, ready.`src/components/ImportStatusBar.tsx`

**Trial run**
The difference card against the current schedule.`src/components/ImportDryRun.tsx`

**Gaps summary**
Missing courses and sites, confirmed in one step.`src/components/ImportCatalogueGaps.tsx`

**Instructor name fill**
Fill from the current schedule or a second PDF on exact match.`src/components/ImportNameFillPanel.tsx`

### 3.8.5 Requirements

**FR-IMP-001** **Authority PDF intake**

The system shall accept the official authority timetable PDF (SWRSCHA) of at most 24 MB and at most 12 pages, within a college, department and term the user is permitted to work in, and shall refuse a larger or longer file entirely instead of reading part of it.

Implemented · Must · Functional · Schedule committee chair, Department head, System administrator

**ACCEPTANCE CRITERIA**

1. A file over 24 MB is refused with a size error and no row is imported.
2. A file of 13 or more pages is refused whole with a message asking to split it; the first 12 pages are not read alone.
3. A scope outside the user's permissions returns 403.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/utils/documentOcr.ts` `src/server/core/http.ts` `src/server/routes/pdfImportRoutes.ts#/api/intelligence/pdf-import` `tests/pdf-import-hardening.ts` `tests/pdf-import-regression.ts`

**FR-IMP-002** **Text layer or scanned reading**

The system shall read generated SWRSCHA files from their embedded text layer using cell coordinates, shall read scanned files with the Tesseract optical character reader in Arabic and English (ara+eng), and shall treat a file with fewer than 120 embedded characters and fewer than 12 text items as an image.

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A text file is read from its text layer and each row is tagged sourceReadMode=pdf-text.
2. A scanned file is read by optical recognition and never creates a course (see FR-IMP-019).

**EVIDENCE**

`src/utils/documentOcr.ts` `src/server/routes/pdfImportRoutes.ts` `tests/pdf-import-golden.ts` `tests/pdf-import-regression.ts`

### FR-IMP-003 Header proof before table reading

The system shall prove the term, college/branch and department from the page-1 header before any row matching, retry with a high-resolution reading when a field is missing, and shall not continue with any unproven field. The high-resolution reading fills only missing fields and never overrides a field proven earlier.

● Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A header still incomplete after the precise reading returns 422 PDF_HEADER_UNRESOLVED naming the missing fields; no row is imported.
2. A complete header that contradicts the scope in the quick probe is refused immediately, before the full reading.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/utils/documentOcr.ts` `tests/header-department-rule-audit.ts` `tests/pdf-import-hardening.ts`

### FR-IMP-004 Header decides the department

The system shall decide the file's department and branch from the page header and not from course numbers, shall let the proven numeric department code outrank the printed name, and shall refuse the file with PDF_DEPARTMENT_MISMATCH when the header department differs from the selected one, or with PDF_MIXED_DEPARTMENTS when text-layer pages carry different departments.

● Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A file of department 0121 uploaded to another department returns 409 PDF_DEPARTMENT_MISMATCH with a suggested department and the canBootstrapSection flag.
2. A course carrying another department's code inside a header department's page is accepted by the page header, not refused.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/utils/authorityAcademicCodes.ts` `tests/header-department-rule-audit.ts`

### FR-IMP-005 Branch match by code

The system shall match the file's branch by its three-digit code (for example 012) and not by name, shall not treat a different site letter inside one branch (012A, 012C, 012D) as a mismatch, and shall refuse the file with PDF_BRANCH_MISMATCH when the branch code differs.

● Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A branch 011 file into a college of branch 012 returns 409 PDF_BRANCH_MISMATCH.
2. Rows with 012C buildings inside a branch 012 file stay legitimate and carry a site badge.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/utils/branchScope.ts` `tests/pdf-import-golden.ts` `tests/pdf-import-hardening.ts`

### FR-IMP-006 Accepted source term rule

The system shall accept a file only when its header term is one of three terms: the selected term itself, the same season of the previous academic year, or the term immediately before it (second accepts the first of its own year, first accepts the previous second, summer accepts itself and last year's summer); otherwise it shall refuse with PDF_TERM_MISMATCH naming the accepted terms.

● Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. With target Second 2026/2027 the files Second 2025/2026, Second 2026/2027 and First 2026/2027 are accepted; First 2025/2026 and Summer 2025/2026 are refused.
2. The refusal names the file term, the selected term and the accepted terms, and imports no row.

**EVIDENCE**

`src/utils/pdfTermRule.ts` `src/server/routes/pdfImportRoutes.ts` `tests/pdf-term-rule-audit.ts`

### FR-IMP-007 Copy into an empty term and trial run

The system shall copy an authority PDF only into a term with no appointments (PDF_TARGET_TERM_OCCUPIED), shall offer a term that already has a schedule a trial run that reads the file with all checks, writes nothing and shows the difference from the current schedule, and shall replace that schedule afterwards only when three conditions hold together: a signed trial-run receipt, an explicit request from the screen, and the replace-filled confirmation.

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. dryRun=1 on a filled term reads the file and returns a receipt flagged replaceFilled with no row written.
2. Saving after a trial without replace-filled returns 409 PDF_TARGET_TERM_OCCUPIED; a preview with every row deleted returns 400 PDF_REPLACE_EMPTY.
3. An appointment added to the term between save and publish makes publishing refuse and deletes nothing.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/server/routes/draftsRoutes.ts` `src/utils/importDiff.ts` `src/components/ImportDryRun.tsx` `tests/import-courses-r3-audit.ts` `tests/import-term-tools-audit.ts`

### FR-IMP-008 Refusing unusable scans up front

The system shall refuse before the full reading any pages that need turning to landscape (PDF_SCAN_REQUIRES_LANDSCAPE) and pale grey photos (PDF_SCAN_GREY_PHOTO), and afterwards refuse a file whose legibility is not proven or whose extraction is judged suspicious (SUSPICIOUS_EXTRACTION), without producing a table of blank cells.

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A grey photo returns 422 PDF_SCAN_GREY_PHOTO with page numbers and no reading.
2. A later page needing rotation returns 422 PDF_SCAN_REQUIRES_LANDSCAPE before row matching.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/utils/documentOcr.ts` `tests/pdf-import-hardening.ts`

### FR-IMP-009 Scanned page verdict

The system shall accept a scanned page with a warning when no more than two lines or 15% of the printed lines were missed, and shall stop the file when the shortfall is larger, when the rows read are below 55% of the visible table bounds (3 rows or more), or when more than half the rows (and more than two) have neither time nor building. It shall also stop the import when the table geometry counts 3 rows or more and matching returns fewer than 70% of them (COUNT_RECONCILIATION_FAILED).

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A page with 28 printed lines of which 4 were read stops the file with a message naming both numbers.
2. A page with 20 printed lines of which 18 were read is accepted with a warning and missedLines=2.

**EVIDENCE**

`src/utils/documentOcr.ts` `src/server/routes/pdfImportRoutes.ts` `tests/pdf-import-hardening.ts`

### NFR-IMP-010 One scan read at a time

The system shall not read two scanned files at once: a file is read in its turn, a different file waits up to 45 seconds and is then refused as SCAN_READING_BUSY (503), the same file sent again shares the running reading, and the recognition workers are terminated after each full reading. The reading routes shall admit only two concurrent requests with a queue of 8, and refuse the rest with 503.

● Implemented · Must · Non-functional · Schedule committee chair, Department head, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A different second file during a scan reading gets 503 SCAN_READING_BUSY after 45 seconds with no row imported.
2. A request beyond two active and eight queued gets 503 immediately.

**EVIDENCE**

`src/utils/documentOcr.ts` `src/server/core/http.ts` `src/server/routes/pdfImportRoutes.ts` `tests/pdf-import-hardening.ts` `tests/section-plan-audit.ts`

### FR-IMP-011 Reading progress and interruption

The system shall stream reading progress line by line as NDJSON with the phases render, orient, read, rescue and match, ending with a done or error line; the screen shall show the four stations (prepare pages, read table, check pages, match registry) without ever going back, and shall name an interrupted reading by the response status (413, 429/502/503/504, 0 and 2xx) stating that no row was imported.

● Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. Status 413 shows a message citing the 24 MB limit and asking to split the file.
2. A station whose phase never arrived (clean read) is shown as skipped, not done.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/utils/importStages.ts` `src/utils/importStreamFailure.ts` `tests/pdf-import-hardening.ts` `tests/journey-reveal-audit.ts`

### FR-IMP-012 Course identity and section number

The system shall bind each row to a department catalogue course by its printed number alone, take the course name from the system and not from optical reading, generate the section number of each course in the sequence 501, 502, 503… in the order its rows appear, and refuse at save any section outside 501–999.

● Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A row whose course number is unproven has an empty course name and the read text is never shown as a name.
2. A course with three sections is numbered 501, 502, 503 regardless of what the section cell read.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/utils/authorityAcademicCodes.ts` `src/server/core/smartImport.ts` `tests/pdf-import-golden.ts` `tests/authority-course-prefix-audit.ts`

### FR-IMP-013 Instructor identity without guessing

The system shall never create an instructor from a PDF, shall bind an instructor cell to a single proven registry record only after removing titles, shall compare name parts position by position so a different family or father name is another person, and shall leave the cell blank when ambiguous while naming the reason (registered more than once, close candidate, unregistered, or unreadable name).

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A family name that contradicts the registry gives no binding and the cell stays blank.
2. Two records with the same folded name give DUPLICATE_REGISTRATION and both candidates are named.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/utils/instructorIdentity.ts` `src/server/core/smartImport.ts` `tests/pdf-import-hardening.ts`

### FR-IMP-014 Building then room from the registry

The system shall resolve each row's location with one resolver that matches the building by an explicit official code and then the room inside that building only, shall never show an unconfirmed optical value as a location, shall mark a failing row LOCATION_REVIEW_REQUIRED, and shall never read seat-count welds such as 345045 as a building code. A building of another branch is marked CROSS_BRANCH and not added to the selected college before review.

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. Room F10 in an unconfirmed building leaves the room cell empty and keeps the raw text for review.
2. Building 011A18 in a branch 012 import is CROSS_BRANCH with a notice blocking publishing until reviewed.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/utils/locationRegistry.ts` `src/utils/branchScope.ts` `tests/pdf-import-golden.ts` `tests/pdf-import-hardening.ts` `tests/location-registry-audit.py`

### FR-IMP-015 Registering branch sites the document proves

The system shall register the building and room of another site in the same branch when proven by a full-shape official code (three branch digits, a site letter and a two-digit building) for a site with a registered college, shall not extend the open home site, another branch or accept a shortened shape, and shall not fail the whole import when registration fails.

Implemented · Should · Functional · The system (automatic), System administrator

**ACCEPTANCE CRITERIA**

1. Code 012D15 in a branch 012 document registers the building with source AUTHORITY_DOCUMENT, so no manual choice is needed.
2. Code 011A09 in a branch 012 document is not registered.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `tests/location-registry-audit.py`

### FR-IMP-016 Plausibility checks on scanned rows

The system shall check scanned rows before calling them confirmed: days × lecture length must equal the course hours × 50 minutes within 40 minutes a week or the days are cleared, a reference number whose length differs from the rest of the page is cleared, and an instructor bound by a shortened name who teaches in another college at the same hour loses that identity. In a multi-page scan only empty cells are recovered, from a unique historical fingerprint, and values the scan read are never overwritten.

● Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A 3-hour course on two days of 80 minutes totals 160 and stays within 150±40; on three days the days are cleared.
2. An ambiguous historical fingerprint invents no course (AdCourseId stays 0).

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/utils/authorityScanRecovery.ts` `src/utils/documentOcr.ts` `tests/authority-scan-recovery.ts` `tests/pdf-import-hardening.ts`

### DR-IMP-017 Per-cell evidence on every row

The system shall attach to every imported row evidence for seven cells (course, section, days, time, instructor, building, room) holding the raw text, canonical value, source, method, score and confidence (CONFIRMED, REVIEW_REQUIRED or UNRESOLVED), and shall return a summary of confirmed, derived and review cells with the number of ready rows, plus a summary per page.

● Implemented · Must · Data · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A value recovered from a historical fingerprint is REVIEW_REQUIRED with derived=true and is not counted confirmed.
2. A row with one unconfirmed cell is not counted in readyRows.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/server/core/smartImport.ts` `tests/pdf-import-golden.ts`

### FR-IMP-018 Creating a missing department after one confirmation

When the header's department code is proven but absent from the college, the system shall allow creating the department with one confirmation under its printed number and name, after re-reading the file on the server rather than trusting the browser, with the permission to create departments (system administrator), provided the code has four digits starting with the user's college code and the branch matches, and shall refuse with PDF_DEPARTMENT_AMBIGUOUS when more than one department carries the code.

● Implemented · Must · Functional · System administrator, Root administrator

**RATIONALE**

> Owner decision: a missing department is created after one confirmation.

**ACCEPTANCE CRITERIA**

1. Department 0125 absent ← created as code 25 under its printed name and never linked to a similarly named department (11 Home economics).
2. A user without the create-departments permission gets 403 PDF_DEPARTMENT_CREATE_FORBIDDEN.
3. A repeated request creates no second department and returns the existing one.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/utils/authorityAcademicCodes.ts` `src/server/routes/pdfImportRoutes.ts#/api/intelligence/pdf-import/bootstrap-section` `tests/header-department-rule-audit.ts`

### FR-IMP-019 Creating missing courses after one confirmation

The system shall summarise courses not registered in the header department from text-layer rows only, shall create only those the user chose and that appear in a signed receipt valid for 6 hours carrying the number, name and units from the file and catalogue and not from the browser, with the permission to create courses inside the department scope and within the committee review window, and shall not duplicate a course on a repeated request. A course is never created from a scanned reading or from a trial run.

Implemented · Must · Functional · Schedule committee chair, Department head

**RATIONALE**

> Owner decision: a missing item is created after one confirmation, and scans never create.

**ACCEPTANCE CRITERIA**

1. A receipt older than 6 hours returns 409 PDF_GAPS_RECEIPT_INVALID and no course is created.
2. A code not in the receipt is ignored.
3. Units and hours are taken from a course with the same code and a name matching at 0.7 or more in any college, otherwise zero and visible in the summary.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/utils/importCatalogueGaps.ts` `src/components/ImportCatalogueGaps.tsx` `src/server/routes/pdfImportRoutes.ts#/api/intelligence/pdf-import/create-courses` `tests/header-department-rule-audit.ts`

### FR-IMP-020 A three-digit tail never links

The system shall never link a printed number to a catalogue course by its three-digit tail alone: a number matching a short catalogue row by its tail is offered for choice (link, or create a new course under its printed number), and 0114464 stays a different course from 0120464 when the file shows the department's own number with that tail.

Implemented · Must · Functional · Schedule committee chair, Department head

**RATIONALE**

> Owner decision: a three-digit tail alone never links.

**ACCEPTANCE CRITERIA**

1. Number 0114324 against catalogue course 324 appears as a choice and is not linked automatically.
2. An unlinked row loses the invalid-course verdict only after the user chooses.

**EVIDENCE**

`src/utils/importCatalogueGaps.ts` `src/utils/authorityAcademicCodes.ts` `tests/header-department-rule-audit.ts` `tests/authority-course-prefix-audit.ts`

### DR-IMP-021 Signed header-check receipt

Inferred

After each successful reading the system shall sign a receipt (HMAC-SHA256) carrying college, department, term, source header values and review pages, and shall accept saving or publishing an authority-pdf draft only with a receipt valid for that scope, so the term, college and department check cannot be bypassed from the screen (PDF_IMPORT_RECEIPT_REQUIRED and PDF_IMPORT_RECEIPT_INVALID).

Implemented · Must · Data · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. Saving a draft with no receipt or one for another department returns 409 PDF_IMPORT_RECEIPT_REQUIRED.
2. Publishing a draft whose receipt is invalid returns 409 PDF_IMPORT_RECEIPT_INVALID.

**EVIDENCE**

`src/server/routes/pdfImportRoutes.ts` `src/server/routes/draftsRoutes.ts` `src/server/core/smartImport.ts`

### FR-IMP-022 Scanned page review confirmation

The system shall not save or publish a draft until the reviewer confirms each scanned page accepted with printed lines that have no row (the page-reviewed button), and the server shall enforce this from the signed receipt and not from a disabled button, returning 400 PDF_PAGE_REVIEW_REQUIRED with the page numbers.

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. Page 2 with two missing lines and no confirmation returns 400 PDF_PAGE_REVIEW_REQUIRED with pages=[2].
2. An outdated window sending no reviewedPages list gets a message asking to close and re-upload, and nothing is saved.

**EVIDENCE**

`src/utils/importPageReview.ts` `src/server/routes/draftsRoutes.ts` `src/components/PagedImportPreview.tsx` `tests/pdf-import-hardening.ts`

### FR-IMP-023 Pre-publish check against the whole term

The system shall provide a read-only check (POST /api/schedules/import-preflight) applying the same conflict rule the save gate applies to the whole term except the department sites about to be replaced, adding the row-level save checks and sites without a matching department, and returning up to 60 conflicts with their preview row positions and the other appointment named (college, department, course, section, days, time) or only its college and time when outside the reader's permission.

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A room booked by another department in the same term shows as a conflict in the preview before pressing, naming the other department.
2. Deleting a preview row makes conflict positions read from current order and not from the negative id.

**EVIDENCE**

`src/server/routes/scheduleImportRoutes.ts` `src/server/core/smartImport.ts` `src/hooks/useImportPreflight.ts` `tests/import-status-bar-audit.ts`

### FR-IMP-024 Single import gate state

The screen shall compute the import state in one place in a fixed order (checking, then current-schedule read failed, then blocking notes, then check failed, then ready), shall neither count notes nor draw a success mark while a check is running, the hook shall re-check 300 ms after the last edit, and a failed check shall be treated as unverified and not as success while the server gate remains the last guard.

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A running check with earlier notes gives the state checking, not blocking notes.
2. The first file is checked without delay; consecutive edits wait 300 ms.

**EVIDENCE**

`src/utils/importGate.ts` `src/hooks/useImportPreflight.ts` `src/components/ImportStatusBar.tsx` `tests/import-status-bar-audit.ts`

### FR-IMP-025 Editable preview and name fill

The system shall show rows in a preview where cells are edited and rows deleted with the same vocabularies as adding an appointment, and shall allow filling empty instructor names from the current schedule, the previous term or a second PDF provided the whole line matches in course, section, days, time and room, so only the instructor cell is filled, a partial match is shown with its exact difference for the user to decide, any ambiguity fills nothing, and the fill can be undone exactly.

● Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A line already holding an instructor is never touched.
2. Two matching lines with different instructors fill nothing.
3. Deleting the last row with the comparison open leaves no decision pointing at a missing row.

**EVIDENCE**

`src/utils/importNameFill.ts` `src/components/ImportNameFillPanel.tsx` `src/components/ImportPreviewTable.tsx` `src/components/PagedImportPreview.tsx` `tests/import-term-tools-audit.ts` `tests/import-review-rows-audit.ts`

### FR-IMP-026 Comparing the schedule with the authority file

The system shall keep the first reading of the file as an unchanging baseline and compare it with the live schedule, not the saved draft, matching rows by the authority reference number (CRN) first and then by unique academic identity, then linking what is left unlinked to rows the coordinator created by hand so that it shows as a yellow change rather than a deletion plus an addition: a section deleted then recreated by its course, its stored section number (the one the coordinator sees, not the official printed one, or its published number when a publication trace exists) and its site, when it is the only row with that key on both sides; then a section whose number changed by course, site, day and time, then by course and site alone when it is the only one on both sides (so a number and time change together remains one change); then, where several deleted and added rows share a course and site, the pair that is clearly the closest for both sides with three or more points out of six (day, start, end, building, room and the known instructor); anything ambiguous or equally close stays a deletion plus an addition with no guessing, and another course or another site is never linked; only the section-number cell is coloured in a row the coordinator created whose number changed (on screen and on the printed sheet), while the number of an imported row is not coloured; classifying each row as added, deleted, changed, unchanged or needing source review (an unlinked imported record is not a proven addition), marking changed cells among twelve fields, comparing a course by its official code and not its internal number, and treating two different registered instructors as a change.

● Implemented · Must · Functional · Schedule committee chair, Department head, College registrar

**ACCEPTANCE CRITERIA**

1. A row deleted from the preview before first publish appears as deleted in the report because the baseline keeps the first reading.
2. Editing a cell then restoring its original value clears the change mark.
3. An empty live table classifies every original row as deleted and does not return 404.
4. Section 501 of course 0109215 deleted then recreated with the same number and site ← unchanged, no deletion or addition; recreated in room G20 instead of F06 ← one change with only the room cell coloured.
5. Section 501 recreated as 515 (the only one of the course in the branch) ← one yellow row with the number cell coloured, whether day and time stayed or changed with it from 11:00 to 14:00 ← no deletion or addition.
6. Two deletions and two additions of the same course and branch, each addition clearly closest to one original ← two yellow changes; two additions equally close to one original, or an addition of another course or branch ← the original stays deleted and the addition stays added.
7. A section deleted in the import preview so that later ones were renumbered at publication ← the recreated section is linked to its published original (reference 1002 published as 501) and not to the deleted one (reference 1001).

**EVIDENCE**

`src/server/core/authority.ts#buildAuthorityPdfDiff` `src/server/routes/reportsRoutes.ts` `src/utils/authorityRowMatching.ts` `src/utils/authorityRowMatching.ts#linkRecreatedSections` `src/utils/authorityRowMatching.ts#linkRenumberedSections` `src/utils/authorityNetChange.ts` `src/utils/authorityReportOrdering.ts` `tests/authority-recreated-section-audit.ts` `tests/authority-net-diff-audit.ts` `tests/authority-identity-reconciliation-audit.ts` `tests/authority-diff-cell-audit.ts` `tests/schedule-changes-audit.ts`

### FR-IMP-027 Assisted reading through Gemini on explicit choice

The system shall not send any file to the Gemini service without an explicit click by the user, shall not offer the assisted reading automatically after an approved reading fails, shall offer it after a successful reading only for pages with an unread course, section, days or time cell, and shall send only those pages as images (longest edge 1700 pixels) in one request per page; the Gemini service only reads and proposes.

Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A file read clean the first time shows no assisted-reading offer and nothing leaves for Gemini.
2. A request with pages=2,5 sends only pages 2 and 5, read in parallel.

**EVIDENCE**

`src/server/routes/smartImportRoutes.ts` `src/server/core/gemini.ts` `src/utils/importPageReview.ts` `src/components/IntelligenceWorkspace.tsx` `src/server/routes/smartImportRoutes.ts#/api/intelligence/smart-import` `tests/gemini-schedule-layer.ts`

### FR-IMP-028 Personal-data redaction and proposal identity

The system shall never send a civil number or any similar key to Gemini, shall supply it a catalogue of at most 260 courses and 360 instructors carrying only id and name, shall ask for literal transcription of what is printed and for an empty cell instead of a guess, and shall discard any course or instructor identifier the service returns and bind locally from the printed name and code.

Implemented · Must · Functional · Schedule committee chair, Department head, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A catalogue carrying a civil field has it stripped before sending.
2. A row returned with an instructor id has the id ignored and the name bound locally or left empty.

**EVIDENCE**

`src/utils/geminiScheduleLayer.ts` `src/server/routes/smartImportRoutes.ts` `tests/gemini-schedule-layer.ts`

### FR-IMP-029 Assisted proposals never write on their own

The system shall ensure the Gemini service writes to no schedule or draft: every row it returns passes the existing deterministic validators (course, instructor, location, time, conflict) before being shown, only empty cells are proposed for filling and no read row or cell is replaced, every proposed cell is shown before anything changes, only the cells the reviewer approved are applied, and saving and publishing remain behind the checks, the receipt and explicit confirmation like any import.

Implemented · Must · Functional · Schedule committee chair, Department head

**RATIONALE**

> Design decision: Gemini only reads and explains; no write without a deterministic validator and explicit confirmation.

**ACCEPTANCE CRITERIA**

1. A sharper reading adding nothing shows the message that the schedule did not change and edits nothing.
2. An approved cell turns its evidence to CONFIRMED with method SMART_FILL and the row counts as ready.
3. A returned row failing the validators appears in blockingIssues and blocks saving.

**EVIDENCE**

`src/utils/geminiScheduleLayer.ts` `src/server/core/smartImport.ts` `src/server/routes/smartImportRoutes.ts` `tests/gemini-schedule-layer.ts`

### IR-IMP-030 Gemini call interface and limits

Inferred

The system shall call Gemini with a JSON request at low thinking level and temperature 0.1 and with system instructions forbidding it to decide the schedule or ask to save, shall allow a document reading 180 seconds and function-call requests 45 seconds, shall not call the service when its key is not configured, and shall return a readable reason for a failed or timed-out request.

Implemented · Should · Interface · The system (automatic), External service

#### ACCEPTANCE CRITERIA

1. No configured key makes no call and reports the assisted reading as not configured on the server.
2. Exceeding 180 seconds aborts the request and returns a timeout reason.

#### EVIDENCE

`src/server/core/gemini.ts` `tests/gemini-schedule-layer.ts`

### FR-IMP-031 Spreadsheet import

The system shall read the first sheet of a spreadsheet file with Arabic headers (room, building, time, days, civil number, course instructor, section, course, course code) or the accepted field names, shall match the course by code within the department's operational courses and the instructor by civil number or name, shall accept at most 450 rows and reject more, shall note each line with an unknown course, unknown instructor or duplicate course/section, and shall write nothing at this step. It shall provide a downloadable template with two sample rows and a guide sheet.

Implemented · Must · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. 451 rows return 400 saying the file exceeds the safe import limit.
2. An unknown course code gives a line note and the row stays in the preview.
3. A repeated course and section gives a duplicate note.
4. «download the default template» builds in the browser «schedule-import-template.xlsx»: a «schedule» sheet with columns from the right (hall, building, time, days, civil number, course instructor, section, course, course code) and two rows with stand-in names («doctor name 1» and «doctor name 2»), a seven-digit course number as the export writes it, and a civil number starting with 3 that fails validation if left in, and a «how to use» sheet explaining matching, days, 24-hour time, incomplete rows and what happens after upload.
5. On screen a spreadsheet row is blocked when its section is not three digits from 501 upward, or its instructor is neither in the department nor among the term's visiting staff unless chosen by hand.

#### EVIDENCE

`src/server/routes/smartImportRoutes.ts` `src/components/ScheduleTransfer.tsx` `src/server/core/smartImport.ts` `src/server/routes/smartImportRoutes.ts#/api/intelligence/import-preview` `tests/import-term-tools-audit.ts` `tests/schedule-board-fixes-audit.ts`

### FR-IMP-032 JSON schedule export and import

Inferred

The system shall export a scope's schedule as schedule-export/2 carrying rows, courses, instructors, halls and visiting staff keyed by code and not by internal id, shall import the file by code and civil number, shall treat an import as a preview unless commit is explicitly requested, shall not replace an existing section (rejecting it as already present), shall reject a row whose building or room is unresolved in the official registry, shall check conflicts against the whole term and refuse the entire import on any problem, shall respect the schedule lock and the wholesale-import deadline, and shall report the change once per batch.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. commit on a locked schedule returns 409 schedule-locked with no write.
2. A preview returns ready, rejected and willAdd with no write.
3. A file carrying an unknown course with commit creates it and counts it in planted.courses.

#### EVIDENCE

`src/server/routes/scheduleImportRoutes.ts` `src/components/ScheduleTransfer.tsx` `src/server/routes/scheduleImportRoutes.ts#/api/schedules/export` `src/server/routes/scheduleImportRoutes.ts#/api/schedules/import`

### FR-IMP-033 Reading a study-plan sheet

The system shall read a study-plan sheet PDF from its text layer only (not an image), at most 2 MB and 6 pages, with no external fonts or code, shall refuse an oversize file or a non-PDF with an explicit message, and shall restrict upload to the root account and refuse a sheet that combines several sheets or belongs to another department without writing anything.

Implemented · Should · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. A 3 MB file gives the file-too-large message.
2. A non-root account gets 403, upload is for the root account only.
3. A sheet of another department returns 422 kind=department and the courses are unchanged.

**EVIDENCE**

`src/server/planPdfExtract.ts` `src/utils/planPdfParser.ts` `src/server/planReviewRoutes.ts` `tests/plan-sheet-import-route-audit.ts` `tests/plan-sheet-import-audit.ts`

### FR-IMP-034 Reconciling courses with their sheet

The system shall make the sheet the source in reconciling a department's courses: a course follows the department its code points to and is created there if absent, the record the department actually taught is preferred over one without history, name, units and hours come from the sheet (spelling alone does not rename), another taught course holding the number is never renamed but a separate course is created under the full code, a course in an active sheet is not corrected from an older sheet, and a service department with no department in the system stays pending.

Implemented · Should · Functional · Root administrator, The system (automatic)

**ACCEPTANCE CRITERIA**

1. Two courses sharing a tail stay separate (0114464 and 0120464).
2. An older sheet does not correct a course in an active sheet.

**EVIDENCE**

`src/server/sheetReconcile.ts` `src/utils/planSheetImport.ts` `scripts/reconcile-plan-sheets.ts` `tests/plan-sheet-import-route-audit.ts` `tests/sheet-membership-audit.ts`

### NFR-IMP-035 Import environment variables and receipt secret

Inferred

The system shall read the Gemini service key from GEMINI_API_KEY then GOOGLE_GEMINI_API_KEY and make no call when both are absent, the model name from GEMINI_SCHEDULE_MODEL then GEMINI_MODEL else gemini-3.6-flash, shall send whole pages to the assisted reading and crop row strips only when SMART_IMPORT_ROW_STRIPS is 1, shall look for the recognition language files (ara and eng) in OCR_DATA_DIR, then the working directory, then the program directory, then its parent, passing a path only when both files exist there, and shall print the scanned-reading stage timings when OCR_PROFILE is 1. It shall also sign the header-check receipt and the course-gaps receipt with HMAC-SHA256 using the server's stored shared secret under two distinct labels (pdf-import and pdf-gaps), and shall compare signatures in constant time.

Implemented · Should · Non-functional · The system (automatic), Root administrator

**ACCEPTANCE CRITERIA**

1. With neither GEMINI_API_KEY nor GOOGLE_GEMINI_API_KEY the call layer returns null without any network request.
2. A gaps receipt older than 6 hours, with an altered signature or a version other than 1 is rejected.
3. A directory holding only ara.traineddata is not passed to the recogniser, which keeps its default path.

**EVIDENCE**

`src/server/core/gemini.ts#requestGeminiScheduleLayer` `src/server/routes/smartImportRoutes.ts` `src/utils/documentOcr.ts#ocrLanguageDataDir` `src/server/routes/pdfImportRoutes.ts#signPdfImportReceipt` `src/server/routes/pdfImportRoutes.ts#verifyGapsReceipt`

### FR-IMP-036 Extracting the legacy system backup

Inferred

The extraction tool shall read the legacy SQL Server backup read-only without modifying the source, rebuild the catalogue and export every non-empty user table, stop when the decoded row count of any table differs from the catalogue count or the active-data integrity check fails, write the data file in the shape the application expects together with a report carrying the SHA-256 of the backup and of every table, and convert passwords to salted scrypt hashes while keeping the compatibility value encrypted with AES-256-GCM under a separate vault key, with no plaintext password in the file.

Implemented · Could · Functional · Root administrator, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A table whose row count differs from sysrowsets stops the tool with an error naming the table and no file is written.
2. The vault key is read from --vault-key or created next to the output file as legacy-password-vault.key.

#### EVIDENCE

`scripts/extract-legacy-bak.py` `docs/DATA_MIGRATION.md` `docs/FIRESTORE_IMPORT.md`

### FR-IMP-037 Import from a branch site is redirected to the base college

The schedule tools dialog shall not show the import controls when the open college is a girls' branch site by the very rule that distributes the girls' sheet to its sites (its name carries the girls' track mark and one of the two branch-site names), and shall instead show a note that import is done from the base college, because the approved schedule is one file issued by the base college and distributed to the sites by the system, naming the base college (the college name with the site segment removed wherever it appears, leaving the girls' base college, or a fixed default name when empty) and without the import status bar.

Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Opening «import» on a college named «<college> - <branch-site name> - girls» shows «import is done from «<college> - girls»» with no template button and no upload button.
2. The girls' base college, the boys' college and any college whose name does not combine the girls' track with a branch-site name are treated as the base and show the import controls.

#### EVIDENCE

`src/components/ScheduleTransfer.tsx#branchSite` `src/components/ScheduleTransfer.tsx#baseCollegeName`
`src/utils/collegeTrack.ts#isCampusCollege` `tests/location-registry-audit.py` `tests/schedule-board-fixes-audit.ts`

### FR-IMP-038 Term of a spreadsheet or JSON file: read or asked, then judged

Before reading the rows of a spreadsheet or JSON file, the system shall apply the same accepted-term rule applied to a PDF: the file's term is taken from scope.term in JSON, and in a spreadsheet from the «term» cell of the «file information» sheet and then from the file name; when the term is unknown the user is asked «which term was this file taken from?» with all terms newest first, and when it is not accepted for the selected term a «term not accepted» card is shown and no row is read. The rule is not applied when the selected term's own name cannot be understood.

Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A spreadsheet exported by the system carries its term in «file information» and is read without asking.
2. A JSON file without scope.term shows the question card, and «continue» stays disabled until a term is chosen.
3. A term not accepted shows a card with the file's term, the accepted term and the selected term and «no row was imported»; the same card shows a PDF refused with PDF_TERM_MISMATCH when it carries the accepted term.

#### EVIDENCE

`src/components/ScheduleTransfer.tsx#declaredTermOf` `src/components/ScheduleTransfer.tsx#readFile`
`src/components/ScheduleTransfer.tsx#termMismatch` `src/utils/pdfTermRule.ts#acceptedPdfSourceLabel`
`src/utils/pdfTermRule.ts#pdfTermAccepted` `tests/pdf-term-rule-audit.ts`

### FR-IMP-039 Recovery cards after a refused PDF

The import screen shall turn a recoverable PDF_DEPARTMENT_MISMATCH refusal into a «the file belongs to «department»» card with one button: «open the right department and re-import» when the department is registered in the college, or «add the department and re-import» when it is not, sending the same file to the bootstrap-section route, switching the department selector to the resulting department and re-reading the same file with the course catalogue reloaded; shall show the portrait-pages message as a «rotate the timetable pages to landscape and upload again» card; and shall carry out the gaps-summary decision by creating the chosen courses with the gaps receipt and re-reading the same file while keeping the code links the user chose for that file.

● Implemented · Should · Functional · Department head, Schedule committee chair, Root administrator

#### ACCEPTANCE CRITERIA

1. A successful reply without a department number shows «the department was processed but the new department number did not arrive.» and the file is not re-read.
2. A code linked to a course in the gaps summary keeps its link after the re-read, the row's course evidence becomes manual, the old server notes on its rows are removed and the code leaves the gaps list; uploading another file drops the held links.

#### EVIDENCE

`src/components/ScheduleTransfer.tsx#resolvePdfDepartment` `src/components/ScheduleTransfer.tsx#confirmCatalogueGaps` `src/components/ScheduleTransfer.tsx#rotatedPdfGuidance` `src/utils/importCatalogueGaps.ts#withoutLinkedRowIssues` `src/server/routes/pdfImportRoutes.ts#/api/intelligence/pdf-import/bootstrap-section` `tests/header-department-rule-audit.ts` `tests/location-registry-audit.py`

### FR-IMP-040 The trial run on screen: difference, apply and undo

When the term has a schedule, the import screen shall say before upload that import here is a «trial run without saving» with its appointment count; shall read a PDF in trial mode automatically when the term has a schedule and the target department is the open one, and offer «try without saving» when the file is refused because the term is occupied; shall read a spreadsheet on a filled term as a trial as well, except a «place sections» review; shall draw the difference between the file and the current schedule section by section (course and section number) as tiles: added, removed, changed, unchanged, conflicts, with a proportional bar and folded lists; and shall make «apply» two steps with a confirmation naming the schedule's and the file's section counts and promising a copy for undo, followed by «undo» restoring the saved versions.

● Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A failed read of the current schedule shows «the current term schedule could not be read.» with «retry», and «apply» is not offered without the comparison baseline.
2. Swapping the times of two meetings on two days of one section counts as «changed · time», not «unchanged»; an instructor or room left unresolved in the file does not count as a change.
3. The conflict tile shows «…» and «checking» until the term check finishes, and the «changed» list opens by itself when it holds 6 entries or fewer.
4. «apply» publishes with the confirmation header publish,replace-filled, the card badge turns «applied» and the bar says «applied: N appointments in the schedule.»; «undo» restores each saved version through the restore path with its overwrite confirmation, then says «the schedule is back as it was before applying.»

#### EVIDENCE

`src/components/ImportDryRun.tsx` `src/utils/importDiff.ts#importDiff` `src/utils/importDiff.ts#meetingChanges` `src/components/ScheduleTransfer.tsx#undoDryApply` `src/components/ScheduleTransfer.tsx#loadTermRows` `src/components/ScheduleTransfer.tsx#readPdf` `tests/import-term-tools-audit.ts` `tests/sections-proposal-import-audit.ts`

### FR-IMP-041 One sharper reading per file and approving its cells

The preview of an authority PDF shall offer a «sharper reading · pages» button only while it has pages with cells that could not be read (not cells the department left empty on purpose) and the sharper reading has not been used for that file, shall send all those pages in one request to the server, which passes them to the Gemini service, shall spend the offer the moment it is pressed so it does not return even when the reading adds nothing, shall freeze the table meanwhile so no edit is accepted, shall show the proposal as empty cells only grouped by page and all ticked at first, with «select all», «clear selection», «apply N cells» and «cancel», and shall bind the proposal to the file on screen (name, size and modification time) so cells of an earlier file are never applied.

● Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Each page lists at most 40 proposed cells with «picked/total» for the page; an instructor or course value is shown by name, and a value naming the placeholder faculty is dropped from the proposal.
2. Applied cells also fill the same rows of the baseline (by source order), so the change report keeps the reviewer's earlier deletions and edits, and the review card adds «N filled by the sharper reading».
3. A reading that adds nothing says «the sharper reading added nothing new this time — the remaining cells need filling by hand. Your table did not change.»; «cancel» leaves the table unchanged and the offer does not return; a new upload starts a new offer.
4. The progress text during the sharper reading is plain Arabic («sharper reading of pages …» or «sharper reading of the troubled pages»), without the service's name.

#### EVIDENCE

`src/components/ScheduleTransfer.tsx#readSmart` `src/components/ScheduleTransfer.tsx#applySmartProposal` `src/components/ScheduleTransfer.tsx#dismissSmartProposal` `src/components/ScheduleTransfer.tsx#smartToken` `src/utils/geminiScheduleLayer.ts#proposeSmartFills` `src/utils/importPageReview.ts#pagesWithUnreadCells` `tests/gemini-schedule-layer.ts` `tests/pdf-import-hardening.ts` `tests/schedule-board-fixes-audit.ts`

### FR-IMP-042 Live checks on the preview

The screen shall check the PDF preview rows against each other with the same conflict function the server refuses with, without counting the placeholder faculty as a double booking, and put the note on both rows «… with row N»; shall block publishing a row whose days or time the reviewer changed by hand unless its days are an approved pattern for the course hours in the pattern library, with a note on the days cell naming the approved patterns; shall move server notes «line N:» and publish refusals by row id onto their rows' cells; shall clear old server notes on any edit, deletion or name fill; and shall write under the table only what has no row (the first 4).

● Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Two rows booking the same instructor at the same time are both red and the publish button does not appear.
2. A row read from the document as printed is published with its days even if they are not a pattern; the pattern is checked only for days or time whose source is MANUAL.
3. A non-editable spreadsheet preview lists its blocking notes: the first 8, then «and N more…».
4. The cards: row count, page count, «ready to publish» (showing «…» and «checking» until the checks settle), and «courses to review» with «missing: N cells»; the colour key: green complete, gold needs review, red missing.

#### EVIDENCE

`src/components/ScheduleTransfer.tsx#previewConflicts` `src/components/ScheduleTransfer.tsx#manualPatternIssues` `src/components/ScheduleTransfer.tsx#serverRowIssues` `src/components/ScheduleTransfer.tsx#commitPreviewRows` `src/components/ScheduleTransfer.tsx#pdfReadinessSummary` `src/utils/scheduleBlockers.ts#blockingConflicts` `tests/import-review-rows-audit.ts`

### FR-IMP-043 The exported spreadsheet carries its term

The «export» tab shall export a spreadsheet with a «study schedule» sheet holding the columns: the seven-digit course number as the authority prints it, course name, section, instructor, civil number, days joined by « - », time, building and room, and a second sheet «file information» holding the term so its term is read automatically when the file is uploaded again; it shall name the file «schedule_department_term.xlsx» after replacing characters not allowed in file names with «_», and shall download JSON as schedule-<term number>.json.

● Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Course 0109105 is exported as 0109105, not by its stored code.
2. Uploading the exported file again to the same term does not ask for its term.

#### EVIDENCE

`src/components/ScheduleTransfer.tsx#exportTerm` `src/server/routes/scheduleImportRoutes.ts#/api/schedules/export` `tests/pdf-term-rule-audit.ts`

### FR-IMP-044 The «place sections» review coming from section planning

Planned

«Place sections» from section planning shall open a review in the import tab, separate from file imports, holding the department's current appointments and the proposed sections, editable by quick edit and deletion; it shall keep a current appointment that has a building but no hall as «pending hall» and never make a proposed section pending by itself; it shall compute its counters from the rows still on screen (current, proposed, current ones deleted, proposed without a hall); placing shall replace the department's schedule with what the user sees through the same import path (a draft named «place sections (from section planning)» then published); and the review shall be cleared when the user leaves for another tab.

● Planned · Must · Functional · Department head, Schedule committee chair

#### RATIONALE

> The 'build sections' button was removed with the old section planning; the review path remains in the schedule tools without an entry point.

#### ACCEPTANCE CRITERIA

1. The banner says «N current appointments + M proposed sections», and after deleting current ones «you deleted N current ones, and they will be removed from the schedule.»
2. Sections that found no free department hall are listed by course and section (the first 4, then «+N») and are not placed until their hall or an explicit «pending hall» is chosen.
3. The button reads «place N sections in the schedule» (or «place the edits in the schedule» with no new section), blocking notes are worded «prevent placing», and the receipt titled «sections placed» names the new sections, the kept and removed appointments and the total.
4. A planning review is never run as a trial run even when the term has a schedule.

#### EVIDENCE

`src/components/ScheduleTransfer.tsx#previewWorksheetRows` `src/components/ScheduleTransfer.tsx#planningMeta` `src/components/ScheduleTransfer.tsx#goTab` `tests/section-plan-audit.ts` `tests/section-plan-audit.ts`

### FR-IMP-045 Publishing from the import review and its receipt

The import review shall not offer «save as draft only» but a single road: save a draft named «approved PDF copy — file name» or «template import — file name» and publish it at once; it shall keep the review and its buttons on screen when publishing is refused, moving the refused rows' names onto their cells; and on success a receipt shall replace the dialog and hide the tabs: the number of appointments published, their split by site when there is more than one site, the courses copied into a department catalogue at another site (the first 8), a pointer to the change report in the reports center, and a «done» button that closes it.

● Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Saving is not sent before the pre-check answers; an early press writes nothing.
2. A PDF preview with every row deleted offers «approve deleting all PDF appointments and publish», while the baseline keeps all source rows marked deleted for the report.
3. A file distributed over three sites lists each site's name and appointment count in the receipt.

**EVIDENCE**

`src/components/ScheduleTransfer.tsx#saveExcelDraft` `src/components/ScheduleTransfer.tsx#publishImportedDraft` `src/components/ScheduleTransfer.tsx#publishReceipt` `src/components/ScheduleTransfer.tsx#plantedCourses` `tests/location-registry-audit.py`

## 3.8.6 Algorithms

ALG-IMP-01 · Import

**Header proof, file department, course and section identity**

Deterministic

*Which term, branch and department does this file belong to, which catalogue course does each row bind to, and what is its section number?*

1. Term, college/branch and department are proven from the page-1 header before any row; a missing field triggers a high-resolution re-read of the header band that fills only missing fields; any unproven field stops the import.
2. Department key = 2 college digits + 2 department digits (01 + 09 → 0109), and the header code must equal the selected department's composite key, otherwise PDF_DEPARTMENT_MISMATCH; course numbers never decide the department.
3. A printed row binds by its number alone: equal digits, or the seven-digit key = department key + the course's three digits (0109105); a six-digit print under the department is expanded with a zero; another department's key never links by its tail alone and is offered for choice instead.
4. The course name comes from the catalogue, not from optical reading.
5. Section numbers are generated per course as 501, 502, … in order of appearance; two rows of the same course with the same reference number (CRN) are one section; save refuses anything outside 501–999.

**Inputs**

The page-1 header text, the rows read from the table, the selected college and department, and the department's course catalogue.

**Output**

A proven scope or a coded refusal, rows bound to catalogue courses with generated section numbers, and unbound numbers offered for a decision.

No college, department or course identity is invented; the high-resolution reading never overrides an already proven field; no row is imported from another department's file.

Displayed course number is always seven digits: college (2) + department (2) + course (3) Section number range 501–999

`src/server/routes/pdfImportRoutes.ts#registerPdfImportRoutes` `src/utils/authorityAcademicCodes.ts#authorityDepartmentMatches` `src/utils/authorityAcademicCodes.ts#authorityCourseCodeMatches` `src/utils/authorityAcademicCodes.ts#assignAuthoritySections` `src/utils/authorityAcademicCodes.ts#authorityCourseCode` `tests/header-department-rule-audit.ts` `tests/authority-course-prefix-audit.ts` `tests/pdf-import-golden.ts`

FR-IMP-003 FR-IMP-004 FR-IMP-012 FR-IMP-020

ALG-IMP-02 · Import

**Deterministic**

### Scan legibility and cell plausibility checks

*Is the scan worth reading, is the page reading complete, and is each read cell plausible before it counts as confirmed?*

1. Before reading: the file is refused when at least half its pages are pale grey photos (median grey < 185 and 55% or more of pixels mid-grey between 110 and 179).
2. After reading: it is refused when meaningful characters fall below 140 per page or engine confidence below 42.
3. Page verdict: stop when missed printed lines exceed max(2, ⌈15%⌉), when rows read are below 55% of visible table rows (3 or more), or when more than half the rows (and more than two) have neither time nor building; smaller misses pass with a warning.
4. A time cell must hold two clocks between 07:00 and 20:59, 30 to 240 minutes apart; a days cell must be an ascending 1–5 sequence without repeats (a mirrored reading is accepted); days × lecture length must equal course hours × 50 minutes within 40 minutes a week, otherwise the days are cleared.
5. An empty cell is recovered from history only with two or more independent facts and an evidence score of 9 or more, when all matching historical rows agree; an optical reading is never overwritten.

**Inputs**

Grey page pixels, the read text and its confidence, printed and read line counts, raw cells, course hours, and the historical timetable.

**Output**

An early refusal with its reason, or a page verdict (stopped or warned), cells cleared for review with their raw text, and recovered cells tagged with their evidence.

A table of blank cells is never handed over as a reading; a cleared value remains visible evidence for the reviewer; no timetable data is manufactured from one weak fact.

Background grey < 185 and mid-grey share ≥ 55% · Legibility: 140 characters per page and confidence 42 · Hours tolerance 40 minutes a week on a 50-minute hour · Recovery: at least two evidence categories and a score of 9

`src/utils/documentOcr.ts#scanPageTone` `src/utils/documentOcr.ts#greyPhotoVerdict` `src/utils/documentOcr.ts#judgeLegibility` `src/utils/documentOcr.ts#scanPageVerdict` `src/utils/documentOcr.ts#authorityTimeCellLooksPlausible` `src/utils/documentOcr.ts#clearImplausibleScanDays` `src/utils/authorityScanRecovery.ts#recoverAuthorityScanRowsFromHistory` `src/server/routes/pdfImportRoutes.ts#registerPdfImportRoutes` `tests/pdf-import-hardening.ts` `tests/authority-scan-recovery.ts`

FR-IMP-008 FR-IMP-009 FR-IMP-016

ALG-IMP-03 · Import

**Deterministic**

### Comparison with the authority source file

*What has actually changed in the live timetable relative to the authority file: added, deleted, changed or unchanged?*

1. The first reading stays an unchanging baseline; its section numbers are generated and instructors are overlaid from the first published snapshot (the source often prints none).
2. Baseline rows are matched to live rows in stages, accepting a pair only when its key is unique on both sides: the reference number (CRN) first, then the full academic placement (course, site, building, room, days, time), then relaxed keys dropping room, time, day, building, and building plus room in turn.
3. A course match requires equal seven-digit keys when both are known (0109105 is not 0118105); another department's course never matches.
4. Unmatched baseline → deleted; unmatched imported live rows → added; matched rows are compared by meaning: the same verified room or the same minute in another notation is not a change.

**Inputs**

The baseline read from the file, the first published snapshot, the live timetable of the scope, course codes and instructor names.

**Output**

Report rows: added, deleted, changed (with fields), unchanged, or needing source review.

A net difference, not an edit log; neither the baseline nor the timetable is written; an ambiguous pair is never guessed.

`src/server/core/authority.ts#buildAuthorityPdfDiff` `src/utils/authorityRowMatching.ts#matchAuthoritySourceRows` `src/utils/authorityNetChange.ts#authorityFieldMatchesOriginal` `tests/authority-net-diff-audit.ts` `tests/authority-identity-reconciliation-audit.ts`

FR-IMP-026 FR-RPT-023

ALG-IMP-04 · Import

**Gemini-assisted reading with cross-verification**

Assisted reading, confirmed

*Which empty cells of a scanned page can be filled from a second reading, without replacing any value already read?*

1. Offered only after a successful approved reading, only for pages with an unread course, section, days or time cell, and sent only on an explicit click.
2. A bounded catalogue (up to 260 courses and 360 instructors) is sent after removing any civil-identity field.
3. Returned rows are bound to the catalogue and pass the deterministic validators (course, instructor, location, time, conflict).
4. Cross-verification per row: the two readings must agree on at least two identity cells (section, start, end, building, room); one contradiction voids the whole candidate unless reference number and section both agree; a matching reference number counts double.
5. Only empty cells are proposed for filling; a disagreement on a read cell is reported (up to 20) and never applied.
6. The reviewer sees every proposed cell before anything changes; only the approved fills are applied and marked confirmed.

**Inputs**

Images of the selected pages, the rows read by the approved engine, and the bounded catalogue.

**Output**

A list of proposed cell fills with page and section, and a list of disagreements and notes.

The Gemini service writes to no timetable or draft; the deterministic validators and the reviewer's explicit confirmation decide.

Document reading budget 180 seconds | At least two agreements to accept a candidate

`src/utils/geminiScheduleLayer.ts` `src/utils/geminiScheduleLayer.ts#bindGeminiRowsToCatalogue` `src/server/core/gemini.ts#requestGeminiScheduleLayer` `src/utils/importPageReview.ts` `tests/gemini-schedule-layer.ts`

FR-IMP-027 FR-IMP-028 FR-IMP-029 IR-IMP-030

## 3.8.7 Edge cases

### ⚠ A file mixing departments

**Scenario** A text-layer file carries a third page with a department code different from page 1.

**Behaviour** The whole file is refused with PDF_MIXED_DEPARTMENTS naming the page and code, asking to upload each department's pages in its own file. A scan proves only the first page header.

### ⚠ A course tail matching another department

**Scenario** The file prints 0114464 while the department catalogue holds a short course 464.

**Behaviour** It is not linked by tail; it is offered as a choice between linking 464 or creating 0114464 as a separate course after one confirmation, and if the file shows the department's own number with that tail it is another course that is created.

### ⚠ A scanned page with missing lines

**Scenario** A page prints 20 lines and 18 are read.

**Behaviour** It is accepted with a warning and nothing is saved or published until the reviewer presses the page-reviewed button and adds the missing lines in the schedule after import; with 28 printed and 4 read the file stops.

### ⚠ A second scan during the first

**Scenario** Two users upload two different scanned files together.

**Behaviour** The first is read and the second is refused after 45 seconds with 503 SCAN_READING_BUSY and no row imported; if it is the same file it shares the running reading.

**⚠ Gemini unavailable or timed out**

**Scenario** Every page fails because of load or the 180-second timeout.

**Behaviour** 503 GEMINI_SMART_IMPORT_UNAVAILABLE with the statement that the schedule did not change; the approved preview stays as it is and the provider is not called again automatically.

**⚠ A term that already has a schedule**

**Scenario** A PDF is uploaded to a term that already holds appointments.

**Behaviour** Saving returns PDF_TARGET_TERM_OCCUPIED, and the trial run shows the difference (added/removed/changed/same); applying afterwards takes two steps and is preceded by a rollback copy.

**⚠ A shortened instructor name that collides**

**Scenario** A full printed name binds to a shortened record of a person teaching in another college at the same hour.

**Behaviour** The identity of every row with that name is cleared and the reason and the other college are stated so the reviewer picks or adds the instructor.

### 3.8.8 Standing owner decisions

- Header decides the department (authority PDF): department and branch come from the page header even when a course number carries another department's code; a missing department or course is created after one confirmation under its printed number and name with the usual permission; a three-digit tail alone never links (0114464 is not 0120464); scans never create.
- Course numbers are 7 digits only in everything a reader sees (college 2 + department 2 + course 3, for example 0109105); the internal AdCourseId is never shown.
- Printed reports keep their design: fix values and data, not layout, including the report comparing the schedule with the authority document.

↑ Contents

3.9 · REQ

# Faculty requests and public links

A secret personal link lets each faculty member request schedule changes, and an inbox lets the department decide item by item.

| 80 | 100% | 50 | 85 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.9.1 Overview

The module issues a secret personal link (/r/) to each faculty member. The link opens a request card with a time window set in Kuwait time, where the member signs with the civil ID the changes, deletions and additions requested. One server engine judges every item against the regulations and clashes before submission, holds the chosen time temporarily and settles races between colleagues in a single transaction. The request reaches the Instructor inbox, where the department fixes the item in the schedule through the normal save path, rejects it with a reason and alternatives, or converses with the owner. It also covers the public faculty card (/s/), guess limits on links and numbers, the not-yet-reached course state, and the appointment helpers (save-blocker checks, mini week, lecture stick).

Faculty member · Department head · Schedule committee chair · Standard user · Public visitor · The system (automatic) · Root administrator

## 3.9.2 User journeys

**Schedule committee chair** — **Opening requests and the department decision**

1. In Publish, Faculty card, the chair picks the mode (view only or request edit), sets the closing time in Kuwait time and chooses all or selected faculty.
2. If the sheet holds locked courses, the not-yet-reached sheet appears; the chair sends as is or opens courses for offering first.
3. The system issues a personal link and a request in status sent for each member, and logs a line in the send log.
4. As members submit, requests appear in the Instructor inbox ordered: ready first, then needing an exception, then blocked.
5. The department fixes the item, which is written to the schedule through the normal save path and then recorded, or rejects it with one of seven reasons and up to three alternatives.
6. The decision reaches the member's live card within seconds and the member can accept an alternative or reply.

### Faculty member — Requesting a time change from the personal link

1. The member opens the link (/r/), sees the week and items, and picks a lecture to change or a course to add.
2. Pressing a day completes the regulation pattern for the course hours; choosing the start computes the end.
3. Start times are coloured: green passes, yellow needs an exception reason, red is blocked; the chosen time is held for ten minutes.
4. On send the member enters the civil ID, which is matched against the record; the request is accepted or refused with the reason of the blocking item.
5. The member follows each item (pending, fixed, rejected with alternatives) and converses with the department or accepts an alternative with a new signature.

### Faculty member — Opening the public faculty card and notifying the department

1. The member opens the card link (/s/) and types the civil ID, optionally choosing remember me.
2. If the number matches no record or the member teaches nothing in the term, the same no-card answer is returned without distinction.
3. The member sees schedule, movement, the next two weeks and each department's approval state, and opens the request links available to them.
4. The member leaves a note (change request or apology) beside a lecture of their own, which reaches the department, capped at eight notes per day.

### 3.9.3 Diagrams

**Request lifecycle**

Request statuses as the server stores them, and who moves them.

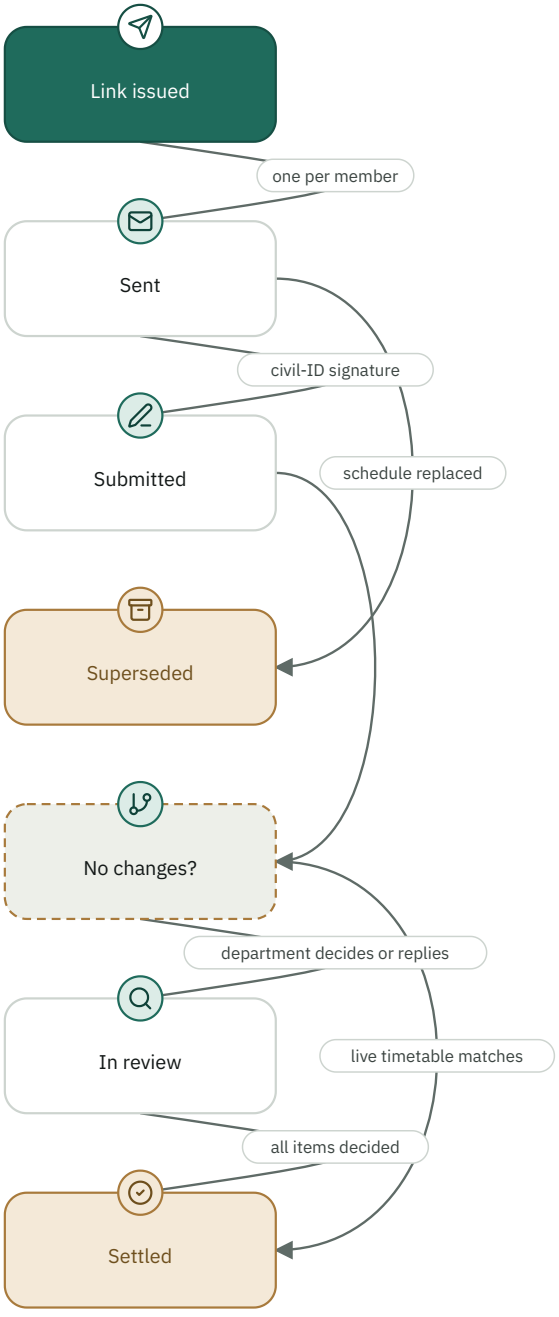

## Item decision

The path of one item from the member's submission to the department outcome.

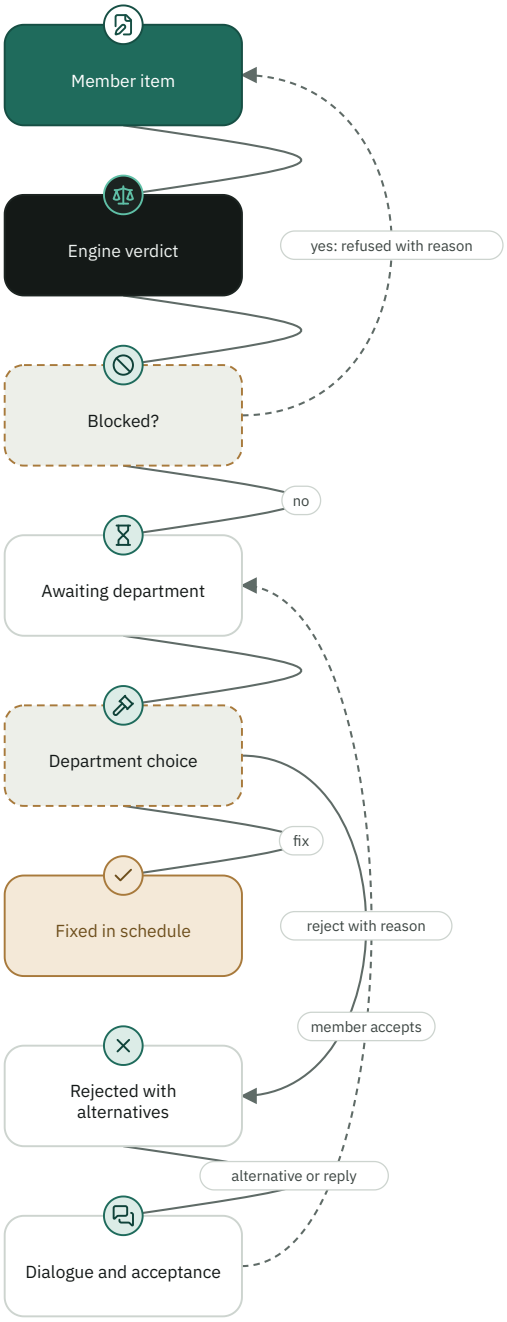

## Public link gates

What an anonymous request passes before anything is read.

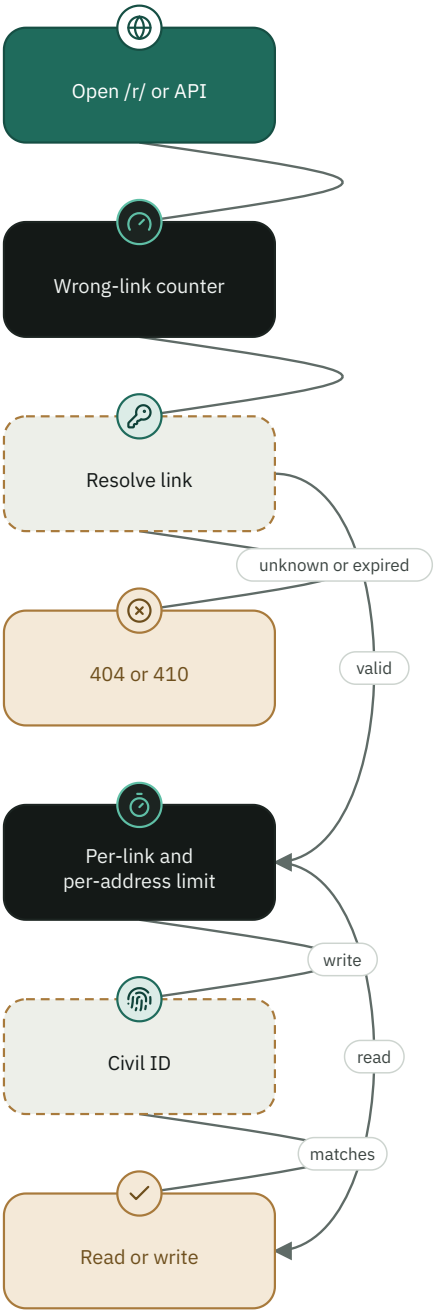

## Hold and race

How two colleagues competing for the same time and room are settled.

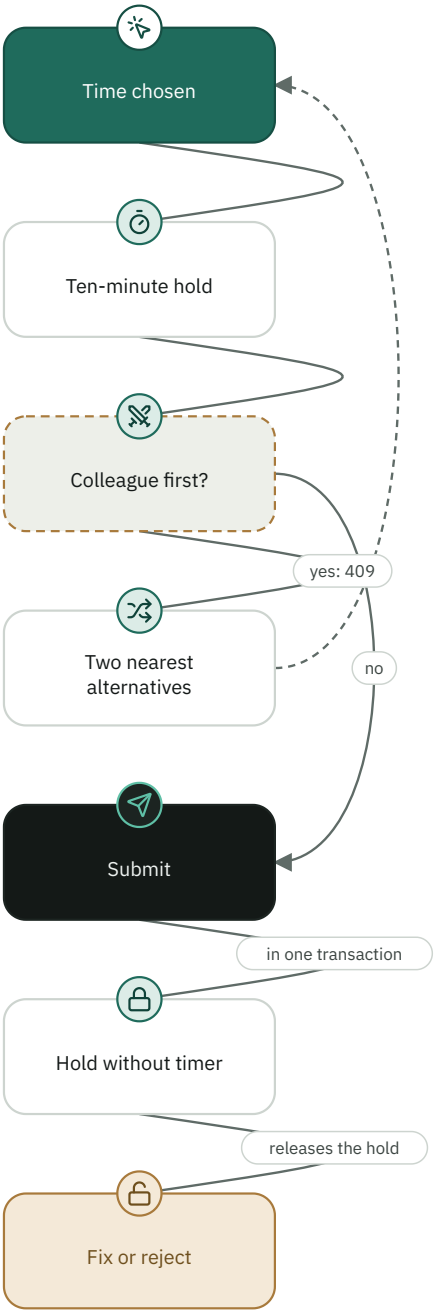

**Who does what**

| | Issue links | Submit signed request | Decide on item | Open faculty card |
|---|---|---|---|---|
| Faculty member | – | ✎ | – | 👁 |
| Schedule committee chair | ✎ | – | ✎ | – |
| Department head | ✎ | – | ✎ | – |
| Standard user | ✎ | – | ✎ | – |
| Public visitor | – | – | – | – |

✎ Write 👁 Read – No access

### 3.9.4 Screens

**Instructor request card (/r/)**
Public page opened with the personal link: the member's week, item editing, signing, dialogue with the department and term memory.`src/server/pages/instructorRequestPage.ts`

**Faculty card (/s/)**
Public card opened with the civil ID: schedule, movement, notes and request links.`src/server/pages/staffCardPage.ts`

**Instructor inbox**
Department decision queue: fix, reject with a reason, dialogue, fix all ready, location filter and congestion heat map.`src/components/InstructorInbox.tsx`

**Publish, Faculty card, For whom?**
Choose all or selected faculty before sending.`src/components/PublishRecipientPicker.tsx`

**Not-yet-reached sheet before sending**
Warning listing locked courses with an open-for-offering action.`src/components/PrepublishReachSheet.tsx`

**Save-blocker checks**
Six status cards for the appointment form and a summary ring.`src/components/AppointmentChecksPanel.tsx`

**Faculty mini week**
The member's week, free slots and before/after targets inside appointment forms.`src/components/TeacherMiniWeek.tsx`

**Course reach state**
Reached / not-yet-reached chips and the prerequisite chain.`src/components/CourseReach.tsx`

### 3.9.5 Requirements

**FR-REQ-001** **Personal request link per faculty member**

The system shall issue to each faculty member in the department family's schedule for the term a secret personal link and a request in status sent holding all of the member's schedule rows, shall never issue a link to the placeholder faculty identity, and shall refuse issuing outside the user's scope or on a frozen term or locked schedule.

Implemented · Must · Functional · Schedule committee chair, Department head, Standard user

**RATIONALE**

> The personal link is the only access permission, so it must belong to a real person and sit within the decision-maker's scope.

**ACCEPTANCE CRITERIA**

1. Issuing for a department with two members returns two issued entries; for a schedule with no rows it returns emptyTerm with reason no-rows.
2. Issuing on a frozen term or locked schedule is refused with 409 (schedule-locked), and outside scope with 403.
3. No link is issued to the placeholder faculty identifier even when it appears in the schedule.

**EVIDENCE**

`src/server/routes/instructorRequestsRoutes.ts#registerInstructorRequestsRoutes` `src/server/core/staffCard.ts#staffFamilyScopes` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/issue` `tests/instructor-request-server-audit.ts` `tests/instructor-request-cross-college-audit.ts` `tests/publish-requests-audit.ts`

**FR-REQ-002** **Request window and link lifetime**

The system shall accept the request closing time in Kuwait time (+03:00) only as a valid date or date and time and shall reject it in the past, and shall set the request link's expiry to the greatest of the closing time plus one day, the issue time plus 21 days, and the end of the term.

Implemented · Must · Functional · Schedule committee chair, Department head, The system (automatic)

**RATIONALE**

> Links used to expire before the announced deadline, and department decisions and alternatives arrive after closing, so the link must remain readable.

**ACCEPTANCE CRITERIA**

1. The date 2026-02-31 alone or the time 25:99 is refused with 400, and a past date is refused with 400 closing date in the past.
2. A date without a time closes at the end of that day in Kuwait time.
3. A request with an elapsed window refuses submission with 403 while dialogue and reading remain available.

**EVIDENCE**

`src/utils/instructorRequestWindows.ts#normalizeInstructorDeadline` `src/utils/instructorRequestWindows.ts#requestWindowOpen` `src/server/core/instructorRequests.ts#REQUEST_LINK_DAYS` `src/utils/shareLinkLifetime.ts` `tests/staff-request-windows-audit.ts` `tests/instructor-request-server-audit.ts`

### FR-REQ-003 Link mode: view, edit or training

The system shall store the card's send mode on each member's request as one of three values (view only, request edit, training phase) and enforce it on the server, so a view-only link writes nothing and the training phase cannot be opened through the normal issue path.

Implemented · Must · Functional · Schedule committee chair, Department head, Faculty member

**ACCEPTANCE CRITERIA**

1. Submitting a request, a hold or a stick from a view link is refused with 403 view-only or returns held false.
2. Issuing with mode ta is refused with 400 and directed to the training phase panel.
3. In the training phase an item that is not a vacant section is refused, and an absent field means request edit.

**EVIDENCE**

`src/utils/linkMode.ts` `src/server/routes/instructorRequestsRoutes.ts` `src/server/routes/publicRequestRoutes.ts` `tests/publish-pick-teachers-audit.ts` `tests/ta-phase-flow-audit.ts` `tests/staff-request-windows-audit.ts`

### FR-REQ-004 Publishing to selected faculty and the send log

The system shall allow sending to a list of selected faculty (up to 300) or to owners of appointments carrying an open registration note, shall never turn an empty list or an identifier outside the family into all, and shall record every send as a log line holding mode, audience, count and sender name, listing the latest 200 lines.

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. Empty or more than 300 instructorIds are refused with 400, and an identifier not in the family's schedule is refused with 404 with nothing written.
2. A selected send does not change the shared deadline or the requests of unselected members, and a notes-only send requires edit mode and is refused with 409 when there are no notes.
3. GET send-log returns audience all, picked, exception or ta and never more than 200 lines, each line carrying what happened (fresh new · renewed renewed or replaced · kept awaiting the department · skipped skipped) and its names without duplicates.
4. Before any faculty-card send (to everyone or a selection, view or edit) the client reads GET live-cards (department permission and scope, no civil ID or link); if anyone holds a live card the coordinator is asked once: repeat (same link with the new deadline, the default), replace (cardAction=replace: a new link that revokes the old one while the request stays) or skip (skipInstructorIds: untouched), and a member who submitted and awaits the department is untouched by every choice. In «selected instructors» the decision is taken per person when their name is picked (a repeat · replace · skip row under the name, repeat by default), so there is no second question on «send», and replace is sent for specific people with replaceInstructorIds so a colleague in the same send keeps their link.

**EVIDENCE**

`src/server/routes/instructorRequestsRoutes.ts` `src/components/PublishRecipientPicker.tsx` `src/components/PublishSendLog.tsx` `src/utils/requestNotedScope.ts` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/send-log` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/live-cards` `tests/publish-pick-teachers-audit.ts` `tests/publish-requests-audit.ts` `tests/publish-live-cards-audit.ts`

### FR-REQ-005 Reopening follows the new deadline

When reissuing to a member who already has a request, the system shall leave a submitted or in-review request untouched, give an unsubmitted request the new deadline (with a new link if its link is dead), and create a new request only when the previous one is settled or superseded.

● Implemented · Must · Functional · Schedule committee chair, Department head

**RATIONALE**

> The mere existence of any earlier request used to make the system treat it as the member's request, so the member never found the request tab on the card.

**ACCEPTANCE CRITERIA**

1. reissueMove returns keep for submitted and in-review, extend for sent, and fresh for settled and superseded.
2. A revoked link, or one expiring before the new deadline, is replaced by a new link and the old one is revoked.

**EVIDENCE**

`src/utils/requestReissue.ts` `src/server/routes/instructorRequestsRoutes.ts` `tests/request-reissue-audit.ts` `tests/publish-requests-audit.ts`

### FR-REQ-006 Individual exception after closing

The system shall allow the department to open an exceptional edit window for one member with a written reason (up to 400 characters) and a dedicated closing time, provided an active published card exists, shall allow revoking the exception immediately without cancelling the card, and shall not extend a settled or superseded request; the exception shall be placed on the member's open request itself (sent, submitted or under review) rather than creating a second one, so a member never has two open requests.

● Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. An individual issue without a reason is refused with 400, and without a published card with 409.
2. exception/revoke records revokedAt and returns 409 when no exception is active, and works even when the term is frozen.
3. requestWindowOpen returns true inside the exception and false after revokedAt or for a settled request.
4. exception/revoke without a college, department, term or a valid member ← 400 «specify the department, term and member.», outside scope ← 403; revokedBy is recorded with an audit line «closing the member's schedule-edit exception before its time».
5. Issuing an exception for a member not in the family's schedule for the term, or for the placeholder faculty, ← 404; the request's general window closes at the published card's deadline (or is already closed) while the exception carries its own closing time.

**EVIDENCE**

`src/utils/instructorRequestWindows.ts#individualExceptionOpen` `src/server/routes/instructorRequestsRoutes.ts` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/exception/revoke` `tests/staff-request-windows-audit.ts` `tests/handover-fixes-audit.ts`

### FR-REQ-007 Not-yet-reached course state

The system shall judge every course in every branch (the department in its college) and every sheet as reached, locked or unknown, from the sheet's prerequisites, corequisites, level and that branch's own section history, shall let an open-for-offering decision override the rule, and shall never lock a course without evidence.

● Implemented · Must · Functional · Schedule committee chair, Department head, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A course with no prerequisites whose level exceeds the highest level offered in the branch by more than one is locked, and the first term of a new sheet opens only 100-level courses with no prerequisites.
2. The boys' branch history does not open a course for the girls' branch, and a branch with no history stays unknown with no tag.
3. A locked course shows greyed with its reason on the faculty card and cannot be chosen, and the server refuses choosing it.

**EVIDENCE**

`src/utils/courseReach.ts` `src/server/courseReachShared.ts` `src/components/CourseReach.tsx` `src/server/routes/publicRequestRoutes.ts#lockUnreached` `tests/course-reach-audit.ts` `tests/sheet-membership-audit.ts`

### FR-REQ-008 Not-yet-reached sheet before sending

Before sending a card in request-edit or training mode, the system shall show a confirmation sheet listing locked courses by code, name and short reason with an open-for-offering action for each, shall not show it for view only or when no course is locked, and shall not let a failure to read the verdict block sending.

Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. The sheet does not appear for view-only mode, and what the administrator already closed (not offered or future) is not counted.
2. Open-for-offering flips the row to open in place and reduces the count including its corequisite.

**EVIDENCE**

`src/utils/prepublishReach.ts` `src/components/PrepublishReachSheet.tsx` `tests/prepublish-reach-audit.tsx` `tests/course-reach-audit.ts`

### FR-REQ-009 Link resolution and error replies

The system shall resolve the faculty request token, returning 404 for an unknown, revoked or other-kind link and 410 for an expired link or a round closed by schedule replacement, shall make the /r/ page show an invalid-link page with the same status, and shall never return a civil ID or phone number in any public reply.

Implemented · Must · Functional · Faculty member, Public visitor, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A department schedule link token on the request path returns 404 not a schedule request.
2. A link expired after its term end returns 410, and a manually revoked link returns 404 before any other consideration.
3. Opening an /s/ link of kind request is redirected to its own door and never shows the department schedule.

**EVIDENCE**

`src/server/core/instructorRequests.ts#resolveRequestLink` `src/server/routes/publicRequestRoutes.ts` `src/server/routes/publicStaffRoutes.ts` `src/server/routes/publicRequestRoutes.ts#/r/:token` `src/server/routes/publicStaffRoutes.ts#/s/:token` `tests/instructor-request-server-audit.ts` `tests/instructor-request-followup-audit.ts`

### FR-REQ-010 Guess limit on wrong links

The system shall count per address only the /r/ page and proposal opens that match nothing (404), shall block the address after 40 misses in ten minutes with a 429 page and a Retry-After header of 600 seconds, and shall credit the address for each page served successfully, with an absolute ceiling of 400 misses.

Implemented · Must · Functional · Public visitor, The system (automatic)

**RATIONALE**

> The university network is one address for thousands of members, so guessing deserves the limit, not entry.

**ACCEPTANCE CRITERIA**

1. The forty-first miss within ten minutes from the same address returns 429, and an expired link (410) is not counted as a miss.
2. Sub-requests under /r/ other than the page and proposals pass without counting.

**EVIDENCE**

`src/server/anonymousGuard.ts#createLinkMissGuard` `src/server/publicAttemptLimiter.ts#createAttemptLimiter` `server.ts#PUBLIC_LINK_PAGE_PREFIXES` `tests/anonymous-guard-audit.ts`

### NFR-REQ-011 Rate limits on public request APIs

The system shall apply per-minute limits counted per link (token fingerprint) rather than per address: 30 for submit, reply and interest, 90 for time checks, hold and stick, and 120 for opening the card stream, on top of a general ceiling of 240 per link and 1500 per address per minute, configurable from the environment.

Implemented · Must · Non-functional · The system (automatic), Faculty member

#### ACCEPTANCE CRITERIA

1. The 31st request in one minute on one token to the submit path returns 429 with an Arabic message.
2. The key is a sha256 fingerprint truncated to 32 characters, not the token itself, so no token stays in memory.

#### EVIDENCE

`src/server/routes/publicRequestRoutes.ts#rateLimitPublicRequest` `src/server/core/rateLimits.ts#requestTokenKey` `src/server/core/rateLimits.ts#requestLinkLimit` `tests/teacher-card-flow-audit.ts`

### FR-REQ-012 Civil-ID signature on requests

The system shall require on submit, reply and acceptance of department alternatives a valid civil ID matching the link owner's record, shall return one answer for a wrong number and for a record with no number, shall store not the number but its fingerprint and a verification code, and shall limit guessing to ten failures in ten minutes per request and address.

Implemented · Must · Functional · Faculty member

#### RATIONALE

> Links are forwarded over messaging apps, and pressing send alone does not prove the owner wrote the request.

#### ACCEPTANCE CRITERIA

1. An incomplete number is refused with 400, and a number not matching the record with 403 civil ID does not match the owner of this link.
2. Arabic and Persian digits are normalised before matching, and the eleventh wrong attempt returns 429.
3. The public reply omits the fingerprint and returns only the date and verification code.
4. The civil-ID format is validated before a signing attempt is reserved, so a typo never consumes attempts, and the signing sheet re-asks for the number only on a mismatch (code civil-mismatch); a 403 for a closed window shows its own message.

#### EVIDENCE

`src/server/core/instructorRequests.ts#verifyRequestSigner` `src/server/core/shareLinks.ts#publicAttemptReserve` `src/server/publicAttemptLimiter.ts` `src/server/publicKit.ts` `tests/request-signature-audit.ts` `tests/instructor-request-server-audit.ts` `tests/teacher-card-r5-audit.ts`

### FR-REQ-013 Accepting a request and validating its items

On submission the system shall rebuild the items from stored data rather than from what was sent (only day, start, course and action), and shall refuse more than 200 items, a blocking item (conflict), an exception without a reason, a closed term, a closed window, an edit outside appointments carrying a registration note, and a course that is not offered or outside the department catalogue.

Implemented · Must · Functional · Faculty member, The system (automatic)

#### ACCEPTANCE CRITERIA

1. Sending 201 items is refused with 400, and an item with verdict conflict is refused with 400 carrying itemIndex and the first blocking reason.
2. An exception without excuse is refused with 400 asking for the reason, and the excuse is truncated at 400 characters.
3. The general note is truncated at 400 characters and does not enter the verdict, and a course outside the catalogue is refused with 400.

#### EVIDENCE

`src/server/routes/publicRequestRoutes.ts#instructorRequestItemsFromPayload` `src/server/routes/publicRequestRoutes.ts` `src/utils/requestNotedScope.ts#notedScopeBreach` `src/server/routes/publicRequestRoutes.ts#/api/public/request/:token` `tests/instructor-request-server-audit.ts` `tests/instructor-request-followup-audit.ts` `tests/instructor-request-availability-audit.ts`

### FR-REQ-014 Engine verdict on a member's item

The system shall judge every item with one engine against the live schedule after applying the whole bundle, with one of three verdicts (clear, needs an exception, not allowed), shall make the regulation binding on the faculty card, shall not block a row the member did not touch, and shall recompute at every read and submit rather than store the verdict.

● Implemented · Must · Functional · Faculty member, Department head, The system (automatic)

#### ACCEPTANCE CRITERIA

1. Moving two lectures to the same hour does not clash each with its old place but with its sibling in the bundle.
2. A review verdict in the regulation passes tagged needs exception, a block verdict prevents submission, and a physical instructor or room overlap blocks.
3. The request window limits the member's submission but not the department's decision: the department read (forDepartment) ignores the window condition.
4. A change item for an appointment that is one row of a multi-row section is judged on send by the whole section's days (for every course, by the same judge the department's apply reads): moving the Tuesday of «Sun 80 + Tue 80» to Thursday is «not allowed», with the days that keep the section an approved pattern; an appointment whose shape did not change is not refused by it.

#### EVIDENCE

`src/utils/instructorRequestVerdict.ts#judgeRequest` `src/server/core/instructorRequests.ts#judgeRequestItems` `src/utils/instructorRequestWeek.ts#instructorWeekAfter` `tests/instructor-request-availability-audit.ts` `tests/instructor-request-review-regressions.ts` `tests/teacher-card-hours-patterns-audit.ts` `tests/final-audit-gaps-audit.ts`

### FR-REQ-015 Meeting length and pattern day completion

The system shall compute the meeting end from days and start with a single engine shared by server and page (the saved length when the days and start are unchanged, otherwise the appointment's own length when the days match and that length is approved in the library, while moving a single-day meeting to a single day with an unapproved length takes the approved length for that day nearest it, otherwise the regulation pattern for the course hours, otherwise 50 minutes, and 80 for Monday and Wednesday), shall block sending an item whose end does not match the approved pattern's length with a line naming the correct end and an «apply the pattern» button, and shall complete the regulation pattern's days on the first day pressed, after which each press adds or removes that day alone.

● Implemented · Must · Functional · Faculty member, The system (automatic)

#### ACCEPTANCE CRITERIA

1. Monday alone for a three-hour course becomes Monday and Wednesday, and the second press adds or removes one day only.
2. The browser copy of the length engine gives the same result as the server on a table of cases, so the member never reads 16:50 and saves 17:15.
3. Nothing is inferred from the course history when a day is chosen.
4. A Thursday 75-minute meeting of a four-hour course moved to a 15:00 start → 15:00–16:50 (110 min), not a 230-minute block; an existing appointment whose days and start are kept keeps its length even if outside the library.

#### EVIDENCE

`src/utils/requestMeetingLength.ts` `src/server/requestLengthScript.ts` `src/server/requestDayAutofillScript.ts` `src/utils/appointmentRegulation.ts#patternLengthIssue` `src/utils/instructorRequestVerdict.ts#judgeRequest` `tests/teacher-card-logic-audit.ts` `tests/request-day-autofill-audit.ts` `tests/teacher-card-hours-patterns-audit.ts` `tests/teacher-card-flow-audit.ts` `tests/new-appointment-pattern-end-audit.ts`

### FR-REQ-016 Temporary hold and race settlement

The system shall temporarily hold the chosen time for ten minutes inside the same ledger transaction that submission uses, so the time disappears from colleagues' maps, shall answer a member beaten by a colleague with 409 and two nearest alternatives, and shall keep a submitted request's hold without a timer until the department decides.

Implemented · Must · Functional · Faculty member, The system (automatic)

#### RATIONALE

> Forty concurrent submissions for one room must produce exactly one winner.

#### ACCEPTANCE CRITERIA

1. A second hold for the same time and room returns 409 with code race-lost and an alternatives field of at most two entries.
2. A temporary hold older than ten minutes holds nothing, and cancelling an addition releases only its own hold by identity, not by index.
3. Browsing options and checking times hold nothing, and fixing or rejecting the item releases the hold.
4. Draft holds per link are capped at the number of items being edited plus one, three at most; the oldest is released first, the same item's hold is replaced, and hold creation is rate-limited to twenty a minute per link.

#### EVIDENCE

`src/utils/instructorRequestReservations.ts` `src/server/routes/publicRequestRoutes.ts#REQUEST_HOLD_TTL_MS` `src/components/RequestHoldSheet.tsx` `src/server/routes/publicRequestRoutes.ts#/api/public/request/:token/hold` `src/utils/instructorRequestReservations.ts#holdRequestReservation` `tests/instructor-request-availability-audit.ts` `tests/teacher-card-logic-audit.ts` `tests/teacher-card-flow-audit.ts` `tests/teacher-card-r5-audit.ts`

### FR-REQ-017 Time map and draft check

The system shall measure against the real schedule up to 14 start times for one item, returning ok, warn or bad for each with the same single verdict, with one reason code for a blocked time, shall return the days problem (shape) with approved patterns instead of colouring every time red, shall check a draft of up to 80 items in one batch, and shall fail explicitly rather than claim there is no conflict.

Implemented · Should · Functional · Faculty member, The system (automatic)

#### ACCEPTANCE CRITERIA

1. More than 14 starts are truncated to 14, a non-HH:MM format is dropped, and a batch above 80 is refused with 400.
2. When the days do not cover the course hours the reply is problem shape with up to three patterns and no times.
3. The blocking reason code is one of instructor, room, facility, cohort, load, regulation and travel.

#### EVIDENCE

`src/server/routes/publicRequestRoutes.ts` `src/server/core/instructorRequests.ts#buildSharedRequestContext` `src/server/routes/publicRequestRoutes.ts#/api/public/request/:token/check` `src/server/routes/publicRequestRoutes.ts#/api/public/request/:token/check-batch` `src/server/routes/publicRequestRoutes.ts#/api/public/request/:token/check-times` `tests/teacher-card-logic-audit.ts` `tests/instructor-request-followup-audit.ts`

### FR-REQ-018 Stick to my lecture

The system shall generate for each of the member's existing lectures two candidate times (before and after), counted from its end or start plus the regulation gap of 10 minutes onto the first start on the regulation ladder, shall judge each candidate with the single engine, and shall order available first without ever sending the member a room or building name.

Implemented · Could · Functional · Faculty member, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A lecture whose move or deletion was requested is not a fixed anchor, and anchors never exceed 12.
2. The reply passes through stickForTeacher so it carries no sameRoom or sameBuilding, and the nearest available candidate stops the check of later ones.

#### EVIDENCE

`src/utils/lectureStick.ts` `src/server/routes/publicRequestRoutes.ts` `src/components/LectureStickChips.tsx` `src/server/routes/publicRequestRoutes.ts#/api/public/request/:token/stick` `tests/lecture-stick-own-audit.ts` `tests/teacher-card-r4-audit.ts` `tests/appointment-forms-r2-audit.ts`

### FR-REQ-019 Choosing a vacant section

The system shall offer the member only sections assigned to the placeholder faculty, with all their meetings, within the allowed courses, after excluding what another member reserved or the member already chose, what has no real room identifier, what exceeds the member's load, and what clashes with the member or in a room, and shall never expose another member's timetable.

Implemented · Must · Functional · Faculty member, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A section with a real instructor on any row does not appear, and a section with no room identifier does not appear.
2. Approval assigns the section's own rows without changing times, rooms or code, rejection releases them, and a submitted hold has no timer.
3. A section of a course locked by not-yet-reached is refused by the server.

#### EVIDENCE

`src/server/routes/publicRequestRoutes.ts#availableInstructorOfferings` `src/server/core/instructorRequests.ts` `tests/instructor-offering-flow-audit.ts` `tests/instructor-request-availability-audit.ts`

### FR-REQ-020 Confirming the schedule unchanged

The system shall settle the request at signing (status settled with an unchanged-confirmed event) only when every item is keep and each item matches the member's live schedule exactly (course, section, days and times), with no free-text note, decision or dialogue, and shall store the schedule fingerprint at that moment.

Implemented · Must · Functional · Faculty member, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A request with any general note stays submitted and reaches the department, and no department notification is sent on direct confirmation.
2. A settled request with no changes returns 409 on resubmission saying the schedule was already confirmed.
3. A copy carried over from a previous term is not confirmed, since the decision concerns the live schedule alone.

#### EVIDENCE

`src/utils/instructorRequestConfirmation.ts` `src/server/routes/publicRequestRoutes.ts` `tests/unchanged-request-confirmation-audit.ts` `tests/unchanged-request-confirmation-http-audit.ts`

### FR-REQ-021 Replaying the previous term's request

On request the system shall show the member what they submitted in the nearest earlier term chronologically (not by identifier order) and how it was decided, and shall replay it as a draft by one rule that does not replay what was rejected, does not guess a section for a course with more than one section, and does not touch an item the member edited, the department decided, or that is already the current time.

Implemented · Could · Functional · Faculty member

#### ACCEPTANCE CRITERIA

1. Each skipped item is shown with its reason (rejected that term, more than one section, already the current time).
2. Replay is a draft not a submission, goes through live checking as if just written, and the reply is cached for five minutes and carries nothing meant for the department alone.

#### EVIDENCE

`src/server/requestReplayScript.ts` `src/utils/previousTermRequest.ts#pickPreviousRequest`
`src/server/routes/publicRequestRoutes.ts` `src/server/routes/publicRequestRoutes.ts#/api/public/request/:token/previous`
`tests/teacher-card-flow-audit.ts` `tests/request-page-browser-syntax-audit.mjs` `tests/doctor-journey-audit.ts`

### NFR-REQ-022 What never reaches the member: rooms and internal history

The system shall strip from every public reply of a member's request the rooms and buildings (candidates, options, reserved, switched and the room field), the signature fingerprint, signature history, archived items and revision stamps, and shall scrub room codes from what the committee writes (rejection note, replies, timeline).

Implemented · Must · Non-functional · Faculty member, The system (automatic)

#### RATIONALE

> Owner decision (2026-10-29): rooms are the department's decision; the member sees only that a time is available or not.

#### ACCEPTANCE CRITERIA

1. The reply of GET /api/public/request/:token contains no roomCandidates, roomOptions, offeringRows, reservedRoom, roomSwitch or signatureHistory.
2. A rejection note written by the coordinator that contains a room code reaches the member with the generic word instead of the code.
3. Schedule movement on the request page carries no room name, and an edit that touched only the room does not arrive as an event.
4. The card shows no room or building anywhere, reads no such field and strips any room or building code from server text; availability alone is a door icon with a check. No blocker wording reaches the member: time not available, review what needs changing.

#### EVIDENCE

`src/server/routes/publicRequestRoutes.ts#stripForInstructor` `src/server/core/staffCard.ts#scheduleMovementEntries`
`src/server/teacherCardLogic.ts#tcNoPlace` `tests/instructor-request-server-audit.ts` `tests/teacher-card-logic-audit.ts`
`tests/teacher-card-r4-audit.ts` `tests/teacher-card-r5-audit.ts`

### IR-REQ-023 Live card stream

The system shall open for the member's page an event stream (SSE) using the same personal link that carries from the request only the event kind and time, capped at 4 connections per request and 600 server-wide with a heartbeat every 25 seconds, and the browser shall fall back to ordinary reading after the cap.

● Implemented · Should · Interface · Faculty member, The system (automatic)

#### ACCEPTANCE CRITERIA

1. The fifth connection for one request returns 429 too many connections on this link, and the registration is cleaned when the connection drops.
2. A department decision reaches an open card within two seconds without reloading.
3. The department-reply banner fires only for department-side changes, not for derived availability; anything else is read silently under the draft. Refresh-keeping-my-edit refetches and reapplies the draft so sending succeeds, keeping the department's decision on an item it decided, in one line. A reconnected stream refetches once, and every timeline kind has an Arabic label with no raw code or machine detail.

#### EVIDENCE

`src/server/routes/publicRequestRoutes.ts#CARD_STREAMS_PER_REQUEST` `src/server/routes/publicRequestRoutes.ts` `src/server/routes/publicRequestRoutes.ts#/api/public/request/:token/events` `src/server/teacherCardLogic.ts#tcDeptSig` `src/server/pages/instructorRequestPage.ts#rebaseDraft` `tests/teacher-card-flow-audit.ts` `tests/teacher-card-r5-audit.ts`

### FR-REQ-024 Instructor inbox: decision list and its scope

The system shall return to the department inbox the current-round requests for a term and college (and optionally a department) with the department family across sites, shall show of an item outside the user's scope only a hidden shell with no course, time or room, and shall return totals (sent, answered, unchanged, changed, unopened, settled) without listing the placeholder faculty.

● Implemented · Must · Functional · Schedule committee chair, Department head, Standard user

#### ACCEPTANCE CRITERIA

1. An item in another department arrives with hidden true and empty slots, keeping action, index and decision state.
2. totals.unopened does not count view-only links, and requests from old rounds (after schedule replacement) do not appear.
3. A request issued by another college appears in this college when it carries an item on a lecture in it.

#### EVIDENCE

`src/server/routes/instructorRequestsRoutes.ts` `src/server/core/instructorRequests.ts#requestItemScope` `src/utils/inboxAudience.ts` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests` `tests/instructor-request-cross-college-audit.ts` `tests/inbox-campus-audit.ts` `tests/inbox-live-audit.ts`

### FR-REQ-025 Department decision on an item: fix or reject

The system shall record the department decision on an item as one of two states (fixed, rejected) within the item's scope rather than the link's scope, shall require for rejection a reason from seven (room, instructor, regulation, cohort, load, department, other), a note of up to 400 characters and up to three alternatives, and shall not record fixed before the schedule itself confirms it happened.

● Implemented · Must · Functional · Schedule committee chair, Department head, Standard user

#### ACCEPTANCE CRITERIA

1. A rejection with no valid reasonCode is refused with 400 asking for the reason, and fixing an already-fixed item is refused with 409 already-fixed.
2. Fixing an addition with no matching saved row (member, course, term, college, department) is refused with 409, and fixing a deletion while the row remains is refused with 409.
3. An item with different times across days is not fixed with one time: refused with 409 mixed-times, and alternatives are cut at three.
4. A rejection with alternatives does not close the request, which stays in review until the member chooses.

#### EVIDENCE

`src/server/routes/instructorRequestsRoutes.ts` `src/utils/instructorRequestVerdict.ts#requestFullySettled` `src/utils/instructorRequestThread.ts#parseOfferedSlots` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/:id/decide` `tests/masari-approval-integrity-audit.ts` `tests/instructor-request-server-audit.ts` `tests/instructor-request-followup-audit.ts`

### FR-REQ-026 Atomic approval of an item

The system shall fix an item (with its pending linked items) in a single call that dry-runs the bundle through the normal save path, then writes the appointments, the decision and the hold release together or writes nothing, under a per-term apply lease, requiring the request revision stamp and each row's stamp, and shall offer a preview that writes nothing.

● Implemented · Must · Functional · Schedule committee chair, Department head, Standard user

#### RATIONALE

> Fixing used to be two steps with a gap that could leave a row without a decision or a chain half moved.

#### ACCEPTANCE CRITERIA

1. A missing request stamp is refused with 428, a stale one with 409 request-revision, a missing row stamp with 428 and a changed row with 409.
2. A fix already running in the same term returns 409 apply-busy, and the lease is renewed every 40 seconds and released at the end.
3. A rejected or fixed item is not approved (409 rejected-item or already-fixed), and linked items are accepted only when pending.
4. preview true returns the plan and warnings with no write.

#### EVIDENCE

`src/server/routes/instructorRequestsRoutes.ts` `src/utils/linkedRequestItems.ts#awaitedItemIndexes` `src/utils/instructorRequestItems.ts` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/:id/apply` `tests/instructor-request-review-regressions.ts` `tests/instructor-request-availability-audit.ts` `tests/linked-requests-audit.ts`

### FR-REQ-027 Item dialogue and accepting an alternative

The system shall let the department reply on an item with text of up to 400 characters and up to three proposed times without deciding or writing to the schedule, and shall let the member, with a signature, accept a proposal or the rejection alternatives (singly or in a batch of up to 100) or reply with another proposal, in a thread of at most 40 messages per item whose first message is kept and the overflow archived, remaining open after the window closes unless the term is frozen.

● Implemented · Must · Functional · Schedule committee chair, Department head, Faculty member

#### ACCEPTANCE CRITERIA

1. A reply with no text and no time is refused with 400, and a fixed and agreed item is refused with 409.
2. Acceptance with an outdated proposal identifier is refused with 409 request-proposal, and a request not yet sent is refused with 409 send your request first.
3. Beyond 40 messages the first and the last 39 are kept and the older ones move to threadHistory.
4. A department reply with proposed times on a chosen section whose time is fixed is refused with 400.

#### EVIDENCE

`src/utils/instructorRequestThread.ts` `src/utils/instructorRequestProposalIdentity.ts` `src/utils/requestAlternatives.ts` `src/server/routes/publicRequestRoutes.ts` `src/server/routes/instructorRequestsRoutes.ts` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/:id/reply` `src/server/routes/publicRequestRoutes.ts#/api/public/request/:token/reply` `src/server/routes/publicRequestRoutes.ts#/api/public/request/:token/reply-batch` `tests/public-kit-audit.ts` `tests/instructor-request-followup-audit.ts` `tests/instructor-request-review-regressions.ts`

### FR-REQ-028 Cancelling a department-placed appointment and undoing a fix

Inferred

The system shall allow cancelling an item the department placed from an appointment by deleting its row through the normal delete path with a line to the member of up to 160 characters (rejected with reason department), and shall allow undoing a fix from the schedule by restoring the item to its earlier state without a notification, provided the row no longer sits on the requested time, with repetition having no effect.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. Cancelling with no line is refused with 400, and cancelling an item that is not a department-placed appointment is refused with 409.
2. reopen-fixed while the row is still on the requested time is refused with 409, a superseded request with 409, and repeating it returns reopened 0.
3. reopen-fixed for an unknown request ← 404, on a frozen term it is refused, and for an item outside the user's scope ← 403; without scheduleId or with no item fixed from that row ← ok with reopened:0 and nothing written.
4. «Still on the requested time» means every requested slot falls on a day the live row carries and its start equals the row's start.

#### EVIDENCE

`src/server/routes/instructorRequestsRoutes.ts` `src/server/core/scheduleConflicts.ts#reopenedRequest`
`src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/:id/cancel-scheduled`
`src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/:id/reopen-fixed`
`tests/instructor-request-followup-audit.ts` `tests/masari-approval-integrity-audit.ts`

### NFR-REQ-029 Request revision stamp against overwriting a colleague

The system shall require the request revision number (requestRevision) on every decision, reply, cancellation and public submission, returning 428 when absent and 409 when it differs from storage, so nothing is written over a change that happened after the screen opened, and the member's draft shall stay preserved in a 409 reply.

Implemented · Must · Non-functional · Schedule committee chair, Department head, Faculty member

#### ACCEPTANCE CRITERIA

1. decide, reply, cancel-scheduled and the public POST without requestRevision return 428 with code request-revision-required.
2. An old number returns 409 with code request-revision, and a changed item order returns 409 with code request-item.

#### EVIDENCE

`src/server/core/instructorRequests.ts#requireInstructorRequestRevision`
`src/server/core/instructorRequests.ts#instructorRequestItemIdentity` `tests/instructor-request-review-regressions.ts`
`tests/instructor-request-server-audit.ts`

### FR-REQ-030 Faculty card identity gate

The system shall open the faculty card (/s/) with the civil ID or a signed device key, shall return one 404 answer for a wrong number and for a member who teaches nothing in the link's term, shall open a personal link only for its owner, shall limit guessing to ten failures in ten minutes per link and address, and shall not count an attempt with neither number nor key.

Implemented · Must · Functional · Faculty member, Public visitor, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A civil ID with fewer than 8 digits after normalisation opens no card, and the eleventh wrong attempt returns 429.
2. A personal link with a colleague's number returns the same 404, and the general department link carries no requests, decisions or rejection notes.
3. A member whose every lecture was removed after having a schedule gets an empty card with the movement, not 404.

#### EVIDENCE

`src/server/routes/publicStaffRoutes.ts` `src/server/core/shareLinks.ts#publicAttempts` `src/server/core/staffCard.ts`
`src/server/routes/publicStaffRoutes.ts#/api/public/staff/:token` `tests/staff-card-global-scope-audit.ts`
`tests/staff-device-key-audit.ts` `tests/doctor-journey-audit.ts`

### FR-REQ-031 Remember this device

After verification by civil ID and on explicit request, the system shall give the device a signed key (HMAC) bound to the link token and the member's internal identifier in an HttpOnly, SameSite=Strict cookie scoped to that link only, expiring at the link's end or after 180 days, whichever is sooner, and carrying no civil ID. The key has the form 'v1.internal id.expiry.signature' in the cookie sk_dev with path /api/public/staff/:token, its signature is compared in constant time, and its signing secret is the STAFF_DEVICE_SECRET environment variable when set, otherwise derived by HMAC-SHA256 from the server's stored shared secret with the label staff-device-key-v1, so one key material never serves two purposes; the cookie carries the Secure flag in production only. The route POST /api/public/staff/:token/forget clears the cookie from the device without any identity.

● Implemented · Should · Functional · Faculty member

**ACCEPTANCE CRITERIA**

1. The key is not valid for another link's token and falls when the link is revoked or renewed or by the forget-this-device button.
2. A key no longer valid is cleared and the number is asked as usual, indistinguishable from no card.
3. Changing the internal id, extending the expiry, altering the signature or using another secret invalidates the key, and STAFF_DEVICE_SECRET when set overrides the derived secret.
4. The key is issued only after the card gates pass and remember:true is sent with the civil ID, and in production the cookie carries HttpOnly, SameSite=Strict and Secure.

**EVIDENCE**

`src/server/staffDeviceKey.ts` `src/server/routes/publicStaffRoutes.ts` `src/server/routes/publicStaffRoutes.ts#/api/public/staff/:token/forget` `src/server/staffDeviceKey.ts#deriveStaffDeviceSecret` `tests/staff-device-key-audit.ts`

### FR-REQ-032 Member notes from the faculty card

After identity is verified the system shall let the member leave a note (change request or apology) of up to 400 characters and a date or date range beside a lecture of their own schedule only, in the live term, stored in the lecture's actual scope, capped at eight notes per day per member, with no path to the schedule row.

● Implemented · Should · Functional · Faculty member, Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The ninth note in a day is refused with 429, a lecture not on the member's schedule with 404, and a non-live term with 409.
2. A change note with no text is refused with 400, an apology is accepted with no text, and a date not in YYYY-MM-DD format is dropped.

**EVIDENCE**

`src/server/routes/publicStaffRoutes.ts#STAFF_NOTES_PER_DAY` `src/server/routes/publicStaffRoutes.ts#/api/public/staff/:token/note` `tests/doctor-journey-audit.ts` `tests/teacher-card-polish-audit.ts`

### DR-REQ-033 Family card publication and schedule movement

The system shall publish the faculty card to the whole academic department family rather than one site, shall show the schedule-change request tab only with an active publication (not revoked, not expired, not personal), and shall build both the faculty card and the request page's schedule movement from one source: the member's requests and the department decision on them, and what was actually added, moved and deleted between schedule versions.

● Implemented · Must · Data · Faculty member, Schedule committee chair, The system (automatic)

**ACCEPTANCE CRITERIA**

1. Revoking card publication hides the request tab on the member's card, and request movement starts from the first submission and is cut at 100 lines.
2. Each line carries its source (request or schedule) and its decision (fixed, rejected, pending), and a course removed entirely stays visible in movement.

**EVIDENCE**

`src/server/core/staffCard.ts#liveStaffPublication` `src/server/core/staffCard.ts#scheduleMovementEntries` `src/server/routes/publicStaffRoutes.ts` `src/utils/instructorRequestWindows.ts#cardRequestsCloseAt` `src/server/routes/publicRequestRoutes.ts#/api/public/request/:token/movement` `tests/staff-card-global-scope-audit.ts` `tests/instructor-request-cross-college-audit.ts`

### IR-REQ-034 Location filter, congestion map and inbox question

The Instructor inbox shall tag each item with its location (an addition where the member chose, an edit or deletion where the row sits), shall offer a location filter that hides items outside it and a request left with no item in it, a congestion map that counts requested appointments per cell (day by start) and warns of room shortage when requests exceed known rooms, and an Arabic-sentence question field that reads and never decides.

● Implemented · Could · Interface · Schedule committee chair, Department head, Standard user

**ACCEPTANCE CRITERIA**

1. Three requests for two known rooms in the same cell is a shortage, two for two is none, and a request with no known rooms creates no shortage.
2. Keep and delete items and sent-but-unanswered requests are not counted in the map.
3. The filter choice is remembered per account on its device, and what the question field understood is shown on a line beneath it to be cleared.

**EVIDENCE**

`src/utils/inboxCampus.ts` `src/utils/inboxHeat.ts` `src/utils/inboxAsk.ts` `src/utils/requestsAsk.ts` `src/components/InstructorInbox.tsx` `tests/inbox-campus-audit.ts` `tests/inbox-heat-audit.ts` `tests/inbox-ask-audit.ts` `tests/inbox-studio-audit.ts` `tests/inbox-undo-audit.ts`

### IR-REQ-035 Save-blocker checks for the appointment form

The appointment form shall show one verdict read together by the fix-before-saving strip, the checks panel and the save button, with six cards (instructor, room, section, facility, time, college) each ok, warning, blocker or unchecked, shall not check a field that was not chosen, and shall show a single blocker number.

● Implemented · Should · Interface · Schedule committee chair, Department head, Standard user

**ACCEPTANCE CRITERIA**

1. An instructor conflict before an instructor is chosen, or a room scope before a room is chosen, stays an idle card, not a blocker.
2. The number in the middle of the ring equals the blocker count the save strip states, and each blocker carries an alternative button.

**EVIDENCE**

`src/utils/appointmentVerdict.ts` `src/components/AppointmentChecksPanel.tsx` `src/utils/appointmentRegulation.ts` `tests/appointment-forms-audit.ts` `tests/appointment-forms-r2-audit.ts` `tests/appointment-forms-r3-audit.ts`

### IR-REQ-036 Faculty mini week in appointment forms

When a member is chosen in any appointment form the system shall show their week in five columns, the current appointment as a ghost (green when sound, outlined red when clashing), free slots that fit the course pattern, before/after targets by the same stick formula, and the load ring, attendance days and gaps, read-only with no new judgement rule.

● Implemented · Could · Interface · Schedule committee chair, Department head, Standard user

**ACCEPTANCE CRITERIA**

1. The verdict on the appointment stays with appointmentVerdict alone, and a free slot fits the course pattern and the regulation gap.
2. The window collapses and remembers its state, floats by dragging its header and docks back with a double click, and on a narrow screen becomes a bottom strip.

**EVIDENCE**

`src/utils/teacherMiniWeek.ts` `src/components/TeacherMiniWeek.tsx` `tests/appointment-forms-r2-audit.ts` `tests/appointment-forms-r3-audit.ts` `tests/appointment-forms-audit.ts`

### DR-REQ-037 Anonymous appointment-entry measure

Inferred

The system shall fold the entry measure of each appointment (time, blocker hits, helper used, device, create or edit) into a monthly document of counts and sums only with no account number, name, course or room, shall not count time while the page was hidden, and shall let only the root administrator account read the document.

Implemented · Could · Data · Root administrator, Schedule committee chair, Department head, Standard user

#### ACCEPTANCE CRITERIA

1. GET on the measure returns the last three months to the root administrator account only, and any other account is refused.
2. Allowed helpers form a closed whitelist that silently drops anything else, and folding is atomic so two simultaneous measures count as two.

#### EVIDENCE

`src/utils/appointmentMeasure.ts` `src/server/appointmentMetrics.ts` `src/components/AppointmentMeasureCard.tsx` `src/server/appointmentMetrics.ts#/api/metrics/appointment-entry` `tests/appointment-entry-parity-audit.ts`

### DR-REQ-038 Personal request link token: generation, verification and rotation

Inferred

The system shall generate the personal request link token from 24 random bytes encoded base64url (prefixed with 'demo.' in the demo sandbox only), shall use the token itself as the link document id in the scheduleShareLinks collection with kind request, the owning member's id, the scope key 'college:section:term' and instructor names hidden, and shall verify it by direct document lookup, then the revoked flag, then readability, with no additional secret or signature on the token. It shall rotate the link on reissue when it is revoked, unreadable or expires before the new closing time plus one day, issuing a new token and revoking the old one, and shall increment the link's view count and last-viewed time on every non-silent open.

Implemented · Must · Data · Schedule committee chair, Department head, Faculty member, The system (automatic)

#### RATIONALE

> The token alone is the access permission, so its random length (192 bits) is what prevents guessing, and rotation keeps a dead link from carrying a new deadline.

#### ACCEPTANCE CRITERIA

1. An issued token is 32 characters from the base64url alphabet, and starts with 'demo.' inside the demo sandbox only.
2. A revoked link returns 404 before anything else, and an expired link returns 410.
3. Reissuing for a sent request whose link expires before the new deadline plus a day creates a new token and marks the old one revoked, while the request itself is kept.

#### EVIDENCE

`src/db/repository.ts#createShareLink` `src/server/routes/instructorRequestsRoutes.ts#mintRequestLink` `src/utils/requestReissue.ts#requestLinkNeedsReplacing` `src/server/core/instructorRequests.ts#resolveRequestLink` `src/utils/demoLinkToken.ts` `tests/instructor-request-server-audit.ts`

### FR-REQ-039 Recipient list and registrar-noted rows

With the department permission (permission 7) and within the user's scope, the system shall return the list of possible recipients: the members in the department family's schedule for the term without the placeholder faculty, each with name, mobile and section count (a section counted once by site, course and section number), with no civil ID and no link, and shall return the appointments carrying an open registrar note by course, section and member so the card can be resent to their owners alone.

Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. GET recipients without college, section or term is refused with 400, and outside scope with 403.
2. A member with two meetings of one section appears with section count 1, and the placeholder faculty does not appear.
3. GET registrar-noted outside scope is refused with 403, and a notes-only send with no open notes is refused with 409.

**EVIDENCE**

`src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/recipients`
`src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/registrar-noted`
`src/server/routes/instructorRequestsRoutes.ts#registrarNotedRows` `src/components/PublishRecipientPicker.tsx`
`tests/publish-pick-teachers-audit.ts` `tests/publish-notes-r4-audit.ts`

### FR-REQ-040 Individual exception list

With the department permission the system shall return, for the department family in the term, the list of individual exceptions taken from each member's latest current-round request, each with member name, exception closing time, grant time, reason, revocation time and whether it is active now, active first, with no civil IDs and no personal links, and on issuing shall record in the audit trail a line naming the kind of send (an individual exception with the member's name and reason, selected members by name, or a family reopening), its deadline and its mode.

Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. GET exceptions without college, section or term, or outside scope, is refused with 403 outside department and term scope.
2. A revoked exception appears with active false and its revokedAt time, sorted after the active ones.

**EVIDENCE**

`src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/exceptions`
`src/utils/instructorRequestWindows.ts#individualExceptionOpen` `tests/staff-request-windows-audit.ts`
`tests/owner-features-2026-10-28-audit.ts`

### FR-REQ-041 Recording link opens and refreshing an unsent request

When a member opens the request link the system shall record in one transaction the first open (linkOpenedAt with a single link-opened timeline event), the number of opens per Kuwait day and the last open time, shall not count a silent re-read (live=1) as an open, and shall rebuild the items of a request still in status sent from the member's live schedule across the whole term and all colleges before showing it, keeping the items the department placed by its own decision and leaving a previous-term request untouched while the member has no schedule in the term.

Implemented · Should · Functional · Faculty member, The system (automatic)

**ACCEPTANCE CRITERIA**

1. Two opens on one day add 2 to that day's linkOpenDays while the link-opened event stays single.
2. A GET with live=1 changes neither linkOpenedAt, linkLastOpenAt, linkOpenDays nor the link's view count.
3. A lecture the department moved for a member who has not yet sent the request shows in the items at the next open without reissuing.

**EVIDENCE**

`src/db/repository.ts#recordInstructorRequestOpen` `src/server/routes/publicRequestRoutes.ts#refreshUnsubmittedInstructorRequest`
`src/server/routes/publicRequestRoutes.ts#/api/public/request/:token` `tests/teacher-card-flow-audit.ts`
`tests/instructor-request-server-audit.ts`

### FR-REQ-042 Future-interest star on a course

The system shall let the member, in a request-edit card only, set or clear a future-interest star on a course of the department catalogue in the chosen college, shall gather the stars in a courseInterest document per college, department and term keyed by course with member ids, and shall return to the card the courses the member starred.

Implemented · Could · Functional · Faculty member, System administrator

**ACCEPTANCE CRITERIA**

1. A star from a view-only or training-phase link is refused with 403 this link does not request courses.
2. A course outside the department catalogue in the chosen college is refused with 400, and on false clears the star.

**EVIDENCE**

`src/server/routes/publicRequestRoutes.ts#/api/public/request/:token/interest` `src/server/teacherCardExtras.ts` `tests/ta-phase-flow-audit.ts`

### FR-REQ-043 Non-blocking academic advice on the request card

The system shall return to the request card aggregate academic advice only (course pairs and time preferences) for the link's scopes, its items' scopes and the allowed add-course scopes, up to 12 scopes, restricted to courses that concern the member, and shall return empty lists flagged nonBlocking when reading fails so the advice never blocks anything.

Implemented · Could · Functional · Faculty member

**ACCEPTANCE CRITERIA**

1. A pair carrying no course from the member's items or add courses is not returned, and the reply always carries nonBlocking true.
2. A failure reading the advice returns empty pairs and timePreferences with status 200.

**EVIDENCE**

`src/server/routes/publicRequestRoutes.ts#/api/public/request/:token/academic-advice` `tests/academic-advice-audit.ts`

### FR-REQ-044 Faculty card contents after verification

After verification the system shall build the faculty card from the member's schedule in the issuing college and their other colleges, showing weekly teaching minutes on the clock and load units by approved course hours as two separate numbers, gaps between two lectures of a day when they reach 30 minutes and the longest gap, what falls in the next fourteen days among cancellation of their lecture, its cover by a colleague or their own cover of another's lecture, the approval status of each department they teach in, a term list holding only terms where they have a schedule plus the shown term, a changed-since-last-visit flag by schedule fingerprint, a link to the department's plan sheet map when it is published, and a stable calendar subscription link carrying no civil ID.

Implemented · Should · Functional · Faculty member

**ACCEPTANCE CRITERIA**

1. A 25-minute gap between two lectures is not shown, and a 30-minute gap is shown.
2. A cancellation 15 days ahead does not appear, and a colleague covering their lecture tomorrow appears as covered by that colleague for the day.
3. The visit is recorded with the schedule fingerprint for the link's term only, and a changed fingerprint returns changedSinceLastVisit true at the next visit.
4. planMapUrl is empty for a department with no published sheet, and the reply carries neither instructorId nor fingerprint.

**EVIDENCE**

`src/server/routes/publicStaffRoutes.ts#buildStaffCard` `src/server/routes/publicStaffRoutes.ts#/api/public/staff/:token` `src/server/pages/staffCardPage.ts` `src/server/staffCardVisual.ts` `tests/doctor-journey-audit.ts`

### IR-REQ-045 Public doors for the member and the department

Inferred

The system shall route the door /s/:token by link kind: the faculty card for kind staff, a 302 redirect to /r/ for a request link, to /q/ for a survey and to /t/ for a students link, and a read-only department schedule page for anything else with a five-column day table and start-time rows, a per-day list on phones, calendar subscription buttons (Apple, Google, Outlook), a print button and the link's expiry date, with noindex and no caching. It shall also serve /r/:token/proposal/:pid as the study proposal page through the same personal link, and shall serve from the same routes file the student doors /t/:token, /api/public/students/:token and /me under the Students module's rules.

Implemented · Must · Interface · Faculty member, Public visitor, Student

**ACCEPTANCE CRITERIA**

1. Opening a request link on /s/ returns 302 to the same /r/ and never shows the department schedule.
2. The department page carries meta robots noindex,nofollow, a Cache-Control no-store header and the footer read-only view.
3. A missing link on /s/ or /r/ shows an error page with the same status (404 or 410).

**EVIDENCE**

`src/server/routes/publicStaffRoutes.ts#/s/:token` `src/server/routes/publicStaffRoutes.ts#/t/:token` `src/server/routes/publicStaffRoutes.ts#/me` `src/server/routes/publicStaffRoutes.ts#/api/public/students/:token` `src/server/routes/publicRequestRoutes.ts#/r/:token/proposal/:pid` `tests/student-door-audit.ts` `tests/staff-card-global-scope-audit.ts`

### FR-REQ-046 Card notification on department decision and reply

Inferred

After every decision on an item (fix, reject or cancel an appointment), every atomic fix and every department reply, the system shall send a single notification to the devices subscribed from the member's own card, replacing the previous one and gathering the latest decisions on the request or the reply alone, shall not send a notification carrying a room trace, shall broadcast a live notice after a department reply so an open card refreshes, and shall record a fix in the audit trail with a line naming the member and each step (delete, add or move with its days and time) and the row ids.

Implemented · Should · Functional · Faculty member, Schedule committee chair, Department head, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A department reply on an item sends a notification of kind reply for that item alone, and a decision sends the digest of recent decisions.
2. A notification text naming a room code from the request items is not sent.

**EVIDENCE**

`src/server/pushRoutes.ts#noteForCard` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/:id/apply` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/:id/reply`

### FR-REQ-047 Item readiness in the inbox and the live check before «fix»

The instructor inbox shall order each card's items by verdict (clear, then exception, then conflict) and hide «keep» items, and before offering «fix» on an undecided change or addition shall ask the server the same question the schedule form asks (POST /api/schedules/check-conflicts) with the room the fix will write; it shall merge the stored verdict with the live check so each reason is shown once, and describe the item in one word: «ready to fix», «needs your decision», «blocked», «checking…», «waiting for another department», «deletion is not checked» or «changed after sending»; a clash with a row that an undecided sibling item moves or deletes is not a block but is said to be fixed first automatically, and when that sibling belongs to another department the item waits for its decision; «fix» is blocked for what saving would block or for an appointment no longer in the schedule («this appointment is no longer in the schedule — perhaps deleted or moved after the request»), and an item changed after sending shows up to two ready alternatives proposed to the member with one press as a thread reply; each card shows «signed» with its verification code or «unsigned» for a request sent before signing existed, and an «inform the member» button with a ready WhatsApp message counting what was fixed and rejected with his link (or «no mobile number»).

● Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. An item clashing with a lecture that a sibling item of the same request moves ← «this request itself frees the time … fixed first automatically» and it is not blocked.
2. The live check fails ← a block reading «could not check the appointment; try again before approving».

#### EVIDENCE

`src/components/InstructorInbox.tsx#useLiveCheck` `src/components/InstructorInbox.tsx#proposedRow`
`src/components/InstructorInbox.tsx#RequestRow` `src/components/InstructorInbox.tsx#RequestCard` `tests/inbox-studio-audit.ts`

### FR-REQ-048 «Fix everything ready» in the inbox

The instructor inbox shall show a «fix everything ready (n)» bar stuck to the bottom of the screen when the shown items include a change item that is ready with no block or warning, has one time across its days, did not change after sending, depends on no other item and is not awaiting the member's answer to a department proposal, and shall not show it in a frozen term or under the «did not take part» and «confirmed unchanged» filters; it shall open a confirmation window listing the count, names and what moves, then fix item after item through the same «fix» path and its preview, waiting before each item for the refreshed inbox and its row check (15 seconds at most), stopping at the first failure naming the item and the reason, counting an item a colleague fixed meanwhile as done, offering «stop after the current one», and finally showing the summary (what was fixed and what remains); the window closes with Escape or the backdrop except while fixing.

● Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A third item refused by the server after two were fixed ← «stopped at 3 of n» with its reason, and nothing after it is touched.
2. An item a colleague fixed after the window opened ← counted as done and not repeated.

#### EVIDENCE

`src/components/InstructorInbox.tsx#BulkSheet` `src/components/InstructorInbox.tsx#runBulk`
`src/components/InstructorInbox.tsx#settledEntry` `tests/inbox-studio-audit.ts`

### FR-REQ-049 Inbox filters, overview and reminders

The instructor inbox shall start with the state filter «awaiting your decision» alongside «fixed», «rejected», «all» and «did not take part», a «confirmed their schedules unchanged» filter for information, «🎓 training» for training-phase requests, and under «more» the type (change, add, delete), check (clear, exception, blocked) and department filters (when there is more than one department and none is chosen), the location filter and a «reset» button; it shall hide every filter with nothing under it except the chosen one, and any group left with nothing to choose between; it shall show an «answered: x of y» ring broken down into opened-not-answered, not opened, settled, asked for change and unchanged, a line of members who have not opened the link with WhatsApp reminder links for the first 12, a folded line of those who said «schedule as is», a «did not take part» list with a «remind» button, and cards grouped by the request's college with a «department family requests» banner when colleges are several; it shall order members alphabetically, leave out the faculty placeholder, search by member name, re-read quietly 900 ms after a notification pulse and when the tab wakes, show a full-permission holder every college and department and anyone else his scope, and open on the request's department when arriving from a notification.

● Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A «type» group whose items are all changes ← the group is not shown.
2. 20 members who have not opened the link ← reminder links are shown for the first 12.

#### EVIDENCE

`src/components/InstructorInbox.tsx#visibleFilterOptions` `src/components/InstructorInbox.tsx#FilterGroup` `src/components/InstructorInbox.tsx#InstructorInbox` `tests/inbox-studio-audit.ts` `tests/inbox-campus-audit.ts`

### FR-REQ-050 Reject, reply and cancel sheets and fix confirmation in the inbox

The instructor inbox shall open the reject sheet with the seven reasons (required), the alternatives proposed from the nearest times, none preselected, for the coordinator to choose deliberately, and an optional line to the member; the reply sheet with proposed times (the last 3 chosen are kept) and text up to 400 characters, not sent with neither text nor time; and the «cancel appointment» sheet for a department-placed item with a required line of up to 160 characters; under every text that reaches the member it shall warn when it seems to name a room or building code («this note reaches the member — do not mention the room or building») without blocking sending; before fixing it shall ask the server for a preview and proceed directly when it is a single step with no warning, otherwise show what will be written (move/add/delete with days and time) for the coordinator to confirm, and after fixing say when the appointment was written as several rows because its times differ and show non-blocking warnings; for an addition it shall open a quick card in place with the course, days and time from the request and the first room proven free prefilled, refuse a different course there, and refuse expanding into the full editor when times differ between days; and it shall translate save messages into the item's meaning (an appointment without an approved building or room, a schedule locked at registration).

● Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A rejection line «room 901A01/L01 is booked» ← the warning shows and sending stays possible; «time 14:00/15:00 overlaps» ← no warning.
2. A two-step preview ← a confirmation «will be written to the schedule: …»; cancelling it writes nothing.

#### EVIDENCE

`src/components/InstructorInbox.tsx#RejectSheet` `src/components/InstructorInbox.tsx#RequestThread` `src/components/InstructorInbox.tsx#CancelScheduledSheet` `src/components/InstructorInbox.tsx#mentionsPlace` `src/components/InstructorInbox.tsx#previewAndConfirm` `src/components/InstructorInbox.tsx#announceApplied` `src/components/InstructorInbox.tsx#inboxMessage` `tests/inbox-studio-audit.ts` `tests/handover-fixes-audit.ts`

### FR-REQ-051 The request draft in the browser, the deadline counter and the best three times

The member's request page shall keep what he wrote and did not send in the browser under req-draft:<link>:<tab> (each tab with an id in sessionStorage) and restore it when the page opens while the window is open within 14 days, with the banner «we restored what you wrote on your previous visit and did not send» and a «start again» button that clears every draft of the link; a draft matching what the server holds is cleared without a banner, and restored items are re-checked; while the window is open it shall show «N days left before requests close» or «requests close today», amber in the last two days and hidden after closing; it shall show «your best three times» only from times the server judged available, ordered by closeness to his other lectures, and not at all when fewer than three exist; and it shall carry the badge «draft · not approved · not an assignment» before sending and «sent · not yet approved» after.

● Implemented · Should · Functional · Faculty member

#### ACCEPTANCE CRITERIA

1. A 15-day-old draft ← not restored.
2. Only two available times ← both appear under suggested for you (the three-time condition is gone); none on these days ← the server's nearest times with their days.
3. Closing day or the day before in the Kuwait calendar ← the line is amber (data-urgent = 1) and reads today or tomorrow.
4. The draft records the request revision and last submission it was built on; a new tab moves the newest draft rather than copying it, a draft older than the last submission is never restored, and a successful send or a settled request clears every draft of the link. The unsent-edit state is derived (the payload differs from the server baseline), so cancelling an edit leaves no leave-site prompt.
5. The deadline counter counts Kuwait calendar days: the last day reads closes today from its morning, the day before reads tomorrow, the deadline is the member's own (an open individual exception when later), and the date is shown in Kuwait time with Latin digits.
6. Suggested for you appears whenever days are chosen for a changed or added meeting, even when the current pick is fine: up to three server-judged available times as cards (days, full time range and an icon reason) applied in one tap, otherwise the server's nearest times with their days. No room, no building, never a whole timetable.

#### EVIDENCE

`src/server/pages/instructorRequestPage.ts#readDraft` `src/server/pages/instructorRequestPage.ts#saveDraft`
`src/server/pages/instructorRequestPage.ts#clearAllDrafts` `src/server/pages/instructorRequestPage.ts#deadlineHtml`
`src/server/pages/instructorRequestPage.ts#bestTimes` `src/server/teacherCardLogic.ts#tcDraftTake`
`src/server/pages/instructorRequestPage.ts#syncDirty` `src/server/teacherCardLogic.ts#tcDeadline`
`src/server/routes/publicRequestRoutes.ts#teacherDeadline` `tests/teacher-card-polish-2-audit.ts`
`tests/teacher-card-r5-audit.ts`

### FR-REQ-052 Voice dictation in request fields

The member's request page shall show a voice dictation button beside the note field, the reply field and the exception-reason fields only when the browser supports speech recognition; it asks for permission on the first press, writes the Arabic speech into the field as text the member reviews and never sends automatically, stops by itself after 30 seconds with a ring and countdown and continues after a short silence up to 3 times, turns Arabic-Indic and Persian digits into Western digits and a spoken time written in Arabic-Indic digits as 9:30 into 09:30, cuts the text at 400 characters with a counter, shows microphone errors as a short sentence (permission refused, no speech, no microphone, service unreachable, language not supported) leaving the field for typing, and stops when the page is hidden; no audio is recorded or sent to the server.

● Implemented · Could · Functional · Faculty member

#### ACCEPTANCE CRITERIA

1. A browser without SpeechRecognition ← no dictation button at all.
2. An existing 395-character text then a long dictated sentence ← the total is cut at 400.

#### EVIDENCE

`src/server/voiceInputScript.ts#viNormalize` `src/server/voiceInputScript.ts#viJoin`
`src/server/voiceInputScript.ts#VOICE_INPUT_LIMIT` `src/server/voiceInputScript.ts#VOICE_INPUT_SECONDS`
`src/server/pages/instructorRequestPage.ts` `tests/voice-input-audit.ts`

### FR-REQ-053 The faculty card in the browser: entry, calendar and tabs

The faculty card (/s/) shall convert Arabic-Indic and Persian digits in the civil ID field and require at least 8 digits before sending, matching the server rule («enter your full civil ID (at least 8 digits)»), make «remember me» checked by default on touch devices only, keep the civil ID in no browser storage (it stays in page memory for term switching only, and the old sk-civil:<link> copy is removed from sessionStorage on opening), so a member who did not choose «remember me» types it again after returning, open the card directly on a remembered device marked sk-dev:<link> and clear the mark when the key no longer works, and show «forget this device» when remembered; it shall allow switching the term when there are two or more, and show each department's approval status, what falls in the next two weeks, the figures (course hours, load, lectures, days, rooms), and the notes «your schedule changed since your last visit», «previous term — read only» and «upcoming term»; the «request a schedule change» tab shall open the form directly when one window is open, list the windows when there are several, and hide when there is none; the «your schedule in your calendar» sheet (Apple, Google, Outlook, copy link, a quarter-hour reminder adding alarm=15, and term= for an upcoming term) shall be offered except for a previous term and close with Escape or the backdrop; and it shall show the wishes deadline, the print footer and «the schedule can be read until the end of the term (date)».

● Implemented · Should · Functional · Faculty member

#### ACCEPTANCE CRITERIA

1. A 7-digit number ← «enter your full civil ID (at least 8 digits)» and nothing is sent; the number appears in neither sessionStorage nor localStorage after the card is shown.
2. Ticking the reminder ← the three subscription links carry ?alarm=15.
3. One open request window ← pressing the tab goes straight to /r/<link>.

#### EVIDENCE

`src/server/pages/staffCardPage.ts#staffCardPage` `src/server/pages/staffCardPage.ts` `tests/staff-device-key-audit.ts` `tests/handover-fixes-audit.ts`

### FR-REQ-054 Resending only for what carries registrar notes

The issue route (POST /api/instructor-requests/issue) shall offer a «notes only» send whose recipients the server computes itself: the owners of appointments in the department's schedule for the term that carry an open note written by registration, in edit mode only; it shall reopen each recipient's request with the new deadline even when it was submitted or is under review; it shall restrict each card to its owner's noted appointments alone, accepting no new change on other appointments and no added course; and any later ordinary issue to that member shall lift the restriction. The note text never reaches the member because it may name a room.

● Implemented · Must · Functional · Department head, Schedule committee chair, Faculty member

#### ACCEPTANCE CRITERIA

1. No open registrar note ← 409 «no open registration notes on this schedule.»; a mode other than edit ← 400 «resending for notes is an edit request.»
2. On the card, changing an un-noted appointment or adding a new one ← 403 «editing is available only for what carries registration notes.» with the item index; a «keep» item, or an item resent exactly as stored, passes.
3. A resolved note, or one not written by registration, does not count; the screen says «resent to N instructors for noted items only.» using total from the reply.

#### EVIDENCE

`src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/issue`
`src/server/routes/instructorRequestsRoutes.ts#registrarNotedRows` `src/utils/requestNotedScope.ts#notedRowsOf`
`src/utils/requestNotedScope.ts#notedScopeBreach` `src/server/routes/publicRequestRoutes.ts`
`src/components/SchedulePublish.tsx#sendNoted` `tests/publish-notes-r4-audit.ts`

### FR-REQ-055 What a send does to each member's request

The issue route shall decide, for each member in the department family's schedule, the fate of their request in the term: a request governed by the training phase is not touched by a send (except a notes send); a request the member submitted or that is under review stays as it is in a family or selected send, and only the new send mode is written on it when it differs; a request sent but not submitted takes the new deadline and has its link replaced when the link is dead or expires before the deadline; anything else gets a new link and a new request in status sent holding all the member's appointments in the source term (this term's schedule, or the previous term's schedule when sent before copying). A send to the whole family (not a selected send and not an exception) shall move the general closing time of every active published faculty card in the family, and every send shall store a send-log line with the sender's name taken from the session.

● Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. The reply carries issued (each with reissued or renewed), total and fresh (new ones only), and picked:true for a selected send.
2. source=previous-term with previousTermId takes the request items from the member's appointments in that term; without previousTermId, from the selected term.
3. An individual exception for a member whose latest request awaits a decision (submitted or under review) puts the exception on that same request and link (replacing the link when it is dead) and adds an «individual exception for an emergency» line to its timeline, so the member never has two open requests.

#### EVIDENCE

`src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/issue` `src/utils/requestReissue.ts#reissueMove` `src/server/core/staffCard.ts#staffFamilyScopes` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/send-log` `tests/request-reissue-audit.ts` `tests/publish-requests-audit.ts` `tests/handover-fixes-audit.ts`

### FR-REQ-056 Same-time hints on the faculty card

The system shall warn the member without blocking: when the chosen time overlaps (partially on a shared day; touching does not count) a section of a peer of the course in the department's study plan (unlock or taken-together, within the department, term and college, from the same plan facts the department sheet reads), a small icon appears beside the time with a short line, and opening it lists only the peer course names with the relation icon; when it overlaps another section of the same course, a clear warning reads «another section of the same course is at this time, and the department may not approve it», using the department's rule (normalised section number, practice rows excluded). The member never sees another instructor's name, a section number, another's time or a room, nor a same-time course without a plan relation.

● Implemented · Should · Functional · Faculty member, The system (automatic)

#### ACCEPTANCE CRITERIA

1. Another section of the same course neither blocks the send nor asks for an exception reason, and the verdict line stays «time available».
2. The page payload carries peers with course names and relation only, and sameCourse as a flag.

#### EVIDENCE

`src/utils/teacherPeerNote.ts#teacherPeerNote` `src/utils/instructorRequestVerdict.ts#judgeRequest` `src/server/core/instructorRequests.ts#judgeRequestItems` `src/server/pages/instructorRequestPage.ts` `tests/teacher-card-peers-audit.ts` `tests/holds-patterns-r4-audit.ts`

### FR-REQ-057 Faculty card per person: recipients, courses, preview and follow-up

The faculty card (view and edit, selected and all) shall reach department faculty only: never visiting members, nor trainees and training-phase trainers (a member who is both appears only in the training phase), enforced by the server in issuing, the recipients list and the delivery list. In an edit send to selected faculty the coordinator picks each person's card courses from a sheet with two tabs (the previous plan and the new plan by its name) that starts from their history: taught courses, their new-plan counterparts matched by normalised Arabic name, and new courses with no counterpart left unselected; the list is stored with the request, so the member neither sees nor requests a course outside it, and anyone without a choice keeps all courses. Previewing a person's card as they will see it issues nothing and records no open. After sending each person shows a state (not opened, opened, replied), and a confirmed «remind those who have not replied» reaches only non-repliers of edit cards through the existing delivery channel.

● Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A selected send to a visiting member or trainee is refused (400, code=card-excluded) and nothing is written; an all send skips them.
2. Requesting a course outside offeredCourseIds from the card is refused with 400 before signing; what was requested before the limit stays.
3. The preview changes no request, link, send log or open counter.
4. The reminder reaches non-repliers only and marks remindedAt; in the demo delivery is simulated (delivery=demo).
5. The routes require screen 7 and the department and term scope, else 403: GET /api/instructor-requests/course-defaults returns the department family's courses with their plan side and what each member taught in earlier terms; GET /api/instructor-requests/follow-up returns each person's state, last reminder and who is awaited; POST /api/instructor-requests/remind with nobody awaited is refused with 409 «nobody is awaiting a reply now.», and «reminder to non-repliers in the faculty card: N» is written to the audit.
6. GET /api/instructor-requests/preview-page opens the card with a bar «preview · as <name> sees it · nothing is sent» and a «back» button that closes the tab so the publish window returns as it was left (otherwise it goes back to the schedule), and the browser's back after the first touch does the same; a member outside the family's schedule for the term gets 404.

#### EVIDENCE

`src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/issue`
`src/server/publishCardsRoutes.ts#/api/instructor-requests/preview`
`src/server/publishCardsRoutes.ts#/api/instructor-requests/preview-page`
`src/server/publishCardsRoutes.ts#/api/instructor-requests/course-defaults`
`src/server/publishCardsRoutes.ts#/api/instructor-requests/follow-up`
`src/server/publishCardsRoutes.ts#/api/instructor-requests/remind` `src/server/pages/instructorRequestPage.ts`
`src/utils/cardRecipients.ts#reminderTargets` `src/utils/personCourseDefaults.ts#personCourseDefaults`
`src/utils/offeredCourses.ts#offeredBreach` `tests/publish-cards-per-person-audit.ts`

### FR-REQ-058 Owner notes on faculty requests: pinning, track, stopping and reopening

A member's schedule shall not be pinned as is when any appointment breaks the regulation, even if the department made the mistake: the section's days across all its rows are not one pattern of the library, the course hours are broken, the meeting length breaks the pattern, or art. 6/2, 6/3 (consecutive lectures), the start ladder (7/8) or the fixed section start (7/9) is broken. Each violating appointment is shown with its article before pressing, with an «edit» action that opens it; the member edits it through a request and then sends, or sends a request with a note to the department — which is not a pin: the violations stay visible to the member before and after sending and are all listed (a pattern violation never hides the others), and the request reaches the department flagged «schedule with regulation violations» with the articles; the server refuses the pin with the same text. Before sending cards the department is warned once: «N members have regulation violations in their schedules», with the list (by all the pin rules themselves: pattern, length, course hours, consecutive lectures, ladder and fixed start); the warning does not block sending. The coordinator shall see each member's track in order: every send with its mode and deadline, card opens, what they sent or pinned, replies and department decisions, across all rounds. Stopping the department card stops it alone; personal member links (and their edit request) stay alive unless «stop all» is explicitly chosen. A selected edit send to a member whose submitted request window has closed reopens that same request with the new deadline. A room whose type contradicts the course type is not offered while the department has a room of the right type, and a room smaller than the section capacity is not offered; the section capacity is MaxStudent, or, when missing, the regulation cap for the course's teaching mode (Art. 8); a room with no recorded capacity ranks after every known room that fits, and an assumed cap (no capacity and no mode) is enforced in full like any other (FR-REQ-060).

● Implemented · Must · Functional · Department head, Schedule committee chair, Faculty member

#### ACCEPTANCE CRITERIA

1. POST /api/public/request/:token with no change on a schedule breaking a pattern, hours, length, art. 6/2, 6/3, the ladder or 7/9 is refused with 409 code=pin-blocked, the reason and the article; nothing is pinned.
2. GET /api/instructor-requests/regulation-teachers requires screen 7 and the department scope, else 403, and returns the members whose schedules break the regulation, with each violation and its article.
3. GET /api/instructor-requests/track requires screen 7 and the department scope, else 403, and returns each member's ordered events with no civil ID and no room.
4. DELETE /api/share/:id on the department card stops it alone; with ?scope=all it also stops personal links and unsent request links.
5. A no-change request with a note on a schedule that has a violation is accepted as a request (status=submitted), not a pin, and is stored with pinViolations (each violation with its item index and article); the inbox shows it as «schedule with regulation violations» and does not count it as «unchanged»; the page keeps showing the violations after sending.
6. The GET /api/instructor-requests/regulation-teachers counter and the pin read one source (pinRowIssues): a «Sun 80 + Thu 80» section, a length that breaks the pattern (75 min) and missing or extra hours are all counted, and a section-level violation is stated once, not per row.

#### EVIDENCE

`src/server/routes/publicRequestRoutes.ts#pinBlockers` `src/server/publishCardsRoutes.ts#/api/instructor-requests/track` `src/utils/cardRecipients.ts#buildTeacherTracks` `src/server/routes/shareRoutes.ts` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/issue` `src/utils/requestRoomRanking.ts#rankRequestRooms` `src/utils/pinViolations.ts#teachersWithRegulationIssues` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/regulation-teachers` `src/utils/pinViolations.ts#pinRowIssues` `src/server/routes/publicRequestRoutes.ts#pinReview` `tests/instructor-requests-owner-notes-audit.ts` `tests/request-room-capacity-audit.ts` `tests/pin-regulation-audit.ts` `tests/pin-violations-note-http-audit.ts`

### FR-REQ-059 Study proposal on an item opens the original appointment in its usual form

Study proposal on a request item in the inbox shall take the coordinator in one tap to schedule management, highlight the original appointment and open its own usual form with its checks and conflicts, with the member's requested time (days, start and end) pre-filled when it is one time for all its days, plus one line saying what was filled and from where. An add item opens the usual add form seeded from the request. No other workspace sits in between: the item no longer opens the proposal workspace, while preparing a study proposal for the whole request (a draft sent to the member then committed) stays as it was.

● Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. The seed lives in sessionStorage for the tab only, is erased on first read, expires after ten minutes, and a malformed row id or time is rejected.
2. The form is only filled when it actually opened (no lock, no phone gate), and times that differ between days open the appointment as it is.

#### EVIDENCE

`src/utils/requestOpenRow.ts#requestedChangeOf` `src/components/InstructorInbox.tsx#openRowInSchedule` `src/components/Schedules.tsx` `tests/proposal-open-row-audit.ts` `tests/instructor-requests-owner-notes-audit.ts`

### FR-REQ-060 «What was decided since your last visit» and «add to my calendar» for the member

The member's request page (/r) and personal card (/s, after identity verification) shall show one list «what was decided since your last visit» from a single source (decisionDigest): what was fixed with the days and time actually written to the schedule (fixedAs), not the requested ones; what could not be done with its reason from the closed list and the department's alternatives (up to three); what the department cancelled; and the department's latest reply — with no room or building, and with no free-text note on the card. The previous visit time comes from the device (req-seen or card-seen per link), otherwise from the last recorded open before this one; this visit's time is stored so a silent re-read does not wipe the list, and «done» folds it. Each fixed appointment has an «add to my calendar» button that downloads an ICS file with one weekly event for the term built from the official row itself (GET /api/public/request/:token/fixed/:itemId.ics), with no place, alongside the existing permanent calendar subscription. The fix decision shall record what was actually written (days, start and end), and an addition's days and time on the item shall be updated to what the coordinator wrote when they differ from the request.

● Implemented · Should · Functional · Faculty member, The system (automatic)

#### ACCEPTANCE CRITERIA

1. An item fixed at a time other than the requested one shows the written time, a rejected item with two alternatives shows its reason and both, and decisions made before the previous visit do not show.
2. Requesting the ICS file for an unfixed item, or for a row no longer owned by the link holder, returns 404, and the downloaded file carries no place.

#### EVIDENCE

`src/utils/requestDecisionDigest.ts#decisionDigest` `src/server/routes/publicRequestRoutes.ts#serveRequestCard` `src/server/routes/publicStaffRoutes.ts` `src/server/pages/instructorRequestPage.ts#sinceHtml` `src/server/pages/staffCardPage.ts#renderDecisions` `src/server/routes/instructorRequestsRoutes.ts#fixedAsOf` `tests/request-decisions-notify-audit.ts`

### FR-REQ-061 «Notify those with new decisions» in the inbox

The inbox shall show a «notify those with new decisions (n)» button when a shown member has a decision (fix, rejection or cancellation) made after their last notification; it opens a window that walks through them one by one in the shown order, each with a summary of what was fixed and rejected and a prepared WhatsApp message with their own card link, opened only by the coordinator's tap; the notification is then recorded (POST /api/instructor-requests/:id/notified writes decisionNotifiedAt alone, without raising the request revision) and the next member follows, with «skip». The system sends nothing externally on its own. The card's «notify the member» button records the notification too and reads «notified» when there is nothing new. The notification time never reaches the member's page.

● Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A request whose member was notified and then received a new decision returns to the list, while decisions before the notification do not; a dialogue reply alone is not counted as a decision.
2. POST /api/instructor-requests/:id/notified without scope over the request is refused with 403, and an unknown request with 404.

#### EVIDENCE

`src/utils/requestDecisionDigest.ts#unsentDecisions` `src/components/InstructorInbox.tsx#NotifySheet`
`src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/:id/notified`
`src/db/repository.ts#setInstructorRequestDecisionNotified` `tests/request-decisions-notify-audit.ts`

### FR-REQ-062 Committing a study proposal settles the request items it handled

Every pending item of the member's request that the study proposal handled shall be fixed together with the proposal, in the same transaction that writes the schedule: only items matching an operation actually committed — a change or deletion of an appointment the proposal moved or removed, and an addition of a course it brought in, not the item it was opened from by that fact alone — with a fixed decision carrying the proposal id, the written time and, for an addition, the written row id — and those items' reservations are released in the same ledger, while items already decided are untouched. Undoing the commit reopens them. Proposal events in the request timeline are written as a single field that does not raise the request revision, so a member typing at that moment is not refused. The member receives a card notification (when subscribed from it) when a proposal or a revised version is sent and when it is committed, with generic text carrying no course, time or room.

● Implemented · Must · Functional · Department head, Schedule committee chair, Faculty member, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A proposal that moves the appointment of a pending change item fixes it with viaProposal and fixedAs from the proposal target, an item rejected earlier stays rejected, and undo returns the item to pending.
2. A proposal event in the request timeline does not change requestRevision.

#### EVIDENCE

`src/utils/proposalSettlesRequest.ts#settleRequestFromProposal` `src/db/repository.ts#commitStudyProposal`
`src/db/repository.ts#appendInstructorRequestTimeline` `src/server/studyProposalRoutes.ts`
`src/server/pushMessages.ts#proposalSentMessage` `tests/request-decisions-notify-audit.ts`

### FR-REQ-063 Inbox robustness: sheets keep input, reads never blank the screen, counts follow what is shown

The reject sheet, the cancel-appointment sheet and the reply field shall not close before the server accepts, and the failure reason shall be shown inside them with the typed text kept; both sheets close with Escape and a backdrop click, take focus and return it to their button, and the rejection note is limited to 400 characters like the server. The coordinator shall be able to start a dialogue on any unfixed item with a «reply / suggest a time» button. A failed inbox read shall not blank the shown cards: the last read stays with a «try again» banner, and reads are sequenced so an older answer never overwrites a newer one. Filter counts shall follow the search, member, department, training and location filters, each group counting itself under the other filters; name search shall match by the Arabic matching key (hamza, taa marbuta, yaa and diacritics); and the inbox can be sorted alphabetically or oldest first. The fix preview shall not take the term lease, and a fix refused with «another fix is running» (apply-busy) shall be retried three times with backoff before the coordinator is told.

● Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Nine pending changes and two pending additions with the type filter on «change»: «awaiting your decision» counts 9 and «addition» counts 2.
2. apply-busy twice then success completes the fix without an error, while four times returns the error to the coordinator.

#### EVIDENCE

`src/utils/inboxFacets.ts#inboxFacetCounts` `src/utils/inboxFacets.ts#nameMatches` `src/utils/inboxFacets.ts#sortInboxRows` `src/utils/applyBusyRetry.ts#withApplyBusyRetry` `src/components/InstructorInbox.tsx#useSheetKeys` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/:id/apply` `tests/request-decisions-notify-audit.ts` `tests/inbox-studio-audit.ts`

### FR-REQ-064 Server edges: view links do not reply, a new round supersedes the old, no decision on what was not asked

The server shall refuse a member's reply and acceptance of alternatives (single and batch) from a view-only link with 403. When an issue creates a new round for a member whose previous request was settled, the old request shall be superseded and its link revoked, so no two live links remain and the inbox does not count them twice. A department decision shall refuse a «keep» item (400) and a request the member has not sent yet (409 not-submitted), except an item the department placed from an appointment; «cancel appointment» shall record its decision on the latest request version when the request changes between deleting the row and recording; an undo of a fix shall check the request revision when it carries one; and a civil ID with a malformed format shall not count as an attempt in the guessing limit. Handing an addition from the inbox to the schedule editor carries the item identity and writes the days the coordinator chose, and saving it in another location says the item stays in the inbox instead of a call that is always refused.

● Implemented · Must · Functional · Faculty member, Department head, Schedule committee chair, The system (automatic)

#### ACCEPTANCE CRITERIA

1. POST /api/public/request/:token/reply from a link with linkMode=view is refused with 403 «this link is view only».
2. POST /api/instructor-requests/:id/decide on a request with status=sent and no submittedAt is refused with 409 code=not-submitted.

#### EVIDENCE

`src/server/routes/publicRequestRoutes.ts` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/issue` `src/server/routes/instructorRequestsRoutes.ts#/api/instructor-requests/:id/decide` `src/server/core/instructorRequests.ts#verifyRequestSigner` `src/utils/requestHandoff.ts` `src/components/Schedules.tsx` `tests/request-decisions-notify-audit.ts` `tests/request-handoff-audit.ts`

### FR-REQ-065 Pilot mode: one pending item at a time with three keyed actions

Pilot mode in the faculty-requests inbox shall give a deciding user (in a non-frozen term, with at least one pending item) a full-window screen showing one pending item at a time: the member, department and submission date, the course and section, the before-to-after day, time and room, the stored verdict (conflict or regulation breach) and live check the inbox already computes, and the pre-computed ready alternatives; with an "n of N" counter and a progress bar. The queue is oldest-submitted first and skips items already decided here or by a colleague. Three actions: Fix (F, or Enter when focus is not on another button) through the inbox's own fix function (preview then /apply with the revision stamp), Alternative (B) opening the same reject sheet with its reasons and computed alternatives then /decide, and Next (Right arrow or Space) which skips the item and brings it back in a second pass; Escape exits. An add item is handed to its quick card in the inbox. A server refusal (conflict, frozen term, newer revision) stays on the same card with its message, and the reject sheet stays open until saved so nothing typed is lost. Skipping is undone by «back to what you skipped», and the last «fix» or «alternative» by «back» through the same endpoint the card offers (FR-REQ-066).

● Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A modal dialog (role=dialog, aria-modal) with a focus trap that returns focus to the entry button on exit, visible key hints on the buttons, keys inactive inside text fields or with Ctrl/Meta/Alt, and working on an Arabic keyboard layout.
2. At phone width (390px) it fills the screen with the buttons in one column at least 56px tall, and motion stops under prefers-reduced-motion.
3. The mode makes no server call itself: every action goes through the inbox's functions, inheriting revision checks, term freeze, locks and error handling unchanged.

#### EVIDENCE

`src/components/inbox/InboxPilot.tsx` `src/utils/inboxPilot.ts#buildPilotQueue` `src/utils/inboxPilot.ts#pilotCommand` `src/components/InstructorInbox.tsx` `src/styles/59-inbox-pilot.css` `tests/inbox-pilot-audit.ts`

### FR-REQ-066 Teacher card: one row per course for violations and a planning infographic

Regulation violations on the teacher card shall be grouped into one row per course with an icon, a short phrase and one Edit button that goes to the meeting, with the full text on tap. Each meeting detail shall show a small infographic sourced only from section planning (never Masari wishes or the survey): dots for existing versus planned sections and a people icon with the expected students, in few words; a course without planning shows nothing.

● Implemented · Should · Functional · Faculty member

#### ACCEPTANCE CRITERIA

1. The server sends each violation with its course name, rule, icon and short phrase (pinIssueShort); the page groups them by course (tcPinGroups).
2. The planning read covers only the member's own courses, as aggregate numbers (planned, existing, expected) without student identities, cached five minutes per request.

#### EVIDENCE

`src/utils/pinIssueShort.ts` `src/utils/teacherPlanFacts.ts` `src/server/routes/publicRequestRoutes.ts#teacherPlanningFor` `src/server/teacherCardLogic.ts#tcPinGroups` `tests/teacher-card-r5-audit.ts`

### FR-REQ-067 The room the system picks for a member's request fits the section, and the member never sees a room or building

Every room the system picks automatically for a member's request (the /r/:token card on every path: the verdict, the draft hold, the submit reservation, the room switch of a moved appointment, the two race-lost alternatives, the time heat map, the batch check and the nearest times) shall fit the section's seats under one rule (requestRoomRanking): seats are MaxStudent when set, else the regulation cap (Art. 8) even when assumed, which the department is told. A room whose recorded capacity is below the seats is never picked; a room with no recorded capacity is not picked while a known room that fits is free, and otherwise is held flagged «capacity not recorded» for the department to confirm. Among fitting rooms the preference stays: department rooms, nearness, previous room, closest capacity, fair use, together with college/department eligibility, approved loans, the companion facility and the room type. A time with no fitting room is not available to the member: they read «no room fits your section at this time» with no room or building name, the alternatives engine never offers it, and the department sees the precise reason (section seats against the free rooms' capacities) and, next to the chosen room, «seats N · capacity M» or «capacity not recorded». No response under /api/public/request/* carries a room or building field (key, code, name or id), nor who granted an individual exception and why; roomAvailable and reason codes stay. The official calendar subscription is unchanged.

● Implemented · Must · Functional · Faculty member, Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. With a colleague in the only fitting room: POST /api/public/request/:token/check for that time returns kind=conflict, roomAvailable=false and headline «no room fits your section at this time», POST /hold returns held=false, the heat map marks it bad, and the nearest times never offer it while each offered time's chosen room fits.
2. The department verdict for that item carries the reason code=capacity with a detail of the section seats and the free rooms' capacities, roomSeats on the item, roomOptions[].capacity and seatFit, and the reservation stores the held room's capacity.
3. GET /api/public/request/:token and check, check-batch, check-times, hold, previous and movement carry none of roomCandidates, roomOptions, reservedRoom, roomSwitch, roomSeats, roomId, buildingId, room, hall or AdRoomCode, and individualException has no grantedBy or reason.

#### EVIDENCE

`src/utils/requestRoomRanking.ts#rankRequestRooms` `src/utils/requestRoomRanking.ts#pickRequestRoom`
`src/utils/instructorRequestVerdict.ts#judgeRequest` `src/utils/instructorRequestReservations.ts#claimProposal`
`src/utils/teacherSafeFields.ts#withoutPlaceFields` `src/server/routes/publicRequestRoutes.ts#stripForInstructor`
`src/components/InstructorInbox.tsx#RoomSeatsBadge` `tests/request-room-seat-rule-audit.ts`
`tests/request-room-seat-http-audit.ts` `tests/request-room-capacity-audit.ts`

### FR-REQ-068 Undoing an inbox decision within a short window

The inbox shall let a deciding user undo a «fix» or «reject» made from the inbox itself for fifteen minutes after the decision (INBOX_UNDO_WINDOW_MS, defined once); the item card shows «undo» with the time left, and pilot mode offers «back» for the last decision; both ask a visual confirmation (visualConfirm) and call POST /api/instructor-requests/:id/undo-decision, with errors shown in place. Undoing a rejection returns the item to pending and re-takes its hold (the same room) or refuses with the reason. Undoing a fix reverses exactly what the fix wrote, from a snapshot saved with the decision (a row restored to what it was, an added row removed, a deleted row re-added with the same id) guarded by each row's revision after the write, and re-takes the item's hold, all in one transaction (repository.undoInstructorRequestFix) after a dry run through the normal save path (scope, schedule lock, regulation gate, conflicts, borrowed-room eligibility, course hours), the apply lease and the request revision. It refuses without writing and with an explicit reason: any row changed after the fix (different revision, deleted or its id reused), a frozen term, an expired window, the member's reply or chosen alternative after the decision, a hold or schedule conflict on restoring, a decision with no snapshot (fixed from the workshop or before this feature), a decision made from the schedule screen (it has reopen-fixed) or a study proposal (it has its own undo) and a cancelled appointment. The undo is recorded in the activity trail and as an item-reopened timeline event and raises the request revision, and sends no notification; the «what was decided» digest and «notify those with decisions» read the live decision so they never announce an undone one, the undone decision never enters the decision history the member reads, and the snapshot reaches neither the member nor the department (only the undoable flag leaves the server).

● Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Inside the window and with no schedule change, an edited row returns to what it was, an added row is removed, a deleted row is re-added, and the item is pending again with its hold.
2. A different row revision, a deleted row, an expired window, the member's reply or a decision with no snapshot is refused with 409, a specific code and reason, and nothing is written.
3. If someone else took the item's time or room after the decision, the whole undo is refused before any row is written.
4. No notification to the member and no undone decision in the digest, the decision history or the «not notified» list.

#### EVIDENCE

`src/utils/inboxUndo.ts` `src/server/routes/instructorRequestsRoutes.ts` `src/db/repository.ts#undoInstructorRequestFix` `src/components/InstructorInbox.tsx` `src/components/inbox/InboxPilot.tsx` `src/utils/inboxPilot.ts#pilotReopen` `src/styles/60-inbox-undo.css` `tests/inbox-undo-audit.ts` `tests/inbox-pilot-audit.ts`

### FR-REQ-069 Arabic question field in the member inbox: day, period, kind, state, location and name

The inbox question field (IR-REQ-034) shall understand a simple Arabic sentence in the browser with no server call (utils/requestsAsk.ts): the day (Sunday to Thursday, with preposition and conjunction prefixes), the period of day by the item's start hour (morning before 12:00, noon until 15:00, evening after), the item kind (add, delete, change), the state (awaiting your decision, fixed, rejected, did not participate, did not open the link), the location (boys, girls), and whatever remains as an instructor name matched with the Arabic match key in any order, so the field stays a name search as before. It combines with the existing filters by AND; naming a state replaces the state chip, and the counters (pending, fixed, rejected, all, kind, check) follow what is shown as in FR-REQ-063. What was understood is shown under the field as «I understood: …»; when nothing is understood it says so and the filters stay as they are, and when only a name remains it says it is a name search.

● Implemented · Could · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. «Rejected Sunday requests» shows only rejected Sunday items, with «I understood: rejected · Sunday» under it.
2. «Who did not open the link» shows those whose link was not opened, from the same row column the «did not open» list reads.
3. A sentence of which nothing is understood says so and changes no existing filter.

#### EVIDENCE

`src/utils/requestsAsk.ts` `src/components/InstructorInbox.tsx` `tests/inbox-undo-audit.ts`

### FR-REQ-070 Wish prediction before publishing: what instructors asked to change in past terms

In the schedule-committee publish list each instructor shall get a small chip showing only a count (absent when there is no recurring pattern); tapping it opens a mini grid (Sunday-Thursday x morning/noon/evening) shading recurring cells with a «terms of observed terms» fraction, one line per course (from slot to slot) and an «open appointment» button that jumps to the appointment in schedule management through the inbox's own handoff (putOpenRow). The source is the requests of the last four past terms of the department (submitted, in-review or settled, excluding view-only links), counting only items asking for change, delete or add, never keep. The period uses the inbox boundaries (morning before 12:00, noon until 15:00, evening after) for the original appointment (away) and the requested one (to). A recurring pattern is a cell repeated in at least two different terms (WISH_MIN_TERMS); up to three per instructor. An optional collapsed strip above the list shows the department heat grid as counts only. Coordinator-only: nothing reaches the instructor and nothing is written to the schedule. Served by GET /api/instructor-requests/history-hints under the department permission (7) and scope, read-only, capped at four terms and 200 instructors with a short cache keyed by the demo-session context.

● Implemented · Could · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. An instructor who asked to change a morning appointment in two different terms gets a count chip with the cell shaded 2/2; two asks in one term make no pattern.
2. Keep items, view-only and unsent requests are excluded, and nothing is sent to the instructor.
3. The route refuses callers without permission or outside scope with 403.

#### EVIDENCE

`src/utils/wishPatterns.ts` `src/server/wishHints.ts` `src/components/inbox/WishPatterns.tsx` `src/styles/65-wish-patterns.css` `tests/wish-patterns-audit.ts`

### FR-REQ-075 A course not offered this term never enters the request via replay or a restored draft

Replay and a restored draft shall skip any course not offered this term and say why in one line, and a submit error caused by such a course shall carry the failing item's itemIndex so the card highlights it.

● Implemented · Must · Functional · Faculty member

#### ACCEPTANCE CRITERIA

1. POST /api/public/request/:token with a non-offered course returns 400 with itemIndex.

#### EVIDENCE

`src/server/requestReplayScript.ts#planReplay` `src/server/teacherCardLogic.ts#tcCourseClosed` `src/server/routes/publicRequestRoutes.ts` `tests/teacher-card-r6-audit.ts` `tests/teacher-card-r6-flow-audit.ts`

### FR-REQ-076 The read-only line under an appointment matches the state

The read-only line under each appointment shall say «view-only link» for a view link, the training phase's own wording for it, «your request is complete» for one settled before the deadline, and «requests period ended» only once the window has closed.

● Implemented · Must · Functional · Faculty member

#### ACCEPTANCE CRITERIA

1. A view link with an open window never shows «requests period ended».

#### EVIDENCE

`src/server/teacherCardLogic.ts#tcRowReadOnly` `tests/teacher-card-r6-audit.ts` `tests/teacher-card-r6-flow-audit.ts`

### FR-REQ-077 Signature verification lockout is per civil ID, not per address

Failed signature-verification attempts shall lock out after ten per civil ID (by fingerprint; the number is never stored nor the fingerprint returned) only, with a much looser per-address ceiling (120) for scanning; a campus network is not blocked by ten misses. Counters are per server instance.

Implemented · Must · Functional · Faculty member

**ACCEPTANCE CRITERIA**

1. Ten misses on one ID return 429 for it while another ID from the same address returns 404.

**EVIDENCE**

`src/server/verifyAttempts.ts#createVerifyAttemptGuard` `src/server/routes/verifyRoutes.ts` `tests/teacher-card-r6-audit.ts` `tests/teacher-card-r6-flow-audit.ts`

### FR-REQ-071 The teacher calendar feed is bound to the member's live card

/api/public/cal/:token/:key shall serve the timetable only while the path token is a live card of that member (personal link, request link, or a department card where they teach); the key derives from the token and member id so renewing or revoking the link invalidates it; a revoked token gets a valid empty calendar, a forged key or a colleague's token 404, and legacy keys keep working while their link is live.

Implemented · Must · Functional · Faculty member

**ACCEPTANCE CRITERIA**

1. Live link: VEVENT; revoked link: empty calendar; colleague token or forged key: 404.

**EVIDENCE**

`src/server/calendarSecret.ts#personCalendarKey` `src/server/routes/publicCalendarRoutes.ts#holdsLiveCardLink` `tests/teacher-card-r6-audit.ts` `tests/teacher-card-r6-flow-audit.ts` `tests/calendar-ics-audit.ts`

### FR-REQ-072 Two sections of one course at the same time: a warning, never a block, in the card

The member card shall show a short visual line for two sections of one course at the same time and let the member continue; it never blocks submission, asks for an exception, or becomes the verdict headline (final owner decision 2026-11-14).

Implemented · Must · Functional · Faculty member

**ACCEPTANCE CRITERIA**

1. The verdict is kind=clear and sendable=true with a non-blocking section-clash reason.

**EVIDENCE**

`src/utils/instructorRequestVerdict.ts#softSectionClash` `tests/teacher-card-r6-audit.ts` `tests/teacher-card-peers-audit.ts`

### FR-REQ-073 «Your next lecture» on the member card

The card shall show at the top the member's next lecture from their official schedule of the current term (Kuwait time, Sunday-first week, Friday and Saturday without lectures): «in 40 minutes · course · section 02» with a live countdown, or «tomorrow 08:00»; tapping scrolls to the meeting; no room or building; hidden when the term is not running or no later lecture exists.

Implemented · Must · Functional · Faculty member

**ACCEPTANCE CRITERIA**

1. With a fixed clock Sunday 07:20 and a lecture at 08:00 gives «in 40 minutes»; Thursday evening gives «Sunday 08:00».

**EVIDENCE**

`src/server/teacherCardLogic.ts#tcNextLecture` `src/server/teacherCardExtras.ts#tcNextHtml` `src/server/teacherWeekFacts.ts#teacherWeekFacts` `tests/teacher-card-r6-audit.ts` `tests/teacher-card-r6-flow-audit.ts`

### FR-REQ-074 «My healthy week» on the member card

The card shall show, from the official schedule only, an infographic: attendance days (4 of 5), the longest in-day gap, the busiest day, campus travel for back-to-back lectures using the travel policy's minutes and the same shortTravelGap rule (no invented minutes), and one sentence when something stands out («your Sunday is packed: 5 hours without a break»); no room or building; hidden without an official schedule.

● Implemented · Must · Functional · Faculty member

**ACCEPTANCE CRITERIA**

1. A Sunday with four back-to-back lectures yields the packed-Sunday sentence.

**EVIDENCE**

`src/server/teacherCardLogic.ts#tcWeekHealth` `src/server/teacherCardExtras.ts#tcWeekHtml`
`src/utils/campusTravelHint.ts#shortTravelGap` `tests/teacher-card-r6-audit.ts` `tests/teacher-card-r6-flow-audit.ts`

### FR-REQ-080 Card pulse in the instructors inbox: where each member stands, one tap to filter

The instructors inbox shall show one strip of non-overlapping stages: not opened, opened, sent (confirmed their schedule as is, nothing for you), awaiting your decision, complete. They are counted from the loaded inbox rows (cardPulse) with verbs agreeing with the count; view-only links and superseded requests are not counted. Each stage is a button that filters the list, and the strip replaces the former answer ring and the not-opened line.

● Implemented · Should · Functional · Department head

**ACCEPTANCE CRITERIA**

1. A view-only link never opened ← counted in no stage.
2. Tapping «opened» ← the list shows only those who opened without sending.

**EVIDENCE**

`src/components/inbox/CardPulse.tsx` `src/utils/cardPulse.ts` `src/components/InstructorInbox.tsx`
`src/styles/60-admin-panels.css` `tests/card-pulse-audit.ts`

### FR-REQ-081 «Remind the rest»: a confirmation sheet with the count, the server decides who, and a send limit

The «Remind the rest» button shall send the existing reminder (remindedAt, the card notification, and a WhatsApp message left to the coordinator) through POST /api/instructor-requests/remind-pending, after a confirmation sheet that reads the count from a no-write dryRun. The server decides at press time (planReminders): edit-mode requests only, not yet sent, no view-only, training or visiting members, window open (an individual extension extends it), not reminded in the last six hours (429 code reminder-rate-limited), and 409 when nobody needs a reminder. No more than six successful presses per hour per user (429 with Retry-After). Every card must fall in the reader's scope or 403.

● Implemented · Should · Functional · Department head

**ACCEPTANCE CRITERIA**

1. A second reminder right away for the same people ← 429.
2. A card outside the scope ← 403.

**EVIDENCE**

`src/server/routes/instructorRequestsRoutes.ts` `src/utils/cardPulse.ts` `src/components/inbox/CardPulse.tsx`
`tests/card-pulse-audit.ts`

### FR-REQ-083 A one-status teacher registry, «Open editing», a no-room warning, and smarter recipients

The instructor requests inbox shall show a teacher registry: one row per teacher with a single status (confirmed, edited, silent, in review, view only) computed from the latest request alone however many sends reached them, status chips with counts that filter the list, and the full movement (sent to whom and when, how many times the link was opened, submitted, confirmed, edited, the department's decisions) read from the teacher track on demand. A teacher whose card is view-only (window closed or a view link) while the department has not finished the request gets an «Open editing» button with a suggested deadline, which sends a private edit send on the same link and is written to the request timeline. In the publish screen, before the create button, the department is warned how many appointments have no room, with a one-tap «show them» (a warning that never blocks, and without any room name); the «specific teachers» list starts with those who need a send (not reached, not opened, not replied, view-only card) with a «will reach N: …» sentence and a suggested deadline (the previous send's deadline or three days ahead), and the coordinator's own selection always wins over the suggestion.

● Implemented · Should · Functional · Department head, Schedule committee chair

#### RATIONALE

> The owner asked to see what happened and the full movement, noted a card that stayed view-only because the department could not recall which send reopens it, and that publishing without a room affects things without saying so.

#### ACCEPTANCE CRITERIA

1. registryStatusOf returns one of five statuses from the latest request, and viewOnlyStuck is true for in-review with a closed window and false for settled and training.
2. roomlessRows counts a pending room as no room, and the warning never disables the publish button.
3. sendNeed returns new, unopened, unreplied and viewOnly, and nothing for someone who replied with a healthy card.

#### EVIDENCE

`src/components/inbox/TeacherRegistry.tsx` `src/utils/teacherRegistry.ts` `src/utils/publishNeeds.ts` `src/utils/roomlessRows.ts` `src/components/SchedulePublish.tsx` `src/components/PublishRecipientPicker.tsx` `tests/teacher-registry-audit.ts`

## 3.9.6 Algorithms

ALG-REQ-01 · Faculty requests and public links

**Faculty request item verdict and meeting length**

Deterministic

*Does what the instructor asks for on the card go through, need an exception, or is it not allowed — and what are the nearest free times when it is not?*

1. Meeting length: days and start as saved → the saved length; else the appointment's own length when its days are kept (or one day moves to one day) and that length is approved in the library, while moving a single day with an unapproved length takes the approved length for that day nearest it (Thursday 75 min → 50 min); else the regulation pattern for the course hours, else 50 minutes on Sunday, Tuesday and Thursday and 80 on Monday and Wednesday; the first day pressed completes the regulation pattern containing it.
2. The week is built after applying the whole bundle to this instructor's rows; everyone else's rows stay as they are.
3. A closed window blocks; delete, keep, and an edit that touches nothing are not judged.
4. Checks in order: clock format, campus and department day bounds, weekly minutes against course hours, approved pattern, same-course section clash (a warning that never blocks), meeting length against the approved pattern, start ladder, regulation, instructor clash, travel, cohort overlap (advice only), load, and hall availability.
5. Any blocking reason → not allowed; non-blocking reasons other than cohort, travel and the other-section-of-the-same-course warning → needs an exception with a written excuse; otherwise clear.
6. When blocked, each start on the department ladder ∪ the regulation ladder is tried, the moved bundle is re-judged, and the three nearest sendable starts are returned.

**Inputs**

The request item (action, days, start), the live term timetable, the department's courses and hours, the start ladder, the request window, the instructor's load allowance, and cohort pairs.

**Output**

One of three verdicts (clear, exception, not allowed) with reasons and their source, a computed end time, and up to three alternative times.

Writes nothing; a row the department placed and the member did not touch is never blocked; no specific hall is revealed to the instructor; the verdict is recomputed at every read and submit.

50 minutes (Sunday, Tuesday, Thursday) and 80 minutes (Monday, Wednesday) · Default campus day 08:00–20:00 (configurable) · Up to 3 alternative times

`src/utils/instructorRequestVerdict.ts#judgeRequest` · `src/utils/requestMeetingLength.ts#meetingMinutes` · `src/utils/requestMeetingLength.ts#meetingSlots` · `src/server/requestDayAutofillScript.ts#REQUEST_DAY_AUTOFILL_SCRIPT` · `tests/instructor-request-availability-audit.ts` · `tests/request-day-autofill-audit.ts` · `tests/teacher-card-hours-patterns-audit.ts` · `tests/new-appointment-pattern-end-audit.ts` · `tests/teacher-card-peers-audit.ts`

FR-REQ-014 · FR-REQ-015

## 3.9.7 Edge cases

### ⚠ A colleague took the same time first

**Scenario** Two members choose the same time and the only available room, and the first submits before the second.

**Behaviour** The first wins in the ledger transaction. The second receives 409 with code race-lost and two nearest alternatives, the draft stays preserved on the page, and no colleague or room name is mentioned.

### ⚠ Item with different times across days

**Scenario** A member requests a course with two different times on two days and the coordinator presses fix.

**Behaviour** The server refuses with 409 code mixed-times because one row has one time, so the coordinator fixes from the schedule with a row per time; fixed is never recorded without verification.

### ⚠ Schedule replaced after links were issued

**Scenario** The department schedule is replaced entirely after members opened their links and some submitted.

**Behaviour** The old round closes: the link returns 410 round closed, its requests leave the inbox and stay in history, and the department issues a link for the current round.

### ⚠ Term frozen after issue

**Scenario** The request window is still open by date but the term has become frozen or ended.

**Behaviour** The server answers the member with 409 in wording of their own (check with your department) without mentioning the schedule committee, and refuses decision, approval and reply from the department; revoking an individual exception stays allowed because it does not touch the schedule.

### ⚠ Guessed civil ID or shared network

**Scenario** Someone tries numbers on a card, or thousands of members open cards from the one university address.

**Behaviour** The limit counts the failure, not the entry: ten failures in ten minutes per link and address block, a successful attempt returns its credit, and opening with neither number nor key is not counted. The same answer is returned for a wrong number and for a member who teaches nothing.

### ⚠ General department link with a colleague's number

**Scenario** Someone enters a colleague's civil ID on the general department link or on another member's personal link.

**Behaviour** A personal link opens only for its owner and returns 404 for anyone else, the general department link shows the schedule alone with no requests, decisions or rejection notes, and request editing remains conditioned on the number matching the member's record.

### ⚠ Two linked items across two departments

**Scenario** A member teaching in two colleges requests deleting a lecture in the first and adding another in the second at the same time.

**Behaviour** Each department sees only its own item, the item waiting on another is marked awaitedElsewhere without that department's details, and approval accepts linked items only when pending and in one transaction.

## 3.9.8 Standing owner decisions

- Rooms and buildings are the department's decision alone: they never reach the member in any reply, in what the committee writes, or in schedule movement on the request page (owner decision 2026-10-29).
- Pressing send is a civil-ID signature, a rejection is never without a reason, and fixed is said only when it actually happened in the schedule.
- Any course number shown is always seven digits (college + department + course), and printed reports keep their design.
- The regulation binds on the faculty card and advises on department screens: the member asks the department so cannot ask for what is not allowed, while the department is an authority that can grant exceptions.

↑ Contents

3.10 · PLN

# Section planning and curricula

From the registrar's demand report and plan sheet to the term's sections and the study proposal

| 55 | 98% | 63 | 69 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.10.1 Overview

The module builds the term's class sections from the study plans. The department uploads the registrar's demand report (SWRDASH: all students, optionally graduates), the system suggests a section count per course and campus from comparable past terms while keeping the full need visible beneath it, and the missing sections are applied to the schedule through one engine with explicit confirmation and undo. It also manages plan sheet rules (levels, prerequisites, electives) from draft to approval and public publishing, course offering states, and the study proposal the department prepares for an instructor and commits after approval. It serves department heads, the schedule committee chair and system administration, while students and visitors read the published sheets.

Department head · Schedule committee chair · Root administrator · Department advisor · Standard user · Faculty member · Public visitor · Student · The system (automatic)

## 3.10.2 User journeys

**Department head** — **From the demand report to sections in the schedule**

1. Uploads the registrar's «all students» report (and optionally «graduates») from section planning and reviews the preview.
2. Reads each course and campus's history-led suggestion with the full need beneath it.
3. Opens «apply sections» and sees suggested, existing and remaining per course, adjusting the count up to the full need if he wishes.
4. Previews a week built with halls, instructors and conflict-free times, plus reasons for what could not be built.
5. Confirms the apply, writing all sections or none, and may undo with one click.

### Schedule committee chair — From plan sheet draft to the public page

1. The main administrator imports the sheets, creating «under review» drafts.
2. The department corrects its courses' levels, prerequisites and elective groups.
3. The chair reviews the blockers and approves the version he saw.
4. Publishes the approved sheet from «sheet publishing» and obtains a link, QR and PDF.
5. Students read the page at /plans/ without an account, and the snapshot refreshes on each later approval.

### Department head — A study proposal for an instructor

1. Starts the proposal from the instructor's request card in the inbox and adds items (assign, new section, edit or replace).
2. Sees the difference on the schedule and the check result at once: blocker, note or information.
3. Sends the version and the instructor receives a personal link, with nothing reserved.
4. The instructor signs with the civil number to approve or requests a change.
5. The department reviews and commits in one transaction, and may undo if no appointment changed.

### 3.10.3 Diagrams

**Section-build workflow**

The decision in planning, the build on the server, and the write through the shared schedule path.

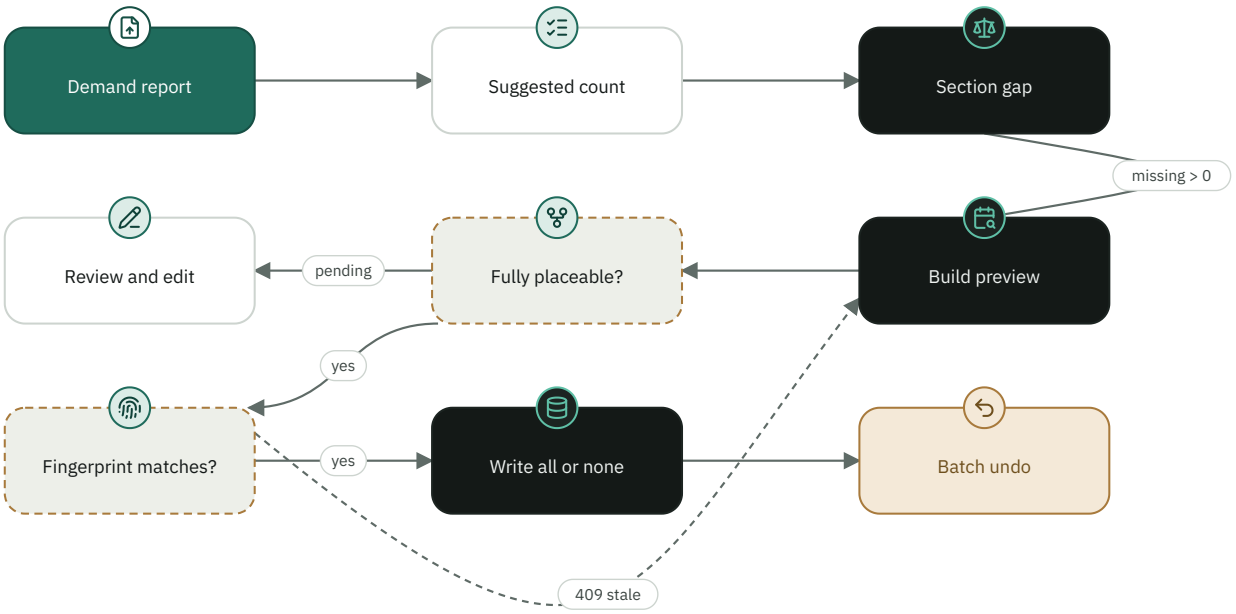

## Plan sheet lifecycle

The approved version stays until the next edit is approved, and the public snapshot is independent.

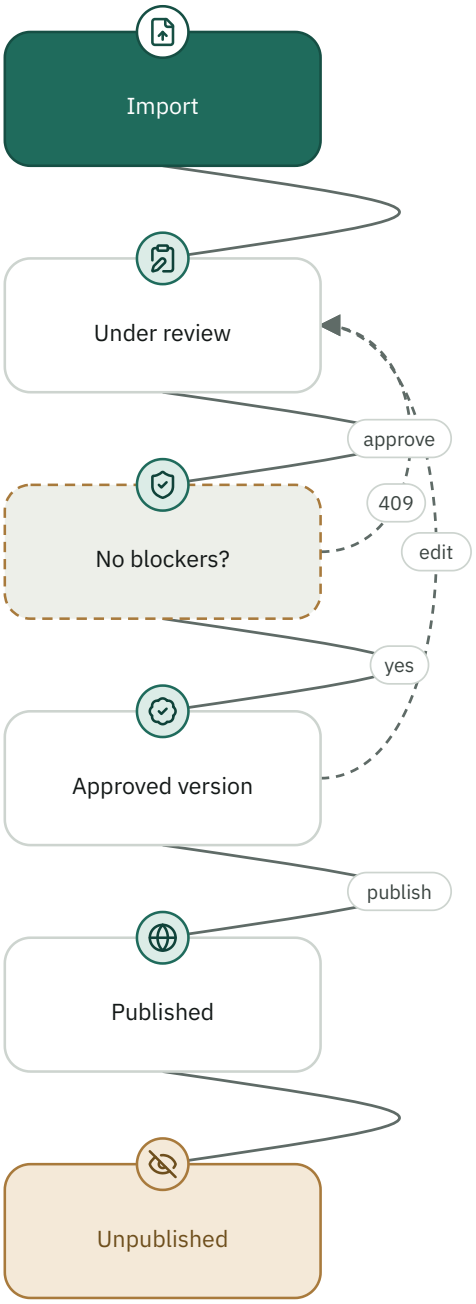

## Proposal states

Only the sent version accepts a response, and only the commit writes to the schedule.

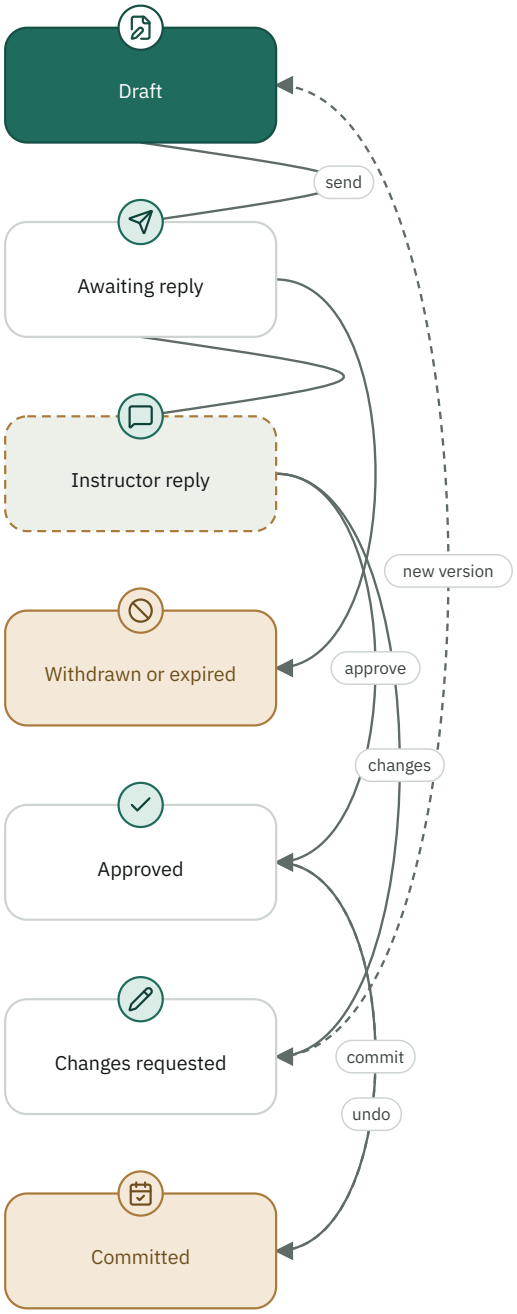

**Who can do what**

| | Section planning | Apply sections | Edit sheet rules | Approve sheet | Publish sheet | Plan upload and reference |
|---|---|---|---|---|---|---|
| Root administrator | ✎ | ✎ | ✎ | ✎ | ✎ | ✎ |
| Schedule committee chair | ✎ | ✎ | ✎ | ✎ | ✎ | — |
| Department head | ✎ | ✎ | ✎ | — | — | — |
| Department advisor | 👁 | — | — | — | — | — |
| Standard user | ✎ | ✎ | 👁 | — | — | — |

✎ Write 👁 Read — No access

## 3.10.4 Screens

**Section planning**
Registrar report (all and graduates), three figures, the graduates and other-students stages, and visiting instructors.`src/components/SectionPlan.tsx`

**Sections students ask for in Masari**
A quiet badge in the approval bar opening a «5 to 7» list.`src/components/SectionGapNote.tsx`

**Course offering status**
Four states, new and old sheet tabs and the reach verdict.`src/components/CourseOfferingPanel.tsx`

**Curriculum plans**
Plan creation, course linking, transitions and archiving.`src/components/CurriculumPlans.tsx`

**Plan review**
Level map, course rules and approval.`src/components/PlanReview.tsx`

**Reference sheet**
Comparison of the two reference sheets with the catalogue and their application.`src/components/CurriculumReferenceReview.tsx`

**Study plan upload**
Upload of the registration office's PDF.`src/components/PlanSheetUpload.tsx`

**Sheet publishing**
Link, QR and PDF for every approved sheet.`src/components/PlanSheetPublisher.tsx`

**Study proposal**
A schedule with visible differences and tabs for changes, vacancies and checks.`src/components/proposal/StudyProposalWorkspace.tsx`

## 3.10.5 Requirements

### FR-PLN-001 Section planning from the registrar report

The system shall build section planning from the registrar's student-needs report (SWRDASH) alone: for each course and campus (boys/girls), required = ⌈students ÷ section capacity⌉, of which graduates need ⌈graduates ÷ capacity⌉, against the sections offered in the department family's schedule; the 'all' report alone suffices and the graduates report puts graduates first.

● Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Course 112 at capacity 60: boys 253 → 5 required, 5 offered (balanced); girls 135 → 3 required, 13 offered (surplus 10); the report's average (90) is not used.
2. Graduates are part of the total: workshop 212 is one line per campus, with its graduate sections inside it.

**EVIDENCE**

`src/utils/sectionPlan.ts#sectionPlan` `src/server/actualDemand.ts#sectionPlanOf` `src/components/SectionPlan.tsx` `tests/section-plan-audit.ts` `tests/actual-demand-audit.ts`

### FR-PLN-002 Mismatched report refusal

The system shall refuse a report that belongs to a different department or term than the open one, or whose kind contradicts the other stored report (judged from its figures, not its file name), and store nothing from it without explicit confirmation, stating the reason.

● Implemented · Must · Functional · Department head, Schedule committee chair

**RATIONALE**

> Figures from another term would corrupt the plan.

**ACCEPTANCE CRITERIA**

1. A mismatch is answered with status 409 unless confirmation is sent, and the preview shows the report's term, department, kind and the matched and unmatched counts.
2. A report for a term other than the open one is not stored without confirmation, not merely warned about.
3. A file typed «graduates» whose figures are the size of the stored «all students» report (60% or more), or whose graduate count exceeds the all-students count in over 10% of courses, or an «all students» file sized like the graduates report, is flagged and not stored without confirmation; the same file already stored as the other kind is flagged too.

**EVIDENCE**

`src/server/routes/planningRoutes.ts` `src/utils/sectionPlan.ts` `tests/section-plan-audit.ts`

### FR-PLN-003 Registration statistics save

Inferred

The system shall store the demand report per (term, department family) in its two variants «all students» and «graduates», with who uploaded it, when, and the file fingerprint, and read it back without further writes.

● Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. No file larger than 4 MB or longer than 60 pages is accepted, and only its text is read.
2. Boys and girls in all the family's colleges share one report, and a manual link for an unmatched course is stored once for the family.
3. A request outside the allowed departments is answered with status 403.

**EVIDENCE**

`src/server/routes/planningRoutes.ts` `src/db/repository.ts#saveRegistrationStats` `src/server/actualDemandRoutes.ts#/api/actual-demand/upload` `tests/section-plan-audit.ts`

### FR-PLN-004 Section count suggestion

The system shall suggest per course and campus a section count from the department's history: the usual count in comparable terms (same season), moved by the full need (students divided by course capacity) within a narrow band, keeping the full need visible beneath the suggestion.

Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The tilt stays within the usual count plus or minus 1, widening to 2 when the usual count is 4 or more, and the suggestion is never below 1.
2. A course with no history is suggested its full need by its capacity and labelled «no history» without an invented cap; a renumbered course inherits its predecessor's sections.
3. The section capacity is the course's recorded capacity as is (5, 25 or 60), else the report average tagged, else «enter capacity»; with history the suggestion needs no capacity.

**EVIDENCE**

`src/utils/sectionPlan.ts` `src/server/routes/planningRoutes.ts` `tests/section-plan-audit.ts`

### FR-PLN-005 Same-season history and course lineage

Inferred

The system shall gather each course's history only from earlier terms of the same season, and let a renumbered or replaced course inherit its predecessor's sections and remaining figures when it was not itself opened.

Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A first term does not borrow history from a second term, nor the reverse.
2. A transition of kind removed inherits nothing.
3. A past remaining figure saved under a column other than «not passed» is excluded from comparison.

**EVIDENCE**

`src/server/routes/planningRoutes.ts` `src/utils/sectionPlan.ts` `tests/section-plan-audit.ts`

### FR-PLN-006 Section gap report

The system shall compare the suggestion per course and campus with the number of distinct sections (SCode) in the term schedule and classify the row: graduates first, then missing, surplus, balanced or no capacity, always showing the full need beside it.

Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Suggested 6 with 5 existing gives remaining 1 and state missing.
2. A course with no capacity and no history is not computed and shows «enter capacity».
3. The report is read-only and writes nothing to the schedule.

**EVIDENCE**

`src/utils/sectionGap.ts` `src/utils/sectionBuild.ts` `src/server/core/planning.ts` `src/server/routes/planningRoutes.ts` `src/components/SectionGapNote.tsx` `src/server/routes/planningRoutes.ts#/api/schedules/section-gap` `tests/section-gap-audit.ts` `tests/section-plan-audit.ts`

### FR-PLN-007 Surplus and conflict review

The system shall present sections above the suggestion as a review item, never a closure: «choose what to close» shows the course's sections in the schedule and deletes nothing.

Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A surplus with neither capacity nor history is not shown.
2. Surplus is computed from the suggestion, not the full need, so nothing history supports is hinted for closure.

**EVIDENCE**

`src/utils/sectionGap.ts` `tests/section-gap-audit.ts`

### FR-PLN-008 Planning stages: graduates, then other students

The section-planning screen shall show three figures (graduates seated, sections short, sections in surplus) and then two stages ordered by course number: first, courses whose graduate sections are short; second, what is short or in surplus for other students; balanced courses are not shown, and each line carries one suggestion that neither writes nor blocks: 'Open a section' opens the editor, and 'Choose what to close' surfaces the course's sections on the schedule.

Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A course with graduates and no section on their campus sits in the first stage and moves to the second once their sections are offered.
2. No 'done' or 'ignore': a course leaves the list once balanced.

**EVIDENCE**

`src/utils/sectionPlan.ts#planStage` `src/components/SectionPlan.tsx` `src/utils/actualDemandHandoff.ts#openCourseSections` `tests/section-plan-audit.ts` `tests/decision-surfaces-audit.ts`

### FR-PLN-009 Course offering states

The system shall let the department set each course's offering state for the term: offered (default), closed, future sheet not yet reached, or limited sections with a maximum count.

Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A course with no entry is offered, and an unconfirmed suggestion changes nothing.
2. The maximum for limited sections lies between 0 and 99.
3. A limited course shows «remaining» = maximum minus existing, and becomes unselectable at zero.

**EVIDENCE**

`src/utils/courseOffering.ts` `src/server/routes/offeringRoutes.ts` `src/components/CourseOfferingPanel.tsx` `src/server/routes/offeringRoutes.ts#/api/course-offering` `tests/owner-features-2026-10-28-audit.ts` `tests/instructor-offering-flow-audit.ts` `tests/prepublish-reach-audit.tsx`

### FR-PLN-010 Offering effect on suggestions

The system shall not suggest new sections for a closed course or one from a sheet whose cohort has not reached its level, and shall trim a limited course to its ceiling.

Implemented · Must · Functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. States closed and future yield zero new sections.
2. A limited course with ceiling 3 and 2 existing allows one new section.
3. Offering states are read through a 20-second cache that is cleared on every save.

**EVIDENCE**

`src/utils/courseOffering.ts` `src/server/offeringStates.ts` `src/server/routes/planningRoutes.ts` `tests/instructor-offering-flow-audit.ts` `tests/section-build-audit.ts`

### FR-PLN-011 Not-yet-reached verdict

The system shall judge for each course, branch and sheet whether the student cohort has reached its level, from the sheet's rules and the branch's own history only, and shall not lock a course without evidence.

Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A course with no prerequisites opens when its level exceeds the highest level offered from the sheet in the branch by at most one level.
2. A branch without history, or a course with neither level nor prerequisites, stays «unknown» and shows without a tag.
3. An «open for offering» decision opens the course whatever the rule says.

#### EVIDENCE

`src/utils/courseReach.ts` `src/server/courseReachShared.ts` `src/components/CourseReach.tsx` `src/components/PrepublishReachSheet.tsx` `src/server/routes/offeringRoutes.ts#/api/course-reach` `tests/course-reach-audit.ts` `tests/prepublish-reach-audit.tsx`

### FR-PLN-012 Section-build preview

Planned

The system shall build a preview of the missing sections from the planning suggestion (graduates first) with the same opening engine: a conflict-free time, a documented hall of sufficient capacity, and an instructor who taught the course and has available load, hardest courses first, stating the reason for every section not built, and let the department raise a course's count up to its full need.

Planned · Must · Functional · Department head, Schedule committee chair

#### RATIONALE

> The screen lives inside section planning: the build starts from the suggestion, not the full need, so hundreds of sections are not proposed.

#### ACCEPTANCE CRITERIA

1. Courses of one level do not overlap within the batch.
2. The recorded reasons are: no documented hall large enough, no instructor who taught it, loads full or no recorded allowance, no conflict-free time.
3. A department with no appointment in the term counts as «not started» and no schedule is invented.
4. The requested count is accepted up to the course's full need (no fixed cap), and a batch above 40 sections is warned that instructor loads are the limit.

#### EVIDENCE

`src/utils/sectionBuild.ts` `src/utils/sectionOpening.ts` `src/server/routes/planningRoutes.ts` `src/server/routes/planningRoutes.ts#/api/section-build/preview` `tests/section-build-audit.ts` `tests/section-opening-feasibility-audit.ts` `tests/section-plan-audit.ts`

### FR-PLN-013 Pending-room sections from history

The system shall, when no hall and instructor are available, place the section at a time taken from the comparable term (first with first), with a «pending room» hall and the «faculty» placeholder instructor, without stopping the build.

Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Two pending sections of one course never fall at the same time.
2. The proposed hall comes from the department's documented halls, most used first.

#### EVIDENCE

`src/utils/sectionPending.ts` `src/server/routes/planningRoutes.ts` `tests/section-build-audit.ts`

### FR-PLN-014 Confirmed section apply

The system shall recompute the build on the server at apply time so that no time is accepted from the browser, and write all picked sections or none through the shared schedule path.

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. The browser sends only «course:section» keys, up to 200 per batch; larger needs apply in several batches, each with its own undo.
2. A differing week fingerprint yields 409 with code stale and nothing is written.
3. Picking a pending section yields 409 with code needs-review.
4. A failure of one section reverts those written before it, and the batch is recorded with an id beginning plan: and origin «section planning».

**EVIDENCE**

`src/server/routes/planningRoutes.ts` `src/utils/sectionBuild.ts` `src/server/routes/planningRoutes.ts#/api/section-build/apply` `tests/section-plan-audit.ts`

### FR-PLN-015 Apply undo

The system shall allow undoing one apply batch by deleting only its rows, and refuse if any row changed after it was applied.

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A batch id not starting with plan: is refused with status 400.
2. A row whose revision exceeds 1 yields 409 with code changed and nothing is deleted.
3. A batch with no rows in the schedule yields 404.

**EVIDENCE**

`src/server/routes/planningRoutes.ts` `src/server/routes/planningRoutes.ts#/api/section-build/undo` `tests/section-plan-audit.ts`

### FR-PLN-016 Plan sheet course rules

The system shall store, for each course in a plan sheet, its level (100 to 400), kind (compulsory, college, university, elective), prerequisites and corequisites, and for elective groups a minimum number of courses and units.

Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The legacy level values 1 to 4 are converted to 100 to 400.
2. A prerequisite accepts «all», «any of» and «minimum units» up to 200, and a group up to 20 courses and 60 units.
3. A course in two groups stays in the first when sanitised.

**EVIDENCE**

`src/utils/curriculumRules.ts` `src/utils/curriculumRulesImport.ts` `tests/plan-review-audit.ts`

### FR-PLN-017 Plan sheet rule checks

The system shall check the plan sheet rules and classify findings as approval-blocking or warnings.

Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Blockers: a prerequisite cycle, an unknown reference, a course not in the sheet, a group that cannot meet its minimum courses or units, and a course in two groups.
2. Warnings: a prerequisite at a later level, an elective without a group, an empty group or one without a minimum.

**EVIDENCE**

`src/utils/curriculumRules.ts` `tests/plan-review-audit.ts`

### FR-PLN-018 Draft editing with department guard

The system shall let a department edit only its own courses' rules in the plan sheet draft, and refuse on the server any edit of another department's course.

Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Editing another department's course yields 403 with code foreign-course.
2. The details editor accepts integer units 0 to 20, hours 0 to 40 in half-hour steps and capacity 0 to 200, and rejects any other field.
3. Every edit returns the draft to «under review» based on the approved version.

**EVIDENCE**

`src/server/planReviewRoutes.ts` `src/components/PlanReview.tsx` `src/server/planReviewRoutes.ts#/api/plan-review/course-details` `src/server/planReviewRoutes.ts#/api/plan-review/rule` `tests/plan-review-audit.ts`

### FR-PLN-019 Plan sheet approval

The system shall let the schedule committee chair (and system administration) approve a draft only on the version they saw, and move it to the approved store with a new version in one transaction.

Implemented · Must · Functional · Schedule committee chair, Root administrator

**ACCEPTANCE CRITERIA**

1. A draft changed after viewing yields 409 with code stale.
2. A blocker yields 409 with code blockers and the list of blockers.
3. A non-chair yields 403 with code not-approver.
4. When the sheet is published its public snapshot is refreshed on approval.

**EVIDENCE**

`src/server/planReviewRoutes.ts` `src/server/planReviewRoutes.ts#/api/plan-review/approve` `tests/plan-review-audit.ts`

### FR-PLN-020 Study plan PDF upload

The system shall read the admissions and registration office's study-plan PDF, apply only the owning department's courses by number, correct name, units and hours without touching capacity, for the main administrator only.

Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. The file limit is 2 MiB, and a non-PDF is refused with status 422.
2. A sheet combining several tracks is refused with kind combined, and a sheet of another department is refused before any write.
3. Re-uploading the same file changes nothing.
4. The course key is seven digits: «105 09 01» becomes 0109105.

**EVIDENCE**

`src/server/planReviewRoutes.ts` `src/utils/planPdfParser.ts` `src/server/planPdfExtract.ts` `src/utils/planSheetImport.ts` `src/server/sheetReconcile.ts` `src/components/PlanSheetUpload.tsx` `src/server/planReviewRoutes.ts#/api/plan-review/sheet/import` `tests/plan-sheet-import-route-audit.ts` `tests/plan-pdf-audit.ts` `tests/plan-sheet-import-audit.ts`

### FR-PLN-021 Reference sheets and their application

The system shall carry the two reference sheets of one reference department (old 130 units, new 125 units) and apply them to the catalogue with a default dry run before writing, for the main administrator only.

Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. A request without dryRun=false previews and writes nothing.
2. A frozen name in transitional sheets changes only with confirmIdentity, while units and hours are always corrected.
3. The created rules are a draft never approved, and re-applying to a matching catalogue changes nothing.
4. In plan review the reference department sees «graduation sheet» in place of the department and sheet pickers, so choosing its site and version drives the whole page, and the «edit units, hours and capacity» and «add the course to the department» buttons open the courses screen with the correction prepared for whoever may use it; the apply panel is for the root account only.

**EVIDENCE**

`src/data/technologyEducationCurricula.ts` `src/data/marineMechanicalDiploma.ts` `src/utils/curriculumReference.ts` `src/utils/referenceApply.ts` `src/server/planReviewRoutes.ts` `src/components/CurriculumReferenceReview.tsx` `src/components/PlanReview.tsx#openCatalogCorrection` `src/server/planReviewRoutes.ts#/api/plan-review/reference/apply` `tests/reference-apply-audit.ts` `tests/curriculum-reference-pdf-audit.ts` `tests/curriculum-reference-audit.ts` `tests/analytics-reports-review-audit.ts`

### FR-PLN-022 Sheet membership and badges

The system shall derive each course's «sheet year» tag and its new and old tabs from one membership source, so tag and tab never disagree on any screen.

Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The tag appears only for a course in the new sheet alone, and the pair exists only for a department holding both sheets.
2. After «ended» all badges disappear and return when a newer sheet arrives.
3. Badges respect the account's scope, so no badge is returned for a course it cannot see.

**EVIDENCE**

`src/utils/sheetMembership.ts` `src/utils/sheetTag.ts` `src/utils/planBadges.ts` `src/server/planBadgeShared.ts` `src/server/planReviewRoutes.ts` `src/utils/courseTags.ts` `src/server/planReviewRoutes.ts#/api/plan-badges` `tests/sheet-membership-audit.ts` `tests/consistent-badges-audit.tsx`

### FR-PLN-023 Department plans and transitions

The system shall allow creating a department plan, renaming it, linking its courses, recording transition relations between two plans, and checking archive readiness before archiving.

Implemented · Must · Functional · Department head, Root administrator

**ACCEPTANCE CRITERIA**

1. Transition kinds are renumbered, renamed, renumbered-renamed, replaced and removed, and all except removed require a counterpart course.
2. Removing a course from its last live plan while offered in the newest term is refused with status 409.
3. Archiving a plan still used in the newest term is refused with status 409 unless force=1 is sent.
4. Adding courses accepts up to 300 courses per request, all from the plan's department.

**EVIDENCE**

`src/server/routes/coursesRoutes.ts` `src/components/CurriculumPlans.tsx` `tests/curriculum-transition-audit.ts`

### FR-PLN-024 Public sheet publishing

The system shall publish an approved sheet, for the schedule committee chair (and system administration) within their scope, as an independent snapshot, copy what is published for female students to its sub-sites, and allow unpublishing.

Implemented · Must · Functional · Schedule committee chair, Root administrator

#### ACCEPTANCE CRITERIA

1. Publishing an unapproved sheet yields 409, and a non-chair yields 403.
2. Clearing the plan after approval does not remove the published page, while unpublishing removes it and its copies.
3. A copy carries mirrorOf, and a site with no matching sheet is reported and not guessed.
4. Publishing is limited to 30 operations per minute.

#### EVIDENCE

`src/server/planSheetRoutes.ts` `src/components/PlanSheetPublisher.tsx` `src/utils/collegeTrack.ts` `src/server/planSheetRoutes.ts#/api/plan-sheets/publish` `src/server/planSheetRoutes.ts#/api/plan-sheets/unpublish` `tests/plan-sheet-audit.ts`

### IR-PLN-001 Public plan pages

The system shall serve published sheets without sign-in at /plans/, each department at /plans/s<department>/ and each sheet at /plans/s<department>/<sheet>/, with a QR code that always carries the official domain and a PDF download.

Implemented · Must · Interface · Public visitor, Student

#### ACCEPTANCE CRITERIA

1. Pages send X-Robots-Tag: noindex and are limited to 120 requests per minute.
2. A department with one sheet redirects with 302 to it, and an unpublished sheet yields 404.
3. The page shows the department's own courses only, with external requirements as notes rather than cards.
4. The /plans/ index does not repeat the sub-sites, and the reference department's static page remains until that department is published.

#### EVIDENCE

`src/server/planSheetRoutes.ts` `src/server/planSheetPage.ts` `src/server/planSheetReferenceLayout.ts` `public/plans/_template/sheet.html` `src/server/planSheetRoutes.ts#/plans/` `src/server/planSheetRoutes.ts#/plans/:dept/` `src/server/planSheetRoutes.ts#/plans/:dept/:plan/` `tests/plan-sheet-audit.ts`

### FR-PLN-025 Study proposal drafting

The system shall let the department prepare a proposal of several items for an instructor who has a request in the inbox, with four operations: assign a section, new section, edit an appointment and replace, kept as a draft independent of the live schedule.

Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. At most 12 items per proposal, 60 proposals per instructor, a 1200-character message and a 600-character reply note.
2. A frozen term or locked schedule yields 409 with code term-frozen or schedule-locked.
3. A reference appointment cannot be used in two items, and a duplicated new section inside the proposal is rejected.

#### EVIDENCE

`src/server/studyProposalRoutes.ts` `src/utils/studyProposal.ts` `src/components/proposal/StudyProposalWorkspace.tsx` `src/server/studyProposalRoutes.ts#/api/study-proposals` `src/server/studyProposalRoutes.ts#/api/study-proposals/:id` `tests/study-proposal-audit.ts` `tests/study-proposal-flow-audit.ts`

### FR-PLN-026 Proposal check with the schedule checker

The system shall check a proposal by applying its operations to an in-memory copy of the term schedule and asking the same conflict checker that governs saving an appointment, classifying results as blockers, review notes and information.

Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Sending is refused with 409 and code not-ready while readiness.canSend is false.
2. An instructor appointment in a department outside the user's scope appears as occupancy only, with no course or section.
3. Sending reserves no section and no hall.
4. A moved or new proposal row has its end computed from the approved pattern for the course hours (an unchanged shape stays as is), an end not matching the pattern length is a blocker, and the course history does not exempt it from the hours ceiling, as at the save gate.

#### EVIDENCE

`src/server/studyProposalEngine.ts` `src/utils/studyProposal.ts` `src/server/studyProposalRoutes.ts` `src/server/studyProposalRoutes.ts#/api/study-proposals/evaluate` `tests/study-proposal-flow-audit.ts` `tests/study-proposal-audit.ts`

### FR-PLN-027 Proposal versions and instructor response

The system shall number proposal versions and accept the instructor's response (approval or change request, independent per item or linked) on the current sent version only, signed with the civil number without storing it.

Implemented · Must · Functional · Faculty member, Department head

#### ACCEPTANCE CRITERIA

1. Every material change to what was sent raises the version and returns the status to draft.
2. A response to an older version yields 409 with code stale-version, and after expiry 409 with code closed.
3. The default validity is 7 days, between 1 and 30.
4. A change request needs a short reason or a note.
5. A duplicate response with identical content is not recorded twice.

#### EVIDENCE

`src/server/studyProposalRoutes.ts` `src/utils/studyProposal.ts` `src/server/studyProposalPage.ts` `src/server/studyProposalRoutes.ts#/api/study-proposals/:id/send` `src/server/studyProposalRoutes.ts#/api/public/request/:token/proposals/:pid/respond` `tests/study-proposal-audit.ts` `tests/study-proposal-flow-audit.ts` `tests/study-proposal-public-page-audit.ts`

### FR-PLN-028 Proposal commit and undo

The system shall commit a proposal to the schedule in one atomic transaction after the instructor's approval and re-check, and allow one complete undo unless an appointment changed after the commit.

Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A request without confirm=true is a dry run that states what would happen without writing.
2. The linked mode commits only with approval of the whole group.
3. A change to an appointment after commit yields 409 with code proposal-stale on undo and nothing is written.
4. Re-committing a committed proposal returns alreadyCommitted and does not write twice.
5. A commit (confirm=true) that breaks a non-blocking rule of decision 1913/2016 (ladder, fixed section start, consecutive lectures) is refused on the server with 409 code regulation-exception and nothing written; it proceeds with regulationException=true and is recorded in the audit log; alternative days for one row of a multi-row section are judged by the whole section, so a day that breaks its pattern is never offered.

#### EVIDENCE

`src/server/studyProposalRoutes.ts` `src/utils/studyProposal.ts` `src/server/studyProposalRoutes.ts#/api/study-proposals/:id/commit` `src/server/studyProposalRoutes.ts#/api/study-proposals/:id/undo-commit` `src/server/studyProposalEngine.ts#sectionDayVariants` `tests/study-proposal-flow-audit.ts` `tests/final-audit-gaps-audit.ts`

### FR-PLN-029 Vacancy ranking for the instructor

The system shall rank vacant sections (the «faculty» placeholder) of the department's own courses with a verdict per section, excluding those overlapping the instructor's lectures and then running the full proposal check with the assignment added.

Implemented · Should · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Verdicts: ready, review, blocked, clash, used and unchecked.
2. The full check covers the nearest 24 sections per call and the rest are «unchecked».

**EVIDENCE**

`src/server/studyProposalEngine.ts` `src/utils/proposalVacancyScope.ts` `src/components/proposal/ProposalVacancies.tsx` `src/server/studyProposalRoutes.ts#/api/study-proposals/vacancies` `tests/study-proposal-studio-audit.ts`

### IR-PLN-002 Instructor proposal page and alert

The system shall show the instructor, through the personal link, the proposal page (current and proposed schedule) and inject a «you have a study proposal» alert in the request page and card, without the page ever claiming the schedule changed before the department commits.

Implemented · Must · Interface · Faculty member

**ACCEPTANCE CRITERIA**

1. The alert reads up to 8 links and hides proposals whose gate is closed or that are committed.
2. A failure fetching the alert is silent and does not break the host page.

**EVIDENCE**

`src/server/studyProposalPage.ts` `src/server/studyProposalAlert.ts` `src/server/routes/publicRequestRoutes.ts#L1571` `src/server/studyProposalRoutes.ts#/api/public/request/:token/proposals` `src/server/routes/publicRequestRoutes.ts#/r/:token/proposal/:pid` `tests/study-proposal-public-page-audit.ts`

### NFR-PLN-001 Department scope and permission

The system shall restrict every planning route to the college and department scope allowed to the user and to the proper permission, and prevent read-only roles from writing.

Implemented · Must · Non-functional · Department head, Schedule committee chair, Department advisor, Standard user

**ACCEPTANCE CRITERIA**

1. A query outside the scope yields 403 «outside your allowed departments».
2. Writing in planning and build requires permission 7, while reading accepts 7 or 14.
3. The plan review is visible to the department head, committee chair and standard user within their scope, and always to system administration.

**EVIDENCE**

`src/server/routes/planningRoutes.ts` `src/server/planReviewRoutes.ts` `src/server/planSheetRoutes.ts` `src/server/routes/offeringRoutes.ts` `tests/plan-review-audit.ts` `tests/section-plan-audit.ts`

### NFR-PLN-002 Seven-digit course numbers and printed design

The system shall show course numbers in sheet and planning pages as seven digits (college 2, department 2, course 3) and correct values rather than the layout of printed reports.

Implemented · Must · Non-functional · Department head

**ACCEPTANCE CRITERIA**

1. A short code is expanded with the owning department code when matched to the reference sheet, becoming 0109105 not 105.
2. A two-digit number (99) is kept in both forms 013099 and 0130099 when reading the sheet.

**EVIDENCE**

`src/utils/curriculumReference.ts` `src/utils/planPdfParser.ts` `src/server/planSheetRoutes.ts` `tests/curriculum-reference-pdf-audit.ts` `tests/plan-pdf-audit.ts`

### DR-PLN-001 Planning data stores

Inferred

The system shall persist planning data in separate stores: the demand report per (term, department family) with its course links, offering states, rule drafts and versioned approved rules, published sheets, and study proposals with a numeric revision.

Implemented · Must · Data · The system (automatic)

#### ACCEPTANCE CRITERIA

1. The demand report key is «term:department family» and the offering document key is «college:department:term».
2. A concurrent write to a proposal with a stale revision yields 409.

#### EVIDENCE

`src/db/repository.ts` `src/utils/courseOffering.ts` `src/types.ts` `tests/study-proposal-flow-audit.ts`

### FR-PLN-030 Training phase: waves and allowed courses

The system shall let the department (permission 7, within scope) open the training phase with a future closing time in Kuwait time, for training-assistant members only, grouped in priority waves separated by 0 to 336 hours with no member in two waves, with a reminder 1 to 168 hours before closing (24 by default) and allowed courses per trainee set before or during the phase (no list means no restriction). It shall send every due wave on reading the panel and every ten minutes, once, marking it sent before sending, issuing each trainee a request link in training-phase mode valid until the later of closing plus one day and the end of the term, superseding their unsubmitted request while keeping only its keep items, adding a send-log line and a notification to the trainee's card, and shall allow closing the phase manually.

Implemented · Should · Functional · Schedule committee chair, Department head, Faculty member

#### ACCEPTANCE CRITERIA

1. A past or invalid closing time is refused with 400, waves with no training assistant are refused with 400, and a frozen term with 409.
2. GET ta-phase returns the vacant sections and their summary, the trainees with their load, how many they chose and whether the link was opened and sent, and the faculty phase state (its closing time and whether it closed).
3. GET ta-trainees returns only trainee ids for the training tag, to holders of any of permissions 3, 7, 8, 9, 10, 14, 16 or 17 within scope.
4. Each trainee's allowed courses are chosen in the same courses sheet as the per-person faculty card (the previous and new plan tabs, what was taught, its counterpart and new courses), and «apply» keeps them as a draft before opening and saves them at once during the phase.

#### EVIDENCE

`src/server/routes/offeringRoutes.ts#/api/ta-phase` `src/server/routes/offeringRoutes.ts#/api/ta-phase/open` `src/server/routes/offeringRoutes.ts#/api/ta-phase/close` `src/server/routes/offeringRoutes.ts#/api/ta-phase/allowed` `src/server/routes/offeringRoutes.ts#/api/ta-trainees` `src/server/routes/offeringRoutes.ts#dispatchTaWaves` `src/utils/taPhase.ts#planWaves` `src/components/TAPhasePanel.tsx` `src/components/PersonCoursesSheet.tsx` `tests/ta-phase-flow-audit.ts`

### FR-PLN-031 Advisor seat ledger

The system shall keep per department and term the advisor seat configuration: an extra quota globally, per course and per section (section, then course, then global, 0 to 200), a default and per-section base capacity, and a fair split by advisor count, with a revision stamp refusing a save over a newer edit with 409. It shall compute for each section a cap equal to the smaller of (base capacity + quota) and the smallest capacity of its rooms, shall accept an advisor adding 1 to 50 seats wholly or not at all in one transaction, refusing when seats are insufficient or the advisor's fair share would be exceeded and suggesting up to three alternative sections of the same course, emptiest first, and shall accept an exception request (1 to 50 seats and a note up to 300 characters) left pending with the administrator.

Implemented · Should · Functional · Department advisor, Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. Adding to a section with no base capacity is refused with 409, and to a section not in the department's schedule with 404.
2. A stale stamp (the number of additions the advisor saw) is refused with 409 with nothing written, and two advisors together never exceed the cap.
3. The tone is red when nothing remains and yellow at 30% of the extra or less or two seats or fewer, and the read returns the latest 50 exception requests and the non-green sections with each advisor's additions.
4. Configuring requires permission 7, adding, exceptions and reading accept permission 7 or 14, and canConfigure is false for the advisor and read-only roles.

#### EVIDENCE

`src/server/routes/offeringRoutes.ts#/api/advisor-seats` `src/server/routes/offeringRoutes.ts#/api/advisor-seats/config` `src/server/routes/offeringRoutes.ts#/api/advisor-seats/add` `src/server/routes/offeringRoutes.ts#/api/advisor-seats/exception` `src/utils/advisorSeats.ts#seatState` `src/utils/advisorSeats.ts#tryAddSeats` `tests/colleagues-advising-registration-audit.ts` `tests/owner-features-2026-10-28-audit.ts` `tests/demo-every-role-audit.ts`

### FR-PLN-032 Offering panel and the open-for-offering decision

The system shall return to the offering panel (permission 7, within scope) the states document, the not-yet-reached verdict, the new and old sheet tabs, the department's courses in the college sorted by course number with their level and section count in the term, suggested future courses from the new sheet, and the names of members who starred each course for future interest. It shall save the states with a display choice for unavailable courses (hide or fade), dropping default entries, keeping an open-for-offering decision unless explicitly sent, clearing the states and reach caches and writing an audit line. It shall also let any user in scope read the reach verdict, and restrict open-for-offering and returning to the rule to roles that are not read-only.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. course-reach/open from a read-only role is refused with 403, and with no course with 400.
2. Saving a state without a reachOpen field for a course opened for offering keeps it open, and open false returns it to the rule.

#### EVIDENCE

`src/server/routes/offeringRoutes.ts#/api/course-offering` `src/server/routes/offeringRoutes.ts#/api/course-reach` `src/server/routes/offeringRoutes.ts#/api/course-reach/open` `src/components/CourseOfferingPanel.tsx` `tests/ta-phase-flow-audit.ts`

### FR-PLN-033 Who teaches each course: counts, not names

Inferred

When the gap panel opens (not with every screen) the system shall return for each department course the counts of who teaches it this term and who taught it in chronologically earlier terms among the department's own members, excluding visiting instructors, the placeholder faculty and those whose status changed (retired or on leave), together with the remaining section allowance of the visiting instructors working in the department this term, by their section count across the whole term.

Implemented · Could · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A future term does not count as taught before, and the reply carries no member names.
2. The route requires permission 7 and scope, and outside it 403.

#### EVIDENCE

`src/server/routes/planningRoutes.ts#/api/schedules/section-gap/staffing`

`src/server/routes/planningRoutes.ts#sectionGapStaffing`

### FR-PLN-034 Read-only planning readings

With permission 7 and within scope the system shall provide readings that write nothing: the early term warning for a department and term (the newest when none is given) from its schedule, courses, members and the student demand saved from the demand report (SWRDASH) only; a preview of opening 1 to 8 sections of a department course with the same opening engine (a hall, a member with available load and a conflict-free time) after the offering states apply; the department's academic advice, never used by save, sign or approval gates; the demand reading from survey answers with a prediction from the previous term when there are no answers, repairs ranked by registration simulation, section opening proposals, live survey links, student cases and the statement that it is built only on those who answered the survey and is not registration data; and the members' notes tray for the reader's own departments with course, time, day and room.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. openings-preview for a course outside the department returns 404, and a count outside 1 to 8 is clamped.
2. An academic-advice failure returns 503 saying recommendations are unavailable and the schedule is unaffected.
3. forecast/term without college or department is refused with 400, and the reply carries scopeKey so the browser discards stale readings.
4. The previous-term prediction is not computed when the term itself has a single answer.

#### EVIDENCE

`src/server/routes/planningRoutes.ts#/api/forecast/term` `src/server/routes/planningRoutes.ts#/api/schedules/openings-preview`
`src/server/routes/planningRoutes.ts#/api/schedules/academic-advice` `src/server/routes/planningRoutes.ts#/api/schedules/demand`
`src/server/routes/planningRoutes.ts#/api/schedules/staff-inbox` `tests/section-plan-audit.ts` `tests/demo-fill-audit.ts`
`tests/student-registration-audit.ts` `tests/role-scope-audit.ts`

### FR-PLN-035 Build review rows in import form

Before applying, the system shall return for review the department's current appointments and the chosen built sections ('course:section' keys, all when none is chosen) as rows with the same import columns (room, building, time, days, civil ID, course instructor, section, course, course code) with explicit start and end, the counts of current and added rows, a key for each current appointment, and the counts of pending-room and roomless sections, writing nothing.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. An added section carries an empty civil ID, and the time is sent as fstarttime and fendtime so Arabic display order cannot reverse it.
2. count equals existing plus added, and pending and roomless count added rows only.

#### EVIDENCE

`src/server/routes/planningRoutes.ts#/api/section-build/review-rows` `tests/section-plan-audit.ts`
`tests/paged-findings-audit.ts`

### FR-PLN-036 Catalogue clean-up tools for the root account

The system shall restrict to the root account tools that show a preview before any write and re-check at execution: foreign courses (outside every sheet of their department, unscheduled, and with a copy of the same number and name in another department within its sheet) are deleted as chosen; duplicate courses within one department (a short and a full code of the same identity) keep the one most entitled to stay and delete the unused; two spellings of one course are merged with explicit confirmation to a canonical name taken from its spellings unless used by students or rules; service-department courses without sheets are added with a default dry run and zero capacity, leaving existing ones untouched; missing department accounts (department head, schedule chair, advisor) are created for those chosen, showing their first password once without writing it to the audit trail; and correcting other departments' courses from the sheets is disabled.

● Implemented · Should · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. Any account other than the root receives 403, and deletion without ids is refused with 400.
2. Merging without confirm true is refused with 428, with courses that are no longer one spelling with 409, and a name not among its spellings with 400.
3. Adding service courses to a department that has a sheet is refused with 422, and sheet/reconcile returns 409 saying the correction is disabled until department codes are confirmed.

#### EVIDENCE

`src/server/planReviewRoutes.ts#/api/plan-review/sheet/foreign`
`src/server/planReviewRoutes.ts#/api/plan-review/sheet/foreign/delete`
`src/server/planReviewRoutes.ts#/api/plan-review/sheet/duplicates`
`src/server/planReviewRoutes.ts#/api/plan-review/sheet/duplicates/delete`
`src/server/planReviewRoutes.ts#/api/plan-review/sheet/spelling-twins`
`src/server/planReviewRoutes.ts#/api/plan-review/sheet/spelling-twins/merge`
`src/server/planReviewRoutes.ts#/api/plan-review/service-courses/groups`
`src/server/planReviewRoutes.ts#/api/plan-review/service-courses/apply`
`src/server/planReviewRoutes.ts#/api/plan-review/section-accounts`
`src/server/planReviewRoutes.ts#/api/plan-review/sheet/reconcile` `tests/plan-sheet-import-route-audit.ts`
`tests/course-spelling-merge-audit.ts`

### FR-PLN-037 Sheet upload batch and the previous sheet

The system shall let the root account, limited to 150 files per minute: read a sheet's header without writing (programme, year, department, whether new and readable) to filter the batch; compare a sheet with a chosen department's courses (similar when 40% or more match by number and name or by name); take a snapshot of every department's courses and sheets; route a sheet with no chosen department to the department matching its name or code, creating a missing department in a college the administrator explicitly picks, together with its accounts; and end the previous sheet for chosen departments (up to 400) only where their track has an active new sheet with courses, or restore it. It shall return to any user whether a department's previous sheet has ended and its operational courses.

● Implemented · Should · Functional · Root administrator, Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A file not starting with %PDF- is refused with 422 in scanning and comparing, and comparing with no department with 422.
2. Ending the previous sheet for a department with no active new sheet holding courses leaves it and returns it in skipped.
3. previous-ended with no department returns ended false and an empty list.

#### EVIDENCE

`src/server/planReviewRoutes.ts#/api/plan-review/sheet/scan` `src/server/planReviewRoutes.ts#/api/plan-review/sheet/compare`
`src/server/planReviewRoutes.ts#/api/plan-review/sheet/audit` `src/server/planReviewRoutes.ts#/api/plan-review/sheet/import`
`src/server/planReviewRoutes.ts#/api/plan-review/previous-plans` `src/server/planReviewRoutes.ts#/api/plan-review/previous-ended`
`src/components/PlanSheetUpload.tsx` `src/components/PreviousPlansPanel.tsx` `tests/plan-sheet-import-route-audit.ts`

### FR-PLN-038 Approving all sheets and importing their rules

The system shall let the root account preview approving all sheet drafts (ready and blocked) and then approve only what was previewed with its versions, counting a draft changed after the preview as stale and not approving it, repairing duplicate groups before approval and republishing a published sheet. It shall also let it import sheet rules from lines (up to 20000) into review drafts that are never approved, skipping a plan that already has a draft under review unless replacement is requested, and returning up to 300 diagnostics with their total.

● Implemented · Should · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. approve-all without previewed items is refused with 400, and the reply carries approved, stale and blocked.
2. Importing with no lines is refused with 400, and any non-root account with 403.
3. In plan review only the root account (canImport) finds, among «maintenance tools», the «import sheet rules» panel: an empty template and an Excel or CSV file (CSV read as UTF-8 text), then the number of drafts created, what was left under review and the first 8 notes with their lines, and the status and open sheet are re-read after the import.

#### EVIDENCE

`src/server/planReviewRoutes.ts#/api/plan-review/approve-all` `src/server/planReviewRoutes.ts#/api/plan-review/import` `src/utils/curriculumRulesImport.ts` `src/components/PlanReview.tsx#ImportPanel` `tests/plan-sheet-import-route-audit.ts` `tests/plan-review-audit.ts` `tests/analytics-reports-review-audit.ts`

### IR-PLN-039 Plan review reads and the publishing list

The system shall return for the review status the pending and approved drafts the account can see, its departments with their non-archived sheets (pending first, then active), upload targets by department track for the root account only, and whether it may approve (schedule chair or administration) and import; shall return the reference sheets for comparison read-only and for the reference department only; shall return the sheet view and allow editing a course rule and an elective group and deleting it to those who may edit, with an audit line per edit, a new group taking its courses away from other groups; shall return sheet badges and requirement kinds within the account's scope, clearing their cache with fresh=1; and shall return the publishing list per department track with its approved sheets, whether and when each was published, and whether the published copy is older than the approved one.

● Implemented · Should · Interface · Schedule committee chair, Department head, Standard user, Root administrator

#### ACCEPTANCE CRITERIA

1. Editing a rule for a course not in the sheet is refused with 400, a group with no name with 400, and someone without edit rights with 403.
2. The reference for a department outside scope is refused with 403, and for any other department returns an empty list.
3. stale is true when the published rule version differs from the approved one.

#### EVIDENCE

`src/server/planReviewRoutes.ts#/api/plan-review/status` `src/server/planReviewRoutes.ts#/api/plan-review/reference` `src/server/planReviewRoutes.ts#/api/plan-review/plan` `src/server/planReviewRoutes.ts#/api/plan-review/rule` `src/server/planReviewRoutes.ts#/api/plan-review/group` `src/server/planReviewRoutes.ts#/api/plan-review/group/delete` `src/server/planReviewRoutes.ts#/api/plan-badges` `src/server/planSheetRoutes.ts#/api/plan-sheets` `tests/plan-review-audit.ts`

### FR-PLN-040 Proposal workspace routes and withdrawal

The system shall provide the department (permission 7, limited to 120 requests per minute) the list of proposals in the term and the reader's scope, recording expiry at the first read after it, the course's layouts in earlier terms to suggest its usual placements, the workspace context (the member, their schedule, the department's operational courses with sheet tag and reach verdict at every site the user may write in), alternative times for one item checked against the whole proposal, and withdrawal of a proposal with its revision stamp unless committed, with a note on the member's request when it was sent. It shall also return to the member through their personal link (limited to 120 per minute) the list of their sent proposals and each one's detail, with one 404 answer for another member's, a missing or an unsent proposal.

● Implemented · Should · Functional · Schedule committee chair, Department head, Faculty member

**ACCEPTANCE CRITERIA**

1. The list without a term is refused with 400, and course history without a course or department with 400 and outside scope with 403.
2. Withdrawing a committed proposal is refused with 409, with a stale stamp with 409, and withdrawing a withdrawn one returns it unchanged.
3. Alternatives for an item not in the proposal are refused with 400.

**EVIDENCE**

`src/server/studyProposalRoutes.ts#/api/study-proposals` `src/server/studyProposalRoutes.ts#/api/study-proposals/course-history` `src/server/studyProposalRoutes.ts#/api/study-proposals/context` `src/server/studyProposalRoutes.ts#/api/study-proposals/alternatives` `src/server/studyProposalRoutes.ts#/api/study-proposals/:id/withdraw` `src/server/studyProposalRoutes.ts#/api/public/request/:token/proposals` `src/server/studyProposalRoutes.ts#/api/public/request/:token/proposals/:pid` `tests/relay-fixes-audit.ts` `tests/rehearsal-audit.ts`

### FR-PLN-041 Collapsed course line with the math as tiles

Each line shall be shown collapsed: course code and campus, a bar showing offered out of required and the graduates' share, 'offered of required', one large number (graduates short / short / surplus) and one button; pressing it opens the math as icon tiles: students ÷ capacity = required, then graduates, offered, difference and unseated students, with the registrar's own suggestion for comparison only.

● Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The math is collapsed by default, with no explanatory paragraphs.

**EVIDENCE**

`src/components/SectionPlan.tsx` `tests/section-plan-audit.ts`

### FR-PLN-042 Section capacity used in the math

Section capacity shall be the course capacity recorded on the courses screen, as entered (5, 25 or 60); if none is recorded, the report's average students per section, tagged 'capacity from the report'; if neither exists the course is not computed and shows 'Enter capacity'; once a capacity is entered the math is redone.

● Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A capacity of 25 is read as 25: 327 ÷ 25 = 14.

**EVIDENCE**

`src/utils/sectionPlan.ts#sectionPlan` `tests/section-plan-audit.ts`

### FR-PLN-043 How many visiting instructors are needed

The end of the screen shall show visiting instructors needed for graduates and for everyone: hours without a teacher (missing sections and existing sections without a real teacher) minus what remains in the family's instructors' and current visitors' loads, divided by 6 hours per visitor, with a thin line 'We assume 6 hours per visiting instructor'.

● Implemented · Should · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Remaining load reduces the count, and a placeholder-taught section counts as without a teacher.

**EVIDENCE**

`src/utils/sectionPlan.ts#visitorsFor` `src/server/sectionPlanRoom.ts#teachingRoomFor` `src/components/SectionPlan.tsx` `tests/section-plan-audit.ts`

### FR-PLN-044 The level map in plan-sheet review

Plan-sheet review shall show only the department's own courses on a map: one column per level (and «no level») with its course and unit counts, one card per course with units, name and code, prerequisite arrows coloured by their source (ten colours); pressing a card shall light what precedes it and what it opens and dim the rest, with a «requires/opens» panel; requirements owned by other departments shall be listed as notes under the map.

● Implemented · Should · Functional · Department head, Schedule committee chair, System administrator

**ACCEPTANCE CRITERIA**

1. Elective-group courses appear in their group strip, not in the level columns, each with its prerequisite arrows beneath.
2. For a department with a reference sheet a category filter appears with each category's course and unit counts, and courses outside the category are disabled.
3. General courses are stated as «n general courses (n units) counted in your sheet's units, belonging to their departments, not shown here».
4. A note distinguishes «also requires the course», «also requires one of the courses» and «is registered with the course … in the same term (or already passed)».
5. The reference department does not see the department and sheet pickers; others see the department with «awaiting review» and sheets with «under review».

**EVIDENCE**

`src/components/PlanReview.tsx#PlanReview` `src/components/PlanMapLines.tsx#planEdges` `src/components/PlanReview.tsx#crossNotes` `src/components/PlanReview.tsx#isTechnologyEducation` `tests/plan-review-audit.ts`

### FR-PLN-045 The issue board and the sheet-approval confirmation

Plan-sheet review shall gather its issues on a folded board that opens by itself when a blocker exists, grouped by kind (prerequisite at a later level, outside the sheet, elective without a group, prerequisite cycle, not in the sheet, unknown course) with blockers first; for an approver on a sheet under review the «approve the sheet» button shall show an in-place confirmation stating that the sheet becomes the next version and reaches the engine and the student door, and that the review icon disappears and returns if it is edited.

● Implemented · Should · Functional · Schedule committee chair, System administrator, Department head

**ACCEPTANCE CRITERIA**

1. The approve button is disabled while any blocker remains, with «n blockers prevent approval until fixed».
2. Pressing an issue selects and opens its course on the map, and the state bar shows «approved · version n» or «under review» with course and level counts and who approved or last edited.
3. Every edit or approval emits the schedule:plan-review-updated event so badges refresh in other screens.

**EVIDENCE**

`src/components/PlanReview.tsx#IssueBoard` `src/components/PlanReview.tsx#ISSUE_KIND` `src/components/PlanReview.tsx#confirmApprove` `src/components/PlanReview.tsx#act` `tests/plan-review-audit.ts`

### FR-PLN-046 Course-rule editor and elective groups

The course editor shall open a dialog that traps focus, closes with Escape and returns focus to its opener, holding the course data (units 0–20, hours 0–40 in steps of 0.5, capacity 0–200) saved only when changed, the level, kind, passed units 0–200, «all» prerequisites, «one of» groups and corequisites; fields shall be read-only for a course owned by another department or for a user without edit rights; the groups panel shall allow creating a group (default one course and 3 units), editing and deleting it.

Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Another department's course shows a lock and the note «this course belongs to … — its department edits its rules», and a general course «a general requirement: … counted in your sheet and edited by its department».
2. Saving a group requires a name, and deleting a group opens an inline confirmation in the approval-confirmation style («yes, delete» and «back») stating that its courses stay in the sheet and become «without a group»; the delete is sent only after confirming.
3. The editor's default level is inferred from the course code when there is no rule.

#### EVIDENCE

`src/components/PlanReview.tsx#CourseEditor` `src/components/PlanReview.tsx#GroupsPanel`
`src/components/PlanReview.tsx#saveCourseDetails` `src/server/planReviewRoutes.ts#/api/plan-review/group/delete`
`tests/plan-review-audit.ts` `tests/analytics-reports-review-audit.ts`

### FR-PLN-047 The instructor's response on the proposal page

The proposal page shall let the instructor respond in one of two ways depending on the proposal: per item («I agree» or «I need a change», items left unchosen staying pending, with an «I agree to all items» button), or a single response to «one integrated arrangement» that cannot be partly approved; requesting a change shall show a form with the main reason (time, days, teaching load, other reason), an optional note up to 600 characters, an optional suggested start time between 08:00 and 19:00 and optional suggested days; the response is then signed with the civil number, which is not stored.

Implemented · Must · Functional · Faculty member

#### ACCEPTANCE CRITERIA

1. With no choice the send button stays disabled reading «choose your response first», and a change request with neither reason nor note ← «choose a short reason or write a note about what you need changed».
2. After recording, the page shows «your approval is recorded · awaiting the department's commit» or «your change request is recorded · the department will review it» and says the schedule has not changed; «change my response» is available until the department commits, and «undo the change» restores what was recorded.
3. An old response with reason «place» is shown as «other reason», and the note counter reads «n / 600».

#### EVIDENCE

`src/server/studyProposalPage.ts#respHtml` `src/server/studyProposalPage.ts#send` `src/server/studyProposalPage.ts#payload`
`src/server/studyProposalPage.ts#REASONS` `tests/study-proposal-public-page-audit.ts`

### FR-PLN-048 Proposal status, reply deadline and sending errors

The proposal page shall show its status (awaiting your response, you approved, partial approval, you requested a change, withdrawn by the department, reply period ended, committed by the department), the «last date to reply» line with the time remaining, or «the period ended on …», the version number after the first, the send time and sender, and the department's message, and shall handle a refused submission with a clear message and a suitable button.

● Implemented · Should · Functional · Faculty member

**ACCEPTANCE CRITERIA**

1. Time remaining reads «n days left», «n hours left» or «less than an hour left», and is highlighted when under 24 hours remain.
2. A 409 for an older version ← «a newer version of this proposal has reached you…» with «open the newer version»; another 409 ← the server message with «refresh the page»; 429 ← «too many attempts; wait a little and retry»; no connection ← «could not connect; your response was not recorded; try again».
3. A closed reply gate shows «you cannot respond now» with its reason, and while the department edits a new version «the department is editing the proposal» with «refresh the page»; schedule data changed after sending shows that the department will review it before committing.
4. After commit each item shows «this item was applied to your schedule» or «this item was not applied at commit».

**EVIDENCE**

`src/server/studyProposalPage.ts#statusInfo` `src/server/studyProposalPage.ts#heroHtml`
`src/server/studyProposalPage.ts#alertsHtml` `src/server/studyProposalPage.ts#postRespond`
`src/server/studyProposalPage.ts#opResultHtml` `tests/study-proposal-public-page-audit.ts`

### FR-PLN-049 Proposal impact, schedule and history on the instructor page

The proposal page shall show, folded until opened, the proposal impact in six «now ← after the proposal» cards: teaching load in credit hours against the recorded load, number of sections, attendance days, presence hours (from first to last lecture each day), teaching hours, and gaps with the longest gap; the weekly schedule as «my current schedule» or «after the proposal», as a week grid or a day view, with a «show what leaves or changes» toggle and a colour legend; and a «proposal history and your responses» list with signature codes.

● Implemented · Should · Functional · Faculty member

**ACCEPTANCE CRITERIA**

1. Load after the proposal above the recorded load ← the warning «exceeds the recorded teaching load (n) by …»; an unknown value ← «not available» with its reason.
2. Each card shows the direction «increase/decrease/unchanged», and the fold heading summarises differences such as «load: 12 ← 15».
3. Schedule colours: existing, proposed (new), modified, leaving or as it was before the edit; the day view is the default below 640 pixels, and pressing an appointment opens its details, closed with Escape.
4. The history lists chronologically each version's sending (and its message after the first) and each response with what was approved and what changes were requested, the reason, suggested time and days, the note and the signature code.
5. After commit only «your schedule now» is shown and the impact cards are hidden.

**EVIDENCE**

`src/server/studyProposalPage.ts#impactHtml` `src/server/studyProposalPage.ts#metricCard`
`src/server/studyProposalPage.ts#ttHtml` `src/server/studyProposalPage.ts#legendHtml`
`src/server/studyProposalPage.ts#historyBlock` `tests/study-proposal-public-page-audit.ts`

### FR-PLN-050 The week grid in the proposal workspace

The instructor's schedule in the proposal workspace shall show «current» or «proposed» with the change count; in «proposed» it draws added, moved (with «was …»), replaced, leaving, conflicting and to-review appointments with border, symbol and colour together, and commitments outside the department as «commitment outside the department» without details; it shall allow showing «the original», showing compatible vacant sections with an «assign» button that adds the assignment to the draft only, and adding an appointment by dragging on an empty slot in the grid or with an «add · day» button in the day view, unless the view is read-only.

● Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. The grid becomes a single day with a timeline when the workspace is narrower than 620 pixels; dragging snaps to 10 minutes and a single click gives 50 minutes.
2. In the day view a gap of 30 minutes or more between lectures is written with its length, and the view opens on the first day with a change.
3. Under each day's name its appointment count, a dot for a change or conflict and another for a compatible vacancy; vacancies shown are ready, to review and being checked, with no «assign» before checking finishes.
4. The colour legend sits behind a «colours» button and closes alone with Escape or an outside click, and the detail panel shows «before ← after» highlighting what changed (days, time or place), the check findings and the appointment's actions.
5. The site tag (boys/girls/college) appears only when his appointments span more than one college.

#### EVIDENCE

`src/components/proposal/ProposalWeekGrid.tsx#ProposalWeekGrid` `src/components/proposal/ProposalWeekGrid.tsx#tagFor` `src/components/proposal/ProposalWeekGrid.tsx#DayView` `src/components/proposal/ProposalWeekGrid.tsx#ColorLegend` `src/components/proposal/ProposalWeekGrid.tsx#windowFor` `tests/study-proposal-studio-audit.ts`

## 3.10.6 Algorithms

ALG-PLN-01 · Section planning and curricula

Statistics from history

### Section-count suggestion from department history and full need

*How many sections does the system suggest per course and campus this term, anchored on what the department actually opened in comparable terms, together with the full need?*

1. History is gathered only from earlier terms of the same season (first with first, second with second, summer with summer); no season borrows another's history.
2. A renumbered or replaced course that has not itself been opened inherits its predecessors' sections; predecessors are found by a breadth-first walk over the recorded course transitions.
3. Usual = plain average of the course's sections in the terms where it was opened (each term weight 1), rounded, never below one.
4. Full need = ⌈campus students ÷ course capacity⌉ from the demand report (SWRDASH); it moves the suggestion from the usual toward itself within ±1 (±2 when the usual is 4 or more).
5. The suggestion never falls below the graduates' sections ⌈graduates ÷ capacity⌉; a closed or future course gets no opening, and a limited course never exceeds its ceiling.
6. A course with no history: the suggestion equals the full need by the course capacity, with no invented cap, labelled «no history»; with neither capacity nor history nothing is computed.

**Inputs**

The registrar's demand report (SWRDASH: all students and graduates) per course and campus, course capacity (MaxStudent), timetables of same-season terms, course transitions between plan sheets, and offering states.

**Output**

Per course and campus: the suggestion, full need, usual count, number of terms and basis (history, calculation, locked), including the graduates' sections; plus the totals of suggestion and full need.

Deterministic and read-only: nothing is written to the timetable, the full need is never hidden, and a course with neither history nor capacity gets no invented number.

Tilt band ±1, widened to ±2 when the baseline is 4 or more

A course without history: suggestion = full need (no cap)

Graduates: the suggestion never falls below ⌈graduates ÷ capacity⌉

An apply batch above 40 sections is warned that instructor loads are the limit

`src/utils/sectionPlan.ts#suggestFromHistory` `src/utils/sectionPlan.ts#sectionPlan` `src/server/actualDemand.ts#planHistoryFor` `src/server/routes/planningRoutes.ts#registerPlanningRoutes` `tests/section-plan-audit.ts`

FR-PLN-004 FR-PLN-005

ALG-PLN-02 · Section planning and curricula

**Deterministic**

## Section gap and surplus review

*Which courses lack sections against the suggestion, which exceed it, and which graduates have no seat?*

1. The suggestion per course and campus from ALG-PLN-01; the full need is shown beside it and never hidden.
2. Existing = number of distinct section codes (SCode) for the course in the term timetable of the campus's college; gap = suggestion − existing: missing, surplus or balanced, graduates first.
3. A surplus is a review item against the suggestion, not the full need, so nothing the history supports is hinted for closure.
4. Visitors = ⌈(hours of missing sections and sections without an instructor − free hours in the family's loads) ÷ 6⌉, for graduates and for all.
5. Student wishes form a separate signal never mixed with the plan: ⌈students ÷ capacity⌉ − existing.

**Inputs**

The demand report, comparable-term history, the term's sections, course capacity, the family's instructor loads, and student wishes (a separate signal).

**Output**

A list ordered by greatest need of missing, surplus and conflict items, each with its basis and the demand figure behind it.

Pure function that reads and writes nothing; a surplus is a review item and never closes or deletes a section.

Ordering: largest gap, then largest demand, then course number

`src/utils/sectionPlan.ts#planStage` `src/utils/sectionPlan.ts#visitorsFor` `src/utils/sectionPlan.ts#planCourseFacts` `src/utils/sectionGap.ts#studentGaps` `src/utils/sectionBuild.ts#gapRows` `src/server/core/planning.ts#sectionGapData` `tests/section-gap-audit.ts` `tests/section-plan-audit.ts`

FR-PLN-006 FR-PLN-007

ALG-PLN-03 · Section planning and curricula

**Search and ranking**

## Placement search for new sections

*Where can each missing section be placed — day, start time, hall and instructor — without colliding with anything?*

1. Shortfall = demand − open sections × capacity, and needed sections = ⌈shortfall ÷ capacity⌉; in the build preview demand is set to target × capacity so the needed count equals the gap exactly.
2. Courses are ordered hardest first: the largest same-level cohort, then the most sections remaining.
3. Candidates: each weekday × the department's learned start ladder × verified, confirmed halls the department has taught in (most used first, up to 24, large enough when capacity is known) × active instructors who taught the course and remain within their load cap.
4. A candidate is accepted only if physically free (no overlapping hall or instructor, with no exemption) and the conflict checker finds nothing, including overlaps with the same cohort's courses and the department's own turnaround minutes.
5. Each accepted placement joins the working week before the next search, so two new sections never share a hall-hour; the section number continues the course's own sequence within 501–999.
6. Lecture length is the most common length of the existing section, else the last term the course was taught, else the department rhythm; no length is invented.

**Inputs**

The department's week and the whole term week, courses, instructors and their loads, history, the demand reading with cohort pairs, the department rhythm and the verified hall registry.

**Output**

Per course: proposed placements with a plain sentence, the reason for any section not placed, and a list of courses with no recorded capacity.

Read-only: every placement remains a proposal until a person opens and saves it through the normal appointment path.

Section codes 501–999; a used code is never reissued

Up to 24 candidate halls per course

`src/utils/sectionOpening.ts#readSectionOpenings` `src/utils/sectionOpening.ts#nextSectionCodes` `src/utils/sectionBuild.ts#hardestFirst` `src/utils/sectionBuild.ts#demandFromTargets` `tests/section-opening-feasibility-audit.ts` `tests/section-build-audit.ts`

FR-PLN-012

ALG-PLN-04 · Section planning and curricula

**Deterministic**

### Not-yet-reached course verdict

*Has this branch's cohort on this plan sheet reached the course's level, so that offering it this term makes sense?*

1. Only the branch's own history before the current term is read, and a new sheet from its start year; a branch with no history makes every course «unknown» and locks nothing.
2. Offered before → reached. Otherwise, with in-sheet prerequisites, it is reached when every «all» prerequisite and at least one of each «any-of» group was offered in an earlier term (summer counts).
3. Without prerequisites, it is reached when its level ≤ highest level offered + 100; a new sheet's first term opens only 100-level courses without prerequisites.
4. Co-requisites are mutual: a course whose twin is locked is locked too, propagated along the chain until nothing changes (fixed point).
5. The department's «open for offering» override wins; across several sheets, reached beats unknown, which beats locked.

**Inputs**

Sheet membership and rules (prerequisites, co-requisites, level), courses offered in each earlier term of the branch, and manual open overrides.

**Output**

Per course: reached / locked / unknown, the reason code, missing prerequisites, and a chain of at most four links when locked.

No course is locked without complete evidence and no radar data is used; the same rule serves the faculty card and the pre-publish sheet.

Level margin: highest offered level + 100 · Locked chain: at most four links

`src/utils/courseReach.ts#sheetReach` `src/utils/courseReach.ts#combineReach` `src/utils/courseReach.ts#classifySheets` `src/utils/prepublishReach.ts` `tests/course-reach-audit.ts` `tests/prepublish-reach-audit.tsx`

FR-PLN-011 · FR-REQ-007 · FR-REQ-008

ALG-PLN-05 · Section planning and curricula

**Deterministic**

### Plan-sheet rule check and reconciliation

*Are the sheet's rules fit for approval, and how are the department's courses reconciled with what the sheet file prints?*

1. Each rule is checked: the course is on the sheet, its references are known, a prerequisite is not at the same or a later level, and an elective has a group.
2. Prerequisite cycles are detected by depth-first search with three-state marking over the prerequisite graph; any cycle blocks approval.
3. Elective groups: a course in two groups, or a minimum of courses or units above what the group offers, blocks; a shortfall caused entirely by courses not yet in the catalogue is only a warning.
4. Reconciliation takes the sheet as the source: a course follows the department its code points to (with fixed aliases) and is created there if absent, the record the department actually taught is preferred, and name, units and hours come from the sheet; a spelling-only difference does not rename.
5. Reconciliation can run as a dry run that counts writes without performing them, and uploaded rules remain a draft for the department to approve.

**Inputs**

Sheet rules and groups, sheet courses, the catalogue and its credits, what the college has taught historically, and the sheet parsed from its file.

**Output**

Findings classified as block or warn, and a reconciled catalogue and rule set (draft or approved).

Membership, groups and prerequisites exactly as printed, nothing added or removed; a number held by more than one record is left untouched.

Sheet levels 100, 200, 300 and 400

`src/utils/curriculumRules.ts#checkRuleSet` `src/utils/curriculumRules.ts#findPrereqCycle` `src/server/sheetReconcile.ts#createReconciler` `tests/plan-review-audit.ts` `tests/plan-sheet-import-route-audit.ts`

FR-PLN-017 · FR-IMP-034

ALG-PLN-06 · Section planning and curricula

**Study proposal check, alternatives and vacancy ranking**

Search and ranking

*Is the instructor's proposal valid as it stands, what is the closest alternative time or hall for a conflicting item, and which vacant sections can be assigned to the instructor without conflict?*

1. The proposal's operations are applied to an in-memory copy of the term timetable; an operation whose snapshot no longer matches the live timetable becomes a blocker.
2. Every appointment entering the instructor's week is judged by the same save gate as the add-appointment screen, and findings are classified blocker, review or info.
3. Alternatives for a conflicting item: starts every 10 minutes within the department's day window, day sets from the same pattern family, eligible halls; rank = |shift in minutes| + 90 for a day change + 14 for a hall change + 35 for a different hall type + 45 for an undersized hall.
4. Cheap filters run first (busy instructor or hall), then a full check of the whole proposal; an alternative that blocks any other item is rejected, and survivors are sorted by review notes, then by change in gaps.
5. Vacant «faculty» sections: those overlapping the instructor's lectures are excluded, the rest get a full check with the assignment added, and are ranked ready, review, unchecked, blocked, clash, used.

**Inputs**

Proposal operations, the whole term timetable and the person's records in every college, the hall registry and hall rights, and the department's scope and day window.

**Output**

Per-item findings and send readiness, up to four alternatives with reasons, and a ranked verdict per vacant section.

No second checker: the save gate decides; the search says plainly when it was partial, and writes nothing.

Start-time step: 10 minutes · At most 100 full checks and at most 4 alternatives · 24 vacant sections fully checked by default

`src/server/studyProposalEngine.ts#evaluateProposal` `src/server/studyProposalEngine.ts#suggestAlternatives` `src/server/studyProposalEngine.ts#rankVacancies` `tests/study-proposal-flow-audit.ts` `tests/study-proposal-studio-audit.ts`

FR-PLN-026 FR-PLN-029

## 3.10.7 Edge cases

### ⚠ Schedule changed between preview and apply

**Scenario** The department previews sections and a colleague adds an appointment before clicking apply.

**Behaviour** The week fingerprint differs, so the request is refused with 409 and code stale, nothing is written, and the preview is rerun.

### ⚠ Section without a confirmed hall or instructor

**Scenario** No documented hall of sufficient capacity and no instructor with allowance for a missing course.

**Behaviour** The system places a time from the comparable term with a «pending room»; direct apply refuses it with 409 and code needs-review and it is opened in «review and edit».

### ⚠ Course with no history and no capacity

**Scenario** A new course never opened in comparable terms with no recorded capacity and no report average.

**Behaviour** Nothing is computed and «enter capacity» is shown; once capacity is entered its full need is suggested, labelled «no history».

### ⚠ Editing an approved sheet that is published

**Scenario** A department edits a course in an approved, published sheet.

**Behaviour** The draft returns to «under review» while the approved version stays; the public page keeps its snapshot until the edit is approved, then refreshes.

### ⚠ A course in two elective groups

**Scenario** A user places the same course in two groups.

**Behaviour** Single approval is blocked with 409 and code blockers, while approve-all keeps it in the first group and flags it as repaired.

### ⚠ Approval of an outdated proposal version

**Scenario** The department edits what was sent while the instructor opens the previous version and approves.

**Behaviour** The reply is refused with 409 and code stale-version and is not credited to the newer version, and the page tells the instructor to reload.

## 3.10.8 Standing owner decisions

- A department sees only its own courses in the sheet map and counters; another department's course is a note, not a card, and is not editable by other departments.
- A course number is always seven digits: college 2, department 2, course 3, such as 0109105.
- The design of the published sheet and printed reports is not changed; differences are fixed in data, not layout.
- Female students have one sheet copied as-is to the two sub-sites, male students have their own, and each college family keeps its independent sheet.
- Only what is approved is published, and the QR code always carries the official domain.

↑ Contents

3.11 · STU

# Student and advising services

Masari for students, the registration sheet, section requests, seats and the registration rehearsal

| 93 | 100% | 75 | 75 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.11.1 Overview

The module covers the permanent student door «Masari» (a profile with a personal code, wishes within their phase, request status), the registration sheet on which the department committee and then registration decide, section requests from advising to the schedule committee and then registration, the advisor seat balance, and seats (account chairs) with their teams. It includes the registration radar (rehearsal) that estimates registration-day crowding from student profiles and schedules. Everything the student sees is an estimate, not a reservation or an official registration, and student identity is sealed and shown only to those working on the case.

Student · Department advisor · Schedule committee chair · Department head · Registration officer · College registrar · University registrar · System administrator · Root administrator · College dean · Public visitor · The system (automatic)

## 3.11.2 User journeys

**Student** — **From civil ID to my suggested schedule**

1. Opens /me and enters the civil ID, learning that no profile exists.
2. Consents to storing the profile and chooses a 6-digit non-sequential code.
3. Chooses department and plan and marks what is done; the system drops what lost its prerequisite.
4. Reads the «suggestions only» card and presses «understood».
5. In the wishes phase writes units (12 up to the university cap), courses and time constraints.
6. After the freeze sees the ticket with three plans and window, without a time for a section whose schedule is unsigned.

### Department advisor — A section request from advising to registration

1. Chooses course, campus and term and sees students in need from Masari, or pastes a list.
2. Sets the preferred period and count and sends the request to the course department's schedule committee.
3. The committee opens the section in the slot editor or links an existing one, writing its capacity into the seat balance.
4. The committee approves all or some students; advising receives «approved» and registration receives what awaits.
5. Registration marks who was registered, and advising sees «registered n of m».

### Schedule committee chair — Committee then registration decision on a student request

1. Opens the registration sheet for the department and sees its students' cases and other departments' courses read-only.
2. Approves a course, choosing «approve + open section» when a new section is proved conflict-free.
3. Chooses for what it does not approve a reason from the defined set.
4. After the department schedule is signed, the registration officer sees what the committee handed over and says «registered» or «rejected» with a reason.
5. The student reads the decision with its reason in «my request status» under the case number.

### System administrator — Handing a seat to a new holder

1. Opens «Seats» and chooses the seat.
2. Records the new holder (from department faculty or manually) and hands over the seat.
3. The first password shows once, open devices are signed out and the team is frozen.
4. The new holder marks each member «continuing» or «ended».

### 3.11.3 Diagrams

**Student-journey phases in a term**

The phase is read from today's date in Kuwait, each date inclusive of its whole day.

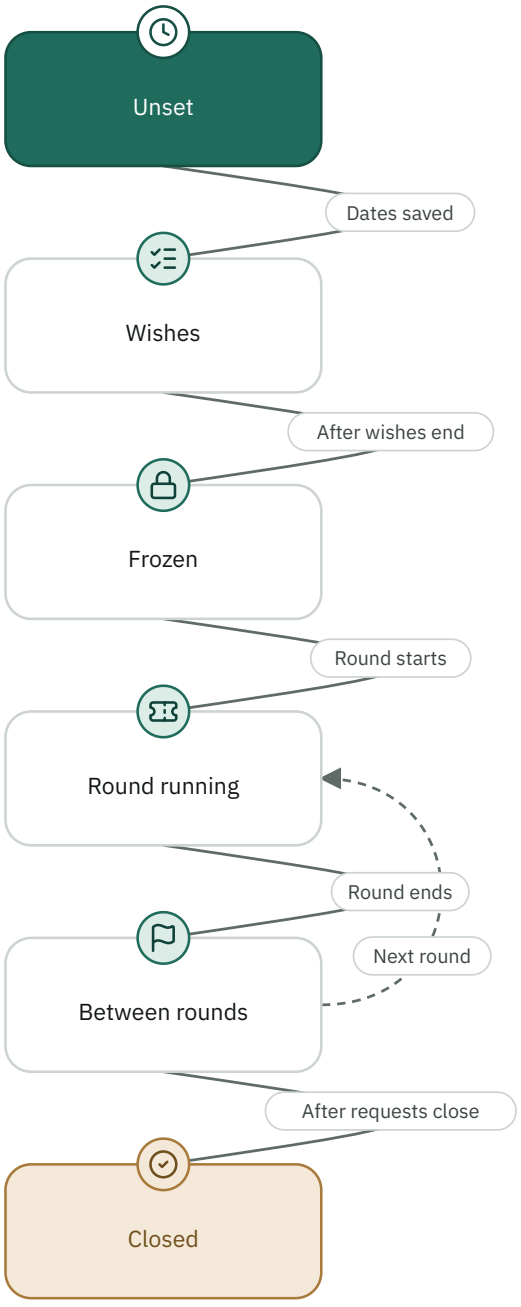

## Section request stages

The stage is always derived from the document; approval closes linking, unlinking, withdrawal and decline.

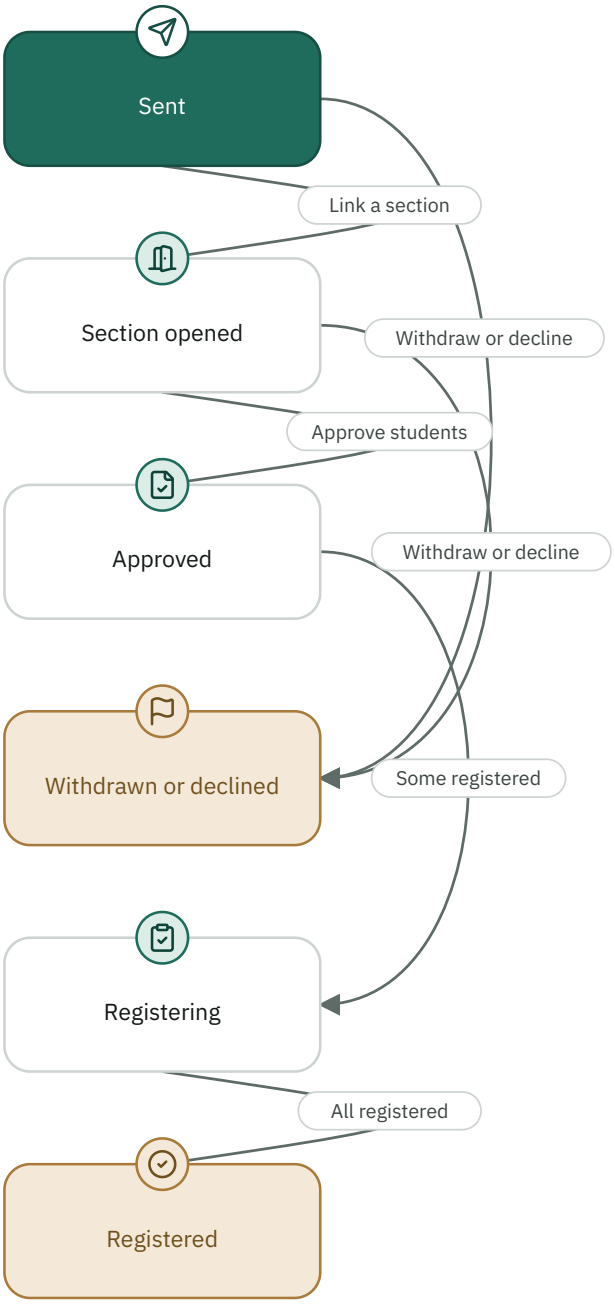

## Case decision: committee then registration

Registration never writes on what the committee has not approved, and the committee never overturns registration.

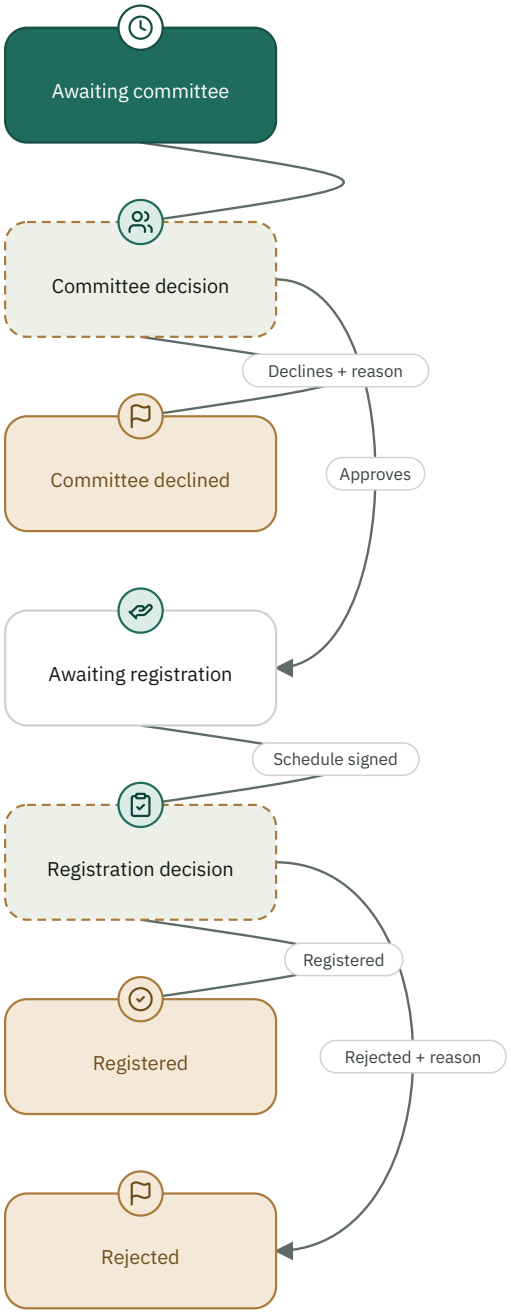

**Registration rehearsal**

A deterministic estimate from profiles and schedules; no seat reservation and no official data.

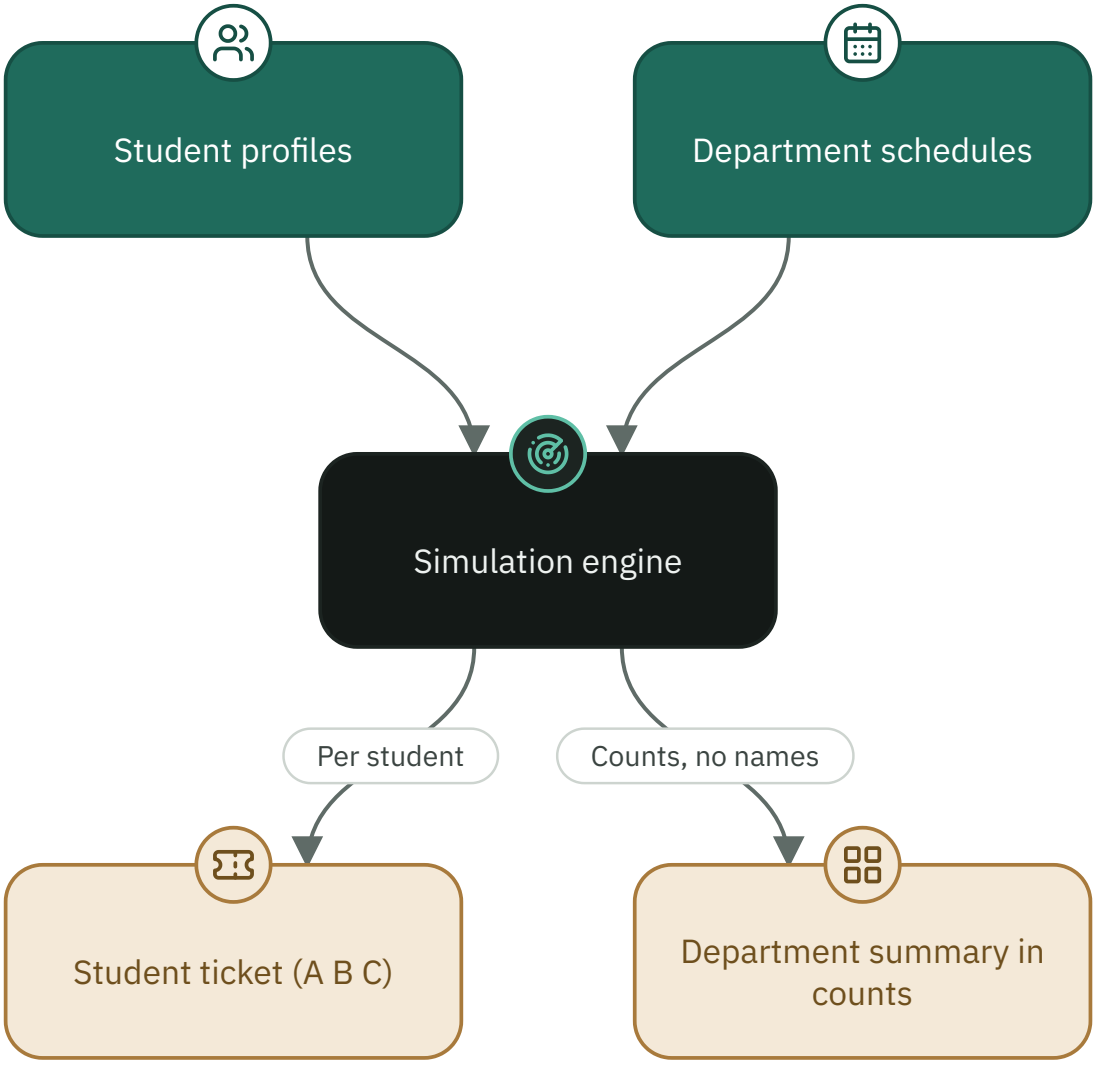

**Who does what**

| | Masari | Registration sheet (committee decision) | Registration sheet (registration decision) | Section request | Seat balance | Seats | Radar |
|---|---|---|---|---|---|---|---|
| Student | ✎ | — | — | — | — | — | 👁 |
| Department advisor | — | 👁 | — | ✎ | ✎ | — | 👁 |
| Schedule committee chair | — | ✎ | — | ✎ | 👁 | 👁 | 👁 |
| Department head | — | 👁 | — | 👁 | ✎ | 👁 | 👁 |
| Registration officer | — | — | ✎ | ✎ | — | 👁 | 👁 |
| College registrar | — | — | ✎ | ✎ | — | ✎ | 👁 |
| University registrar | — | — | ✎ | ✎ | — | ✎ | 👁 |
| College dean | — | 👁 | 👁 | 👁 | — | — | 👁 |
| System administrator | — | ✎ | ✎ | ✎ | ✎ | ✎ | ✎ |

✎ Write 👁 Read — No access

### 3.11.4 Screens

**Masari (/me)**
The student door: entry, setup, wishes, «my plan», «did you register?», my cases.`src/server/studentHomePage.ts`

**My map**
The whole-plan board, computed identically to the server.`src/server/studentMapUi.ts`

**My request status**
By civil ID and case number.`src/server/pages/studentCaseStatusPage.ts`

**Public student schedule**
The approved department schedule or «provisional».`src/server/pages/studentSchedulePage.ts`

**Registration sheet**
One screen for the committee and registration. Schedule builders also get a collapsed «demand analysis» section (what students said, the survey link, how many sections to open, and moves).`src/components/StudentRegistration.tsx`

**Section requests**
For advising, the committee and registration.`src/components/sectionRequests/SectionRequestsPanel.tsx`

**Advisor seat balance**
A ring per section, atomic addition and exception request.`src/components/AdvisorSeatsPanel.tsx`

**Seats**
Managing seats, teams and access cards.`src/components/seats/SeatsAdmin.tsx`

**Registration radar**
Registration-day rehearsal in counts, not names.`src/components/RegistrationRehearsal.tsx`

**Student journey**
Dates for wishes, rounds and close.`src/components/StudentPhasesBlock.tsx`

## 3.11.5 Requirements

### FR-STU-001 Masari entry by civil ID and personal code

The system shall let a student open or create a Masari profile from the permanent link /me using a 12-digit civil ID that passes the checksum and a 6-digit personal code the student chooses, shall create the profile only after explicit consent to store it and together with the student's full name (6 to 80 characters with no digits and none of < > { } \), shall reject a code made of one repeated digit or a run of consecutive digits ascending or descending, and shall convert Arabic-Indic digits to Western digits before checking.

● Implemented · Must · Functional · Student

**ACCEPTANCE CRITERIA**

1. A 12-digit civil ID with a bad checksum yields 400 with code bad-civil.
2. Create without agree=true yields 400 no-consent; code 111111 or 123456 yields 400 weak-code.
3. Creating an existing profile yields 409 exists; a new profile yields 201 with a session cookie.
4. Creating with a 5-character name or a name containing a digit yields 400 bad-name and no profile is created.

**EVIDENCE**

`src/server/studentDoorRoutes.ts` `src/utils/studentProfile.ts` `src/server/studentDoor.ts` `tests/student-door-audit.ts` `tests/student-journey-audit.ts`

### FR-STU-002 Profile lockout after wrong codes

The system shall lock a student profile for 15 minutes after 5 consecutive wrong codes, shall keep the lock even when a correct code arrives in parallel, and shall count against the network address only real guesses (a wrong code for an existing profile), not successful entries or wrong civil IDs.

● Implemented · Must · Functional · Student

**ACCEPTANCE CRITERIA**

1. The fifth failure yields 401 with locked; the next attempt yields 423 with retryInSeconds.
2. The address cap is 600 guesses per 10 minutes with a hard ceiling of five times that (3000); credit is returned when the request is not a guess.

**EVIDENCE**

`src/server/studentDoorRoutes.ts` `src/utils/studentProfile.ts` `tests/student-door-audit.ts` `tests/student-door-shared-network-audit.ts`

### FR-STU-003 Signed door session

The system shall issue after entry a signed (HMAC) sh_session cookie with HttpOnly and SameSite=Lax that carries the fingerprint, expiry and a code version but neither the name nor the civil ID, shall keep the session 12 hours (ending when the browser closes) or 180 days under «this is my device», and shall end every earlier session when the code changes.

Implemented · Must · Functional · Student

**ACCEPTANCE CRITERIA**

1. A cookie without remember has no Max-Age; with remember it has Max-Age = 180 × 86400 seconds.
2. After POST /api/public/me/code an old session returns 401 signed-out.
3. A tampered or expired signature is not accepted.

**EVIDENCE**

`src/server/studentDoor.ts` `src/server/studentDoorRoutes.ts` `tests/student-door-audit.ts`

### DR-STU-001 Identity stored sealed

The system shall never store a student's name or civil ID in the clear: an HMAC fingerprint of the ID is the profile key, the name and ID are sealed with AES-256-GCM, the code is salted with scrypt, the civil ID is returned to the student only masked (last three digits), and sealed values open only for the session owner and authorised staff.

Implemented · Must · Data · Student, The system (automatic)

**ACCEPTANCE CRITERIA**

1. The profile document holds no plain name or ID and holds nameCipher, civilCipher and codeHash.
2. The response says only hasIdentity and shows the ID masked to its last three digits.
3. A different case secret makes earlier sealed values unreadable, so the stored secret wins over the environment value on conflict.

**EVIDENCE**

`src/server/core/studentIdentity.ts` `src/server/studentCaseSecret.ts` `src/server/studentDoorRoutes.ts`
`src/server/studentDoor.ts` `tests/student-door-audit.ts` `tests/masari-approval-integrity-audit.ts`

### DR-STU-002 Student profile lifetime and deletion

The system shall compute for every profile a deletion date equal to the earlier of expected graduation + 365 days and last sign-in + 730 days (creation + 6 years when no plan is set), shall purge expired profiles one minute after start-up and every 6 hours in batches of at most 400 (the job is not scheduled when the database failed at start-up), and shall treat «forgot my code» as a deletion request executed after 30 days that the owner cancels by entering with the code. Expected graduation is re-estimated on every profile save as remaining units ÷ 13.5 rounded up × 6 months.

Implemented · Must · Data · Student, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A profile with no plan created today gets deleteAt = last sign-in + 730 days (the nearer date).
2. POST /api/public/me/reset returns days = 30, and the owner's next entry clears resetRequestedAt.
3. There is no recovery of the code through phone or department; deletion is the only path.

**EVIDENCE**

`src/utils/studentProfile.ts` `src/server/studentDoorRoutes.ts` `tests/student-door-audit.ts`

### FR-STU-004 Profile setup: department, plan, passed courses

The system shall save the student's department, plan (mandatory when two or more plans exist) and passed courses after closing them over prerequisites, dropping any course whose condition fails together with what depends on it except what a transfer student declared as equivalent, and shall keep the wishes while department and plan are unchanged, removing those that became passed or lost their prerequisite.

Implemented · Must · Functional · Student

**ACCEPTANCE CRITERIA**

1. A department with two plans and no plan chosen yields 400 bad-plan.
2. Marking a course passed without its prerequisite drops it and returns droppedPassed ≥ 1.
3. Changing the department clears the wishes.

**EVIDENCE**

`src/server/studentDoorRoutes.ts#/api/public/me/profile` `src/utils/studentProfile.ts` `src/utils/studentMap.ts` `tests/student-door-audit.ts` `tests/student-map-audit.ts`

### FR-STU-005 Validation of the student-journey dates

The system shall enforce on term dates the order: schedule submission deadline, then wishes (open and close together), then rounds (up to 8, name up to 30 characters, no overlap), then request close after the last round, shall refuse dates spanning more than 400 days, shall name the offending field in every refusal, and shall not accept dates for an ended or closed term.

Implemented · Must · Functional · University registrar, System administrator

**ACCEPTANCE CRITERIA**

1. Wishes opening on or before the submission day is refused on wishesOpen.
2. Two overlapping rounds are refused on rounds.1; a round starting with the wishes close is refused on rounds.0.
3. POST /api/approvals/student-phases by anyone but the university registrar or an administrator yields 403, and for an ended term yields 409 term-closed.

**EVIDENCE**

`src/utils/termStudentPhases.ts` `src/server/routes/approvalsRoutes.ts` `src/components/StudentPhasesBlock.tsx` `tests/term-student-phases-audit.ts`

### FR-STU-006 Phase reading and door-term choice

The system shall derive the student phase (waiting, wishes, frozen, round, between rounds, closed, or unset) from today's date in Kuwait with each date inclusive of its whole day, shall give the student door the newest unfinished term whose dates are not yet closed, otherwise the upcoming planning term, otherwise the current term, and shall let a term without dates behave as before, neither blocking nor opening anything.

Implemented · Must · Functional · Student, The system (automatic)

**ACCEPTANCE CRITERIA**

1. Today = wishesClose gives mode wishes; the next day gives mode frozen.
2. The day after requestsClose gives mode closed and the door moves to the next term.
3. A term without dates gives key unset and mode none.

**EVIDENCE**

`src/utils/termStudentPhases.ts` `src/server/studentDoorRoutes.ts` `tests/term-student-phases-audit.ts` `tests/student-door-audit.ts`

### FR-STU-007 Writing wishes during the wishes phase

The system shall accept wishes only during the wishes phase, after the profile is complete, with units from 12 up to the university cap, at most 12 courses taken from the remainder of the student's plan, shall exclude any course whose prerequisite is unmet, and shall store the three time constraints (no morning, no afternoon, a free day).

● Implemented · Must · Functional · Student

#### ACCEPTANCE CRITERIA

1. PUT /api/public/me/wishes outside the phase yields 409 wishes-closed; without a department yields 409 no-setup.
2. targetUnits = 11 or above the cap yields 400 bad-units.
3. 15 submitted courses keep at most 12 and exclude any with an unmet prerequisite.

#### EVIDENCE

`src/server/studentDoorRoutes.ts` `src/utils/studentNeedRequest.ts` `tests/student-door-audit.ts` `tests/student-journey-audit.ts`

### FR-STU-008 University-wide student unit cap

The system shall read in Masari one student unit cap set by the root administrator for the whole university (3-30, default 15), shall ignore old per-department caps, and shall send the cap in limits.wishUnitsMax, reject wishes above it and bound the advice by it.

● Implemented · Should · Functional · System administrator, Student

#### ACCEPTANCE CRITERIA

1. A university cap of 18 with an old department cap of 21 yields wishUnitsMax = 18, and a wish of 19 units yields 400.
2. With no setting wishUnitsMax = 15.
3. Every wishes save without an explicit unit choice (the form, «my schedule», the map and the advice) clips the units to the server limits, and a missing value becomes the cap; the map's unit bar measures from the minimum to the cap («excellent ✓ within the limit (12 to the cap)»).
4. Registration radar tickets use the university cap; changing it marks saved radar runs stale so tickets regenerate on the next read, while saving the same value does not.

#### EVIDENCE

`src/utils/studentUnitCap.ts` `src/server/routes/referenceRoutes.ts` `src/server/studentDoorRoutes.ts` `src/components/StudentUnitCapSetting.tsx` `src/server/simulationData.ts#saveUniversityUnitCap` `src/utils/registrationSim.ts` `src/server/studentHomePage.ts` `src/server/studentMapUi.ts` `tests/student-door-audit.ts` `tests/admin-rules-r4-audit.ts` `tests/registration-flow-audit.ts` `tests/masari-responsive-audit.ts`

### FR-STU-009 Student advice and peer counts

The system shall suggest to the student the term's courses from the plan, its rules and what is actually offered, with units from 12 up to the university cap, ordered by what each course unlocks, giving the reason for every pick and an estimate of remaining terms (up to 14), and shall show «wanted by N students» only in a department with at least 10 profiles and for a course wanted by at least 5.

● Implemented · Should · Functional · Student

#### ACCEPTANCE CRITERIA

1. A course lacking a prerequisite is not suggested and appears under waiting with what is missing.
2. A department with 9 profiles gives show=false and an empty byCourse; a course wanted by 4 is not sent.
3. No advice is returned without an open term (reason no-term) or without a plan (no-plan).

#### EVIDENCE

`src/utils/studentAdvice.ts` `src/utils/studentProfile.ts` `src/server/studentDoorRoutes.ts#/api/public/me/wishes-count` `tests/student-advice-audit.ts` `tests/student-door-audit.ts`

### FR-STU-010 The «suggestions only» acknowledgement

The system shall show on entering Masari a card stating «these are suggestions only, not a final registration», shall not let the student continue before acknowledging, shall store the acknowledgement in the profile on the server under a key of term, department and plan so it returns when the path changes, and shall keep a fixed «suggested · not final» ribbon on every screen afterwards.

● Implemented · Must · Functional · Student

**ACCEPTANCE CRITERIA**

1. POST /api/public/me/ack with a key not matching masari-ack:... yields 400 bad-ack.
2. The acknowledgement is read from the profile on another device with no browser storage.

**EVIDENCE**

`src/server/masariDisclaimer.ts` `src/server/studentDoorRoutes.ts#/api/public/me/ack` `tests/student-journey-audit.ts` `tests/student-door-audit.ts`

### NFR-STU-001 Aggregated home and no caching

The system shall serve the student home through one request GET /api/public/me/home that gathers nine parts (notices, cases, graduate, request-context, ticket, report, advice, offered, map) of which a slow one is dropped after 8 seconds without blocking the rest, and shall send every door response with Cache-Control: no-store.

● Implemented · Should · Non-functional · Student, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A part exceeding 8 seconds returns parts[key] = {ok:false,status:504}.
2. Responses of /api/public/me/* carry no-store.

**EVIDENCE**

`src/server/studentDoorRoutes.ts` `tests/student-door-audit.ts` `tests/student-journey-audit.ts`

### FR-STU-011 Student request to open a course or review a conflict

The system shall accept an individual student request (open a course, up to 12 courses, or a two-course conflict) only with the student's consent to send identity, only after the latest current simulation proves the student cannot reach 12 units, with a reason of 3 to 600 characters, shall send one case with a case number to each department owning a requested course, and shall accept a conflict only when published complete schedules prove it unresolvable.

● Implemented · Must · Functional · Student

**ACCEPTANCE CRITERIA**

1. Without consent yields 400 consent-needed; without a proven blocker yields 409 no-proven-blocker.
2. Details of length 2 yield 400 details-needed; a course outside the remainder or not blocked yields 400 course-outside-plan.
3. An unproven conflict yields 409 conflict-not-proven.

**EVIDENCE**

`src/server/studentDoorRoutes.ts` `src/utils/studentNeedRequest.ts` `src/utils/studentCaseConflict.ts` `src/utils/studentNeedMerge.ts` `tests/masari-approval-integrity-audit.ts` `tests/registration-flow-audit.ts` `tests/student-needs-scale-audit.ts`

### FR-STU-012 The «did you register?» question after a round

The system shall open the «did you register?» question only during a running round and after it until requests close, shall accept up to 40 answers (registered, or stuck with a reason: full, prerequisite, conflict, other) on courses of the student's own plan, shall tally them in 64 counter shards, and when a stuck student asks for department help shall create one case per department owning a stuck course after verifying the civil ID matches the profile fingerprint.

● Implemented · Must · Functional · Student, Department head

**ACCEPTANCE CRITERIA**

1. POST /api/public/me/report outside a round yields 409 report-closed; with no valid answer yields 400 empty.
2. A civil ID not matching the profile fingerprint yields 403 civil-mismatch.
3. Stuck courses of two departments create two cases, one per department.
4. A student with an open course request at the same department in the term has the stuck courses merged into that request with «after registration: …» appended to its details (up to 900 characters) instead of a second case; the reply is {ok, registered, stuck, cases}.

**EVIDENCE**

`src/server/studentDoorRoutes.ts#/api/public/me/report` `src/utils/studentNotices.ts` `src/utils/registrationCauses.ts` `tests/registration-flow-audit.ts` `tests/student-journey-audit.ts`

### FR-STU-013 Graduate request and graduation-sheet proof

The system shall accept a graduate request (field-training kind: conflict or prerequisite) while requests are not closed even outside the wishes phase, provided the uploaded graduation sheet (PDF or image up to 14 MB, 12 attempts per 10 minutes per profile) is proved by matching the civil ID and programme to the student's department, with a signed proof token valid for 20 minutes, and shall fail closed when the department has no approved graduation rule.

● Implemented · Must · Functional · Student, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Uploading a sheet for a department without a saved graduation rule yields 422 without reading the document.
2. A civil ID on the sheet not matching the entered one yields 422; a programme not matching the department yields 422.
3. A request in the closed phase yields 409 requests-closed.

**EVIDENCE**

`src/server/studentDoorRoutes.ts` `src/server/core/studentIdentity.ts` `src/utils/studentCaseDecision.ts` `tests/masari-approval-integrity-audit.ts` `tests/student-journey-audit.ts`

### FR-STU-014 Request status by case number

The system shall let a student read the status of a request from the link /m/:token using the civil ID and the case number together, shall give the same «no request» answer when either is wrong, shall limit attempts, and shall not promise registration: what the committee approved while the department's schedule is unsigned is reported as awaiting signatures.

● Implemented · Must · Functional · Student

**ACCEPTANCE CRITERIA**

1. A valid civil ID with a wrong case number returns found:false, identical to an ID with no request.
2. The case number is the first 8 uppercase characters of the record id.
3. Status approved for a department that has not signed returns awaiting-signatures.

**EVIDENCE**

`src/server/pages/studentCaseStatusPage.ts` `src/server/routes/surveyRoutes.ts` `src/utils/studentNeedMerge.ts` `src/components/StudentCaseStatus.tsx` `tests/student-case-status-audit.ts` `tests/masari-approval-integrity-audit.ts`

### IR-STU-001 Public student schedule page

Inferred

The system shall serve the department schedule page to students from the link /t/:token of kind students, showing the approved schedule of the current term, and before approval the current schedule marked «provisional», with no sign-in, and shall refuse a link of another kind.

Implemented · Should · Interface · Student, Public visitor

**ACCEPTANCE CRITERIA**

1. The /api/public/students/:token response carries provisional:true when no approved rows exist and the schedule has rows.
2. A link of kind survey yields 404 stating it is not the students' schedule.

**EVIDENCE**

`src/server/pages/studentSchedulePage.ts` `src/server/routes/publicStaffRoutes.ts`

### FR-STU-015 «Try as a student»: isolated demonstration

The system shall open at /me/demo a private demonstration sandbox for the visitor, empty of real data, with two cookies, a fictional student, wishes and a rehearsal run inside it, living 2 hours, at most 150 sandboxes, 30 creations per 10 minutes, and neither read from nor written to by real data.

Implemented · Could · Functional · Public visitor, Student

**ACCEPTANCE CRITERIA**

1. /me/demo returns 302 to /me?track=girls#now with cookies sh_demo_stu and sh_session.
2. An expired sandbox clears both cookies and requests return 401 against real data.

**EVIDENCE**

`src/server/studentShowcase.ts` `src/server/demoRadarSeed.ts` `tests/student-showcase-audit.ts`

### FR-STU-016 Registration sheet: scope and signature gating

The system shall serve the registration sheet (GET /api/student-registration) to holders of the workshop (7) or department-report (14) permission within their scope, shall show the same requests the Analytics Center reads under the same ownership rule, shall withhold it from registration officers until the schedule committee chair and the department head have both signed the department's schedule, and shall hide identity from view-only roles.

Implemented · Must · Functional · Schedule committee chair, Registration officer, College registrar, College dean

**ACCEPTANCE CRITERIA**

1. A registration officer with an unsigned schedule gets 409 not-signed.
2. A department outside scope yields 403.
3. A dean (view-only) sees counts without name or civil ID.

**EVIDENCE**

`src/server/routes/studentRegistrationRoutes.ts` `src/utils/studentCaseScope.ts` `src/components/StudentRegistration.tsx` `src/components/StudentCasesTable.tsx` `tests/student-registration-audit.ts` `tests/masari-approval-integrity-audit.ts`

### FR-STU-017 Committee first, then registration

The system shall order decisions on a student request as: the department committee approves or declines (with a reason from not eligible, not in plan, prerequisite, duplicate, other), then registration decides «registered» or «rejected» (with a reason from no seat, prerequisite, level, conflict, closed, other) only on what the committee handed over, shall not let the committee overturn a registration decision, and shall decide a graduate case with one decision for the whole case in the same order.

Implemented · Must · Functional · Schedule committee chair, Department head, Registration officer, College registrar

**ACCEPTANCE CRITERIA**

1. The committee writing registered yields 403; registration writing committee-rejected yields 403.
2. Registration on a course the committee has not approved yields 409 with the committee-not-approved message.
3. A rejection without an allowed reasonCode yields 400.

**EVIDENCE**

`src/server/routes/studentRegistrationRoutes.ts` `src/utils/studentCaseDecision.ts` `tests/student-registration-audit.ts`

### FR-STU-018 Stale-write refusal on decisions

The system shall refuse with 409 and code stale-write a decision built on a version that is no longer current (expectedAt for a course, expectedStamp for a case), inside the same transaction so two colleagues cannot overwrite each other on an old state, telling the writer to refresh and retry without changing anything.

● Implemented · Must · Functional · Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. A stamp not matching the current record yields 409 code=stale-write and the course state is unchanged.
2. A matching stamp yields 200 and a new at value.

**EVIDENCE**

`src/server/routes/studentRegistrationRoutes.ts` `src/utils/staleWrite.ts` `tests/student-registration-audit.ts` `tests/colleagues-advising-registration-audit.ts`

### FR-STU-019 Committee approval with section opening

The system shall let a committee holding the schedule permission (7) use «approve + open section», opening the section through the same change path the workshop uses (scope, lock, conflict), so the approval is not recorded when the section is refused (stateSaved:false), the section is removed if saving the decision fails afterwards, and a section opened earlier is picked up through the reference need:<request>:course:<course> so it is never opened twice.

● Implemented · Should · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. openSection without permission 7 yields 403 no-schedule-permission.
2. Two simultaneous presses create one section and opened.reused = true in the second.
3. Refusing the section for a conflict returns stateSaved:false and leaves the course state unchanged.

**EVIDENCE**

`src/server/routes/studentRegistrationRoutes.ts` `src/components/ApplyProposal.tsx` `src/server/core/scheduleWrites.ts` `tests/student-registration-audit.ts` `tests/masari-approval-integrity-audit.ts`

### FR-STU-020 Advising sends a section request

The system shall let a department advisor send one section request for a course, campus and term with a preferred period (morning, evening or any), a count and a student list taken from Masari or pasted (identities sealed), with at most 400 students in the list, 1000 in the count and a note of up to 300 characters, only from the advisor's own department scope and in a term that is not frozen.

● Implemented · Must · Functional · Department advisor

**ACCEPTANCE CRITERIA**

1. A request without a valid period yields 400 asking for the preferred period.
2. A sender who is not an advisor in the department scope yields 403.
3. A count of 5000 is clipped to 1000; students duplicated by fingerprint are merged.

**EVIDENCE**

`src/server/sectionRequestsRoutes.ts` `src/utils/sectionRequests.ts` `src/components/sectionRequests/SectionRequestsPanel.tsx` `src/utils/sectionRequestHandoff.ts` `tests/section-requests-audit.ts`

### FR-STU-021 Section request stages and transitions

The system shall always derive a section request's stage from its document (sent, section opened, approved, registering, registered, withdrawn, declined) rather than a stored field, and shall enforce the transitions: no approval before a section is linked, no linking or unlinking after approval, no withdrawal or decline after approval except for a count-only request (no student list) of which nobody is registered yet, registration only for approved students, no removal of approval from a registered student, and a decline carries a written reason that reaches advising. For a count-only request registration records how many were registered (0 to the count); its approved number is the whole count and it completes at the whole count. The system shall refuse a second open request for the same course from the same advising department in the same campus and term (409 duplicate-request); the screen shall confirm before a withdrawal and before «approve all», fold closed requests under those still needing work, and disable writing in a past term.

● Implemented · Must · Functional · Department advisor, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. Approval with no linked section yields 409 asking to link a section first.
2. A decline without text yields 400; after the decline every write is refused with 409.
3. Registering an unapproved student yields 409 stating only approved students are registered.
4. A count-only request of 40 once approved has 40 approved and can be withdrawn or declined; after «registered 25» it is «registering» and cannot be withdrawn; «registered 40» completes it; 41 yields 400.
5. A second open request for the same course from the same department yields 409 duplicate-request; a closed or approved one does not block.

**EVIDENCE**

`src/utils/sectionRequests.ts` `src/server/sectionRequestsRoutes.ts` `src/components/sectionRequests/SectionRequestsPanel.tsx` `tests/section-requests-audit.ts` `tests/advising-audit.ts`

### FR-STU-022 Distributing request capacity across sections

The system shall distribute the request count over all its linked sections rounding up (count ÷ number of sections) and write each section's share as base capacity in the advisor seat balance up to 200 per section, shall redistribute on every link or unlink and on withdrawal or decline (a closed request holds no capacity), shall sum the shares of open requests linked to the same section, and shall never touch a capacity an administrator wrote by hand.

● Implemented · Should · Functional · Schedule committee chair

**ACCEPTANCE CRITERIA**

1. 100 students and two sections give 50 each; after a third link, 34.
2. A hand-written capacity different from appliedCapacity stays as it is.
3. Unlinking a section the request wrote removes its capacity from the balance.
4. Two requests of 50 on the same section write 100; withdrawing one leaves 50; withdrawing the only one removes it.

**EVIDENCE**

`src/utils/sectionRequests.ts` `src/server/sectionRequestsRoutes.ts` `src/utils/advisorSeats.ts` `tests/section-requests-audit.ts` `tests/advising-audit.ts`

### FR-STU-023 Party powers and notifications

The system shall decide what each party may do on a section request from role, scope and granted permissions rather than the role template (advising sends and withdraws, the course department's committee links, declines and approves, registration approves and records, a view-only role reads without names), and shall deliver to each party what awaits it through the bell and mobile alerts without waking the system administrator for every request.

Implemented · Must · Functional · Department advisor, Schedule committee chair, Registration officer, College dean

**ACCEPTANCE CRITERIA**

1. An advisor of another department requesting a request not from their department gets 404.
2. An account without permission 7 or 14 cannot read.
3. The bell shows up to 8 items derived at query time with nothing stored.

**EVIDENCE**

`src/server/sectionRequestsRoutes.ts` `src/utils/sectionRequests.ts` `tests/section-requests-audit.ts` `tests/colleagues-advising-registration-audit.ts`

### FR-STU-024 Advisor seat balance

The system shall compute for each section a hard cap = the lesser of (base capacity + balance) and the hall capacity, shall let an advisor add seats (1 to 50) atomically, all or nothing, so two advisors acting together cannot exceed the cap, shall split the balance evenly under fair split, shall suggest alternative sections when full, and shall allow an exception request to the administrator (up to 50 seats and a 300-character note) that cannot be pending twice for the same section from the same advisor, decided by the administrator (a writing role holding the schedule permission) either approving, which raises that section's balance by its count exactly once per request (recorded in the quota document, so a retry after a failed close does not raise it again) before the request is closed, or declining. It shall let an advisor undo their own last addition in a section (never a colleague's), audited, shall refuse every balance write in a past term, shall cap configuration inputs at 200 on screen as on the server, and shall not draw write buttons for a role the server refuses.

Implemented · Must · Functional · Department advisor, Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Capacity 60 with balance 10 shows «60 + 0/10»; adding 11 is refused as full.
2. Adding 0 or 51 is invalid; an undefined base capacity yields 409.
3. A rev not matching the number of additions yields 409 stale-write.
4. An advisor adds 3, a colleague 1, then the advisor 1: their undo removes only their last addition (1); one who added nothing gets 409.
5. A second pending exception for the same section from the same advisor yields 409 duplicate-exception; the administrator's approval raises that section's balance by the requested count.
6. An addition, undo, exception or configuration in a past term yields 409 term-frozen.

**EVIDENCE**

`src/utils/advisorSeats.ts` `src/server/routes/offeringRoutes.ts` `src/components/AdvisorSeatsPanel.tsx` `src/server/roleGuard.ts` `tests/section-requests-audit.ts` `tests/colleagues-advising-registration-audit.ts` `tests/advising-audit.ts`

### FR-STU-025 Seat, holder and handover

The system shall treat an account as a fixed seat whose holder changes: one ledger per seat (holder, team, deputy, history up to 400 events); the holder or the system administrator hands it over, a first password is generated and shown once, all open devices are signed out and the team is frozen until the new holder marks each member «continuing» or «ended», and the session owner acts under their own name in the log and signature.

Implemented · Must · Functional · System administrator, Schedule committee chair, College registrar, University registrar

**ACCEPTANCE CRITERIA**

1. Handing over to the same current holder (same instructor number) yields 409.
2. Anyone other than the holder or the administrator yields 403.
3. After handover every member has status frozen.

**EVIDENCE**

`src/server/seatsRoutes.ts` `src/server/seats.ts` `src/utils/seats.ts` `src/components/seats/SeatsAdmin.tsx` `src/components/seats/SeatPanel.tsx` `src/components/seats/SeatDrawer.tsx` `tests/seats-audit.ts`

### FR-STU-026 Team member link and deputy

The system shall let a team member enter through the personal link /k/<token> after confirming the last four digits of their civil ID, working under their own name and team role (a registration officer within their own scope), not with the seat password, and not signing; the link locks after 5 wrong attempts, a reset link expires after 24 hours if unopened, the team is limited to 40 members, and a deputy appointed from the team acts and signs until the end date.

Implemented · Must · Functional · Schedule committee chair, Registration officer, College registrar, University registrar

**ACCEPTANCE CRITERIA**

1. Five wrong attempts yield 423, revoke the token and log link-locked.
2. A new member after 40 active members yields 409 stating the team is full.
3. A deputy end date before today yields 400.

**EVIDENCE**

`src/server/seatsRoutes.ts` `src/server/seats.ts` `src/utils/seats.ts` `src/server/seatTeamPage.ts` `src/components/seats/SeatLinkCard.tsx` `src/utils/seatAccessCard.ts` `tests/seats-audit.ts` `tests/seat-access-card-audit.tsx`

### FR-STU-027 Registration rehearsal engine

The system shall deterministically simulate for each student with wishes the remaining courses under the plan's rules and build three plans: (A) closest to wishes and constraints, drawing on a virtual seat ledger in window order, (B) alternative sections, and (C) a safe minimum of 12 units, with units clamped between 12 and 18 (default 15) and never above the university cap, ordering students by greatest need first and splitting them evenly over rounds, and shall remain an estimate rather than a reservation.

Implemented · Must · Functional · The system (automatic), System administrator

**ACCEPTANCE CRITERIA**

1. The same inputs produce the same outputs (determinism).
2. targetUnits = 21 is clamped to 18 in the simulation.
3. A university cap of 9 → no ticket plan exceeds 9 units, a non-participant is assumed at 9 rather than 15, plan C does not exceed it, and the capacity bands measure against the smaller of 15 or 12 and the cap.
4. Plans B and C do not draw on the ledger.

**EVIDENCE**

`src/utils/registrationSim.ts` `src/server/simulationData.ts` `tests/registration-sim-audit.ts` `tests/registration-flow-audit.ts`

### FR-STU-028 Running and refreshing the radar

The system shall restrict running the radar to system administration with an in-process lock and a database lock across servers, shall refresh it automatically every 24 hours (RADAR_AUTO_HOURS) during and after wishes until requests close and once after wishes close, checking every 5 minutes, stoppable with RADAR_AUTO=false and inactive in the demonstration, shall show departments their own courses as counts not names, and shall store for each student a ticket with no name or civil ID. The screen shall offer «refresh the radar» to those who may run it, and the server shall refuse a manual run before a minimum gap after the last run (RADAR_MANUAL_GAP_SECONDS, default 120 seconds) with 409 too-soon; the screen shall say plainly when automatic refresh is off, show the estimated registration windows (students per round) on screen and in the report, export the selected scenario (actual wishes or projection), and search courses case-insensitively. The screen's endpoints (summary, causes and «did you register?») shall be guarded by the same door: system administration, the workshop (7) or the department report (14); each course in the summary is attributed to its catalogue owner.

● Implemented · Must · Functional · System administrator, Root administrator, Department head, Student

**ACCEPTANCE CRITERIA**

1. POST /api/simulation/run by a non-administrator yields 403; during another run yields 409 busy.
2. A frozen term yields 409 term-frozen.
3. A ticket whose runId does not match the summary is ignored.
4. A run 30 seconds after the last one yields 409 too-soon with retryAfterSeconds = 90; RADAR_MANUAL_GAP_SECONDS=0 removes the gap.
5. An account with neither 7 nor 14 requesting /api/simulation/summary gets 403.

**EVIDENCE**

`src/server/simulationRoutes.ts` `src/server/simulationData.ts` `src/components/RegistrationRehearsal.tsx` `src/utils/radarRunGap.ts` `tests/registration-flow-audit.ts` `tests/rehearsal-audit.ts` `tests/advising-audit.ts`

### FR-STU-029 Why a student does not reach 12 units

The system shall explain a student's shortfall below 12 units by comparing scenarios: one constraint (capacity, conflict, student constraints, prerequisite) is lifted for everyone and the question is whether the student then reaches 12, so a single cause is named, more than one is «shared», and none is «course not offered or other», with the interface stating it is an estimate not proof.

● Implemented · Should · Functional · The system (automatic), Department head

**ACCEPTANCE CRITERIA**

1. Lifting capacity alone resolves the case so the cause is full.
2. Lifting two constraints resolves it so the cause is shared.
3. No constraint resolves it so the cause is other.

**EVIDENCE**

`src/utils/registrationCauses.ts` `src/utils/registrationSim.ts` `tests/registration-causes-audit.ts`

### NFR-STU-002 Limits on a shared university network

The system shall withstand thousands of students entering from one network address under tuned limits: 24,000 identity queries and 600 code errors per address per 10 minutes, 60 writes per minute per student (keyed by their signed session's fingerprint when there is one, else their civil ID, else the address) and a ceiling of 1200 writes per minute per address, adjustable through STUDENT_DOOR_* variables, and shall not count /api/public/me/* against the general public address counter.

● Implemented · Must · Non-functional · Student, The system (automatic)

**ACCEPTANCE CRITERIA**

1. 600 students from one address within two minutes are not blocked by the identity limit.
2. The 61st write within a minute by one student yields 429 with the too-many-requests message.
3. The STUDENT_DOOR_WRITES_PER_MINUTE variable changes the limit.
4. With a valid session, rotating the civil ID in each request body does not create a new limit: the 61st request in a minute ← 429.

**EVIDENCE**

`src/server/studentDoorRoutes.ts` `tests/student-door-audit.ts` `tests/student-door-shared-network-audit.ts` `tests/student-recovery-audit.ts`

### IR-STU-002 Academic advice panel for departments

The system shall show a department a non-blocking academic reading from approved plans and wishes: course pairs needed by at least 3 eligible students whose times overlap with whether alternative sections exist, and a morning or afternoon preference for a course wanted by at least 3 (up to 160 pairs and 24 preferences), shall never change the save, sign or send verdict, and shall show neither identity nor counts below 3.

● Implemented · Should · Interface · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A single student wanting the pair gives shared = 0 and basis = curriculum.
2. A mandatory prerequisite is not simultaneous demand, so no pair forms between a course and its prerequisite.
3. The response carries nonBlocking:true.

**EVIDENCE**

`src/utils/academicAdvisory.ts` `src/server/academicAdvisoryData.ts` `src/server/academicAdvisoryVisual.ts` `src/components/AcademicAdvicePanel.tsx` `tests/academic-advice-audit.ts`

### IR-STU-003 Registration and radar tabs and the phase line

The system shall join «registration sheet» and «registration radar» in two tabs atop the screen for someone holding both (someone holding one sees no bar), with the same names in the «Advising» menu group and in each screen's title (the group name «Advising» above both), shall show the group to holders of the workshop (7), the department report (14) or system administration — view-only roles included, reading without writing — computed from permissions without downloading the radar summary, shall have the phase line say «numbers only» before registration and show the names of stuck students to the owning departments only once a round starts, shall carry a QR code button for the permanent /me link, and shall let the college and department picker narrow what the reader sees inside their scope, never widen it.

● Implemented · Should · Interface · Department head, Registration officer, College registrar, System administrator

**ACCEPTANCE CRITERIA**

1. An account without radar or sheet permission gets no RegistrationTabs bar.
2. phase.namesVisible is false before a round and true during and after it.
3. ?collegeId&sectionId outside scope does not widen results.
4. A dean holding 14 sees the «Advising» group and opens the registration sheet «read only» without names or civil IDs.

**EVIDENCE**

`src/components/RegistrationTabs.tsx` `src/components/MasariQrButton.tsx` `src/components/AdvisingScopePicker.tsx` `src/server/simulationRoutes.ts` `src/utils/termStudentPhases.ts` `src/App.tsx` `tests/registration-flow-audit.ts` `tests/rehearsal-audit.ts` `tests/advising-audit.ts`

### DR-STU-030 Student identity secret and the keys derived from it

The system shall derive everything that guards a student's identity from one secret shared by all server instances: it is read from the Firestore document systemSecrets/student-case-identity-v1 (or from the file student-case-identity.key with mode 0600 beside the local database), seeded once from STUDENT_CASE_SECRET when nothing is stored, otherwise generated at random (32 bytes) and saved in a transaction; the stored value always wins, so a differing environment value is logged as an explicit error and ignored; CALENDAR_SECRET is never read here; the secret is always read outside the demonstration sandbox and cached in the process. From it: the civil ID fingerprint = the first 32 hex characters of HMAC-SHA256 over «need|» + the ID; the identity key = HMAC-SHA256 over «student-case-identity-v1», which seals the name and civil ID with AES-256-GCM (12-byte IV + 16-byte tag + ciphertext, base64url) and signs the door session (HMAC over «door|» + body) and the graduation-sheet proof token.

● Implemented · Must · Data · The system (automatic)

#### RATIONALE

> Two instances may serve consecutive requests: a per-instance secret makes what one sealed unreadable to the other, and changing the secret silently blinds every case sealed before it.

#### ACCEPTANCE CRITERIA

1. A stored secret and a different STUDENT_CASE_SECRET ← the stored one is used, the [student-case-secret] error is printed, and nothing is written.
2. Nothing stored and no variable ← a secret is generated and saved with source=generated, and every instance reads it afterwards.
3. A sealed value that does not open with the current key ← a key derived from CALENDAR_SECRET is tried for old records, otherwise an empty string is returned without an error.

#### EVIDENCE

`src/server/studentCaseSecret.ts` `src/db/repository.ts#getOrCreateStudentCaseSecret`
`src/server/core/studentIdentity.ts#surveyFingerprint` `src/server/core/studentIdentity.ts#studentIdentityKey`
`src/server/core/studentIdentity.ts#openStudentIdentity` `src/server/studentDoor.ts#signDoorSession`
`tests/student-journey-audit.ts`

### FR-STU-031 Identity question and entry outcomes

The system shall answer POST /api/public/me/identity with three facts only about the civil ID: whether a profile exists, whether a deletion request is pending, and the deletion date, with no name or other data, counting every question against the address identity limit; shall answer POST /api/public/me/enter for an ID with no profile with 404 no-profile counted against the identity limit rather than the code limit, for a locked profile with 423 and retryInSeconds, for a wrong code with 401 bad-code and attemptsLeft, and for an unexpected failure with 500 «cannot enter now»; and POST /api/public/me/exit shall clear the session cookie only.

● Implemented · Must · Functional · Student

#### ACCEPTANCE CRITERIA

1. An ID with a profile ← {exists:true, resetPending:false, resetAt:""}; a valid ID with no profile ← exists:false.
2. The third wrong code ← 401 with attemptsLeft = 2; the fifth ← 401 locked with attemptsLeft = 0.
3. Exceeding the address identity or code limit ← 429 with code rate.

#### EVIDENCE

`src/server/studentDoorRoutes.ts#/api/public/me/identity` `src/server/studentDoorRoutes.ts#/api/public/me/enter`
`src/server/studentDoorRoutes.ts#/api/public/me/exit` `tests/student-door-audit.ts` `tests/student-door-shared-network-audit.ts`

### FR-STU-032 Session check on every request and presence touch

The system shall verify on every request to the protected /api/public/me routes the signature and expiry of the sh_session cookie, then read the profile by its fingerprint and refuse the session when the code version (the first 8 characters of the code hash) differs or the profile is gone, answering 401 signed-out; shall write the session owner's last presence at most once a day (every 24 hours) and recompute the deletion date with it; opening the page with a valid session (or any save with it) shall neither cancel a pending deletion request nor push its date — only entering the code cancels it: signing in, «keep my profile» (POST /api/public/me/keep), changing the code, or recovery with a department code.

● Implemented · Must · Functional · Student, The system (automatic)

#### RATIONALE

> Any request with a session used to cancel the deletion request, so whoever created someone else's profile with their civil ID could void «forgot my code» just by opening the page.

#### ACCEPTANCE CRITERIA

1. Two visits on the same day ← one write of lastSeenAt; a visit after 25 hours ← a second write and a new deleteAt.
2. A profile with resetRequestedAt and a valid session ← GET state and PUT name neither clear the request nor change deleteAt (its reason stays reset); keep with the correct code clears it.
3. Deleting the profile from another device ← the open session answers 401 signed-out.

#### EVIDENCE

`src/server/studentDoorRoutes.ts` `src/server/studentDoor.ts#readDoorSession` `src/utils/studentProfile.ts#shouldTouch` `tests/student-door-audit.ts` `tests/student-recovery-audit.ts`

### FR-STU-033 Code change, name correction and profile deletion

The system shall change the code through POST /api/public/me/code only with the current code, checking the new code by the same rule, with a new salt that clears the failure counter, cancels a pending deletion request, issues a new session and ends the other sessions; a wrong current code here and in deletion shall count on the profile's own lock (5 failures ← 15 minutes, as at sign-in) and on the address limit; shall correct the name through PUT /api/public/me/name under the same rules and seal it again, while the civil ID never changes because it is the key; and shall delete the profile permanently and at once through POST /api/public/me/forget after confirming the code, clearing the cookie, while case requests sent before remain in the departments' records.

● Implemented · Must · Functional · Student

#### ACCEPTANCE CRITERIA

1. A wrong current code ← 401 bad-code with no change and attemptsLeft; the fifth in code or forget ← locked, and the correct code after it ← 423 (sign-in too); a new code 123456 ← 400 weak-code.
2. A name containing a digit ← 400 bad-name; a valid name ← the summary returns with the new name and the masked ID.
3. forget with a correct code ← the profile is deleted, and the next question about the ID ← exists:false.

#### EVIDENCE

`src/server/studentDoorRoutes.ts#/api/public/me/code` `src/server/studentDoorRoutes.ts#/api/public/me/name` `src/server/studentDoorRoutes.ts#/api/public/me/forget` `src/server/studentHomePage.ts` `tests/registration-flow-audit.ts` `tests/student-door-audit.ts` `tests/student-recovery-audit.ts`

### FR-STU-034 «Forgot my code»: a department code, or deletion after a grace period

The system shall never recover or reset the code except with a recovery code issued by department staff (FR-STU-066); the «forgot my code» sheet shall offer two choices, «I have a code from my department» and «delete my profile and start again», with the profile's creation date so that someone who never created it knows another person did; it shall accept through POST /api/public/me/reset a deletion request with the civil ID alone (counted against the identity limit and the write limit), keeping the first time it was requested and setting the deletion date to the nearer of the existing date and today + 30 days with reason «reset»; the entry page shall show the ID's owner a notice with the deletion date stating that entering with the correct code cancels it; after deletion a new profile can be created with the same ID.

Implemented · Must · Functional · Student

#### ACCEPTANCE CRITERIA

1. An ID with no profile ← 404 no-profile; an ID with a profile ← {ok:true, deleteAt, days:30}.
2. A profile due for deletion in 10 days ← the date stays in 10 days with reason reset.
3. A second request before deletion ← resetRequestedAt keeps the first request's time.
4. POST identity for an ID with a profile ← since with the creation date (a day, no time).

#### EVIDENCE

`src/server/studentDoorRoutes.ts#/api/public/me/reset` `src/server/studentHomePage.ts` `src/server/studentRecoveryScript.ts#openForgot` `src/utils/studentProfile.ts#resetLifetime` `tests/student-door-audit.ts` `tests/student-door-shared-network-audit.ts` `tests/student-recovery-audit.ts`

### IR-STU-035 Door state, college and department list, and department plans

The system shall return GET /api/public/me/state without a session: the demonstration flag, the door term, the phase (key, mode, line, whether wishes can be edited and reports made, next date, round name), the term timeline, whether the visitor is signed in with the profile summary, and the limits (code length 6, units from 12 to the department cap, 13.5 units for a typical term, 365 days after graduation); shall return GET /api/public/me/catalog the university's colleges that have departments (built from the colleges and departments tables rather than written names; the boys' or girls' track is derived from the college data, and a college that does not split stays without a track), and with collegeId only that college's departments with their own identifiers (the same department in two colleges or sites is two departments and is never merged; a repeated name inside one college is told apart by the department code), bad-college for a missing college, and an optional track that narrows the list while keeping colleges without a track, with public caching for 300 seconds; and shall return GET /api/public/me/plan?sectionId the department's non-archived, non-empty plans with their courses and each course's prerequisites, or the department's operational courses when it has no plans.

Implemented · Should · Interface · Student, Public visitor

#### ACCEPTANCE CRITERIA

1. catalog with no parameters ← the list of every college that has departments and empty specializations; with collegeId ← that college's departments only; a college with no departments ← bad-college.
2. plan with an unknown department ← 400 bad-section; a department with no plans ← source=catalog.
3. A new plan with no course yet ← does not appear in the list.
4. The same department name in two colleges or sites ← two different identifiers in their lists, never merged.

#### EVIDENCE

`src/server/studentDoorRoutes.ts#/api/public/me/state` `src/server/studentDoorRoutes.ts#/api/public/me/catalog` `src/server/studentDoorRoutes.ts#/api/public/me/plan` `src/utils/studentCatalog.ts` `tests/student-colleges-audit.ts` `tests/student-door-audit.ts` `tests/student-showcase-audit.ts`

### FR-STU-036 My map and what changed since the last visit

The system shall build the student's map (GET /api/public/me/map) from the whole plan: the department's courses, other departments' courses and general requirements, with their rules and what is offered this term, with no data about the student in the model; shall save once a day per term a snapshot of what was passed, what is offered and what became available, returning the difference from the previous snapshot of the same term (newly passed, newly offered, newly available) without delaying the display on writing it; and shall serve GET /api/public/me/map-page as the printed plan sheet coloured by what was passed, with a QR code leading back to the public Masari door rather than the session, with noindex and no-store.

● Implemented · Should · Functional · Student

**ACCEPTANCE CRITERIA**

1. A profile without a department ← {ready:false, reason:"no-setup"}; a department with neither plan nor courses ← reason "no-plan".
2. The first visit in a term ← changes = null; a visit on a later day after a new course is offered ← it appears in changes.offered.
3. map-page for a plan whose rules are not approved ← 404 «your plan's rules are not approved yet»; without the sheet template ← 503.

**EVIDENCE**

`src/server/studentDoorRoutes.ts#/api/public/me/map-page` `src/utils/studentMap.ts` `src/server/studentMapUi.ts` `tests/student-map-audit.ts` `tests/student-showcase-audit.ts`

### FR-STU-037 Offered to me and my cases

The system shall show the student the remainder of the plan and the number of sections of each course in the door term from the draft or the approved schedule (counts, not times), excluding a course locked or deferred in its offering state, with the missing prerequisites, ordered by most sections; and shall show in «my cases» up to 100 of the student's latest requests across all terms by fingerprint, with a general status per request and per course (under review, committee approved, not approved, completed, rejected, removed by you after the decision) without the committee's internal notes or what the student wrote.

● Implemented · Should · Functional · Student

**ACCEPTANCE CRITERIA**

1. A remaining course with two sections in the draft ← sections = 2; a course in a locked state ← not counted as offered.
2. A request whose courses are all «registered» ← statusCode = registered; one with a course «committee not approved» ← committee-rejected.

**EVIDENCE**

`src/server/studentDoorRoutes.ts#/api/public/me/${name}` `src/server/studentDoorRoutes.ts#/api/public/me/offered` `src/server/studentDoorRoutes.ts#/api/public/me/cases` `src/server/offeringStates.ts` `tests/student-door-audit.ts` `tests/registration-flow-audit.ts`

### FR-STU-038 Student notices «what's new?»

The system shall derive the student's notices at the moment the page opens, storing nothing: complete your profile, write your wishes (with their closing date), you edited your profile after the last calculation, your suggested schedule is ready with your round and window, did you register, your personal suggestion, a new section opened for a course you wanted or were stuck in (from a schedule row whose origin is the radar or the Analytics Center within 21 days, up to 4), and the department's or registration's decision on each course of a request with the rejection reason or note; ordered: what is asked of the student, then what was rejected, then what is new, then what is done, dropping what the student removed after the decision.

● Implemented · Should · Functional · Student

**ACCEPTANCE CRITERIA**

1. A course «rejected» for prerequisite with no note ← an alert notice reading «a prerequisite was not met».
2. A section opened 22 days ago ← does not appear in «a new section opened».

**EVIDENCE**

`src/utils/studentNotices.ts` `src/server/studentDoorRoutes.ts` `tests/feature-notifications-audit.ts` `tests/registration-flow-audit.ts`

### FR-STU-039 My ticket: times after signature, alternatives and sharing

The system shall show the student's ticket from the latest radar run only when its runId matches the summary, showing a section code, times and alternatives only for a section whose department schedule is signed and that is not locked, offering a «swap pool» of up to 40 remaining courses with up to 8 signed sections each ordered by fewest missing prerequisites, campus travel minutes from the travel policy, and a stale flag when the profile changed after the run; and shall let the student in the browser, without writing to the server, try an alternative section or drop or swap a course, save the edited ticket as wishes (up to 12 courses), share it as an image drawn on the device with no name or civil ID, and add a reminder of the round date to the calendar through a file served by the server (/api/public/ics-reminder); the «built on an assumption» chip shall state the default unit count the server sends (defaultUnits) in Western digits like the rest of the page.

● Implemented · Should · Functional · Student

#### ACCEPTANCE CRITERIA

1. A section whose department has not signed ← timesVisible = false with empty section and slots.
2. A ticket whose runId does not match the summary ← {ready:false, reason:"no-run"}.
3. Sharing with no approved time ← the message «no approved times to share yet» and no image.
4. Two consecutive meetings on the same day at two different campuses with a gap shorter than the travel policy's time for that pair ← a small icon on the later meeting and one line in the list and in the course panel, at most two hints a day; it never blocks or changes a choice, overlapping meetings or a sufficient gap get no hint, and the campus in the ticket is only a key, a missing one meaning the main campus.

#### EVIDENCE

`src/server/studentDoorRoutes.ts` `src/server/studentHomePage.ts#tkShareImage` `src/server/core/travelPolicy.ts` `src/utils/campusTravelHint.ts#travelHints` `tests/masari-return-audit.ts` `tests/masari-travel-hint-audit.ts` `tests/registration-flow-audit.ts` `tests/student-recovery-audit.ts`

### FR-STU-040 Graduation-sheet verification gates

The system shall verify an uploaded graduation sheet (an application/octet-stream body with its type in the x-file-type header) in order: the department belongs to the student's college, a saved graduation rule exists before the file is read, then the sheet is official, the civil ID stored in the profile appears on it as one token or as digit groups on one line with no digit repaired, the «programme» line matches the department, the plan matching its required units, and the passed units (from 60 up to the degree units) are not below the term threshold (summer or regular); the typed name is not a condition; of the 12 attempts per 10 minutes (STUDENT_DOOR_PROOF_MAX) only failures count; on submission the token, its owner, its department and the threshold from the current rule rather than the token are re-checked, and a new-course request is refused when the student has a verified graduate case in the term.

● Implemented · Must · Functional · Student, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A sheet with no readable «programme» line ← 422 programme-unreadable.
2. Submitting 20 minutes after verification ← 400 proof-expired, keeping the notes and kind on the page.
3. A profile without sealed name and ID ← 409 identity-needed before upload; a new-course request with an eligible graduate case ← 409 verified-graduate-case.

#### EVIDENCE

`src/server/core/studentIdentity.ts#graduateProofCore` `src/server/core/studentIdentity.ts#graduateSubmitCheck` `src/server/studentDoorRoutes.ts#/api/public/me/graduate/proof` `src/server/studentDoorRoutes.ts#/api/public/me/request` `tests/student-journey-audit.ts`

### NFR-STU-041 Read caches in Masari

Inferred

The system shall read what repeats for every student from a temporary memory rather than the database on every visit: the department catalogue, plans and department list for 10 minutes, the offered-section index for 5 minutes, approved rules for 5 minutes, the count of students who sent wishes for 10 minutes, and recently opened sections for two minutes; requests from the demonstration sandbox shall neither enter nor read this memory.

Implemented · Should · Non-functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. A section added to the draft ← appears in «offered to me» within 5 minutes at most.
2. A request carrying the sh_demo_stu cookie ← is loaded from its sandbox every time and leaves no trace in the shared memory.

#### EVIDENCE

`src/server/studentDoorRoutes.ts` `src/server/notificationCache.ts#createTtlMemo`

### DR-STU-042 The civil ID fingerprint as the join key for everything about a student

The system shall link by the same fingerprint (not by the civil ID and not by an account): the profile document in studentProfiles (whose id is the fingerprint), case requests in studentNeeds (field fingerprint, which feeds «my cases», reading a case by number at /m and reuse in the old survey), radar tickets per (term, fingerprint), «did you register?» answers, and the merging of student lists in section requests (without a civil ID a fingerprint of «name:» + the name is used); in «did you register?» it shall check that the typed civil ID yields the profile's own fingerprint; the same identity key guards the session cookie and the proof token, and faculty signature fingerprints on their requests are derived from the same secret.

Implemented · Must · Data · The system (automatic), Student

#### RATIONALE

> Whoever replaces student sign-in with university accounts must keep the same fingerprint or migrate all these collections together, otherwise a student is cut off from the profile, cases and ticket.

#### ACCEPTANCE CRITERIA

1. A student who sent a request from the old survey and then created a Masari profile with the same ID ← the request appears in «my cases» with no manual link.
2. A valid civil ID that is not the profile's in the help request ← 403 civil-mismatch.

#### EVIDENCE

`src/server/studentDoorRoutes.ts` `src/server/core/studentIdentity.ts#surveyFingerprint` `src/server/sectionRequestsRoutes.ts` `src/server/routes/publicRequestRoutes.ts` `src/db/repository.ts#getStudentNeedHistoryByFingerprint` `tests/student-door-audit.ts` `tests/student-journey-audit.ts`

### IR-STU-043 Section request interface

The system shall serve section requests to holders of the registration-sheet permission through these routes: GET /api/section-requests?termId (the requests the reader may read in the term, newest first, each with its powers), GET /api/section-requests/compose (the campus courses with the number of Masari students who asked for each, for advising only), GET /api/section-requests/candidates (Masari students for a course with the name and only the last 4 digits of the civil ID), POST /api/section-requests to send, and POST /api/section-requests/:id/link, unlink, decline, withdraw, approve and register for the transitions, all without caching.

Implemented · Must · Interface · Department advisor, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. GET /api/section-requests without termId ← 400 «specify the term».
2. compose or candidates from anyone other than advising in the department scope ← 403.
3. candidates returns a 4-digit civilTail and never the full number.

**EVIDENCE**

`src/server/sectionRequestsRoutes.ts#/api/section-requests` `src/server/sectionRequestsRoutes.ts#/api/section-requests/compose` `src/server/sectionRequestsRoutes.ts#/api/section-requests/candidates` `src/server/sectionRequestsRoutes.ts#/api/section-requests/:id/link` `src/server/sectionRequestsRoutes.ts#/api/section-requests/:id/unlink` `src/server/sectionRequestsRoutes.ts#/api/section-requests/:id/decline` `src/server/sectionRequestsRoutes.ts#/api/section-requests/:id/withdraw` `src/server/sectionRequestsRoutes.ts#/api/section-requests/:id/approve` `src/server/sectionRequestsRoutes.ts#/api/section-requests/:id/register` `tests/section-requests-audit.ts`

### IR-STU-044 The registration sheet decision routes

The system shall write a course decision through POST /api/student-registration/:id/course-state and a whole-case decision (graduate request) through POST /api/student-registration/:id/case-state, guarding scope twice (on reading and on writing the specific record), accepting a note of up to 300 characters, and logging every decision in the activity trail with its label (committee approved, committee did not approve, registered, rejected); the rejection note or reason reaches the student's notices.

Implemented · Must · Interface · Schedule committee chair, Department head, Registration officer, College registrar

**ACCEPTANCE CRITERIA**

1. A view-only role writing ← 403 «this sheet is read-only for your role».
2. case-state on a request decided course by course ← 400; without side ← 400 «specify the side».
3. A course not in the student's request ← 400 «this course is not in the student's request».

**EVIDENCE**

`src/server/routes/studentRegistrationRoutes.ts#/api/student-registration/:id/course-state` `src/server/routes/studentRegistrationRoutes.ts#/api/student-registration/:id/case-state` `tests/student-registration-audit.ts` `tests/registration-flow-audit.ts`

### FR-STU-045 Seat directory and switching between seats

The system shall show the system administrator alone (GET /api/seats) every seat with its role, holder, deputy, team counts (active, pending, frozen, ended) and last event, and the campuses missing a college registrar grouped by college; shall show every seated user their seat (GET /api/seats/mine); and shall let someone sitting on more than one seat with the same instructor number (GET /api/seats/switch-options and POST /api/seats/switch) move without signing out to a seat they hold (from a holder session, and to a seat not awaiting a password change) or to a team where they are an active member, with a new session that deletes the previous one and the move written to the audit log; there is no switching in the demonstration environment.

● Implemented · Should · Functional · System administrator, Department head, Schedule committee chair, University registrar

**ACCEPTANCE CRITERIA**

1. switch to a seat not among the options ← 403 «you are neither the head nor a member of this team».
2. GET /api/seats by anyone but the system administrator ← refused; a «standard user» account does not appear as a seat.

**EVIDENCE**

`src/server/seatsRoutes.ts#/api/seats` `src/server/seatsRoutes.ts#/api/seats/mine` `src/server/seatsRoutes.ts#/api/seats/switch-options` `src/server/seatsRoutes.ts#/api/seats/switch` `src/server/seatsRoutes.ts#/api/seats/:id` `tests/seats-audit.ts` `tests/activity-trail-audit.ts`

### FR-STU-046 Seat passwords: recording the holder, first password and reset

The system shall let the system administrator record a seat's current holder as is (POST /api/seats/:id/holder) without a new password or sign-out, reissue the first password (POST /api/seats/:id/first-password) only for a seat whose holder has not yet chosen a password, and reset the holder's password (POST /api/seats/:id/password-reset) to a random 14-character password shown once and stored only as its hash, valid for 24 hours and to be changed on sign-in, ending the holder's sessions while members keep their links, limited to 12 operations per 10 minutes per administrator, and not actually applied in the demonstration environment; the first password expires 7 days after issue.

● Implemented · Must · Functional · System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. first-password for a seat whose holder chose a password ← 409 «hand over the seat if you want a new first password».
2. The thirteenth reset within 10 minutes ← 429.
3. After password-reset ← the seat ledger carries a password-reset event «a temporary password for twenty-four hours».

**EVIDENCE**

`src/server/seatsRoutes.ts#/api/seats/:id/holder` `src/server/seatsRoutes.ts#/api/seats/:id/first-password` `src/server/seatsRoutes.ts#/api/seats/:id/password-reset` `src/server/accountPassword.ts` `src/utils/seatAccessCard.ts` `tests/password-reset-audit.ts` `tests/first-password-room-loans-audit.ts`

### FR-STU-047 Team member management, deputy and member limits

The system shall let the seat holder (from their own password session, not as a member or deputy) or the system administrator: add a member (POST /api/seats/:id/members) — schedule committee members from department faculty and registration staff by typing with a scope inside the team's scope — without repeating a name or number or adding the holder; issue a new link that invalidates the previous one (.../members/:mid/link); reset access with a 24-hour link that signs the member's devices out (.../reset, active members only); mark «continuing» or «ended» (.../status), where ending invalidates the link, signs devices out and drops a deputyship; change a registration officer's scope (.../scopes); appoint a deputy from active members until a date (POST /api/seats/:id/deputy) and end it (.../deputy/end); and shall stop a member from signing, withdrawing, returning a schedule, changing the password and managing seats and users with code seat-member, except the deputy, who signs.

● Implemented · Must · Functional · Schedule committee chair, University registrar, College registrar, System administrator

#### ACCEPTANCE CRITERIA

1. A scope for an officer wider than the team's ← 400 «an officer cannot be given a wider scope than your team».
2. A member (not a deputy) sending POST /api/approvals/sign ← 403 seat-member; a deputy ← passes.
3. reset for a frozen member ← 409 «membership awaits your confirmation»; the thirteenth operation within 10 minutes ← 429.

#### EVIDENCE

`src/server/seatsRoutes.ts#/api/seats/:id/members` `src/server/seatsRoutes.ts#/api/seats/:id/members/:mid/link` `src/server/seatsRoutes.ts#/api/seats/:id/members/:mid/reset` `src/server/seatsRoutes.ts#/api/seats/:id/members/:mid/status` `src/server/seatsRoutes.ts#/api/seats/:id/members/:mid/scopes` `src/server/seatsRoutes.ts#/api/seats/:id/deputy` `src/server/seatsRoutes.ts#/api/seats/:id/deputy/end` `src/server/seatsRoutes.ts#seatMemberGuard` `tests/seats-audit.ts` `tests/password-reset-audit.ts`

### FR-STU-048 College registrar seats

The system shall let the system administrator create a «college registrar» seat for one or more campuses (POST /api/seats/college-registrar) with a typed holder name, create the missing ones for all colleges at once (POST /api/seats/college-registrars/all), adding a missing campus to its college's seat when one exists and otherwise creating one seat for the college, and change a seat's campuses (POST /api/seats/:id/colleges); the login is the college code + registrar (then 2, 3 on repetition) with the first password changed at first sign-in, no campus is covered by two seats, and an automatically named seat is renamed after its college when another campus joins, without touching a name the administrator wrote.

● Implemented · Should · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. A campus that already has a registration team ← 409 «already has a registration team».
2. colleges with an empty list ← 400 «the team keeps at least one campus»; a seat that is not a college registrar ← 404.

#### EVIDENCE

`src/server/seatsRoutes.ts#/api/seats/college-registrar` `src/server/seatsRoutes.ts#/api/seats/college-registrars/all` `src/server/seatsRoutes.ts#/api/seats/:id/colleges` `src/server/seatsRoutes.ts#ensureCollegeRegistrars` `tests/seats-audit.ts`

### FR-STU-049 Choosing the new holder at handover

The system shall choose the new holder (GET /api/seats/:id/handover-candidates?q) by search rather than a full list: two characters or more, at most 8 results, 40 searches per minute per user, from the seat's scope only (department faculty for the department head, schedule committee and advisor; college faculty for the dean and vice dean; all university faculty for the dean of registration; typing for registration seats), excluding seconded staff and the current holder, with the fields number, name, department and whether a mobile exists; shall ask for the mobile once when the instructor record has none; shall let the university registrar hand over a college registrar seat within scope; and shall refuse in the demonstration environment a holder handing over their own seat from their session.

● Implemented · Should · Functional · Department head, College dean, University registrar, System administrator

**ACCEPTANCE CRITERIA**

1. An instructor from another department for a department seat ← 400 «this instructor is not department faculty».
2. A one-character search ← no results; the forty-first search in a minute ← 429.
3. A self-handover in the demonstration ← 409 demo-self-handover.

**EVIDENCE**

`src/server/seatsRoutes.ts#/api/seats/:id/handover-candidates` `src/server/seatsRoutes.ts#/api/seats/:id/handover` `src/utils/handoverPick.ts` `src/utils/seats.ts#seatHolderSource` `tests/handover-pick-audit.ts` `tests/seats-audit.ts`

### FR-STU-050 Member link entry page and «remember this device»

The system shall serve GET /k/:token as the member entry page with no caching and no referrer, answering 410 with a clear reason for a revoked link, a frozen one (awaiting the new head's confirmation), an ended one or an expired one; POST /api/public/team/:token shall sign the member in with a session under their own name on the seat after matching the last 4 digits of the civil ID when recorded, clearing the failure counter, recording first and last entry and dropping the reset-link expiry; on «remember me» it shall issue a seat_dev cookie signed with the shared secret, bound to the link and the member for 30 days so the four digits are not asked on that device, which any new link invalidates; in the demonstration the visitor becomes the member in their own sandbox.

● Implemented · Must · Functional · Registration officer, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A reset link after 24 hours ← 410 «this link has expired».
2. Four wrong digits ← 400; the fifth attempt ← 423 and the link is revoked.
3. A valid seat_dev cookie for the same link ← the four digits are not requested.

**EVIDENCE**

`src/server/seatsRoutes.ts#/k/:token` `src/server/seatsRoutes.ts#/api/public/team/:token` `src/server/seats.ts#issueSeatDeviceKey` `src/server/seatTeamPage.ts` `tests/seats-audit.ts` `tests/password-reset-audit.ts` `tests/seat-access-card-audit.tsx`

### FR-STU-051 Routing Masari requests to the demonstration sandbox and leaving it

The system shall run every request to /api/public/me carrying an sh_demo_stu cookie beginning with demo_stu_ inside its sandbox, and when the sandbox is gone shall clear both cookies and continue the request against real data; shall drop expired sandboxes, and the oldest once the count reaches 150, when opening a new one; POST /api/public/me/exit with the demonstration cookie shall drop that sandbox and clear both cookies together; the fictional student's name and an all-zero civil ID are sealed so no real number is used, and a failure answers 500 with an Arabic text.

● Implemented · Could · Functional · Public visitor, The system (automatic)

**ACCEPTANCE CRITERIA**

1. Leaving the demonstration ← Set-Cookie clears sh_demo_stu and sh_session, and the sandbox is deleted.
2. An sh_demo_stu cookie not beginning with demo_stu_ ← ignored and the request runs normally.

**EVIDENCE**

`src/server/studentShowcase.ts#/api/public/me/exit` `src/server/studentShowcase.ts#registerStudentShowcase` `tests/student-showcase-audit.ts`

### FR-STU-052 Masari entry screens in the browser

Inferred

The Masari page shall clean the civil ID as it is typed (Arabic-Indic and Persian digits become Western digits, anything else is removed, at most 12 digits), show «N digits left» until it is complete, then check the check digit in the browser and enable «Continue» only for a valid number (Enter submits); on the code screen it shall accept 6 digits shown as masked dots, state the attempts left when 1 to 4 remain, show the pending-deletion notice with its date and offer «I forgot my code» and «another civil ID»; on the create screen it shall accept a full name of 6 to 80 characters after collapsing spaces with no digits and none of < > { } \, reveal the repeat-code field once the first code has 6 digits, say «the two codes do not match», require the «I agree to save my profile» box, and offer a «this is my personal device · stays signed in 180 days» switch that is off by default.

Implemented · Should · Functional · Student

#### ACCEPTANCE CRITERIA

1. 11 digits ← «1 digit left» with «Continue» disabled; 12 digits with a wrong check digit ← «this number is not valid — check your civil ID card».
2. A wrong code with attemptsLeft = 3 from the server ← the message is followed by «(3 attempts left)», and the code field is cleared and refocused.
3. The «Create my profile» button stays disabled until the name is valid, both codes are complete and equal, and the consent box is ticked.

#### EVIDENCE

`src/server/studentHomePage.ts#viewGate` `src/server/studentHomePage.ts#viewCode` `src/server/studentHomePage.ts#viewCreate` `src/server/studentHomePage.ts#civilValid` `src/server/studentHomePage.ts#digits`

### NFR-STU-053 Read and write deadlines in Masari and what the browser keeps

The Masari page shall abort a read after 15 seconds with «the network is slow, try again», never abort a write but, after 30 seconds without a reply, return the screen to the student with «we could not confirm your request went through; reopen the page and check before repeating it» while the original request keeps running and its late result is ignored; shall say «could not connect, check the internet and try again» on a network failure; shall fetch each home part from its own route /api/public/me/<part> when the aggregated request fails or the part came back with status 500 or more; and shall write nothing to browser storage other than the display preference masari-device.

Implemented · Must · Non-functional · Student

#### ACCEPTANCE CRITERIA

1. A write with no reply within 30 seconds ← an unknown:true result with the message above, and the write is not repeated automatically.
2. A home «ticket» part with status 504 ← GET /api/public/me/ticket is requested on its own.
3. No localStorage, sessionStorage or IndexedDB in the page script other than reading and writing masari-device.

#### EVIDENCE

`src/server/studentHomePage.ts#api` `src/server/studentHomePage.ts#homePart` `tests/masari-visual-audit.ts`

### FR-STU-054 Profile setup wizard in the browser: college, specialisation, plan, passed courses

The Masari page shall set up the profile in steps topped by a slim «step x of n» bar (counting only what will actually be shown: creating the profile, the college when the university has more than one, the specialisation, the plan when there is more than one, and passed courses): choosing the college from the list of all the university's colleges (chosen automatically when there is only one, a saved profile starting from its own college, and the college choice is pushed into the browser history so both the browser back button and the in-page «change» button return to the college list; old /me?track= links only narrow the list), then the specialisation by searching the chosen college's departments with tolerant Arabic matching on both sides (alef forms to bare alef, taa marbuta to haa, alef maqsura to yaa, no tatweel or diacritics); a catalogue that failed to load is not stored as empty but shown as an error with a retry button; then the plan (skipped when there is only one, and a plan with no courses cannot be chosen), then the passed courses ordered by level (first digit of the three-digit number × 100) then by code; when there is more than one level they are topped by a one-tap «where are you?»: «newcomer» clears all ticks and «finished up to level L» clears then ticks everything up to L with its prerequisites, after which the student adjusts freely; with nothing ticked the save button reads «start as a newcomer»; with more than 10 courses it offers search by name or code (same matching) and an all / passed / remaining filter, and «mark all / unmark all» per level; it shall not let a course be ticked before its prerequisites, shall remove with an unticked course what depends on it and count them in a message, and shall repeat bulk marking until stable; after an explicit confirmation it offers a transfer mode; changing the department clears the passed courses and the plan, while choosing the same plan again keeps the passed courses; on first setup the line «these are suggestions only, not final registration» with its three stages sits above the save button so saving acknowledges it (POST /api/public/me/ack) with no separate «got it» screen; it saves through PUT /api/public/me/profile with a collegeId that must match the department's college.

● Implemented · Should · Functional · Student

#### ACCEPTANCE CRITERIA

1. A course coded ARB 302 ← level 300; a course with no three-digit number ← level «general» (0).
2. Unticking a prerequisite two courses depend on ← both are removed with a message counting them.
3. A plan with 8 courses ← no search, filter or level shortcut.
4. GET /api/public/me/catalog failing ← the error with a «retry» button, not «no specialisation by that name», and the request repeats on press.
5. Searching the name with a different alef or taa marbuta spelling ← finds the department.
6. After choosing a college, the browser back button ← the college list.
7. «Finished up to 200» after ticking a 300 course ← only courses up to 200 stay ticked.
8. Choosing the same plan again ← the ticked passed courses stay; changing the plan ← they are cleared.

#### EVIDENCE

`src/server/studentHomePage.ts#arNorm` `src/server/studentHomePage.ts#ensureCatalog` `src/server/studentHomePage.ts#lvOf` `src/server/studentHomePage.ts#prog` `src/server/studentHomePage.ts#setupPassed` `src/server/studentHomePage.ts#setupPlan` `src/server/studentHomePage.ts#setupSection` `src/server/studentHomePage.ts#collegeBack` `tests/masari-door-ux-audit.ts` `tests/masari-ease-audit.ts` `tests/student-colleges-audit.ts`

### FR-STU-055 Home: three tabs and one primary card by phase

The Masari page shall show the signed-in student a header card (a ring of the share of plan units passed, a greeting by first name, the department, plan and passed units, the remaining units, the estimated terms to graduation, and the phase with its next date) and three tabs «Now», «My plan» and «My profile»; on «Now» it shall place one «your step now» card (review or write your wishes during wishes, open your suggested schedule during a round or the freeze once it is ready, «passed courses before?» when nothing is ticked — with the headline then reading «your plan ahead: N units» so it never nags twice — and «choose your plan again» with one button when the plan has no courses (archived, or a department without courses), which is never shown as complete in the headline, ring or terms to graduation; otherwise review your plan) and one primary card by phase (wishes then the ticket during wishes, «did you register?» then the ticket during a round, the ticket then wishes during the freeze, and the term journey otherwise), folding the rest under «More from Masari (n)», raising above it notices that carry an action or alert, and raising «request to the department» under the primary card when it applies; it shall reserve the awaited card's space with a skeleton until the home answer arrives (4 seconds at most); at 960px and wider outside phone mode it shall move the tabs into the sticky header and open «More»; an address ending in #plan opens «My plan». Colour carries a fixed meaning: green for done, gold for now, grey for not yet. The tabs carry full tab/tabpanel semantics (aria-controls and aria-labelledby) and arrow keys and Home/End move between them; a card that failed to load (network or server) stays a quiet «could not load … now» line with a retry button and never becomes the primary card. The phase date comes from until (the inclusive last day), so on the last day it says «until today» rather than the round's start.

● Implemented · Should · Functional · Student

#### ACCEPTANCE CRITERIA

1. Wishes phase ← primary order wishes then ticket; an unset phase ← the term journey.
2. A 1280px window with the device forced to phone mode (demo) ← not wide, and the tabs stay in the bottom bar.
3. Opening /me#plan ← the «My plan» tab opens.
4. profile.progress.totalUnits = 0 ← the headline asks to choose the plan again and «your step now» offers «choose my plan», never «you completed your plan».
5. The last wishes day ← «edit until the end of today».
6. GET cases returning 503 ← a «could not load «my cases» now» line with a retry button.

#### EVIDENCE

`src/server/studentHomePage.ts#laterUpdate` `src/server/studentHomePage.ts#nextStepInfo` `src/server/studentHomePage.ts#noPlan` `src/server/studentHomePage.ts#placeTabs` `src/server/studentHomePage.ts#primaryOrder` `src/server/studentHomePage.ts#quietFail` `src/server/studentHomePage.ts#rePickPlan` `src/server/studentHomePage.ts#viewHome` `tests/masari-desktop-audit.ts` `tests/masari-ease-audit.ts` `tests/masari-responsive-audit.ts`

### FR-STU-056 The «What's new?» and «My cases» cards on the page

Inferred

The Masari page shall show the first 3 notices with a «show all (n)» button, a gold counter of notices carrying an action or alert and a dot on the «Now» tab when any exist, shall hide the «write your wishes» notice while the wishes card is shown, and touching a notice shall take the student to its target, opening a folded section or tab and scrolling to it (the «complete your profile» target opens the passed-courses step); the «My cases» card shall show each case with its title and a status chip (green for approved, gold for committee-declined or rejected), the term, the case number, its courses with «removed from the request» or each course's status, and its detail.

● Implemented · Could · Functional · Student

#### ACCEPTANCE CRITERIA

1. 5 notices of which two are action ← 3 shown, a «show all (5)» button, a counter of 2 and a dot on «Now».
2. A case with status approved ← a green chip; rejected ← gold.

#### EVIDENCE

`src/server/studentHomePage.ts#loadNotices` `src/server/studentHomePage.ts#loadCases` `src/server/studentHomePage.ts#reveal`

### FR-STU-057 Wishes wizard and peer counter on the page

The Masari page shall collect wishes in three slides moved by buttons or a horizontal swipe of at least 60px (except on the unit picker): the number of units with a single picker — «−» and «+» buttons (56px), a large number and a draggable slider (44px) between wishUnitsMin and whatever university cap wishUnitsMax is (3…30) — starting from what the student wrote clipped to the limits, otherwise the cap; then optional constraints; then optional specific courses, up to 12, from the remainder whose prerequisites are met, with a folded list of locked courses and their reason; after saving it shall show a «received» chip that pulses once and the line «N students sent their wishes in your department, you among them» («you are the first in your department» when N = 1) when the server allows the count, otherwise «your wishes help your department open the sections students need»; it shall show the wishes read-only during the freeze and hide them outside these two phases. «My wishes» is one list: «add to my wishes» (in the suggestion) merges into it, and «save to my wishes» (the «My plan» basket and an edited suggested schedule) makes the student's edit the list, naming and asking about anything that would be removed before saving; after every save the «My plan» basket follows the same list.

● Implemented · Should · Functional · Student

#### ACCEPTANCE CRITERIA

1. Choosing a thirteenth course ← the message «up to 12 courses» and it is not added.
2. Course chip wording: 1 «one specific course», 2 «two specific courses», 3 and 11 follow the Arabic counting rule.
3. A 40px horizontal swipe ← the slide does not change.
4. A university cap of 21 on a 360px phone ← every picker target is 44px or more.
5. Wishes containing course X, then «save to my wishes» from a basket without X ← a «X will be removed from your wishes» sheet before any write.
6. «Add to my wishes» from the suggestion ← earlier wishes stay and the suggested ones are added.

#### EVIDENCE

`src/server/studentHomePage.ts#chosenCourses` `src/server/studentHomePage.ts#loadPlan` `src/server/studentHomePage.ts#renderWishes` `src/server/studentHomePage.ts#saveWishCourses` `src/server/studentHomePage.ts#unitPicker` `src/server/studentHomePage.ts#wishesDone` `src/server/studentMapUi.ts#kmSendWishes` `tests/masari-door-ux-audit.ts` `tests/masari-ease-audit.ts`

### FR-STU-058 Comparing the three plans and editing the suggested schedule in the browser

The Masari page shall show plans A «closest to your wishes», B «alternative sections if A fills» and C «safe minimum» in a fixed order that the score never reorders, and shall compute for each plan (in its edited form) a score: unit fit = max(0, 100 − |units − target| × 12), with the target being the wishes' units clipped to the server limits (wishUnitsMin and wishUnitsMax), otherwise the cap; when all times are visible, schedule fit = max(0, 100 − 22 × constraint violations (a start before 08:00 under «no morning», or at 13:00 or later under «no afternoon») − 9 × (days − 1) with «free day» or 3 × (days − 3) without it − 5 × whole gap hours), and score = 0.45 × unit fit + 0.45 × schedule fit + 0.10 × max(0, 100 − 14 × low-seat sections), otherwise score = unit fit; the best is the highest, then the fewest units, labelled «best for you», or «closest to your target» when times are not approved; it shall show the week as a grid or a list, touching a course shows its alternative sections on the grid (red when clashing), choosing a clashing section is refused with a message, «I don't want it» comes with an undo chip, «add a course» and «swap it» open the available pool marking courses locked by a prerequisite, clashing, or above the cap, and proposing to switch one other course's section when that removes the only clash; it shall warn «less than 12», list «what we could not place (n)» with reasons, and show «make these my wishes» only after an edit and while wishes are editable, saving the first 12 courses with the current unit target clipped to the limits, otherwise the cap. All of it is a personal preview that does not change the department schedule.

● Implemented · Should · Functional · Student

#### ACCEPTANCE CRITERIA

1. A 15-unit plan with a 15-unit target and no approved times ← score 100 labelled «closest to your target».
2. A new course clashing with exactly one course that has a free alternative section ← switching that section then adding is offered; clashing with two courses ← no offer.
3. An alternative section clashing with another course ← «this section clashes with another course in your plan; choose another section» and the plan does not change.

#### EVIDENCE

`src/server/studentHomePage.ts#tkPlanFit` `src/server/studentHomePage.ts#tkPlanCompare` `src/server/studentHomePage.ts#paintTicket` `src/server/studentHomePage.ts#tkPoolSheet` `src/server/studentHomePage.ts#tkFix` `src/server/studentHomePage.ts#tkSaveWishes` `tests/masari-ease-audit.ts`

### FR-STU-059 «What if?» and the graduation-terms estimate

The Masari page shall estimate the terms to graduation from the student's units per term: his wishes' target for the door term when written, otherwise the average termUnits rounded (13.5 by default), clamped between wishUnitsMin and wishUnitsMax; under «My plan» it shall offer a «what if?» calculator with unit buttons from wishUnitsMin to wishUnitsMax and an «add a summer term every year» switch worth about 6 units in every third term, stating the regular (and summer) terms and about the years = ceil(terms ÷ 2, or ÷ 3 with summer), with a loop cap of 60 terms, and «you have completed your plan's units.» when nothing remains; «how did we estimate graduation?» explains that it is an estimate that changes, not an official date.

● Implemented · Could · Functional · Student

#### ACCEPTANCE CRITERIA

1. 90 units at 15 without summer ← 6 terms, about 3 years; at 12 ← 8 terms.
2. 100 units ← 4 years without summer and 3 with it.
3. A student with no wishes and a department average of 13.5 ← 14 units per term.

#### EVIDENCE

`src/server/studentHomePage.ts#whatIf` `src/server/studentHomePage.ts#wireWhatIf` `src/server/studentHomePage.ts#defaultUnits` `src/server/studentHomePage.ts#termsLeft` `tests/masari-return-audit.ts` `tests/masari-ease-audit.ts`

### FR-STU-060 The «request to the department» sheets on the page

Inferred

The Masari page shall show the «course not opened» tile when the request context returns blocked courses, «two-course conflict» when proven conflict pairs exist, and «graduate / expected» when a graduation rule is saved (dimmed when units are short); the courses sheet shall allow up to 12 courses (a thirteenth is unticked with «you can choose up to 12 courses in one request»), and the conflict sheet the stuck course from the plan then the other only from proven pairs; sending shall require a reason of 3 to 600 characters and the box consenting to send the name and civil ID, after which each department's case number is shown and «My cases» refreshes; the graduate sheet shall show a meter of passed units against the threshold (with «(minimum)» when the threshold is not exact) and the term kind, ask for the request kind (a course clashing with field training, or a field prerequisite clashing with another prerequisite) and the graduation sheet as a PDF or image, refusing in the browser before upload anything over 14 MB, say when an earlier request exists that sending will update, and clear the file on proof-expired or proof-required.

● Implemented · Should · Functional · Student

#### ACCEPTANCE CRITERIA

1. A 15 MB file ← «the file is larger than 14 MB…» and nothing is sent.
2. A two-character reason ← the send button stays disabled.

#### EVIDENCE

`src/server/studentHomePage.ts#loadCaseRequest` `src/server/studentHomePage.ts#reqCourses` `src/server/studentHomePage.ts#reqGrad` `src/server/studentHomePage.ts#reqDone`

### FR-STU-061 The «did you register?» card on the page

The Masari page shall show the «did you register?» card when the question is ready and has courses, with «registered / stuck» buttons per course and stuck reasons (sections full, prerequisite does not allow, clash, other), sending «other» when no reason is chosen; it shall show the «I want my department to help with my case» box when a course is stuck and reporting is open, using the saved identity when the profile holds one and otherwise asking for the full name and civil ID without saving them in the permanent profile, keeping what was typed in them when the card is redrawn after each answer or reason click; it shall show the answers read-only once reporting is closed after an answer, and the case numbers after sending.

● Implemented · Should · Functional · Student

#### ACCEPTANCE CRITERIA

1. «Stuck» with no reason chosen ← reason = other is sent.
2. A profile with a saved identity ← help = true without the name and number fields.

#### EVIDENCE

`src/server/studentHomePage.ts#loadReport` `src/server/studentHomePage.ts#paintReport` `tests/masari-ease-audit.ts` `tests/masari-return-audit.ts`

### FR-STU-062 The «My profile» tab: correction, code, sign-out and deletion

Inferred

The Masari page shall show under «My profile» the name and masked civil ID with a «correct» button opening the name sheet (PUT /api/public/me/name), a «change code» sheet with the current code, the new code and the new code again (6 digits each) with an eye button that shows and hides the cells, a mismatch or a new code equal to the current one stated in place with saving disabled, and remember sent from the current session's own lifetime (state.session.remember) so a 180-day session is not shortened by the change, a «sign out» button (POST /api/public/me/exit) that returns to the entry screen and clears what is in memory, a «delete my profile» sheet that states the deletion is final and asks for the code to confirm (POST /api/public/me/forget), and the line «kept until <date>», adding «unless you come back to it» when the reason for keeping is inactivity.

● Implemented · Could · Functional · Student

#### ACCEPTANCE CRITERIA

1. keepsReason = inactive ← the line ends with «unless you come back to it».
2. The delete button stays disabled until the 6-digit confirmation code is complete.
3. Two different new codes ← «the new codes do not match» and saving stays disabled.

#### EVIDENCE

`src/server/studentHomePage.ts#viewHome` `src/server/studentHomePage.ts#sheetName` `src/server/studentHomePage.ts#sheetCode` `src/server/studentHomePage.ts#sheetForget`

### NFR-STU-063 Sheets, messages and accessibility

Masari sheets shall open a role=dialog, aria-modal dialog that puts focus on the first field and traps Tab inside it, closes with Escape or a touch on the backdrop (even when the browser fires no click after the touch) and returns focus to the element that opened it; a toast shall last 3.8 seconds with role alert for an error and status otherwise; switches use role switch and selectable rows role checkbox, working with Space and Enter.

Implemented · Should · Non-functional · Student

**ACCEPTANCE CRITERIA**

1. Shift+Tab on the first element of a sheet ← moves to its last element.
2. Touching the backdrop ← the sheet closes and focus returns to the button that opened it.

**EVIDENCE**

`src/server/studentHomePage.ts#sheet` `src/server/studentHomePage.ts#sheetKeys` `src/server/studentHomePage.ts#closeSheet` `src/server/studentHomePage.ts#toast` `tests/masari-responsive-audit.ts`

### FR-STU-064 Phone and desktop view switch in the demonstration, and the page shell

The Masari page shall show in the demonstration only a «demo · fictional» chip and a button switching between phone and desktop views, keeping the choice in the browser under masari-device; ?device=phone or ?device=desktop in the link forces the view and is removed from the address when switching; an unknown value or blocked storage falls back to «desktop» (following the window width), and the choice is not applied outside the demonstration; the demonstration also shows an interactive explanation of the three plans; the page carries robots noindex,nofollow, the manifest /me.webmanifest, an «about the system» link to /?journey=1&back=/me and the message «JavaScript must be enabled to open Masari» without script, and when it cannot open it shows the error with a «try again» button that reloads.

Implemented · Could · Functional · Student, Public visitor

**ACCEPTANCE CRITERIA**

1. ?device=desktop with masari-device = phone stored ← desktop view.
2. A real account with an old masari-device value ← no data-device attribute is applied.

**EVIDENCE**

`src/server/studentHomePage.ts#deviceMode` `src/server/studentHomePage.ts#applyDevice` `src/server/studentHomePage.ts#setTop` `src/server/studentHomePage.ts#studentHomePage` `src/server/studentHomePage.ts#boot` `tests/masari-desktop-audit.ts`

### FR-STU-065 Quick decision, filtering and export in the registration sheet

Inferred

The registration sheet screen shall offer writers a «quick decision» window showing one card after another with «x of y» and a progress bar: Enter approves, R (or its Arabic key) opens the rejection reason, Left arrow or Space skips, Escape closes, and a horizontal swipe of 80 px or more approves to the right and skips to the left; for someone holding both roles it shows committee items first and registration items once those are done; the committee can «approve all courses of this student» for everything awaiting it in one student's request; the default status filter is set once per viewer (committee «awaiting the committee», registration «awaiting registration») when it has students, and never reset after the user chooses; search works by case number, name or civil ID; export writes what is shown, with the same filter, to an .xlsx file named «registration sheet_<department>_<term>» in Arabic; the sheet re-reads 800 ms after a notify or work pulse and when the tab wakes, and tells teammates «working on this student» while the student's sheet is open and for 60 seconds after a decision; colleges can be filtered by the boys' or girls' campus; a «read only» chip shows for someone who cannot write, and every decision is disabled for a past term.

● Implemented · Should · Functional · Schedule committee chair, Registration officer, College registrar

#### ACCEPTANCE CRITERIA

1. A 60 px right swipe in quick decision ← no decision.
2. An account holding both roles with committee items pending ← registration items do not appear in quick decision until committee items are done.
3. Filtering «registered» then exporting ← the file holds only registered courses.

#### EVIDENCE

`src/components/StudentRegistration.tsx#QuickDecide` `src/components/StudentRegistration.tsx#approveAll` `src/components/StudentRegistration.tsx#exportVisible` `src/components/StudentRegistration.tsx#quickItems` `src/components/StudentRegistration.tsx`

### FR-STU-066 Quick-decision shortcuts and the reason sheet never write what was not meant

The «quick decision» window shall not read Enter, R or Space when focus is on a button, link, field or element with a button role, nor a key press from inside another dialog (not even Escape), nor any shortcut while the reason sheet is open over it, and shall show a decision's error inside itself. The reason sheet shall close only after a successful save, keeping the reason and the line on refusal with the error written in it, shall close on Escape, and shall start focus on the reason and keep it inside. The sheet shall not paint a late response for a previous department or term under the current one, shall state a refused read by its cause (an unsigned schedule) rather than «no requests yet», shall count journey stations and filters in one unit, students, and shall not count a course the student dropped as awaiting.

● Implemented · Must · Functional · Schedule committee chair, Registration officer, College registrar

#### ACCEPTANCE CRITERIA

1. Focus on «skip» and Enter ← no approval is sent.
2. With the reason sheet open over quick decision, Enter is not read by quick decision.
3. A refusal rejected by the server ← the sheet stays with the reason, the line and the error.
4. A student with two courses awaiting the committee counts 1 in «awaiting the committee».

#### EVIDENCE

`src/utils/quickDecideKeys.ts` `src/components/StudentRegistration.tsx` `src/components/StudentCaseStatus.tsx` `tests/advising-audit.ts`

### FR-STU-067 A section opened for a request that was then not approved

The system shall keep the link of the section opened by «approve + open section» (scheduleId and sectionCode) on the course decision when a later decision is written (registered, rejected, committee-rejected), shall show on the cell, once the decision becomes «committee-rejected» or «rejected», that the section was opened for this request, with an explicit button that confirms before removing it for holders of the schedule permission, and shall never remove it silently. Removal (POST /api/student-registration/:id/close-opened-section) is accepted for an in-scope request in a non-frozen term, only on a row whose origin reference is need:<request>:course:<course>, through the usual schedule deletion path (scope, lock, version snapshot, audit), after which the link is cleared from the decision and the decision itself stays.

● Implemented · Should · Functional · Schedule committee chair, Registration officer

#### ACCEPTANCE CRITERIA

1. Approve + open section then «registered» ← scheduleId and sectionCode remain on the decision.
2. Removal while the decision is still «awaiting registration» yields 409; a row whose reference is another request yields 409.
3. Removal without the schedule permission yields 403 no-schedule-permission.

#### EVIDENCE

`src/db/repository.ts` `src/server/routes/studentRegistrationRoutes.ts` `src/components/StudentRegistration.tsx` `tests/advising-audit.ts`

### FR-STU-068 The radar suggests a section for every course that needs a decision

The system shall offer any signed-in user GET /api/simulation/suggestions without browser caching, for the door term only and within the reader's scope (the administrator sees everything, others their departments, and the college and department picker narrows and never widens): for each course «requested but not offered» or «filling» in the latest radar run, at most 8 courses heaviest first, a suggested section (day and time, room, instructor and section number) built by the same section-opening engine from the department ladder clipped to the regulation ladder and lengths, an instructor who taught the course and has spare load, a verified room the department has taught in that fits the section, is of the room type the course was taught in and is not blocked by its booking policy, and a time free of clashes with the term week and the cohort; it shall choose among the engine's free times the one the most waiting students (those left without a seat because sections are full or absent) can take given their «no morning» or «no afternoon» constraint and without clashing with the courses they were seated in, then simulate the best three and return the one seating the most students in the course with the before and after counts; when no valid suggestion exists it shall return one reason in one line instead; it shall write nothing and return no student name or identifier.

● Implemented · Should · Functional · System administrator, Department head, Schedule committee chair, College dean, University registrar

#### ACCEPTANCE CRITERIA

1. A course awaited by three students with «no morning» and one busy every afternoon ← the suggested time is in the afternoon and fits 3 of 4.
2. No instructor who taught the course with spare load ← «no instructor who taught this course has spare load» and no suggestion; no room that fits ← «no free room of the right type fits the section»; every free time unsuitable for the waiting students ← «no clash-free time suits the waiting students».
3. A room taken by another department on Sunday 08:00 ← Sunday 08:00 in it is not suggested.
4. A request naming a past frozen term in termId ← ready=false with no suggestions.

#### EVIDENCE

`src/server/radarSuggestions.ts#registerRadarSuggestionRoutes` `src/server/radarSuggestions.ts#suggestForCourse` `src/utils/radarSuggestion.ts#radarCandidates` `src/utils/radarSuggestion.ts#waitingStudentsFor` `src/utils/radarSuggestion.ts#roomsOfRightType` `src/utils/sectionOpening.ts#readSectionOpenings` `src/server/simulationRoutes.ts` `tests/radar-suggestions-audit.ts`

### FR-STU-069 Suggestion effect and adoption from the radar

The «registration day radar» screen shall show below the readiness tiles, in «actual wishes» for the door term and when something needs a decision, a «the radar suggests the fix» panel with one card per course: its kind («requested but not offered» or «filling») and how many have no seat, the suggested section, how many waiting students its time suits, and «find a seat in the course» before and after; a «what changes for students?» button shall measure the effect through POST /api/schedules/what-if with kind opening and show «below 12 units» and «reaching 12 or more» before ← after with the impact card; «adopt the section» shall appear only to someone who can write the schedule in that scope (schedule permission and not view-only) and go through POST /api/schedules/apply-proposal with origin radar under every check of a manual save (conflicts, the regulation gate, scope and permission, term freeze and the approval cycle), while others see the suggestion read-only with a line naming the department whose schedule editor can adopt it; after adopting it shall re-read the radar, announce that the schedule changed and hide adoption of the remaining suggestions until the radar is recomputed; it shall state the reason for a missing suggestion in one line; and it shall work at 390 px width with one full-width card.

● Implemented · Should · Functional · Department head, Schedule committee chair, College dean, University registrar, System administrator

#### ACCEPTANCE CRITERIA

1. A reader without schedule write permission ← sees the suggestion and the line naming who adopts it, with no «adopt the section» button.
2. Adopting a section whose time clashes after the suggestion was built ← the save path refuses with the conflict and nothing is written.
3. After adopting a section ← «the schedule changed after these suggestions; they renew after the radar is recomputed» and the other adopt buttons disappear.

#### EVIDENCE

`src/components/RadarSuggestions.tsx` `src/components/RegistrationRehearsal.tsx`
`src/components/ApplyProposal.tsx#postScheduleProposal` `src/components/ApplyProposal.tsx#postWhatIf`
`src/styles/19-beauty-admin-registration.css` `tests/radar-suggestions-audit.ts`

### FR-STU-070 A recovery code for a student from their department

The system shall give whoever opens the «registration sheet» (permission 7 or 14, and not a pure viewing role) a «recovery code for a student» card: the staff member types the civil ID after seeing the civil card and POST /api/student-recovery/code issues a 6-digit code valid for 24 hours and for one use, whose issue voids any earlier code; it is refused when the profile's department is outside the staff member's scope unless they are the system administrator (a profile with no department yet may be issued by any staff member holding the permission), with a limit of 20 issues an hour per staff member; the profile keeps the code's fingerprint (HMAC with the server key), its expiry, who issued it and when, a log of the last 10 issues with their time of use, and an audit-log entry without the civil ID; the staff member sees only the last 3 digits, the stored name and the department to match against the card, and the code is shown large with «copy» and the time left.

● Implemented · Must · Functional · Department advisor, Schedule committee chair, Registration officer, System administrator

#### RATIONALE

> A civil ID is not a secret: whoever knows it can create the profile before its owner with a code of their choice. Only department staff see the card in person, so they are the simple, safe way to give the profile back to its owner.

#### ACCEPTANCE CRITERIA

1. Staff of another department for a profile with a department ← 403 out-of-scope; the dean and those without the permission ← 403; with no account ← 401.
2. The answer carries the code and civilMasked with the last 3 digits and never the full ID; the profile never holds the code itself.
3. A second issue ← replaced:true and the first code no longer works; the 21st issue in an hour by the same staff member ← 429.

#### EVIDENCE

`src/server/studentRecovery.ts#registerStudentRecoveryRoutes` `src/server/studentRecoveryWiring.ts#issuerOf`
`src/components/StudentRecoveryCard.tsx` `src/components/StudentRegistration.tsx` `tests/student-recovery-audit.ts`

### FR-STU-071 Taking the profile back with the department code

The system shall accept through POST /api/public/me/recover the civil ID, the department code and a new personal code (typed twice and checked as at creation): it replaces the code so its version changes and every old session ends (including those of whoever created the profile wrongly), clears the failure counter and any pending deletion request, voids the department code so it cannot be used twice, records its time of use, and issues a new session; a wrong department code counts on the profile's lock (5 ← 15 minutes) and on the code itself (5 failures void it so another must be asked for); an expired or missing code ← 400 no-recovery without counting.

● Implemented · Must · Functional · Student

**ACCEPTANCE CRITERIA**

1. After recovery ← the impostor's two sessions answer 401, the owner's session 200, the old code no longer opens and the new one does.
2. The same code a second time ← no-recovery; five failures ← recovery-void then 423.
3. A code issued 25 hours ago ← no-recovery.

**EVIDENCE**

`src/server/studentDoorRoutes.ts#/api/public/me/recover` `src/server/studentRecovery.ts#readRecovery` `src/server/studentRecoveryScript.ts#openRecover` `tests/student-recovery-audit.ts`

### FR-STU-072 «Keep my profile» for the session holder

The Masari page shall show a session holder whose profile has a pending deletion request (resetPending in the summary) a «your profile will be deleted» bar with its date and a «keep it» button that opens a code sheet, and POST /api/public/me/keep shall accept the current code, clear the request and restore the profile's normal lifetime; a wrong code counts on the profile's lock.

● Implemented · Should · Functional · Student

**ACCEPTANCE CRITERIA**

1. keep with a wrong code ← 401 bad-code; with the correct one ← resetPending:false and the deletion reason is no longer reset.

**EVIDENCE**

`src/server/studentDoorRoutes.ts#/api/public/me/keep` `src/server/studentRecoveryScript.ts#recoveryHomeHook` `tests/student-recovery-audit.ts`

### FR-STU-073 Subscribing to «my proposed timetable» in the phone calendar

The system shall give the student, from the «my proposed timetable» card, a «subscribe to my timetable in your phone calendar» button that opens a sheet with webcal:// for iPhone and Mac, Google and Outlook buttons, and «copy» for the link; the link comes from GET /api/public/me/calendar (with a session), stable per student, and its key is a seal (AES-256-GCM with an HMAC-derived IV) of the profile fingerprint with the code version that carries neither the civil ID nor the fingerprint in clear; GET /api/public/me/cal/<key>.ics shall serve, with no cookie, a calendar with VTIMEZONE Asia/Kuwait holding plan «A» of the student's ticket (sections whose department timetable is signed and that are not blocked) as weekly events (RRULE until the term's end) with code, name and section, with ETag and 304 like the teacher feed, updating by itself whenever the ticket changes, and an empty valid calendar before there is one; it shall answer 404 when the student changes or recovers their code, deletes the profile, or the key is tampered with.

● Implemented · Should · Functional · Student

**ACCEPTANCE CRITERIA**

1. Before the ticket ← 200 with no VEVENT and the name «جدولي المقترح — مساري»; after it ← a weekly event BYDAY=SU,TU in Kuwait time.
2. If-None-Match with the same tag ← 304.
3. After a code change ← the old link 404 and the new one 200; after deletion ← 404.

**EVIDENCE**

`src/server/studentDoorRoutes.ts#/api/public/me/cal/:file` `src/server/studentDoorRoutes.ts#/api/public/me/calendar` `src/server/studentRecovery.ts#calendarToken` `src/server/routes/publicCalendarRoutes.ts#sendCalendar` `src/server/studentRecoveryScript.ts#openCalSub` `tests/student-recovery-audit.ts` `tests/calendar-ics-audit.ts`

### FR-STU-074 Session expiry: one state that returns to the door without losing what was typed

The Masari page shall treat every 401 answer with code signed-out from /api/public/me/* (wishes, «did you register?», requests, passed courses, home cards) with one «your session ended» state whose «sign in again» button returns to the door; before it, it holds in page memory (with no browser storage) whatever was unsaved: the wishes draft and its slide, the «My plan» basket choice, unsaved passed ticks and the setup step; and it restores them after sign-in for the same profile only (by its creation date), saving the passed ticks first and then reopening the wishes draft as it was left.

● Implemented · Should · Functional · Student

**ACCEPTANCE CRITERIA**

1. Clearing the session cookie then «send my wishes» ← «your session ended» with «what you typed is kept», and nothing in browser storage.
2. Signing in to another profile on the same device ← nothing is restored to it and the held draft is cleared.

**EVIDENCE**

`src/server/studentHomePage.ts#sessionExpired` `src/server/studentHomePage.ts#rescueSave`
`src/server/studentHomePage.ts#rescueRestore` `src/server/studentHomePage.ts#api` `tests/masari-door-ux-audit.ts`

### FR-STU-075 The critical course in «My plan»

The Masari page shall mark with a «critical» badge (a flame and one word) every remaining compulsory course of the student's plan through which the remaining prerequisite chain (its depth + what follows − 1) is at least 2 and at least the student's terms to graduation T, where T is the larger of the unit estimate at the student's per-term units and the longest remaining chain; delaying it by a term delays graduation by a term. The badge shows on its card in «this term's plan», in «offered to me» and in the wishes list, with the line «delaying it delays your graduation by a term», and in the course sheet. Alternatives («one of») count by the shortest and bind none unless a single one remains, electives are not counted, and nothing shows when the plan has no approved prerequisites or contains a cycle.

● Implemented · Should · Functional · Student

**ACCEPTANCE CRITERIA**

1. Chain 1→2→3 with two terms by units ← all three critical and T = 3; with five terms ← none.
2. A plan without prerequisites ← no badge.
3. The function injected into the page matches the server function on 400 random plans.

**EVIDENCE**

`src/utils/criticalCourses.ts` `src/server/studentMapUi.ts#kmCrit` `src/server/studentHomePage.ts#critTag`
`tests/critical-courses-audit.ts`

### FR-STU-076 «Demand analysis» in the registration sheet

The registration sheet shall show, only to holders of the schedule screen (permission 7) and once a department and term are chosen, a collapsed «demand analysis» drawer that reads nothing until opened; once open it reads GET /api/schedules/demand for the department (or for every college of the department when the reader picks «all colleges of the department» and the department spans more than one college in scope) and re-reads every 10 seconds while open and the page is visible and in use. The drawer holds: the students' door (issuing a survey link valid 7, 30, 90 or 180 days through POST /api/share, copying it, showing and printing its QR code alone, and stopping it with a confirmation through DELETE /api/share/:id), the forecast from the previous term, new versus returning students, the four figures (respondents, requested courses, pairs that must not overlap, ready moves), «how many sections to open» with its visible arithmetic and placements, the note on courses without a «maximum students» ceiling, moves and swaps with impact preview and adoption, the 8 most requested courses, overlaps without a clean fix, and the course sequence. The drawer does not repeat the case register or the request journey, which the sheet already shows.

● Implemented · Should · Functional · Department head, Schedule committee chair, System administrator

#### ACCEPTANCE CRITERIA

1. An account without permission 7 ← the drawer is not shown and no /api/schedules/demand request is sent.
2. «Open it in the trial copy» and «preview the impact» ← a handoff entry is written to sessionStorage and the trial-copy editor opens in the Analytics Center; nothing is saved.
3. «Apply to the schedule» for a section or a move ← goes through POST /api/schedules/what-if for the preview then POST /api/schedules/apply-proposal with the same regulation prompt, then the demand is re-read.
4. The students' door is not shown for an archived term; printing the code hides the sheet and the figures so only the code and link remain on paper.

#### EVIDENCE

`src/components/DemandAnalysis.tsx` `src/components/StudentRegistration.tsx` `src/utils/intelligenceLink.ts#handOffToTwin` `src/components/ApplyProposal.tsx#postScheduleProposal` `src/components/ApplyProposal.tsx#postWhatIf` `src/styles/08-print.css` `tests/student-registration-audit.ts`

### FR-STU-077 Per-course seat balance and the effective balance beside each section

The advisor seat balance panel shall give a role that may configure it (and is not refused by the server, in an unfrozen term) a balance field for each course that has sections this term, where empty inherits the department balance, and shall show beside each section the effective balance and its source, section, then course, then department, in the same order the server applies, shall clamp the field at the server's limit (200), shall keep the revision stamp and unsaved-draft tracking, shall leave the server-owned applied-exceptions list untouched on save, and shall render course names with course tags.

● Implemented · Should · Functional · Department head, Schedule committee chair, System administrator

#### ACCEPTANCE CRITERIA

1. A course balance of 12 and a section with none of its own shows «balance 12 from the course»; with its own section balance it shows «from the section».
2. A course with no balance ← «from the department» with the global balance.
3. An advisor who cannot configure sees no balance fields.

#### EVIDENCE

`src/components/AdvisorSeatsPanel.tsx` `src/utils/advisorSeats.ts#quotaResolve` `src/styles/61-advisor-seat-quota.css` `src/server/routes/offeringRoutes.ts` `tests/advisor-seat-quota-audit.ts` `tests/colleagues-advising-registration-audit.ts`

### FR-STU-078 Arrow-key navigation in advising tabs

The «registration roster» and «registration radar» tabs shall follow the WAI-ARIA tabs pattern: a tablist of tabs with roving focus (one tab stop), arrow keys moving in right-to-left order (Left is next), Home and End to the ends, with manual activation because the tabs lead to separate screens: arrows move focus, Enter or Space opens the screen and focus returns to its active tab; both screens shall carry a tabpanel tied to the tab (aria-controls and aria-labelledby); and the tab groups inside the radar (its sections and analysis source) shall also move by arrows with immediate activation since they switch the view in place.

● Implemented · Should · Functional · Department advisor, Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Left arrow on the roster tab moves focus to «registration radar» without opening it; Enter opens it.
2. Home and End go to the first and last tab.

**EVIDENCE**

`src/components/RegistrationTabs.tsx` `src/utils/arrowChoice.ts` `src/components/RegistrationRehearsal.tsx` `src/components/StudentRegistration.tsx` `src/components/registration-tabs.css` `tests/advisor-seat-quota-audit.ts`

### FR-STU-079 Live registration day: an urgency-ordered section board with a ready alternative

The registration radar shall show a «registration day» board to whoever may read the radar: open and prominent while a registration round is running in the door term's phases, otherwise opened by a «registration day» button. It lists the reader's in-scope sections (isPowerUser or isScopeAllowed; the college and department picker narrows, never widens) ordered by urgency (full with waiting, full, filling, open) with a coloured state: open, filling from 80%, full at 100%, and who is waiting as a count with no student names or ids. Numbers come only from the app's own sources (students' «did you register?» answers, section requests and the «registered» marks in the registration sheet, and the radar simulation), each dated; the board states «last update of the numbers: … · source: …», warns when a number is stale (over three hours in a round, two days otherwise) and says plainly when the freshest source is the simulation rather than a real count; there is no link to the official registration system. For each full or filling course with waiting students it shows the same suggested alternative card («the radar suggests the fix»), and «adopt the section» stays on apply-proposal for those who edit the department schedule only. It refreshes on the live pulse (a notification or a schedule save) rather than polling, and has no board for a frozen past term. Route: GET /api/simulation/live-board guarded by requireAuth then radarReader.

● Implemented · Should · Functional · Department head, Schedule committee chair, College dean, University registrar, System administrator

**ACCEPTANCE CRITERIA**

1. A round is running ← the board is open and prominent; otherwise only the «registration day» button shows.
2. A section 30 of 30 ← «full»; 29 of 30 ← «filling»; 10 of 30 ← «open»; no capacity ← «unknown» with no guessed ratio.
3. The freshest source is only the simulation ← the header says these are simulation numbers, not real registrations; numbers older than the limit ← a staleness warning.
4. The route payload has no student names, fingerprints, civil ids or id lists.
5. An account without the schedule permission (7) or outside the course's department ← sees the alternative but not «adopt the section»; a frozen past term ← no board.
6. A student's «did you register?» answer, a «registered» mark or a schedule save ← the board is re-read on the pulse after two seconds.

**EVIDENCE**

`src/utils/liveBoard.ts` `src/server/liveBoard.ts` `src/components/LiveRegistrationBoard.tsx` `src/server/simulationRoutes.ts` `src/server/radarSuggestions.ts` `src/server/studentDoorRoutes.ts` `src/styles/62-live-board.css` `tests/live-board-audit.ts`

### FR-STU-084 Every university college works in Masari

The system shall make Masari follow the student's own college rather than one fixed college: the student chooses a college, then a department, then a plan, with the lists built from the colleges, departments and plans data and no written names or identifiers; PUT /api/public/me/profile stores the college of the chosen department and rejects (400 bad-college) a department that does not match the sent collegeId; and the offered list, peer counts, map and ticket are built from the student's own department and college only, so a student of one college never sees another college's departments, courses or student counts.

● Implemented · Should · Functional · Student

**ACCEPTANCE CRITERIA**

1. A student of a college such as nursing or law ← creates a profile, picks a department and plan, saves wishes and sees only their own college's offered list.
2. Two students of two colleges ← neither sees the other's department, courses or peer counts.
3. collegeId that does not match the department ← 400 bad-college.

**EVIDENCE**

`src/utils/studentCatalog.ts` `src/server/studentDoorRoutes.ts#/api/public/me/catalog`
`src/server/studentDoorRoutes.ts#/api/public/me/profile` `src/server/studentHomePage.ts#setupSection`
`tests/student-colleges-audit.ts` `tests/student-door-audit.ts`

### FR-STU-085 Small fixes to sign-out, privacy, reminders and wishes

The Masari page shall show the door after «sign out» only once the server has confirmed the exit; if the request fails or drops the student stays signed in and sees «sign-out did not complete, check the connection and try again»; it shall say that the name and civil ID typed for a department help request are stored sealed, shown only in that request and deleted with the profile; it shall show «remind me of my registration date» whenever the student's turn and date are known even when lecture times are hidden; PUT /api/public/me/wishes shall write the last-modified time and the profile lifetime like other writes (so the «you edited your profile after the last calculation» badge is truthful); and GET /api/public/me/wishes-count shall send n and of only where showing them is allowed (a department with 10 or more profiles).

● Implemented · Should · Functional · Student

**ACCEPTANCE CRITERIA**

1. Sign-out while offline ← the student stays signed in with a clear message.
2. Saving wishes ← a newer updatedAt and a computed deleteAt.
3. wishes-count in a small department ← no n and no of.

**EVIDENCE**

`src/server/studentHomePage.ts#doExit` `src/server/studentHomePage.ts#paintTicket`
`src/server/studentDoorRoutes.ts#/api/public/me/wishes` `src/server/studentDoorRoutes.ts#/api/public/me/wishes-count`
`tests/student-colleges-audit.ts` `tests/masari-return-audit.ts`

### FR-STU-080 Your next lecture

The Masari page shall show at the top of the Now tab one «Your next lecture» card with a live countdown, the course name and section, built from plan A of the proposed timetable in Kuwait time (Sunday first, Friday and Saturday off), drawn only when a timetable exists and the term is running; otherwise nothing renders. Tapping opens the week grid. The calculation is one pure function injected into the page as text.

● Implemented · Should · Functional · Student

**ACCEPTANCE CRITERIA**

1. Sunday 07:20 and a lecture at 08:00 gives «in 40 minutes»; Thursday evening gives Sunday 08:00; after the term ends no card.

**EVIDENCE**

`src/utils/criticalCourses.ts` `src/server/studentMapUi.ts#kmCrit` `src/server/studentHomePage.ts#critTag`
`tests/critical-courses-audit.ts`

### FR-STU-081 Reminders that arrive by themselves (device opt-in)

The student shall enable phone notifications with one tap «Enable notifications» in «My profile» (offered once after the profile is complete) and stop them with «Stop notifications»; the device subscription (up to five devices) is stored on the profile keyed by the fingerprint, never the civil ID, and is voided by a code change, recovery or profile deletion; no civil ID or fingerprint appears in any response or message. Without VAPID keys or with an explicit off switch the button is disabled with a short reason and nothing throws.

● Implemented · Should · Functional · Student

**ACCEPTANCE CRITERIA**

1. A subscription endpoint outside push services gives 400; without keys 503 with push-off.
2. The STUDENT_PUSH=off variable switches student notifications off explicitly.

**EVIDENCE**

`src/utils/criticalCourses.ts` `src/server/studentMapUi.ts#kmCrit` `src/server/studentHomePage.ts#critTag` `tests/critical-courses-audit.ts`

### FR-STU-082 Reminder messages: once per student per term

A scheduled sender (hourly, 08:00 to 21:00 Kuwait) shall send three short messages without names: «Wishes close today», «Your proposed timetable is ready» and «Your registration starts tomorrow», each once per student per term using an atomic marker written before sending so two server instances do not repeat it, only to the profile owner's devices, in bounded batches under a database lock, without delaying startup; subscriptions answered 404 or 410 are removed.

● Implemented · Should · Functional · Student

**ACCEPTANCE CRITERIA**

1. Two instances on the last wishes morning give one message per device; someone who subscribes with the timetable already visible gets no «ready».

**EVIDENCE**

`src/utils/criticalCourses.ts` `src/server/studentMapUi.ts#kmCrit` `src/server/studentHomePage.ts#critTag` `tests/critical-courses-audit.ts`

### FR-STU-083 Share with your advisor

The student shall generate from «My profile» a read-only link and QR code valid for 24 hours (192 random bits, only its hash with the expiry stored on the profile; a new link voids the previous one, «Stop sharing» revokes it at once; a code change, recovery or profile deletion voids it). The advisor opens /me/share/:token and sees the department, college, plan sheet, progress ring, estimated terms to graduate, completed courses, the term's wishes and the proposed timetable week if any, with no name, civil ID, code or contact data, stating «Read only · sharing ends at …».

● Implemented · Should · Functional · Student

**ACCEPTANCE CRITERIA**

1. One student's locator with another's secret gives 404 with no data; after 24 hours unavailable; the page carries no name, civil ID or fingerprint.

**EVIDENCE**

`src/utils/criticalCourses.ts` `src/server/studentMapUi.ts#kmCrit` `src/server/studentHomePage.ts#critTag` `tests/critical-courses-audit.ts`

**IR-STU-084** **Extras routes and the public share page**

The system shall serve with the student session GET /api/public/me/extras, POST /api/public/me/push, push/off, push/test and push/offered, and POST /api/public/me/share and share/off; and serve GET /me/share/:token as a server-rendered public page without script, with Cache-Control no-store, X-Robots-Tag noindex, Referrer-Policy no-referrer and a strict CSP, rate-limited per address, answering one 404 for every expired, revoked or invented token.

Implemented · Should · Interface · Student

**ACCEPTANCE CRITERIA**

1. Beyond the limit 429 with no data.
2. The STUDENT_SHARE_PER_MINUTE variable changes the share page limit per address.

**EVIDENCE**

`src/utils/criticalCourses.ts` `src/server/studentMapUi.ts#kmCrit` `src/server/studentHomePage.ts#critTag` `tests/critical-courses-audit.ts`

## 3.11.6 Algorithms

ALG-STU-01 · Student and advising services

**Deterministic**

### Passed-course closure over prerequisites

*Which of the courses a student marks as passed can be kept, given that every passed course requires its own prerequisites to be passed as well?*

1. Start from the declared set and compute passed units from course credits.
2. Scan the set: the first course whose «all» prerequisites, one of each «any-of» group, or minimum units are not satisfied is dropped, and units are recomputed.
3. Repeat until a full pass drops nothing (fixed point), so everything built on a dropped course falls with it.
4. Courses a transfer student declared equivalent are exempt and still unlock their dependants.

**Inputs**

Courses declared passed, the sheet's prerequisite rules, course credits, and declared equivalents.

**Output**

Two lists: kept and dropped.

The same closure runs in the browser and on the server, and the server does not trust the page; an exemption never extends beyond the declared equivalent.

`src/utils/passedClosure.ts#closePassed` `src/utils/curriculumRules.ts#unmetPrereq` `src/server/studentDoorRoutes.ts` `tests/student-map-audit.ts`

`FR-STU-004`

ALG-STU-02 · Student and advising services

## Graduate plan choice and graduation-sheet proof

Deterministic

*Which plan (old or new) is this graduate measured against, and does the uploaded graduation sheet prove eligibility?*

1. The sheet's «programme» row must match the selected department name; a missing programme row refuses the request.
2. One live plan → that plan. Otherwise the sheet's «required units» must equal exactly one live plan's degree total: the direct reading first, then nearby figures between 60 and 300, excluding the passed-units figure.
3. If the total is unreadable but every live plan has the same rule, the result is the same; otherwise the request is refused with a written reason: unreadable, unknown total, ambiguous, or rule not approved.
4. Passed units: the direct reading, otherwise bounded candidates between 60 and the plan's degree total, excluding the total itself, taking the largest remaining.
5. The result is compared with the plan rule's graduation threshold for a regular or summer term.

**Inputs**

Facts read from the graduation sheet (programme, required and passed units and their candidates), the department's live plans and their approved graduation rules, and the term name.

**Output**

The chosen plan, its rule and the evidence used, or a coded refusal with a reason; the passed units and eligibility.

No student is measured against another plan's rule and nothing is verified without a saved rule; a rule derived from the department name is only a seed suggestion.

Range for nearby total figures: 60 to 300

Seed suggestions (saved before use): 130 units → 107 regular, 109 summer; 132 → 109 and 111; 134 → 111 and 113

`src/utils/graduationPlan.ts#choosePlanForSheet` `src/utils/graduationPlan.ts#sheetTotalEvidence`
`src/utils/degreeRules.ts#suggestedDegreeRule` `src/server/core/studentIdentity.ts#graduationCandidatesForSection`
`tests/curriculum-graduation-audit.ts` `tests/student-journey-audit.ts`

FR-STU-013 FR-ENG-004

ALG-STU-03 · Student and advising services

## Registration rehearsal and semester readiness

Search and ranking

*If students register on the offered sections, who reaches 12 units or more, which sections fill up, and how ready is the semester?*

1. Offerings are audited first: valid identity, a positive integer capacity, valid non-overlapping meetings, a unique id; flawed ones are excluded and their course marked uncertain.
2. Per student: remaining need from the approved plan; candidates = remaining compulsory courses, enough of each unfinished elective group, then wishes; priority = (1000 if required, else 400) − 20 × level + 8 × courses it unlocks + 150 if wished.
3. Ordering by need: students within 36 units of graduating first (2000 − remaining), then compulsory units, with a stable hash tie-break; students are then split evenly across registration windows.
4. Plan A: depth-first backtracking over course bundles (a course with its co-requisites) and their sections on a shared virtual seat ledger, maximising units up to the target; beyond 2,000 visited states the student becomes «unknown» rather than guessed.
5. Plans B (different sections) and C (a safe 12-unit minimum of required courses) are fall-backs that reserve no seat.
6. Each student falls into a band: 15+, 12–14, graduating below 12, below 12, unknown; readiness = 60% × share reaching 12+ + 40% × share of demand that found a seat.

**Inputs**

Student profiles (passed courses, wishes, constraints), offered sections with meetings and capacities, approved plan rules, course credits, and the number of windows.

**Output**

A ticket per student with three plans and a window, the seat ledger, unmet demand by reason, the band distribution, and the readiness score and tier.

No database, clock or randomness: the same inputs give the same tickets; seats are virtual and nothing is reserved.

Units: minimum 12, default 15, maximum 18 · A seat is «tight» when less than 10% of capacity remains · Search cap of 2,000 states per student · Readiness: «ready» from 85, «needs attention» from 65, and weak when «unknown» exceeds 20%

`src/utils/registrationSim.ts#simulateRegistration` `src/utils/registrationSim.ts#auditSimOfferings` `src/utils/semesterReadiness.ts#semesterReadiness` `src/server/simulationData.ts` `tests/registration-sim-audit.ts` `tests/registration-causes-audit.ts`

FR-STU-027 FR-DSH-014

ALG-STU-04 · Student and advising services

## Shortfall cause attribution by scenario comparison

Deterministic

*Why does this student not reach 12 units: full sections, time conflicts, the student's own constraints, or a prerequisite?*

1. The registration rehearsal runs for students with wishes as the baseline, collecting those below 12 units.
2. It is re-run four times, each lifting one constraint for everyone: capacity, conflicts, student constraints, or prerequisites.
3. For each short student, record which lifts bring them to 12 units or more.
4. Exactly one → that cause; more than one → «shared»; none → «not offered or data»; totals add up to the short count.
5. Counts are grouped per college and department, offerings rejected by the audit are listed as incomplete data with a link to their row, and the result is cached for 10 minutes per source fingerprint.

**Inputs**

The same registration-rehearsal inputs for the term, and the reader's scope.

**Output**

Per scope: students, short students and the cause distribution; the dominant cause; and the list of offerings with incomplete data.

A scenario comparison shown as an estimate, not an absolute causal claim; counts, never names.

4 relaxation scenarios · Result cached 10 minutes; up to 5,000 data-quality items held

`src/utils/registrationCauses.ts#explainShortfalls` `src/utils/registrationCauses.ts#dominantCause` `src/server/radarInsight.ts#radarInsightFor` `tests/registration-causes-audit.ts` `tests/radar-insight-audit.ts`

FR-STU-029 FR-INT-020

ALG-STU-05 · Student and advising services

**Advisor seat cap and section-request capacity**

Deterministic

*How many extra seats may advisors add in each section, and how is a section request's count spread over its linked sections?*

1. Extra balance: the section's value, else the course's, else the global value (most specific wins), each clamped to 0–200.
2. Hard cap = min(base capacity + balance, the physical hall capacity when known).
3. Adding n seats (1–50) is all or nothing: refused when remaining < n or, under fair split, when the advisor's total would exceed ⌊extra ÷ advisors⌋; it runs inside a single atomic read-write transaction.
4. A section request's count is spread as ⌈count ÷ sections⌉ (up to 200) over all linked sections and recomputed on every link or unlink; a capacity written by an administrator is left untouched.
5. The request stage is derived, never stored: sent → opened → approved → registering → registered, or closed.

**Inputs**

Balance settings (global/course/section, fair split, advisor count), the section ledger and its adds, hall capacity, and the request's linked sections.

**Output**

Seat state (cap, remaining, fair share, ring tone), the add result with its message, written section capacities, and the request stage.

No student is added beyond the physical seats whatever the balance, two advisors acting together cannot exceed the cap, and the result does not depend on linking order.

One add: 1 to 50 seats | Red at zero remaining; yellow at 30% or less, or 2 seats or fewer

`src/utils/advisorSeats.ts#seatState` `src/utils/advisorSeats.ts#tryAddSeats` `src/utils/advisorSeats.ts#quotaFor` `src/utils/sectionRequests.ts#planCapacities` `src/utils/sectionRequests.ts#capacityShare` `src/utils/sectionRequests.ts#stageOf` `tests/section-requests-audit.ts`

FR-STU-021 FR-STU-022 FR-STU-024

## 3.11.7 Edge cases

### ⚠ Changing the code during an open session

**Scenario** A student changes the code on one device while another stays open.

**Behaviour** The code version in the cookie no longer matches the profile, so the other device receives 401 signed-out and must sign in again.

### ⚠ A lock raised while a correct code is being verified

**Scenario** Parallel requests: failures reach the fifth while a correct code arrives.

**Behaviour** The lock stays and is not erased by the later success, returning 423 locked.

### ⚠ A student removes a course after a decision

**Scenario** A student resubmits a request without a course registration already recorded.

**Behaviour** The request is updated, not replaced: the id and case number remain, and the decision stays marked «cancelled by the student after registration» so no held seat goes unnoticed.

### ⚠ Two people approving the same section list at once

**Scenario** Two committee members press approve on the same request at the same moment.

**Behaviour** The write is atomic with the rev stamp: one succeeds and the other gets 409 refresh-and-retry without any change.

### ⚠ A new term saved before the current term's requests close

**Scenario** Dates for a newer term are saved while the current term still has an open round.

**Behaviour** The door switches at once to the newer term as the newest unfinished one; the remedy is to move the current term's request close earlier or to set the new term after it closes.

### ⚠ A registration officer meeting an unsigned schedule

**Scenario** A decision is written on a course of a department whose schedule is unsigned while the other course in the request belongs to a signed one.

**Behaviour** Signature is checked for the requested course's own department, not the first department owning the request, so it returns 409 not-signed even if the other department has signed.

### ⚠ Setting STUDENT_CASE_SECRET to a new value after go-live

**Scenario** The operator sets STUDENT_CASE_SECRET to a value differing from the secret stored in systemSecrets/student-case-identity-v1, thinking it rotates the key.

**Behaviour** The variable is ignored, the stored one stays and the [student-case-secret] error is printed, so fingerprints, seals and sessions stay valid. Were the stored secret deleted, every fingerprint would change: no student would find their profile or cases, every session would end, and sealed names and IDs would become unreadable.

## 3.11.8 Standing owner decisions

- Course numbers are always seven digits in everything a student or staff member sees; the stored three-digit code and AdCourseId are never shown.
- The design of printed reports and sheets (the registration sheet and the plan sheet) is not changed; fixes go into data, not layout.
- Masari is always light and never follows the device's dark mode, and the word «radar» never appears in student-facing text.
- The seat is fixed and the person changes: no new account is created per person.
- What the student sees is an estimate, not a reservation or official registration, and every screen says so.

↑ Contents

3.12 · INT

# Analytics Center and Guide

Deterministic schedule readings, next-term forecasts, a natural-language query layer that never executes, and an in-app Guide that runs in the browser.

| 84 | 100% | 52 | 43 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.12.1 Overview

The Analytics Center is the screen where the department head, the schedule committee chair and the dean read the state of the schedule: its quality, approval blockers, room pressure, instructor loads and campus movement, and then try the effect before deciding. The module also holds the next-term forecast, the academic decision lab and the live schedule layer. In the natural-language query layer the Gemini service reads the sentence and proposes calls from five allowed functions only; the calls are then sanitised and executed on the server with deterministic logic inside the user's scope, so execution always passes through the deterministic validators and an explicit confirmation by the user. The Guide is an in-app assistant that understands questions in standard Arabic and the Kuwaiti dialect, shows the steps and walks the user through a tour on screen, and sends nothing out of the browser.

Department head · Schedule committee chair · College dean · Vice dean for academic affairs · System administrator · Root administrator · Standard user · Public visitor · The system (automatic) · External service

## 3.12.2 User journeys

**Schedule committee chair** — **From a sentence to a confirmed move**

1. The committee chair types in the query box: move 101 to Wednesday 11:00.
2. The server sends Gemini only the text, the scope and the names of the five allowed functions.
3. The proposed calls are sanitised; if the service returns nothing valid the server parses the sentence with its own rules.
4. The server runs the simulation, conflict check and regulations check against the real schedule without writing.
5. The screen shows a before/after preview, the schedule quality and the reason for refusal if a save blocker exists.
6. If the preview can be applied the user confirms explicitly, and the move goes through the usual move path and its validators.

### Department head — Reading the schedule and trying a movement fix

1. The department head opens the Analytics Center and picks the department and term.
2. They read the quality out of 100, the blocker count, the largest gap, the day balance and the crowding map.
3. They open the movement reading and find an instructor moving between two buildings in less time than needed.
4. The system offers a room move or a room swap, and shows only what does not raise movement risk for any other instructor.
5. They turn the proposal into a draft for review; the published schedule does not change before approval.

### Standard user — Asking about a task, then an on-screen tour

1. The user types in the Guide a Kuwaiti-dialect question about moving a lecture to another room.
2. The Guide normalises the text and matches it against the knowledge bank inside the browser with no network request.
3. It shows short standard-Arabic steps, four at most, and only what the user's role can reach.
4. The user presses the show-me action and the tour moves to the screen and highlights the element.
5. If the element does not appear the tour says so and stays alive; it closes only by the user's hand.

### Root administrator — Reviewing where users struggle

1. The root administrator opens unanswered questions in the Guide to see the phrasings it did not understand.
2. They read the struggle points ranked by failure and help rate over the last 30 days against the previous 30.
3. If struggle rises after a new release they change the interface itself rather than the explanation.

### 3.12.3 Diagrams

**From sentence to safe preview**

Gemini reads the sentence and only proposes; execution is deterministic and bound to the user's scope.

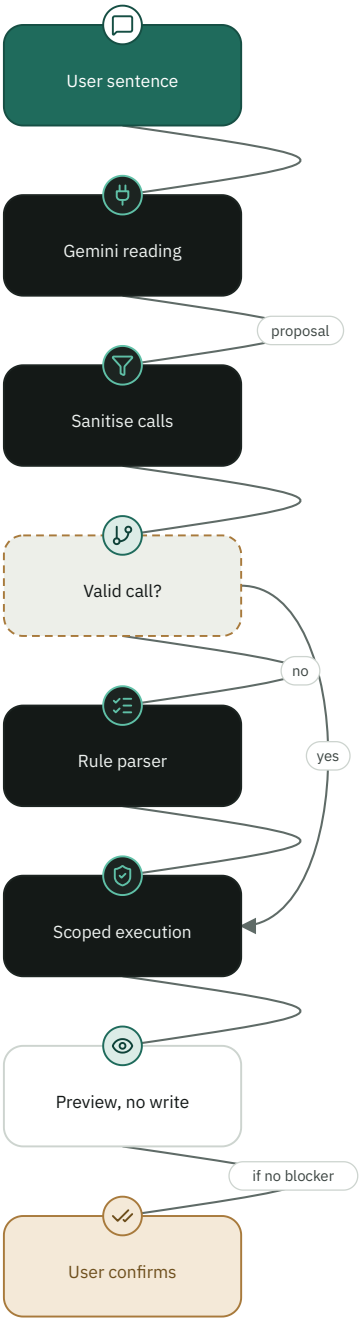

## How the Guide understands a question

Every stage runs in the browser; permissions apply before ranking.

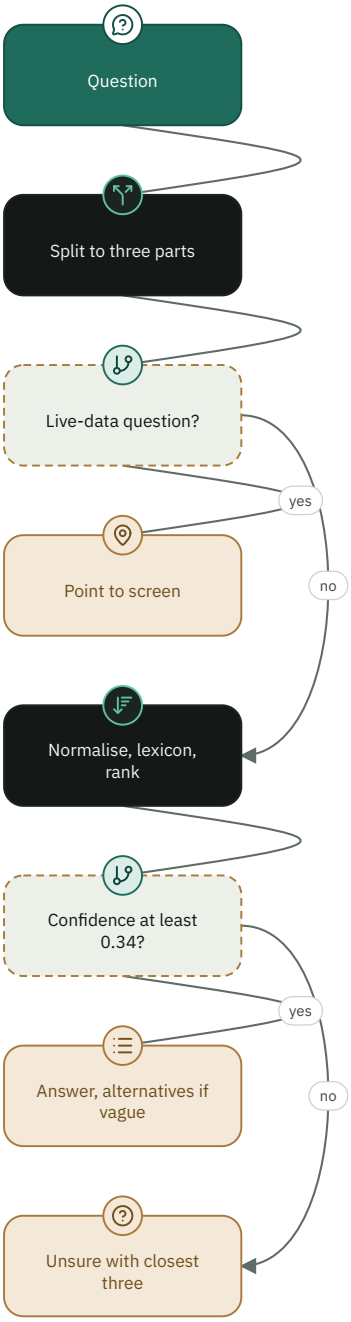

## Guide tour states

A tour never disappears silently: element shown, waiting for an action, or an explicit not-found.

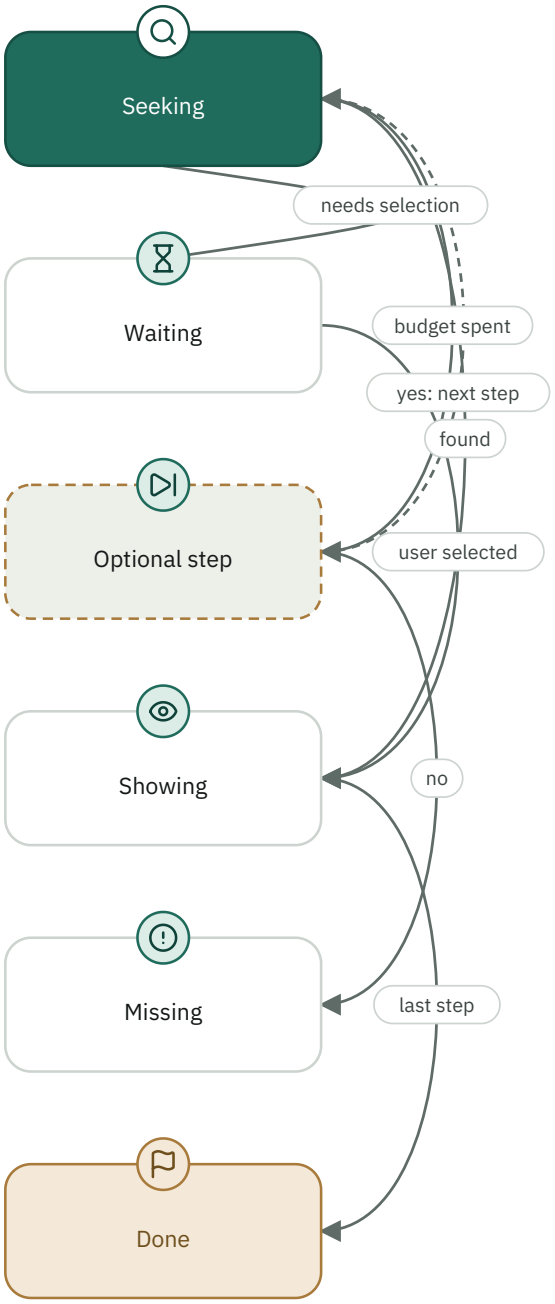

**Forecast confidence gate**

No one-click action unless confidence is medium or higher.

### 3.12.4 Screens

**Analytics Center**

Three scenes: understand, try and approve; tabs for quality, rooms, instructors, data health and forecast.`src/components/IntelligenceWorkspace.tsx`

**Decision scope bar**

Choose college, department and term; shows a read-only pill when offline.`src/components/IntelligenceContextBar.tsx`

**Analysis scope switch**
This college only, or every college of the department.`src/components/IntelligenceScopeSwitch.tsx`

**Next-term forecast**
Every figure carries its confidence and the number of terms behind it.`src/components/PredictiveInsightPanel.tsx`

**Academic decision lab**
Six read-only views: academic twin, before/after, domino, path rescue, balance and trust.`src/components/AcademicDecisionLabPanel.tsx`

**Decision tools inside the Analytics Center**
The decision centre became cards in the Analytics Center: schedule health (overview, health and fairness), attention (one-minute brief), pressure and density (pressure map), why this solution, context assistant, start of term, decision ledger (minutes and memory) and version history (safety net). Above the timetable only the three rings remain.`src/components/LivingScheduleLayer.tsx`

**Guide**
Screens: ask, more, all, what is new, and unanswered questions for the root administrator.`src/components/guide/GuideAssistant.tsx`

**Guide tour**
A card that highlights the target element and waits for the user's action when needed.`src/components/guide/GuideTour.tsx`

**Course impact**
What precedes the course, what it opens, its plan sheets and the demand on it.`src/components/CourseImpact.tsx`

### 3.12.5 Requirements

**FR-INT-001** **Analytical overview of the schedule**

The system shall compute, for a given department and term, the schedule quality out of 100, its readiness, approval blockers, instructor gaps, day balance and a crowding map in 30-minute slots within the configured day hours, and return them in one reading.

● Implemented · Must · Functional · Department head, Schedule committee chair, College dean

**RATIONALE**

> A decision maker needs one picture of where the problem is before opening any tool.

**ACCEPTANCE CRITERIA**

1. Quality = 100 minus penalties: booking safety up to 58, gaps up to 16, slots after 16:00 up to 10, day balance up to 10, data health up to 18; the result is clamped to 0–100.
2. Readiness is blocked when an approval blocker or an incomplete appointment exists; otherwise ready at 85 or more, review at 70 or more, else needs work.
3. A call with no department or term returns 400, and one for a department outside the user's permissions returns 403.

**EVIDENCE**

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/overview` `src/utils/scheduleIntelligence.ts#analyzeSchedule` `tests/intelligence-scope-api.mjs`

### FR-INT-002 Reading scope: one college or all colleges of a department

The system shall read with the «this college» scope by default, widen the reading on a «all colleges of the department» request to the matching departments in other colleges that the user is permitted to read, and treat any unknown scope value as the single-college scope.

Implemented · Must · Functional · Department head, Schedule committee chair, College dean

**ACCEPTANCE CRITERIA**

1. A mathematics department in two colleges is read together on a department-scope request, and a department with a different name is not added.
2. A scope value such as «invalid» returns the single-college reading without error.
3. Term comparison and aggregation keep each row's source, so an identical course and section in two colleges are never merged.

**EVIDENCE**

`src/server/core/scope.ts#intelligenceReadScopes` `src/utils/intelligenceReadingScope.ts`
`src/components/IntelligenceScopeSwitch.tsx` `tests/intelligence-reading-scope-audit.ts` `tests/intelligence-scope-api.mjs`

### FR-INT-003 Room insight

Inferred

The system shall show, for a room confirmed in the buildings and rooms registry and a given term, its weekly bookings, the free windows of at least 30 minutes and its usage split by department, hiding the department name of any booking outside the user's permissions.

Implemented · Should · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A request with no term or no identified room returns 400, as does an unconfirmed or inactive room.
2. Another department's booking shows to a non-administrator as «booking from another department» with its time, and its usage is grouped under «other departments».

**EVIDENCE**

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/room`

### FR-INT-004 Instructor insight

Inferred

The system shall show, for a given instructor and term, the weekly load, gaps, the appointments visible to the user and the count of commitments outside the user's permissions, and shall not show an instructor who appears in no department the non-administrator user may read.

Implemented · Should · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A request with no instructor or term returns 400, and an instructor with no visible appointments returns 403 for a non-administrator.
2. Appointments in other departments are counted in externalCommitments and their rows are not shown.

**EVIDENCE**

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/professor/:id`

### FR-INT-005 Appointment story and context

Inferred

The system shall show, for a given appointment, its context: the instructor, course and room appointments visible to the user, conflicts with bookings outside the user's scope without revealing their details, the department's historical memory, the course life, the cost of a change, the reasons behind the room and instructor choice, and a timeline of how the appointment changed across versions, drafts, comments and the audit trail.

Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A missing appointment returns 404 and one outside the scope returns 403.
2. A conflict with another department's booking returns the other party's identifier as zero instead of revealing it.
3. A failure computing the why-reasons does not fail the response; it returns an empty reasons list.
4. The timeline reads up to 16 versions, 20 drafts and 30 audit entries for the appointment.
5. The appointment context panel shows from .../context: «within pattern» or «outside the usual» and «no blocker» or «needs checking» from whyHere, the course life (terms and stability %), the offering life (versions and changes, or «first appearance»), the change cost out of 100 only when computed, the counts of the instructor's, course's and room's visible appointments (a zero count is not drawn), the first 6 of the instructor's appointments, the department memory with surprising lines marked, and up to three «best alternatives now» from conflict-solutions when a conflict exists.
6. .../replay is read in the background after 2 seconds idle; the panel shows one line «moved ... · reason» from the latest move that has a reason, and the «decision anatomy» lists each event with its title, detail, reason with its source («inferred from that day's version»), date and actor; a move gets a reason only when the old placement clashes with that day's version.
7. .../replay events: the earliest trace, moves (time, room, instructor, days), a conflict appearing or clearing, drafts (published or trial), comments, the publication and up to 30 direct audit entries, ordered in time with a coverage note saying no older events are invented.

#### EVIDENCE

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/context/:id`
`src/server/routes/intelligenceRoutes.ts#/api/intelligence/replay/:id` `src/utils/advancedIntelligence.ts`

### FR-INT-006 Campus movement and safe room swaps

Inferred

The system shall detect an instructor moving between two buildings with a gap shorter than the campus movement profile requires, and propose moving the room or swapping two rooms without changing the time, instructor or days, and shall show a proposal only if it does not raise movement risk for any instructor in the term.

Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Margin = gap − travel time; below 0 is high risk, 0 to 10 minutes is a tight transfer, anything above is not listed.
2. Score = 100 − 18 per high risk − 6 per tight transfer, floored at 0.
3. The 12 worst high risks are examined, at most 8 proposals are returned, and a proposal is accepted only if term-wide high risks do not rise and the overall score does not fall.
4. Up to 40 risks are listed in the reading.

#### EVIDENCE

`src/server/routes/intelligenceRoutes.ts#spatialBurnoutAnalysis` `src/server/routes/intelligenceRoutes.ts#roomCastlingProposals`

### FR-INT-007 Ripple forecast before a drop

Inferred

The system shall forecast the effect of moving an appointment to a proposed day and time, including conflicts, instructor effect and campus movement, before the user drops it, and shall write nothing.

Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A day outside Sunday–Thursday or a time not in HH:MM returns 400 «invalid drag position».
2. A time that pushes the appointment outside the configured day hours returns 400 naming the day bounds.
3. The response carries the movement score before and after and the difference.
4. During a drag the «effect forecast · the future before the drop» strip asks .../ripple 170 ms after the pointer settles on a new square, and shows the headline, the candidate day, time and room and the effect chips; a failure shows «the instant effect of this square could not be computed».
5. A one-day appointment moves to the target day, while a multi-day one keeps its days and only its time moves; the reply adds the spatial strain score before and after and up to 3 risks touching the appointment.

#### EVIDENCE

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/ripple/:id` `src/utils/scheduleInnovation.ts#forecastScheduleMove`

### FR-INT-008 Rule-based analytical assistant

The system shall answer analytical-assistant questions about the schedule with explicit rules over the permitted department's data only, and return figures, bars and a before/after pair alongside the text when relevant, writing no change to the schedule.

Implemented · Should · Functional · Department head, Schedule committee chair, College dean

#### ACCEPTANCE CRITERIA

1. A question shorter than two characters returns 400.
2. The assistant distinguishes: biggest problem, gaps (default threshold 3 hours, changed by «N hours»), a day-crowding investigation, «if I move...», best distribution, rooms, and a general reading when nothing matches.
3. An aggregate question such as who/how many/everyone is never read as an instructor name, and a named instructor with no appointment in the department is answered as having no data here, without mixing in another department.

#### EVIDENCE

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/copilot` `tests/intelligence-scope-api.mjs`

### FR-INT-009 Intent identification by Gemini within allowed functions

The system shall send the natural-language query to the Gemini service together with the scope identifiers and the names of five allowed functions only, and sanitise the proposed calls so that only allowed functions with bounded arguments are accepted, and no call is executed before sanitising.

Implemented · Must · Functional · Department head, Schedule committee chair

#### RATIONALE

> The Gemini service reads the text and proposes; execution is always through the deterministic validators and an explicit confirmation by the user.

#### ACCEPTANCE CRITERIA

1. Allowed functions: check_conflicts, find_rooms, check_instructors, check_regulations, simulate_schedule; any other name such as updateSchedule is dropped.
2. Up to 8 calls are accepted, with up to 24 arguments each, strings up to 240 characters, arrays up to 20 items and objects up to 2000 characters.
3. An argument whose name contains a write verb (save, publish, apply, delete...) or is commit or confirmed is removed, so {commit:true} never reaches execution.
4. The query text is cut to 800 characters, and fewer than two characters returns 400.

#### EVIDENCE

`src/utils/geminiScheduleLayer.ts#sanitizeGeminiScheduleCalls`
`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/nl-schedule` `src/server/core/gemini.ts`
`tests/gemini-schedule-layer.ts`

### FR-INT-010 Deterministic scoped execution of calls

Inferred

The system shall execute each accepted call on the server with its own deterministic logic over the permitted department and term schedule, without taking any execution result from the Gemini service.

Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. simulate_schedule returns the move preview; check_conflicts returns the critical blocker count and the first 6 alerts; check_regulations evaluates the department rules.
2. find_rooms examines up to 80 active confirmed rooms of the department and returns up to 12 that are free in a 30-minute window.
3. check_instructors matches the name and returns up to 12 instructors with their appointment counts.
4. A scope that is not permitted returns 403 before any call to the Gemini service.

#### EVIDENCE

`src/server/routes/intelligenceInsightRoutes.ts#executeGeminiScheduleCalls`

### FR-INT-011 Fallback to the rule parser

When the Gemini service returns no valid call (no key, a refusal, a timeout or an invalid result), the system shall parse the sentence with a deterministic rule parser and produce the same kind of calls, and state their source in the response.

Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. «Move course 101 to Wednesday 11:00» yields simulate_schedule, check_conflicts, check_regulations in order, with day index 3 and time 11:00.
2. The source field is gemini-function-calls or deterministic-parser according to the origin.
3. A sentence from which nothing is extracted returns ok:false and a hint asking for the course, day, time or room.

#### EVIDENCE

`src/utils/geminiScheduleLayer.ts#deterministicSchedulingCalls` `src/utils/naturalQuery.ts#parseNaturalQuery`
`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/nl-schedule` `tests/gemini-schedule-layer.ts`

### FR-INT-012 Move preview without writing, separate confirmation

The system shall return, for a natural-language move request, a before/after preview with conflicts, regulations and schedule quality, declare that confirmation is required, and write nothing to the schedule; applying is a second explicit step through the usual move path.

Implemented · Must · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. The response carries commitRequired:true, canApply, and blockedReason when a save blocker exists.
2. A course code matching more than one appointment with no day given returns ambiguous with up to 6 options (section, days, time).
3. A code matching no course in the department and term returns a message rather than an HTTP error, and the lecture duration is preserved when the start time changes.
4. The response text states that the path is preview only and execution remains after the user's confirmation.

#### EVIDENCE

`src/server/routes/intelligenceInsightRoutes.ts#previewNaturalLanguageMove`
`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/nl-move` `tests/gemini-schedule-layer.ts`

### FR-INT-013 Academic decision lab

The system shall try, in the academic decision lab, moving the time of an existing section to alternative times and count the eligible students whose full wished bundle becomes arrangeable before and after, writing no row, and shall not show a result for fewer students than the privacy floor.

Implemented · Should · Functional · Department head, College dean, Vice dean for academic affairs

#### ACCEPTANCE CRITERIA

1. The privacy floor is 3 students; fewer than 3 or more than 800 eligible students produces no scenarios.
2. Up to 12 courses with groups of 3 to 250 students are analysed, up to 3 sections per course, start times 08:00, 09:30, 11:00, 12:30, 14:00, 15:30 and 17:00 with a shift of at most 300 minutes.
3. A move that collides with an instructor or a room is dropped, and one that helps fewer than 3 is counted as below the floor and not shown.
4. The «expected graduates» signal: a single expected graduate (graduating within 12 months) needing a course is enough for it to appear among the path courses, while ordinary demand keeps its floor of 3; the order is not-offered first, then most expected graduates, then demand, then what it unlocks; a graduation-cap badge leads the line with a counted phrase («two expected graduates need it»). In the demo, graduating students and some advanced ones carry an expected graduation date consistent with their units.
5. Every result carries a caution that it is not applied and settles neither capacity, instructor consent nor regulations, and the diagnostics panel counts the funnel stages so an empty result explains itself.

#### EVIDENCE

`src/utils/academicDecisionLab.ts#buildAcademicDecisionLab` `src/server/academicAdvisoryData.ts`
`src/components/AcademicDecisionLabPanel.tsx` `tests/academic-advice-audit.ts` `tests/graduation-watch-audit.ts`

### FR-INT-014 Decision room, automatic optimiser and auto proposal

Inferred

The system shall offer alternatives for a department schedule through the decision room, the automatic optimiser and the auto proposal as scenarios to review, not apply, and shall propose a change only if it does not increase save blockers and does not lower schedule quality.

Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. The optimiser explores 240 attempts with a fixed-seed generator so the same input gives the same result, returns up to 3 options, and declares it does not publish, change days or rooms, and that the gate is human.
2. The auto proposal changes times only and keeps course, instructor, days and room; if the improvement is not safe it returns the schedule unchanged with zero changes.
3. A department with no appointments in the term receives a 200 response pointing to «start of term from the previous term» or import, not a 400 error.

#### EVIDENCE

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/autopilot`
`src/server/routes/intelligenceRoutes.ts#/api/intelligence/auto-schedule`
`src/server/routes/intelligenceRoutes.ts#/api/intelligence/war-room` `src/utils/scheduleInnovation.ts#runScheduleAutopilot`

### FR-INT-015 Custom scheduling rules

Inferred

The system shall let a power administrator create a scheduling rule for a department and term from six types, enable, disable and delete it, and evaluate the schedule and its scenarios against the enabled rules.

Implemented · Should · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. Types: instructor latest end, instructor day off, department day off, course room, max instructor gap, room doorway; any other type returns 400.
2. Max gap is clamped between 30 and 480 minutes (default 120), and a doorway between 1 and 60 minutes.
3. No new rule is created for a retired or released instructor, and a course room must come from the official registry.
4. A user without power rights is refused on create, edit and delete.
5. The screen matches the server: the add form and the toggle and delete buttons are for a system administrator or the root account only, and anyone else sees the rules and their state with a «read only» note.

#### EVIDENCE

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/constraints`
`src/utils/scheduleInnovation.ts#evaluateScheduleConstraints` `src/components/IntelligenceWorkspace.tsx#canEditRules`
`tests/analytics-reports-review-audit.ts`

### FR-INT-016 Policy simulation

The system shall simulate the effect of a policy of four types on the term's appointments against the last ten academic years of history, and return the size of the effect on departments, instructors and rooms without changing any appointment or rule.

Implemented · Could · Functional · Department head, College dean, System administrator

#### ACCEPTANCE CRITERIA

1. Types: a day off, close a building, no classes after a time, growth by a percentage (default 10); any other type returns 400.
2. The university scope is accepted only from an administrator; others are held to their own scope.
3. The response carries a guardrail stating it is a simulation only.

#### EVIDENCE

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/policy-simulate` `src/utils/advancedIntelligence.ts#simulatePolicy`
`tests/intelligence-scope-api.mjs`

### FR-INT-017 Open decisions

Inferred

The system shall keep an open-decisions list per department and term to which the user adds a decision with a title, priority, owner and due date, merge into it decisions inferred from schedule alerts and logical anomalies, and close recorded ones by updating their status.

Implemented · Could · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A title under 3 characters returns 400; the title is cut at 140 characters, the detail at 500 and the owner at 100.
2. Priority is low, medium or high (default medium), and status is open or done.
3. Inferred items are up to 5 alerts and 4 non-low anomalies, and count towards the open total.

#### EVIDENCE

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/open-decisions`

### FR-INT-018 Next-term demand forecast

The system shall forecast, for each course, the expected number of sections for the next term as a value and a range from previous terms' sections, registration statistics for the last 6 terms and live radar wishes, together with prerequisite bottlenecks, crowded hours and graduation delay, within the reader's scope and without writing.

Implemented · Should · Functional · Department head, College dean, Vice dean for academic affairs

#### ACCEPTANCE CRITERIA

1. Each older term is weighted ×0.6, terms of the same season are preferred, and the result is deterministic with no randomness or clock.
2. The reader's scope is applied before computing, not after, and a department is not affected by another department's figures.
3. No student list or student identifier leaves the server; the distribution and reasons are counts only, and the graduation simulation runs up to 12 terms.
4. The backtest hides the measured term and later ones so the future does not leak, and each course's error is Σ|expected − actual| ÷ Σ actual.

#### EVIDENCE

`src/server/predictiveInsight.ts` `src/utils/predictiveIntelligence.ts`
`src/server/simulationRoutes.ts#/api/simulation/predictive` `src/components/PredictiveInsightPanel.tsx`
`tests/predictive-intelligence-audit.ts` `tests/predictive-backtest-audit.ts`

### FR-INT-019 Forecast confidence and action gate

The system shall attach to every forecast figure an explicit confidence of four levels, enable the one-click open action only from medium confidence or higher, and show the reason for disabling it when confidence is weak.

Implemented · Must · Functional · Department head, College dean

#### RATIONALE

> So that a guess is not presented as a fact.

#### ACCEPTANCE CRITERIA

1. The score is a weighted mean: number of terms ÷ 4 with weight 45, stability of the figures weight 25, agreement of history with wishes weight 20, input quality weight 10.
2. Levels: high at 0.70 or more, medium at 0.45 or more, else low; zero terms with no live signal is «history not enough».
3. One term or fewer caps the score at 0.34, no previous term of the same season multiplies it by 0.75, and the backtest error lowers it by at most half.
4. The surplus review action is enabled only for a surplus of 2 or more with enough confidence, and never closes anything automatically.

#### EVIDENCE

`src/utils/predictiveIntelligence.ts#confidenceFrom` `src/utils/predictiveIntelligence.ts#isActionable`
`src/components/PredictiveInsightPanel.tsx` `tests/predictive-intelligence-audit.ts` `tests/predictive-backtest-audit.ts`

### FR-INT-020 Radar insight: shortfall causes and offering quality

The system shall explain, for students who did not reach the required hours, the shortfall cause in a classification that sums to their count, and list the offerings with incomplete data with a way to open their row, within the reader's scope.

Implemented · Should · Functional · Department head, College dean, Vice dean for academic affairs

#### ACCEPTANCE CRITERIA

1. The sum of causes equals the number of students who did not reach 12 hours.
2. The computation is heavy, so it runs on request once per source fingerprint, is held for 10 minutes, and two simultaneous requests share one computation.
3. Up to 5000 quality items are kept in memory and 300 are shown after the reader's scope is applied, with a truncation flag.
4. A request without sign-in is refused (401 or 403).

#### EVIDENCE

`src/server/radarInsight.ts` `src/server/simulationRoutes.ts#/api/simulation/insight` `src/utils/registrationCauses.ts`
`tests/radar-insight-audit.ts`

### FR-INT-021 Live schedule layer

Inferred

The system shall provide the decision tools inside the Analytics Center from one reading that combines pulse, health, fairness, fragility, room flexibility, conflict topology and decision memory: in «understand» the «schedule health» card (overview; quality, flexibility and fairness; who carries most; what breaks the schedule if it fails; rooms without an alternative), «attention» with the one-minute brief's what changed, start here and largest risk, «pressure and density» with two views (pressure map and density), «why this solution?», and the «context assistant» beside «ask the schedule» under one «ask» heading; in «try» «start of term»; in «history» the decision minutes and decision memory inside the «decision ledger», and the safety net inside «version history».

Implemented · Should · Functional · Department head, Schedule committee chair, College dean

#### ACCEPTANCE CRITERIA

1. The approval-blocker number in the layer is the approval bar's own number (same exemption for placeholder instructors and the same room identity).
2. The response is held for 120 seconds per scope (except in demo mode), so a later request returns it without recomputation.
3. The server yields to the main loop between the six readings so other requests are not frozen during computation.
4. The response states that the emergency capability has no screen yet (emergency:false) and that the one-minute brief says what changed since the last safety point.

#### EVIDENCE

`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/living` `src/utils/livingSchedule.ts`
`src/components/LivingScheduleLayer.tsx` `src/components/LivingScheduleScenes.tsx`

### FR-INT-022 Course impact and appointment memory

The system shall show, for a course, what precedes it, what it opens, the live plan sheets that carry it, the demand on it and its seats, and show for an appointment its origin and the latest 12 recorded events, storing nothing new.

Implemented · Should · Functional · Department head, Schedule committee chair, College dean

#### ACCEPTANCE CRITERIA

1. A missing course or appointment returns 404, outside permissions returns 403, and without sign-in 401 or higher.
2. The plan sheets shown exclude virtual and archived ones, and prerequisites and corequisites come from the sheet's rules.
3. The appointment memory carries a truncated flag when events exceed 12.

#### EVIDENCE

`src/server/insightRoutes.ts` `src/components/CourseImpact.tsx` `tests/radar-insight-audit.ts`

### FR-INT-023 Guide knowledge bank

The system shall keep in the repository an authored knowledge bank covering every feature defined in the Guide, each feature having one to four short standard-Arabic steps and at least two question phrasings in standard Arabic, Kuwaiti dialect and English, with nothing generated at run time.

Implemented · Must · Functional · Standard user, Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Every feature in the registry has a bank entry, its steps number 1 to 4, and the question phrasings are at least 2.
2. Step text is standard Arabic with no dialect words, and the team is called «فريق» not the legacy term.
3. Question phrasings are for understanding only and are never shown to the user.

#### EVIDENCE

`src/guide/bank.ts` `src/guide/smartGuide.ts#GUIDE_FEATURES` `tests/guide-brain-audit.ts`

### FR-INT-024 Guide question understanding within role permissions

The Guide shall understand a question inside the browser with no network request, by splitting it into at most three parts and ranking features by weight, and shall not suggest to a user a feature that the user's role cannot reach, even if it is the closest.

Implemented · Must · Functional · Standard user, Department head, Schedule committee chair, System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. Weight = 0.62 for matching a phrasing + 0.30 coverage + 0.12 title, and the current screen adds 0.025 only when scores are close.
2. Confidence of 0.34 or more is an answer, below it is «unsure» with the closest three; confidence under 0.55, unknown words or a rival within 0.9 of the first adds a «did you mean» list.
3. A question asking how to move a course and how to print the report is split into two parts, and a report of instructors and departments stays one question.
4. A user with permission 7 only is not answered with the backup feature.
5. Accuracy on 160 questions written by two parties who had not seen the bank is at least 90%.

**EVIDENCE**

`src/guide/brain/engine.ts` `src/guide/smartGuide.ts#canAccessGuideFeature` `tests/guide-brain-audit.ts`

### FR-INT-025 Kuwaiti-dialect understanding and spelling correction

The Guide shall normalise the question text and map Kuwaiti and English words to a single concept through an internal lexicon, correct spelling mistakes with an edit distance proportional to the word length, and show nothing of the lexicon to the user.

Implemented · Should · Functional · Standard user, Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Normalisation unifies hamza forms, ta marbuta, alef maksura, elongation, diacritics and Arabic-Indic digits, so a decorated spelling of «the administrative hall 12» becomes its plain form.
2. Correction allows an edit distance of 1 below 8 letters and 2 from 8 letters, and a word under 5 letters is not corrected; a misspelled «clash» maps to its right word.
3. A word after the negators «mo/mob/mish/not» is not counted as requested.
4. A question outside the program's world (weather, salaries, restaurants…) is answered as outside what the Guide knows.

**EVIDENCE**

`src/guide/brain/normalize.ts` `src/guide/brain/lexicon.ts` `src/guide/brain/engine.ts#correct` `tests/guide-brain-audit.ts`

### FR-INT-026 Guide on-screen tours

The Guide shall build a tour for each feature from its own definition and walk it on screen with a state machine that never disappears silently: the element appears, it waits for the user's action, or it states plainly that it did not find it.

Implemented · Should · Functional · Standard user, Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The engine looks for the element every 120 ms for 7000 ms, for an optional step 1200 ms, then reports «missing» and keeps looking every 800 ms without taking the card away.
2. The screen's safe command is resent every 8 polls during the search, and an absent optional step is skipped quietly.
3. A tour from another screen opens the menu, navigates and then shows a real step; a step waiting for a selection does not advance by itself.
4. Tour progress (feature and step number) is stored in the browser, so a tour left within a day resumes, a finished one is remembered for seven days, and 40 records are kept.
5. Every tour target and selector exists in the code.

**EVIDENCE**

`src/guide/tour/runner.ts` `src/guide/tour/tours.ts` `src/guide/awareness.ts#saveTourProgress`
`src/components/guide/GuideTour.tsx` `tests/guide-tours-audit.ts` `tests/guide-targets-audit.ts`

### FR-INT-027 Guide situational awareness and quiet hints

The Guide shall read the user's situation from the screen, the open dialog, the selected lecture, the import state and recent actions, offer at most three suggestions, and show a proactive hint only within cooldown limits.

Implemented · Could · Functional · Standard user, Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. An approval blocker puts «approval review» first even if its tour was finished before.
2. The situation produces an answer before ordinary suggestions: import stopped at notes, current schedule unreadable, pre-check failed, check complete, selected lecture in conflict.
3. The cooldown between hints is 90 seconds for high confidence, 6 minutes for medium and 12 minutes for low, a hint the user ignored does not recur within 24 hours, and in quiet mode only high-confidence hints appear.
4. The predicted next step needs at least 5 uses, 3 successes and a 0.6 success rate.
5. The session trail holds at most 8 actions in memory only, fixed identifiers with no names or rooms, and dies when the page closes.

**EVIDENCE**

`src/guide/awareness.ts` `src/guide/sessionTrail.ts` `src/guide/smartGuide.ts#canProactivelyHint` `src/guide/smartGuide.ts#predictedNextFeature` `tests/guide-tours-audit.ts`

### FR-INT-028 Interface telemetry intake and anonymous Guide question log

The system shall accept interface telemetry batches from the signed-in user and record Guide events without the user's identity, and mask the digits and names in unanswered questions before they reach the server or are stored.

Implemented · Should · Functional · Standard user, Department head, Schedule committee chair, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A batch holds up to 20 entries; an entry with a college and department outside the scope is dropped.
2. Kind is one of api, error, offline, sync, guide, otherwise error; name up to 140 characters, message up to 320, duration 0 to 120000 ms and breadcrumbs the last 12 steps.
3. A Guide record carries user id 0 and an empty name.
4. An unanswered question is cleaned in the browser by removing the name after a title, digits and emails with a 90-character limit, and digits are replaced on the server as well.

**EVIDENCE**

`src/server/routes/guideRoutes.ts` `src/guide/awareness.ts#anonymizeQuestion` `src/guide/brain/engine.ts#maskUnknownWords` `tests/guide-brain-audit.ts`

### FR-INT-029 Guide friction points for the root administrator

Inferred

The system shall show the root administrator alone anonymous friction points over the last 30 days against the previous 30, ranked by failure and help rate, together with unanswered questions.

Implemented · Could · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. A user other than the root administrator receives 403 «reserved for the main system administration».
2. Ranking is by (failed + abandoned) rate plus 0.35 of the help rate; at most 12 points, 8 items and 30 unanswered questions are shown.
3. Change versus the previous period is the difference in failure rate, and the response declares anonymous:true and windowDays:30.
4. The accompanying interpretation: rising friction after a new release may mean the interface needs redesign, not more explanation.

**EVIDENCE**

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/guide-friction` `src/utils/clientTelemetry.ts#telemetryGuideJourney` `src/guide/smartGuide.ts#evaluateGuideFriction`

### FR-INT-030 Experience health

Inferred

The system shall compute for the reading scope an experience-health score from response times, errors and offline events in the last 14 days, and show the slowest paths and error replays.

Implemented · Could · Functional · Department head, System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. Score = 100 − 55 × failure share − 35 × slow share (≥ 1800 ms) − up to 10 for offline events, between 0 and 100.
2. Label: excellent at 90, good at 75, needs follow-up at 55, otherwise needs intervention.
3. p50 and p95 are computed from the last two hours' samples together with client measurements, showing the slowest 5 paths and up to 6 replays.

#### EVIDENCE

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/experience-health`

### NFR-INT-001 Read-only: analytics routes write nothing to the schedule

The simulation, forecast, optimiser, natural-language query and analytical-assistant routes shall not write any change to schedule appointments or rules; every application goes through the usual write path with its validators and an explicit confirmation.

Implemented · Must · Non-functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. Every response from the simulation, assistant and query routes carries text declaring it a preview or simulation only.
2. A what-if request changes no schedule row (the row fingerprint before and after is identical).
3. The natural-language query accepts neither a commit nor a confirmed argument nor a name implying a write.

#### EVIDENCE

`src/utils/geminiScheduleLayer.ts#sanitizeGeminiScheduleCalls`
`src/server/routes/intelligenceRoutes.ts#/api/intelligence/policy-simulate` `tests/gemini-schedule-layer.ts`
`tests/radar-insight-audit.ts`

### NFR-INT-002 Privacy: no civil identity or student list leaves

No civil number or national identifier shall be sent to the Gemini service, no student list or student identifier shall leave the server in forecast and radar readings, the Guide shall store no name or room, and the service keys shall stay on the server.

Implemented · Must · Non-functional · The system (automatic), External service

#### ACCEPTANCE CRITERIA

1. The course and instructor catalogue sent to the service has the identifier and name only, and any key resembling a civil or national number is removed.
2. The student list is removed from the forecast reading before it is sent to the client.
3. The service key is read from a server environment variable and never reaches the client.
4. Tour progress and the Guide profile are kept in the browser with identifiers only.

#### EVIDENCE

`src/utils/geminiScheduleLayer.ts#buildSmartImportCatalogue` `src/server/predictiveInsight.ts` `src/server/core/gemini.ts`
`src/guide/sessionTrail.ts` `tests/gemini-schedule-layer.ts` `tests/predictive-intelligence-audit.ts`

### IR-INT-001 Analytics Center screen: scenes and scope

The Analytics Center screen shall show the decision scope bar (college, department, term) and the analysis scope switch, three scenes «understand», «try» and «history», and tabs covering schedule health, before approval, attention, pressure and density, why this solution, section planning, schedule improvement opportunity and next-term forecast, with a collapsed «advanced» group below holding the department fingerprint, campus movement, term comparison, the advanced decision lab and system diagnostics.

● Implemented · Should · Interface · Department head, Schedule committee chair, College dean

**ACCEPTANCE CRITERIA**

1. When offline, «read only» appears in the scope bar.
2. Dismissing the error notice clears it from the state, and the decision-lab tools include the rules board, decision room, automatic optimiser and policy lab.
3. An action's reading returns to its source and blocks stale answers when the term or scope changes.

**EVIDENCE**

`src/components/IntelligenceWorkspace.tsx` `src/components/IntelligenceContextBar.tsx`
`src/components/IntelligenceScopeSwitch.tsx` `tests/intelligence-reading-scope-audit.ts`

### IR-INT-002 Gemini service interface: request constraints and timeout

Inferred

The system shall call the Gemini service from the server only, with an instruction that confines it to understanding the request and forbids it from asking to save, publish, apply or delete, with function-calling mode restricted to the allowed names, and shall return the failure reason to the screen instead of staying silent.

● Implemented · Must · Interface · The system (automatic), External service

**ACCEPTANCE CRITERIA**

1. With no key an empty value is returned and the deterministic fallback applies.
2. The function-call timeout is 45 seconds, the document-reading timeout 180 seconds, temperature 0.1 and a low reasoning level.
3. A service refusal (HTTP code) or a timeout returns a failed field and a reason cut to 300 characters, and is logged on the server.
4. The service reads and proposes; execution is always through the deterministic validators and an explicit confirmation by the user.

**EVIDENCE**

`src/server/core/gemini.ts#requestGeminiScheduleLayer`

### FR-INT-031 «Why?» and «why not?» for an appointment

The system shall explain through POST .../why the decision behind an existing appointment, and through POST .../why-not the effect of a proposed alternative for it, after checking the alternative with the appointment validators themselves, returning warnings, trade-offs, the quality difference and a one-line answer («possible, but...» or «possible, and this alternative is better...»), with the department's decision memory for that course for power users only (up to 120 entries), saving nothing.

● Implemented · Should · Functional · Schedule committee chair, Department head, System administrator

**ACCEPTANCE CRITERIA**

1. A missing appointment ← 404; an appointment outside scope ← 403.
2. An alternative timed outside the teaching day ← 400 with the first issue and the issues list.
3. The sent question is cut to 240 characters, and the response carries text saying the screen explains and does not apply.
4. The square verdict during a drag sends .../why with the candidate together with .../ripple and the conflict check, and asks .../why-not («why is this position less preferred?») only when the verdict is less preferred or impossible.

**EVIDENCE**

`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/why`
`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/why-not` `tests/one-blocker-number-audit.ts`

### FR-INT-032 Department decision memory

Inferred

The system shall save through POST …/decision-memory an entry with the decision's reason (3 to 700 characters) and kind (rejected option, accepted note or meeting decision; default rejected option), optionally linked to an appointment of the same department with its course and section, under the writer's name, and show through GET …/decision-memory up to 250 entries of the department summarised and filtered by course when asked.

Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A two-character reason ← 400 «write a clear reason between 3 and 700 characters».
2. An appointment from another department ← 403 «the appointment is outside this department»; a successful save ← 201.

**EVIDENCE**

`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/decision-memory`

### FR-INT-033 Contextual decision assistant and emergency plans

Inferred

The system shall answer POST …/context-copilot for one of four contexts: an appointment (up to 3 options from conflict solutions), a room (its resilience), an instructor (load fairness) or a day (the best emergency plan for the day), refusing an unknown context or an invalid day with 400; and shall build through POST …/emergency, for power users only, three alternative plans for a disrupted room, day or instructor as scenarios only that are not published, refusing a case that touches no appointment; emergency plans have no screen yet and are not advertised as available.

Implemented · Could · Functional · Schedule committee chair, System administrator

**ACCEPTANCE CRITERIA**

1. A department with no appointments in the term ← 400 «there is no schedule in this scope».
2. emergency without a specified item ← 400 «specify the item affected by the emergency»; from anyone but a power user ← refused.
3. The living-layer reading carries capabilities.emergency = false.

**EVIDENCE**

`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/context-copilot`

`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/emergency`

### FR-INT-034 The department's time rhythm from its history

The system shall build through GET …/department-start-rhythm the department's time model from the last 10 terms of its history the reader may see, with layers for the department, the active day pattern and each course, weighting recent terms more, from which the client picks the narrowest reliable layer; the answer is kept for 5 minutes under a key that carries the reader when no department is given, is invalidated by any schedule change, and the memory is cleared beyond 180 keys.

Implemented · Could · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A college outside scope or no collegeId ← 403.
2. Two readers without a department in the same college ← two different keys so neither sees the other's departments.

**EVIDENCE**

`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/department-start-rhythm` `tests/role-scope-audit.ts`

### FR-INT-035 Watching what changed under the settled term

The system shall check through GET …/settled-drift the settled term (the term that has a successor) only: it reads the department's appointments against all of the university's appointments in that term and returns up to 40 findings with type, message, day, time and room, with a room doorway margin from the room_doorway rule clamped between 0 and 60 minutes, the department's unwritten «habit» sentence, and a limit statement saying it reads only what is in the system; it shall not claim «no problems» when no settled term exists, and shall point to the settled term when the reader is viewing another term.

● Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. No settled term ← watching:false with the reason «there is no settled term yet».
2. A termId different from the settled term ← watching:false «the check concerns the settled term».
3. The «whole college» habit is not shown to a non-administrator without a department.
4. The schedule board asks …/settled-drift when idle and again whenever the live channel reports a write, and shows a chip named after the settled term only when watching is true with findings; its sheet lists each finding's course, time, room and detail, the source («source: …» or «source outside your view») for findings involving another department, and the limit sentence as the footer.
5. The reply is cached per scope, viewed term and reader until a schedule write changes the serial, and the cache is cleared beyond 200 entries.

**EVIDENCE**

`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/settled-drift` `tests/role-scope-audit.ts`

### FR-INT-036 Term rollover reading and the beginning-of-term draft

The system shall read through GET …/rollover whether a department's previous term can be copied, creating nothing: what carries over as is, what needs review (up to 40) and the department's style (up to 6 notes), a room counting as live when it appears in any appointment in the system today; and shall create through POST …/genesis a draft for the target term from the source term's appointments of the department's non-archived courses, renumbering each course's sections 501, 502 and so on, filling a missing instructor and room from the course's other sections, then shifting times only in at most 4 passes to avoid target-term conflicts, checking every row with the appointment validators, and returning the draft (201) with its analysis and coverage; it writes nothing to the schedule.

● Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A source term with no copyable appointments ← 400 «no copyable appointments found».
2. A course with sections 1, 10 and 11 in the source ← 501, 502 and 503 in the draft.
3. The rollover answer carries «read only; nothing was created or changed».

**EVIDENCE**

`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/rollover`
`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/genesis` `tests/blockers-stream-audit.ts`

### FR-INT-037 One-minute brief and decision minutes

The system shall return through GET …/brief a one-minute brief of the department schedule and what changed in it since last time, and shall build through POST …/meeting-minutes decision minutes: the problem (the first appointment needing verification), the alternatives with their scores, blockers and number of changes, the chosen alternative (or the first), the expected impact (quality and save blockers before and after), up to 8 comments on the appointment, up to 5 decision-memory entries, the approver's name up to 120 characters and the generation time; the minutes are not saved.

● Implemented · Could · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. Minutes for a department with no appointments ← 400 «there is no schedule to build minutes from».
2. An unknown optionId ← the first alternative is chosen.

**EVIDENCE**

`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/brief`
`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/meeting-minutes` `tests/blockers-stream-audit.ts`

### FR-INT-038 Safety net and undoing a decision

The system shall show through GET .../safety-net the last 18 safety points of the department schedule and term, each with its kind, title, writer, row count and the live effect of restoring it on the schedule as it is now; and shall restore a point through POST .../safety-net/:id/undo only with the explicit confirmation decision-undo, after checking scope, the schedule lock, overwriting others' work, the wholesale-replacement deadline and the validity of times, capturing beforehand a «before undoing the decision» point, replacing the department schedule and recording the publication.

● Implemented · Must · Functional · Schedule committee chair, Department head, System administrator

**ACCEPTANCE CRITERIA**

1. undo without confirmation ← 409 «undoing the decision requires explicit confirmation».
2. A locked schedule ← 409 schedule-locked; after the wholesale deadline ← 409 deadline-wholesale.
3. A version with invalid times ← 400 and no change.
4. In «version history» each version shows its kind icon and title; the restore impact and «restore this decision» are for the main administration only, as they were in the «safety net», and others keep «restore» as before, so restore permission is not widened.

**EVIDENCE**

`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/safety-net`
`src/server/routes/intelligenceInsightRoutes.ts#/api/intelligence/safety-net/:id/undo` `tests/safety-net-restore-audit.ts`
`tests/blockers-stream-audit.ts`

### FR-INT-039 Updating open decisions and the operations review

Inferred

The system shall limit an open decision to a title of 3 to 140 characters, a detail up to 500, an owner up to 100 and a date up to 30 characters, with a low, medium (default) or high priority, and shall change through PATCH .../open-decisions/:id only its status (open or done), priority, owner and date, for a decision in the same scope, inferring up to 5 decisions from schedule alerts and up to 4 from non-low anomalies; and shall return through GET .../operations-review the schedule accuracy from up to 24 versions, logical anomalies, unwritten rules discovered from the department history, and the history size in rows and terms.

● Implemented · Could · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. PATCH for a decision from another department ← 404 «the decision is not in this scope».
2. A two-character title ← 400 «write the open decision's title».

**EVIDENCE**

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/open-decisions/:id`
`src/server/routes/intelligenceRoutes.ts#/api/intelligence/operations-review`

### FR-INT-040 Conflict solutions, spatial alternatives and scenario evaluation

The system shall propose through POST .../conflict-solutions up to 5 alternative times for a proposed appointment after checking it, against all appointments of the term; shall return through GET .../spatial-burnout room-swap proposals for movement between buildings from the campus mobility profile; shall evaluate through POST .../evaluate a sent draft against the current schedule (quality and rules before and after) without checking conflicts within the draft itself; and shall return through GET .../genome the department schedule's profile across its terms within the reading scope, and through GET .../lookups the courses and instructors of the reader's departments only (all of them for the system administrator).

Implemented · Should · Functional · Schedule committee chair, Department head, System administrator

#### ACCEPTANCE CRITERIA

1. An appointment with incomplete data in conflict-solutions ← 400 «the appointment data is incomplete».
2. A draft with invalid rows in evaluate ← 400 «the draft contains data needing review» with issues.
3. lookups for a department head ← only the department's courses and instructors.

#### EVIDENCE

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/conflict-solutions`
`src/server/routes/intelligenceRoutes.ts#/api/intelligence/spatial-burnout`
`src/server/routes/intelligenceRoutes.ts#/api/intelligence/evaluate`
`src/server/routes/intelligenceRoutes.ts#/api/intelligence/genome`
`src/server/routes/intelligenceRoutes.ts#/api/intelligence/lookups` `tests/appointment-forms-audit.ts`
`tests/role-scope-audit.ts` `tests/decision-surfaces-audit.ts`

### FR-INT-041 Scheduling rule limits, toggling and deletion

Inferred

The system shall clamp the minute limit of a room_doorway rule between 1 and 60 and of a maximum instructor gap rule between 30 and 480 (default 120), and shall refuse a new rule for a retired or full-time-released instructor, a latest-end time outside the teaching day, and a course room not approved in the official buildings and rooms registry; and shall let a power user enable or disable a rule only through PUT .../constraints/:id, and delete it through DELETE .../constraints/:id, for a rule in the same department and term scope.

Implemented · Should · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. room_doorway with 90 minutes ← saved as 60.
2. PUT or DELETE for a rule from another term ← 404 «the rule is not in this scope».

#### EVIDENCE

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/constraints`
`src/server/routes/intelligenceRoutes.ts#/api/intelligence/constraints/:id`

### FR-INT-042 Appointment comments and protecting the registration note

The system shall show the comments of an appointment in scope (GET .../comments/:scheduleId) and add a comment of 2 to 600 characters under its writer's name (POST), shall change a comment's «resolved» state through PUT .../comments/:scheduleId/:commentId only when it belongs to that same appointment, and shall never close from here a note written by registration, because it blocks submission until handled in the approval-notes path.

Implemented · Must · Functional · Schedule committee chair, Department head, Registration officer

**ACCEPTANCE CRITERIA**

1. Closing a note with origin=registrar ← 403 registrar-note.
2. A commentId of another appointment ← 404 «the comment is not on this appointment».
3. A 601-character comment ← 400; a valid one ← 201.
4. The appointment context panel does not show team notes today (TEAM_NOTES_ENABLED = false); the «handled» button in the instructors' message tray uses the same PUT route with resolved:true.

**EVIDENCE**

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/comments/:scheduleId`
`src/server/routes/intelligenceRoutes.ts#/api/intelligence/comments/:scheduleId/:commentId` `tests/publish-notes-r4-audit.ts`
`tests/blockers-stream-audit.ts`

### IR-INT-043 The course impact and appointment history routes

The system shall return GET /api/impact/course?courseId for a course in the reader's scope: the live plans that carry it, its prerequisites and corequisites, the courses depending on it with their plans, and its demand from the latest radar run of the door term (wanted, seated, sections, capacity, taken, unmet); and shall return GET /api/schedules/:id/history the origin written in the appointment and the latest 12 successful events about it from the last 1500 audit-log entries, with a truncated flag when there are more; both without caching.

Implemented · Should · Interface · Schedule committee chair, Department head, System administrator

**ACCEPTANCE CRITERIA**

1. A missing course ← 404 «the course does not exist»; outside scope ← 403.
2. An appointment with 15 events ← 12 events and truncated = true.

**EVIDENCE**

`src/server/insightRoutes.ts#/api/impact/course` `src/server/insightRoutes.ts#/api/schedules/:id/history`
`tests/radar-insight-audit.ts` `tests/activity-trail-audit.ts`

### IR-INT-044 Interface telemetry intake

The system shall accept through POST /api/telemetry/client from the signed-in user up to 20 entries per batch of kinds api, error, offline, sync and guide (any other counts as error), dropping those about a department outside the user's scope, storing guide entries with no user id or name, replacing digits with # in unanswered questions, cutting the name to 140 characters and the message to 320, clamping the duration between 0 and 120000 milliseconds, keeping the last 12 breadcrumb steps, and returning the accepted count.

Implemented · Should · Interface · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A batch of 25 entries ← only the first 20 are considered.
2. A guide entry named unanswered|room 204 ← stored as «unanswered|room #» with SystemUserId = 0.

**EVIDENCE**

`src/server/routes/guideRoutes.ts#/api/telemetry/client` `tests/activity-trail-audit.ts`

### NFR-INT-045 Gemini service configuration variables

Inferred

The system shall read the Gemini service key from GEMINI_API_KEY, then GOOGLE_GEMINI_API_KEY, and the model name from GEMINI_SCHEDULE_MODEL, then GEMINI_MODEL, otherwise gemini-3.6-flash; it shall work without a key using the deterministic parser alone, and shall log on the server the refusal reason (HTTP status and the first 300 characters of the message) or the timeout, returning it to the screen.

Implemented · Should · Non-functional · The system (automatic), External service

#### ACCEPTANCE CRITERIA

1. With neither key variable ← no request to the service, and the query runs on the deterministic parser.
2. An HTTP 403 from the service ← {failed:true, status:403, reason} and a server log line.

#### EVIDENCE

`src/server/core/gemini.ts#requestGeminiScheduleLayer`

### IR-INT-046 Reading cards in «decision reading»

Inferred

The Analytics Center screen shall show in «decision reading» a board of cards, each with its name, description and figure, each opening its reading as a separate page that keeps the centre title and the scope bar above it, under a pinned row holding an «all cards» button (same label in «understand», «try» and «history») and a horizontal strip of the stage's cards; below the board a collapsed «advanced» group shows, in the same card style, «department fingerprint» when a fingerprint exists, «campus movement» when a movement reading exists, «term comparison» when two terms exist, the «advanced decision lab», and «system diagnostics» for the full administrator only. The rooms and instructors cards (now in Reports), student requests (now in the registration register) and the plan sheet (now in «schedule tools → publish») are no longer in the centre.

Implemented · Should · Interface · Department head, Schedule committee chair, System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. The quality card shows «score/100» and the readiness as its description: ready for approval, ready after review, something blocks approval, needs improvement; the «before approval» card shows the blocker count or «no blockers».
2. Zero is never printed on a card, and a long text value (more than 7 characters) is drawn smaller.
3. The forecast card shows «history not sufficient», the number of actions or «no proposal» from /api/simulation/predictive-summary.
4. Arrows, Home and End move between cards and open them; in all three stages Escape closes the explanation sheet first, then the drawer, then the open card; the stage and card live in the URL (?stage=&card=) so the browser Back button returns to the card grid or to the card that sent the user to another stage; switching stage closes the open card; and the link accepts every «understand» card including improvement opportunity, forecast and actual demand.

#### EVIDENCE

`src/components/IntelligenceWorkspace.tsx#insightScenes` `src/components/IntelligenceWorkspace.tsx#moveInsightFocus`
`src/components/IntelligenceWorkspace.tsx#metricBadge` `src/components/IntelligenceWorkspace.tsx#liftToTop`
`src/components/IntelligenceWorkspace.tsx#CardPageHead` `tests/plan-sheet-audit.ts`

### FR-INT-047 The «why this figure» sheet behind indicators

Inferred

Pressing the «before approval» indicators and any alert shall open a read-only explanation sheet listing the items that make up the figure: high-severity approval blockers, instructors whose gap exceeds 180 minutes, appointments starting at 16:00 or later, incomplete records (instructor, course, room, time or days) and the load split between days, at most 12 items per list; indicator cards whose value is zero shall be hidden.

Implemented · Should · Functional · Department head, Schedule committee chair, System administrator

#### ACCEPTANCE CRITERIA

1. The explanation kind follows the alert title: conflict/booking/double/approval blocker ← blockers, gap ← gaps, late/time ← late appointments, data/record ← incomplete records, distribution/days ← days.
2. The attention reading shows the first three alerts and the rest under «show the rest (n)».
3. The sheet closes by clicking outside, ×, «done» or Escape, and its footer reads «explanation only · does not change the schedule».
4. In the department-wide reading an alert's explanation is limited to the rows of the college it came from.

#### EVIDENCE

`src/components/IntelligenceWorkspace.tsx#reasonForSmartAlert` `src/components/IntelligenceWorkspace.tsx#conflictReasonItems` `src/components/IntelligenceWorkspace.tsx#longGapReasonItems` `src/components/IntelligenceWorkspace.tsx#lateReasonItems` `src/components/IntelligenceWorkspace.tsx#invalidReasonItems`

### FR-INT-048 Quality, before-approval, density and movement readings

Inferred

The quality reading shall show the score out of 100 with a «how was the score formed?» breakdown, one bar per factor saying «clean» when it cost nothing, and the auto-improve and ask-the-assistant buttons; the «before approval» reading shall show the approval and publication states with the last publication time, and in the department-wide reading a button per college with its blockers and publication state that moves to it; the density map shall show teaching hours only, and campus movement shall show strenuous transfers and safe room swaps.

Implemented · Should · Functional · Department head, Schedule committee chair, System administrator

#### ACCEPTANCE CRITERIA

1. Density rows start one hour before the first busy hour and end one after the last, and colour strength = the slot's appointments ÷ the busiest slot; the «department/university» switch is shown to the full administrator only.
2. Campus movement shows the first 5 transfers with the available gap and the required minutes, and the first 3 room swaps, which open in the trial copy; a swap touching an appointment outside the college is refused with «the proposal includes an appointment outside this college».
3. Movement indicators equal to zero are not shown, and the department-wide reading shows the score of the most pressured college.

#### EVIDENCE

`src/components/IntelligenceWorkspace.tsx#heatTimes` `src/components/IntelligenceWorkspace.tsx#openSpatialProposal` `src/components/IntelligenceWorkspace.tsx#readinessLabel`

### FR-INT-049 Rooms and instructors readings and their panels in Reports

Inferred

Reports (not the Analytics Center) shall show in the «occupancy» lens the 8 most-used rooms with their estimated utilisation (occupied hours ÷ official day hours) for the site or the department family, and in the «instructors» lens each instructor's longest gap; pressing opens a side panel: for a room its rate and, for schedule builders, the departments that use it most and its free windows; for an instructor the «week shape» with days, longest gap and commitments outside the reader's scope.

Implemented · Should · Functional · Department head, Schedule committee chair, System administrator

#### ACCEPTANCE CRITERIA

1. An instructor whose longest gap is 180 minutes or more is flagged, and one without a long gap reads «no long gap».
2. The room panel shows the first 6 departments and the first 14 windows grouped by day, and states that other bookings are counted while their details stay hidden.
3. The instructor's week shape draws each day's lectures and waits, marking a wait of 60 minutes or more and writing its length when it fits.
4. The panel closes with Escape, a click outside or ×, and focus returns to what opened it.

#### EVIDENCE

`src/components/IntelligenceWorkspace.tsx#loadRoom` `src/components/IntelligenceWorkspace.tsx#loadProfessor` `src/components/IntelligenceWorkspace.tsx#professorWeekShape` `src/components/IntelligenceWorkspace.tsx#WAIT_THRESHOLD`

### FR-INT-050 System diagnostics for the full administrator

Inferred

The «system diagnostics» card in the «advanced» group shall show, to the full administrator only, logical anomalies, the department experience score, the 95th-percentile response time, front-end errors over the last 14 days, failure replays and the slowest server routes, without deleting or correcting anything; the missing-rows, duplicates and unscheduled-courses counters were removed.

Implemented · Could · Functional · System administrator, Root administrator

#### ACCEPTANCE CRITERIA

1. An experience score below 75 is highlighted, as is every counter above zero.
2. The first 6 anomalies are shown, the first 4 failures with the last 6 steps before each, and the slowest server routes with their average.

#### EVIDENCE

`src/components/IntelligenceWorkspace.tsx#insightScenes`

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/experience-health`

### FR-INT-051 Student requests reading and the survey link (moved to the registration sheet)

The «student requests» reading shall no longer be a card in the Analytics Center: it moved whole to the «demand analysis» drawer of the registration sheet (FR-STU-076) for holders of the schedule screen (permission 7), with the students' door (issuing a survey link valid 7, 30, 90 or 180 days, copying it, its QR code and printing, and stopping it with a confirmation), the forecast, new versus returning students, the four figures, «how many sections to open», the moves, the most requested courses, the overlaps and the course sequence; the case register stays in the sheet alone. What that reading used to open in the trial copy reaches the Analytics Center through a handoff entry in sessionStorage, which opens the trial-copy editor.

Implemented · Should · Functional · Department head, Schedule committee chair, System administrator

#### ACCEPTANCE CRITERIA

1. The students' door is not shown for an archived term; stopping a link states that submitted cases remain and their owners can follow «my request status» until 30 days after the term ends.
2. A term with no answers shows a forecast labelled as such from the previous term (first 8 courses and first 5 pairs) that disappears with the first answer.
3. A proposed section placement opens in the trial copy, and is applied to the schedule through a preview then confirmation only when it has an instructor; without one it reads «an instructor is required».
4. The Analytics Center shows no «student requests» card; a sessionStorage handoff older than ten minutes is not opened.

#### EVIDENCE

`src/components/DemandAnalysis.tsx` `src/components/StudentRegistration.tsx` `src/utils/intelligenceLink.ts#handOffToTwin`

`tests/student-journey-audit.ts`

### FR-INT-052 Department fingerprint reading and its unwritten rules

Inferred

The fingerprint reading shall show the pattern match percentage and how many terms built it, the day distribution, the 5 usual rooms, and under «reading details» the top 4 start hours, 3 bottlenecks and 2 deviations, and the historical average gap as a pattern reading, not a binding rule; it shall allow adding any of the first 6 rules discovered from history to the open-decisions book.

Implemented · Could · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. An added rule is titled «proposed rule: » plus its first 110 characters, its detail carries the confidence and the first 220 characters, and its priority is high at a confidence of 90 or more, otherwise medium.
2. Without earlier history it reads «the fingerprint starts from this term» and the percentage is «—».

#### EVIDENCE

`src/components/IntelligenceWorkspace.tsx#proposeUnwrittenRule`

`src/server/routes/intelligenceRoutes.ts#/api/intelligence/genome`

### FR-INT-053 The «ask the schedule» screen and printing its results

Inferred

The «ask the schedule» screen shall offer four ready questions sent with one click and four commands that write their text into the box, show the answer as figures, bars or a «before ← after» shift ahead of the text, with the answer's scope and appointment count, turn a move command («move 101 to 11:00») into a preview with its conflicts that applies only through the «apply the move» button, and print the questions and answers four per page.

Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A move command in the department-wide reading is not sent: the reading returns to the college and asks «choose the appointment's college, then send the move command», keeping the question in the box.
2. Applying the move goes through /api/schedules/move-batch with the same blockers, showing the first 4 conflicts, the blocking reason, or «moved successfully».
3. The send button is disabled while the box is empty, and a new answer is scrolled into view within the thread only and takes focus.
4. A side panel shows the knowledge limits and the decision book: the first 5 open and inferred decisions, adding a decision of 3 to 140 characters, and pressing a written decision closes it.

#### EVIDENCE

`src/components/IntelligenceWorkspace.tsx#sendCopilot` `src/components/IntelligenceWorkspace.tsx#applyMove`
`src/components/IntelligenceWorkspace.tsx#addOpenDecision` `src/components/IntelligenceWorkspace.tsx#closeOpenDecision`

### FR-INT-054 The trial copy in the «try» scene

The «try» scene shall show cards: the trial copy and the decision lab, then the trial board and the change ledger once a copy exists; the copy shall be taken from the schedule or from the auto proposal, its appointments moved by dragging onto half-hour slots between 08:00 and 18:00 keeping their days, or edited in the editor (start, end, room and days), and re-evaluated automatically 650 ms after the last change, while the real schedule changes only by saving it as a draft and then publishing it.

Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. The trial board shows the current schedule's score, the quality difference (pressing it recalculates) and the rule violations.
2. «save as draft» is disabled with no change; saving updates the open draft if it is a draft, otherwise creates one, then moves to the schedule screen with a message that the draft is not published.
3. The change ledger shows up to 30 changed appointments with their time before and after and their room if it changed, and «identical to the real schedule» when nothing changed.
4. The default draft name is «scenario» or «auto proposal» followed by the date and time.

#### EVIDENCE

`src/components/IntelligenceWorkspace.tsx#startTwin` `src/components/IntelligenceWorkspace.tsx#moveTwinTime`
`src/components/IntelligenceWorkspace.tsx#saveDraft` `src/components/IntelligenceWorkspace.tsx#twinSlots`
`src/components/IntelligenceWorkspace.tsx#CardDeck` `tests/intelligence-reading-scope-audit.ts`

### FR-INT-055 Decision-lab tools on screen

The decision lab shall show four tools: the rules board (six kinds as the server accepts them: instructor latest end, instructor day off, department research day, mandatory course room, maximum gap, and a break between two lectures in the same room), the decision room (a problem from the first 12 conflicts or the biggest problem, and three compared options), the automatic optimiser (a required written goal) and the policy lab (a day without lectures, closing a building, no lectures after a time, demand growth 1–100%), and any option shall become a draft only.

● Implemented · Should · Functional · Department head, Schedule committee chair, System administrator

#### ACCEPTANCE CRITERIA

1. Rule defaults: latest end 14:00, Wednesday, gap limit 120 minutes between 30 and 480 in steps of 30; deleting a rule passes a confirmation, and the instructor list holds assignable instructors only.
2. The policy scope is «this college», «all the department's colleges» when the department has more than one college, and «university» for the full administrator; «test» is disabled for closing a building with no building chosen.
3. A decision-room option is saved as a draft named «committee option n» and an optimiser plan as «auto plan n», and an empty answer for a department without appointments is shown as a message, not an error.
4. The room-break rule asks for minutes between 1 and 60 (default 10 when the kind is chosen), and the add form and the toggle and delete buttons are for a system administrator or the root account only, while anyone else sees a «read only» note.
5. Tool wording is Arabic: the option button reads «open in the trial copy», and the optimiser guard says it «has no publishing right».

#### EVIDENCE

`src/components/IntelligenceWorkspace.tsx#createConstraint` `src/components/IntelligenceWorkspace.tsx#deleteConstraint` `src/components/IntelligenceWorkspace.tsx#runWarRoom` `src/components/IntelligenceWorkspace.tsx#runAutopilot` `src/components/IntelligenceWorkspace.tsx#runPolicy` `src/components/IntelligenceWorkspace.tsx#saveOptionAsDraft` `tests/intelligence-reading-scope-audit.ts` `tests/analytics-reports-review-audit.ts`

### FR-INT-056 The «history» scene: term comparison, drafts, versions and the decision ledger

Inferred

The «history» scene (formerly «approve») shall show a term-comparison card when at least two terms have data for the scope, a drafts card with its count, a version-history card, and a «decision ledger» card with three tabs (open decisions, decision minutes, and decision memory for the main administration), each with its own data; the first compares appointment count, quality, additions, deletions and rooms between two different terms with «added/moved/disappeared» columns; the second opens and publishes a draft — the only publish path, including the «start of term» draft — followed by «undo publish» to the version taken before it; the third compares two versions of the same college visually and restores any version.

● Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Each comparison column shows up to 24 rows then «and n others», and comparing a term with itself is not sent.
2. Publishing and restoring are disabled while offline, ask before erasing later edits, and save a version before the change.
3. Two versions of different colleges ← «choose two versions of the same college», and the same version twice ← «choose two different versions to compare».
4. The timeline compares each version with the previous one 220 ms after it stops, the comparison slider accepts 0, 50 and 100% or dragging, and the schedule accuracy and the edit heat between 07:00 and 22:00 are shown.
5. The version's source badge in the timeline is Arabic: manual save, draft, publish, undo, copy, import, and anything else «edit»; the stored code is never shown.

#### EVIDENCE

`src/components/IntelligenceWorkspace.tsx#compareTerms` `src/components/IntelligenceWorkspace.tsx#publishDraft` `src/components/IntelligenceWorkspace.tsx#restoreVersion` `src/components/IntelligenceWorkspace.tsx#compareVersionPair` `src/components/IntelligenceWorkspace.tsx#versionActivityHeatmap` `src/components/IntelligenceWorkspace.tsx#versionSourceLabel` `tests/analytics-reports-review-audit.ts`

### NFR-INT-057 Robustness of the Analytics Center screen

The screen shall paint its board and quality first, then fill eight secondary readings each on its own, naming any that failed in a retryable notice without dropping the rest; only the newest request may paint; any write shall be refused while offline with a message; and an incomplete scope shall show an idle state without a stale error.

Implemented · Must · Non-functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. The secondary readings: drafts, versions, department fingerprint, rules, student requests, operations review, open decisions, experience health; the technical details of an error are for the full administrator only.
2. A response carrying the X-Reading-Partial header shows a «partial reading» chip with a re-read button instead of a full error.
3. A non-GET request while offline ← «you are offline; reading is available, but saving and publishing wait for the connection».
4. An action on an item from another college first moves the reader there, then runs only after that reading completes and only if the term is unchanged.

#### EVIDENCE

`src/components/IntelligenceWorkspace.tsx#reload` `src/components/IntelligenceWorkspace.tsx#fetchJson` `src/components/IntelligenceWorkspace.tsx#enterSourceScope` `tests/decision-surfaces-audit.ts` `tests/intelligence-reading-scope-audit.ts`

### FR-INT-058 Guide simulation in the trial copy

Inferred

The Analytics Center shall turn a Guide simulation request younger than 10 minutes into a trial copy carrying the requested change (the day, the time keeping the same lecture length, the room, a free alternative room or the instructor), and show «before/after» with three buttons: «try an alternative», «preview on the schedule» and «keep as draft», without changing the real schedule.

Implemented · Could · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. The alternative room is chosen among verified rooms free on the same days and time, preferring rooms of the same building, then by room order.
2. «try an alternative» delays the start by 30 minutes up to 22:00, and «keep as draft» saves a draft named «Guide simulation» and publishes nothing.

#### EVIDENCE

`src/components/IntelligenceWorkspace.tsx#guideSimulationMeta` `src/components/IntelligenceWorkspace.tsx#openScheduleWorkspace`

### IR-INT-059 Health rings above the timetable and decision tools in the Analytics Center

Inferred

The live layer above the timetable shall show a strip with the schedule pulse, the first note and three rings (quality, flexibility, fairness) that open the «schedule health» card in «Analytics Center → understand» when pressed, with no «decision centre» button or dialog; its scenes shall be shown in their cards in the Analytics Center, with «decision memory» opened from «why» inside the same card for the main administration; the strip reading waits for a quiet moment of at most 5 seconds and is cancelled if the scope changes first, showing the last scores saved for this account and scope meanwhile, while an opened card reads at once.

Implemented · Should · Interface · Department head, Schedule committee chair, System administrator

#### ACCEPTANCE CRITERIA

1. «Most important decision now» became a mode of the «committee decision room» (with no selection the server picks the highest-impact node) with «open the original appointment», which opens the appointment and the ones overlapping it in the edit form; «department fingerprint» is its card in «understand».
2. The layer read is shared with the experience layer so it is not requested twice for the same scope.
3. A safety point shows its kind icon, title, time, author, appointment count and restore effect, and «restore this decision» is disabled when restoring would change nothing.
4. «Main administration» follows the server's own rule: a system administrator or the root account; for anyone else the safety net is not in the bar, decision memory does not open, neither is read, and the memory warning in a «why» answer is shown without a button.

#### EVIDENCE

`src/components/LivingScheduleLayer.tsx#loadLiving` `src/components/LivingScheduleLayer.tsx#sceneItems` `src/components/LivingScheduleLayer.tsx#undoDecision` `src/components/LivingScheduleLayer.tsx#power` `src/utils/livingCache.ts` `tests/blockers-stream-audit.ts` `tests/analytics-reports-review-audit.ts`

### FR-INT-060 Reviewing and publishing the start-of-term draft in the live layer

Inferred

The «start of term» scene shall offer as source only earlier terms with data for the department, the rollover reading before creation, then the created draft's table with each row's blockers and warnings, allowing a row to be edited (instructor, time, room and days) and checked, deleted, «edit all» row after row, or «delete all» with an in-place confirmation, then «publish now», disabled while any note remains, and «undo the publication» after it.

Implemented · Should · Functional · Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. Delete-all sends x-schedule-confirm: delete-all-draft-rows and does not touch the official schedule.
2. After creation the page scrolls to the first row with a blocker, and the instructor list shows a former, non-assignable instructor as a disabled option.
3. With reduced motion preferred the animation is replaced by the line «the schedule is being built…».
4. The publication message states the number of appointments and how many had their time safely adjusted before publication.

#### EVIDENCE

`src/components/LivingScheduleLayer.tsx#runGenesis` `src/components/LivingScheduleLayer.tsx#saveGenesisRow`
`src/components/LivingScheduleLayer.tsx#deleteGenesisRow` `src/components/LivingScheduleLayer.tsx#deleteAllGenesisRows`
`src/components/LivingScheduleLayer.tsx#publishGenesisDraft` `src/components/LivingScheduleLayer.tsx#undoGenesisPublish`

### IR-INT-061 Content of the live-layer scenes

Inferred

The overview shall list the pulse items ordered by what deserves a decision, each opening its scene; the pressure map the first 8 hotspots (instructor, course, section, room or time) with their signal counts, separating blockers from advisory notes; health and fairness three dials, the 6 heaviest loads, the 5 riskiest failure points and 5 rooms without a substitute; and the one-minute brief the scores, the first 3 issues, what changed, where to start and the largest risk.

Implemented · Could · Interface · Department head, Schedule committee chair, System administrator

#### ACCEPTANCE CRITERIA

1. Dial colour: 85 or more good, 70 or more warning, below that bad.
2. An account without a topology reading sees «the pressure map is not available for this account», and a schedule without blockers sees «there is no blocker in the schedule».
3. A «why?/why not?» answer shows four before ← after indicators marked improved, worse or unchanged (higher quality is better; fewer blockers, instructor gap and rule violations are better), the gains and costs, and the memory warning with «open the memory» for the main administration only.
4. The appointment picker groups options by course and writes each as: name — section · instructor · days · time [seven-digit course number].

#### EVIDENCE

`src/components/LivingScheduleScenes.tsx#PulseScene` `src/components/LivingScheduleScenes.tsx#TopologyScene`
`src/components/LivingScheduleScenes.tsx#HealthScene` `src/components/LivingScheduleScenes.tsx#BriefScene`
`src/components/LivingScheduleScenes.tsx#WhyResult` `src/components/LivingScheduleScenes.tsx#ContextPicker`
`tests/course-number-seven-digit-audit.ts`

### DR-INT-062 Browser session keys of the Analytics Center

Inferred

The Analytics Center shall read one-shot keys from browser session storage: the requested-tab key (ending in -tab, accepting only command, copilot, twin and history), the requested-reading key (ending in -insight) and schedule-guide-simulation (a Guide simulation request, valid 10 minutes, temporarily taking precedence over the shared scope without overwriting it), and shall write schedule-guide-ghost-preview, schedule-return-note and schedule-command when moving to the schedule screen.

Implemented · Could · Data · The system (automatic)

#### ACCEPTANCE CRITERIA

1. The key is removed as soon as it is read, so the same reading is not reopened on a later visit.
2. An «import» tab saved by an older session is replaced by command.

#### EVIDENCE

`src/components/IntelligenceWorkspace.tsx#IntelligenceWorkspace` `src/components/IntelligenceWorkspace.tsx#openScheduleWorkspace`

### FR-INT-063 The Guide panel screens and tools

Inferred

The Guide panel shall show an «ask» screen whose question field answers with a steps card holding «show me» (or «continue from step N» for a tour left unfinished) and «try without saving» for a feature that has a simulation; it shall answer a «where was I / what now» question with the situation card, the unfinished tour or the closest suggestion, and a question about live data by saying it does not read schedule data, with «show me where»; under «more» it shall offer «point for me», «what is new», «all», «try without saving» and a «hints while working» switch, under «all» the groups of features the user may reach, and for the root administrator alone «unanswered questions» for the open scope's department.

● Implemented · Should · Functional · Standard user, Department head, Schedule committee chair, Root administrator

#### ACCEPTANCE CRITERIA

1. «point for me»: the next press on any control is captured and not executed; a known feature opens its answer, otherwise the control's label (up to 72 characters) becomes the question; the Guide's own elements and elements marked to be ignored are not captured, and «cancel» leaves the mode.
2. «what is new» lists at most 12 features the user has not seen, ranked by priority, with «mark all as read», and a dot on «more» signals unread items.
3. A question that stays «unsure» is logged masked at most 5 times per panel session and the same text is never logged twice; Escape closes the panel and focus returns to the element that opened it.
4. A tour plan carrying the phone note shows «done from a computer» instead of steps; «try without saving» stores the simulation request in the session store and moves to the Analytics Center «try» scene after 500 ms.

#### EVIDENCE

`src/components/guide/GuideAssistant.tsx#GuideAssistant` `src/components/guide/GuideAssistant.tsx#NOW_QUESTION` `src/guide/smartGuide.ts#markAllGuideProductUpdatesSeen` `src/guide/smartGuide.ts#setHintMode` `src/guide/awareness.ts#situationAnswer`

### FR-INT-064 The tour card and its controls

The tour card shall block the whole screen except the lit element (with a 6-pixel margin) and follow its position frame by frame, shall offer «next», «back» and «end» as buttons and through the arrow keys and Escape, shall leave the whole screen usable while waiting for the user's choice with «waiting for your choice» and «skip», shall say when the element is absent «I did not find this element in your current state» with its appearance condition from the knowledge bank, «retry» and «skip the step», and shall press the last step's button itself only for a read-only feature («open it»), otherwise asking «press the lit button».

● Implemented · Should · Functional · Standard user, Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. The card is 340 px wide, below the element or above it when there is no room; on a screen narrower than 640 px it sticks to the top or bottom edge opposite the element.
2. Pressing the lit element itself completes the step; an element that disappears after showing is searched for again.
3. A collapsed side rail is held open while a sidebar step shows and folded again after, and the phone «more» drawer is opened and closed by the tour.
4. Every step change saves the tour progress and sets the Guide's current task «guidance: …», and finishing records «helped» or «abandoned».

#### EVIDENCE

`src/components/guide/GuideTour.tsx` `src/components/guide/GuideAssistant.tsx#holdRail` `src/components/guide/GuideAssistant.tsx#revealSidebar` `src/guide/tour/runner.ts#TourRunner` `tests/guide-tours-audit.ts`

### FR-INT-065 Guide commands on the schedule screen

Inferred

The schedule screen shall receive the Guide's safe commands and carry them out without saving anything: switching the view (list, week or rooms), opening the review, opening the schedule tools, highlighting a given appointment, opening the editor on the time, course or instructor field of a selected appointment after marking it with «here», looking for alternatives for an appointment without a new conflict, and preparing an appointment move in the rooms view; it shall answer each command with a result (success or failure with a signal) the Guide reads, and shall report its context to the Guide: scope, view, selected appointment and its conflict, current task and the user's mastery of the view.

Implemented · Should · Functional · Standard user, Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A command needing a selected appointment with none selected writes «select a course first, then ask for help again.» and fails with signal schedule.editor.no-selection; the move preparation opens the rooms view and says no transaction has started.
2. The editor opens only after the card is found on the week view (up to 30 frames) and marked for 760 ms; opening the schedule tools on a phone outside the list view is refused with signal schedule.transfer.blocked.
3. The command palette lists under «Guide» every allowed, non-sensitive Guide action of the schedule screen not already in it (time, course, instructor and find-room disabled without a selection), and under «Guide destinations» the pages of other screens.
4. The user counts as expert in a view at mastery 0.72 or more; an undo asked by the Guide runs only an undo entry not yet used.

#### EVIDENCE

`src/components/Schedules.tsx#onGuideCommand` `src/components/Schedules.tsx#emitGuideResult`
`src/components/Schedules.tsx#paletteCovered` `src/guide/smartGuide.ts#GUIDE_ACTIONS` `src/guide/smartGuide.ts#canRunGuideAction`

### FR-INT-066 Practice mode on the schedule through the Guide

Inferred

The Guide's «safe practice» command shall offer a practice mode on the schedule screen that keeps a copy of the appointments on screen, so adding and editing from the editor, deleting and moving by drag apply to the appointments on screen only with no request to the server, while every other write to the server is refused with a clear message, with a «practice mode» strip saying that drags, edits and deletes are temporary on this device and that whatever writes to the real schedule is paused, and an «end» button that restores the appointments from the kept copy and says «practice mode ended. Your real schedule did not change.»

Implemented · Could · Functional · Standard user, Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. The approval bar (signing, sending and notes) is paused during practice, replaced by a line saying it returns when practice ends.
2. Deleting in practice asks «delete from the practice copy» with a «practice delete» button; a new appointment gets a temporary negative id and an edit keeps the row id.
3. The mode starts by the Guide command, from a «safe practice» button under «more» on the schedule toolbar, and from its command-palette entry; the feature's «show me» tour opens «more» and points at that button before practice, and at the strip once it has started.
4. Saving from the editor, deleting and moving by drag in the week and on the halls board are diverted to the copy; everything else (undo, the repair chain, copying and its undo, the safety-net point, placeholder actions, hall borrowing, comments, quick add, the schedule tools, start of term and trainee conversion) is refused with a message that practice mode is on and the action writes to the real schedule, and the wipe button and the hall market are hidden; every write request also passes a last barrier before the network and the offline queue that lets only the conflict check and the explanation reads through.

#### EVIDENCE

`src/components/Schedules.tsx#practiceMode` `src/components/Schedules.tsx#practiceSnapshotRef`
`src/components/Schedules.tsx#refuseInPractice` `src/components/Schedules.tsx#PRACTICE_READ_POSTS`
`src/guide/smartGuide.ts#GUIDE_ACTIONS` `src/guide/bank.ts` `tests/schedule-board-fixes-audit.ts`

### FR-INT-067 Previewing a change proposed by the Guide on the schedule

Inferred

The schedule screen shall show a «before/after» preview of a change the Guide proposes for an appointment (the day, the time keeping the lecture length with a 30-minute minimum, the room, or the instructor), whether it arrives as a direct command or as a handoff from «try» in the Analytics Center through the session store within 10 minutes, with the number of conflicts with the other appointments; «approve by hand» opens the editor on the appointment without saving, and «cancel» closes it.

Implemented · Could · Functional · Standard user, Department head, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. A handoff older than 10 minutes is ignored, a handoff read is deleted so it opens once, and the week view opens with the appointment highlighted.
2. The summary is «this preview will show N conflicts.» or «no blocking conflict appears in this preview.» without counting the placeholder faculty; with no selected appointment ← «select a course first to preview the change.»

#### EVIDENCE

`src/components/Schedules.tsx#guideGhostDiff` `src/components/Schedules.tsx#onGuideCommand` `src/components/IntelligenceWorkspace.tsx#openScheduleWorkspace`

### DR-INT-068 The Guide profile in the browser

Inferred

The Guide shall keep each user's profile in the browser's local storage under a key carrying the schema number (12) and the user number, holding each feature's mastery (attempts, successes, failures, helps and the last 21 samples of duration, steps and retries), moves between screens, ignored hints and the hint mode, the current and previous task, journeys, the last 8 transactions and which updates were seen; it shall migrate a profile of an older version to the current one and shall not send this profile to the server.

Implemented · Could · Data · The system (automatic)

#### ACCEPTANCE CRITERIA

1. Mastery = (evidence × 0.74 + reliability × 0.26) × e^(−days since use/240), where evidence = min(1, (1.65 × completed − 1.55 × failures − 0.65 × abandoned − 0.15 × helps)/10); a feature newer than the version the user saw is multiplied by 0.45, and an unused feature counts as 365 days old.
2. Discovered controls older than 60 days are not shown as new; a failure to read the store returns a blank profile with hint mode «auto».

#### EVIDENCE

`src/guide/smartGuide.ts#loadGuideProfile` `src/guide/smartGuide.ts#masteryScore` `src/guide/smartGuide.ts#profileKey` `src/guide/smartGuide.ts#discoveredNew`

### FR-INT-069 Reading the registrar's actual-demand report

The system shall read, on the server, the PDF of the registrar report «study of the courses students need» (SWRDASH): the term, the department, the faculty count and the total legal load from the header, and for every course its 7-digit number (subject + course, e.g. 0109105), name, units, offered sections, average students per section, students needing it and suggested sections (boys/girls/total) and the breakdown by student program; each number is placed by its column from its own page header, so empty cells never shift values.

Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

#### ACCEPTANCE CRITERIA

1. The real general report (9 pages) reads 50 courses; 0109105 has 3 units, two sections per track and 218 students; programs sum to each course total with no warning.
2. A file that is not SWRDASH is refused with a message; a non-PDF is refused (422); the limits are 4 MB and 60 pages.

#### EVIDENCE

`src/utils/actualDemand.ts#parseDemandReport` `src/server/actualDemand.ts#extractDemandItems` `tests/actual-demand-audit.ts`

### FR-INT-070 Storing actual demand per department family with an upload history

The report shall be stored per term and department family (boys and girls across its colleges) in both its «general» and «graduates» variants, after a preview showing the department, the term, the counts and what matched; saving shall be refused without explicit confirmation when the file's department or term differs from the one open; every upload records who, when and the file fingerprint (SHA-256) in the upload history and the audit log, with the same permission as editing the department schedule.

Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. The preview stores nothing; saving returns the variant and an upload history entry with a 64-character fingerprint.
2. A file for another term is answered with 409 unless confirmation is sent.

**EVIDENCE**

`src/server/actualDemand.ts#storeDemandVariant` `src/server/actualDemandRoutes.ts` `src/components/SectionPlan.tsx` `tests/actual-demand-audit.ts`

### FR-INT-071 Matching report courses to the catalogue and linking the rest

The system shall match every report course to its copies in the catalogue of each member of the department family by number only (never by name), and list what did not match so the user links it to a family course or marks it «not this department» once; the choice is stored for the family and applied every term.

Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. 0109105 matches 105 in the boys' college and 0109105 in the girls' college together; a course of a department outside the family does not match.
2. A stored link extends to all family copies, and «not this department» removes the course from the list.

**EVIDENCE**

`src/utils/actualDemand.ts#matchDemandCourses` `src/server/actualDemand.ts#saveDemandLink` `tests/actual-demand-audit.ts`

### FR-INT-072 Red alert for a needed course with no section

Right after upload the system shall show a list, most severe first, of courses needed by 20 or more students (the minimum of a theoretical section in art. 8) or by any graduate that have no section in the family schedule for the term (or in the report when the course did not match): graduates first, then the most students; each item has a «fix» button opening a new-appointment editor for the course in the college of the track that needs it, without saving.

Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. 0109108 with 458 students and no section appears in the list; a course that has a section in our schedule does not.
2. «Fix» carries the course, college and term to the workspace through the session store and is erased on first read.

**EVIDENCE**

`src/utils/actualDemand.ts#demandAlerts` `src/utils/actualDemandHandoff.ts` `src/components/Schedules.tsx#takeActualDemandHandoff` `tests/actual-demand-audit.ts`

### FR-INT-073 Supply against demand per course and track

For every matched course the system shall compare the students who need it with the seats of its sections in the department family's schedule for the term, first for the family and then per track (boys/girls) and its colleges, with a seat counted by our regulation cap: the course's entered capacity up to its nature's maximum in art. 8, a course excused by the administrator under art. 9 at its capacity, without capacity the nature's maximum, and without nature or capacity 60 flagged «assumed» — never the report's average; the result is a shortage or surplus in sections, and when one track is short while another has surplus the suggestion is to move a section between them before opening a new one.

● Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. An applied course with capacity 40: boys 93 students on one section → short two sections; girls 50 on four sections → two spare; the suggestion moves two sections from girls to boys.
2. A capacity of 70 on a theoretical course counts as 60 (art. 8), practical as 25, an excused course at its capacity.

**EVIDENCE**

`src/utils/actualDemandSupply.ts#demandSupply` `src/utils/actualDemandSupply.ts#seatCap` `src/server/actualDemand.ts#demandSupplyOf` `tests/actual-demand-supply-audit.ts`

### FR-INT-074 Section-planning figures in the analytics center

The 'Section planning' card in the analytics center shall carry the share of graduates seated when their report is uploaded, otherwise the number of sections short, and open the same screen as in the schedule tools.

● Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. Without a report the card says 'Upload'.

**EVIDENCE**

`src/components/IntelligenceWorkspace.tsx` `src/components/SectionPlan.tsx` `src/utils/sectionPlan.ts#sectionPlan` `tests/section-plan-audit.ts` `tests/actual-demand-audit.ts`

### FR-INT-075 Actual-demand badge in the approval review

Every course card in the «approval review» shall carry a small actual-demand badge: graduates without a seat with their number, or a shortage in sections, or a surplus, or ✓ balanced, without blocking approval and without appearing on the printed report.

● Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. Without an uploaded report there is no badge.

**EVIDENCE**

`src/components/DemandBadge.tsx` `src/components/ScheduleReview.tsx` `tests/actual-demand-audit.ts`

### FR-INT-076 The «remove a course» verdict uses the real numbers

The «I want to remove a course» verdict in «what if» shall read the actual demand when present: a course needed by students or graduates → «not advised» with their number from the registrar report, and «no student data» is not said then.

● Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. A course needed by 90 students including 6 graduates → a «actual demand» reason with the stop tone.

**EVIDENCE**

`src/utils/smartSuggestions.ts#courseRemovalVerdict` `src/server/timeMachineRoutes.ts` `src/server/timeMachineRoutes.ts#actualDemandFactsFor` `tests/smart-suggestions-audit.ts`

### FR-INT-077 Clashes between courses needed by one program's graduates

The system shall reveal in the «approval review» every two courses needed by graduates of the same program (from the graduates report) where every section of the first overlaps every section of the second in the same track, with an impact = sum of min(program graduates in the first, in the second) over shared programs, ordered by impact, as a note that never blocks approval and does not appear on paper.

● Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. Two BA-0115 courses overlapping in all boys sections → «affects 5 graduates»; a second non-overlapping section removes the clash.

**EVIDENCE**

`src/utils/actualDemandGraduates.ts#graduateClashes` `src/components/ScheduleReview.tsx` `tests/actual-demand-graduates-audit.ts`

### FR-INT-078 Impact of an appointment on graduates before saving

Before saving an appointment that creates a new clash between courses needed by one program's graduates, the editor shall say «affects N graduates» as a note that never blocks the save (the check-conflicts reading), and the «this appointment breaks the regulation» sheet shall carry the same note as a quiet line when it appears, with no new dialog.

● Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. Moving a section onto the time of a course its program's graduates need → «affects 4 graduates»; an edit that removes the clash raises nothing.
2. Count agreement: «7 graduates», «12 graduates».

**EVIDENCE**

`src/utils/actualDemandGraduates.ts#graduateImpactOf` `src/server/actualDemand.ts#graduateImpactFor` `src/server/routes/scheduleReviewRoutes.ts` `src/components/RegulationExceptionSheet.tsx` `src/components/Schedules.tsx` `tests/actual-demand-graduates-audit.ts`

### FR-INT-079 The single planning badge on the schedule

The approval bar on the schedule shall show one 'Planning' badge with a graduate cap and the number of graduate sections short when any, and the numbers suggested to open and to close; it opens the section-planning screen in place, where 'Open a section' and 'Choose what to close' act on the schedule without navigating; it is hidden when every course is balanced.

● Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. There is no «actual demand» badge and no second-report upload icon beside it: the demand report is uploaded from section planning only.

**EVIDENCE**

`src/components/ApprovalBar.tsx` `src/components/SectionPlan.tsx#SectionPlanningBadge` `src/utils/actualDemandHandoff.ts#openActualDemandFix` `tests/section-gap-audit.ts` `tests/decision-surfaces-audit.ts`

### FR-INT-080 Section planning in the schedule tools

The schedule tools shall carry one 'Section planning' tab showing the same screen: uploading the registrar report (all and graduates) with a preview before saving, the two stages, visiting instructors, and linking unmatched courses.

● Implemented · Should · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. No separate 'actual demand' tab.

**EVIDENCE**

`src/components/ScheduleTransfer.tsx` `src/components/SectionPlan.tsx` `tests/actual-demand-audit.ts`

## 3.12.6 Algorithms

ALG-INT-01 · Analytics Center and Guide

### Next-term demand forecast with confidence

Statistics from history

*How many sections will each course need next term, with what confidence, and is the confidence enough for a one-click action?*

1. Demand value of each past term = distinct sections + ⌈(not registered − vacant seats) ÷ capacity⌉.
2. Same-season terms are used when there are at least two, otherwise all history; the series starts at the course's first appearance.
3. Recency-weighted mean (newest weight 1, ×0.6 per older term) plus a damped linear slope (only from 4+ points, ×0.5, clamped to ±1); range ± ⌈weighted standard deviation⌉ (±1 with fewer than 3 terms).
4. It is blended with live radar wishes ⌈wanted ÷ capacity⌉: weight 0.5 with 3+ terms, otherwise 0.6.
5. Confidence = weighted mean of coverage (45, terms ÷ 4), stability (25, 1 − coefficient of variation), agreement (20) and input quality (10); ×0.75 with no same-season term; capped at 0.34 with one term or fewer; reduced by up to half by the back-test error (predicting each past term from earlier terms only).
6. The one-click «open sections» action is enabled only at medium confidence or above; a surplus of two or more is review only. Prerequisite bottlenecks, crowded hours (60-minute slots) and graduation delay (up to 12 future terms at 15 units) are produced alongside with the same confidence rule.

**Inputs**

Past terms' sections, registration statistics for the last 6 terms, live radar wishes, student profiles and approved plan rules — within the reader's scope.

**Output**

Per course: expected value and range, planned count and difference, trend, a reason line, confidence with level and terms used, and an action enabled or disabled with its reason.

Deterministic with no randomness or clock, read-only, counts not names; no figure without earlier terms («not enough history»).

High confidence ≥ 0.70, medium ≥ 0.45, thin-history cap 0.34 · Recency decay 0.6; full coverage at four terms · Back-test penalty up to 50%; errors above 25% are stated

`src/utils/predictiveIntelligence.ts#predictDemand` `src/utils/predictiveIntelligence.ts#confidenceFrom` `src/utils/predictiveIntelligence.ts#backtestDemand` `src/server/predictiveInsight.ts#predictiveReadingFor` `tests/predictive-backtest-audit.ts` `tests/predictive-intelligence-audit.ts`

FR-INT-018 FR-INT-019

ALG-INT-02 · Analytics Center and Guide

### Academic decision lab

Search and ranking

*Which time shift of an existing section lets more students arrange their entire wished bundle?*

1. Eligible people: profiles of the college and department with wishes for the term, on an approved sheet, with at least two offered eligible wished courses; the analysis runs only for 3 to 800 people.
2. Feasibility = can the whole wished bundle be arranged: backtracking over sections (fewest options first) with no-morning, no-afternoon and free-day constraints; counted infeasible beyond 20,000 steps.
3. The 12 most-wanted courses (3 to 250 interested) are taken, up to 3 sections each, and 7 standard starts (08:00 to 17:00) are tried with a shift of at most 300 minutes inside the day window; shifts colliding with an instructor or room are dropped.
4. Gain = feasible after − before; a gain below 3 is never shown, nor a comparison whose «before» count is 1 or 2 (privacy floor).
5. Score = 10 × gain + 3 × removed overlap pairs + min(4, downstream courses) − shift hours − 3 when resources are unverified; the best per section is kept, top 8, plus a combined chain.

**Inputs**

The college's term rows, student profiles with wishes and constraints, approved sheets, and course pairs that share students.

**Output**

Up to 8 scenarios with before, after, gain, reasons and cautions, and diagnostics that explain each stage when the result is empty.

Writes no row; a transparent score that claims no global optimum; seats and instructor consent are not decided here.

Privacy floor: 3 students · 7 standard starts: 08:00, 09:30, 11:00, 12:30, 14:00, 15:30, 17:00 · Backtracking cap: 20,000 steps per person

`src/utils/academicDecisionLab.ts#buildAcademicDecisionLab` `src/utils/academicDecisionLab.ts#feasibleAcademicBundle` `tests/academic-advice-audit.ts`

FR-INT-013

ALG-INT-03 · Analytics Center and Guide

### Natural-language query layer

Assisted reading, confirmed

*What does the user's sentence in the Analytics Center ask for, and which deterministic check should answer it?*

1. The sentence is sent to the Gemini service with the scope identifiers and five read-only function names (check_conflicts, find_rooms, check_instructors, check_regulations, simulate_schedule) in a calling mode restricted to them.
2. Sanitising before any execution: at most 8 calls; a name that is not allowed or contains a write word (save, delete, publish, apply…) is dropped; at most 24 arguments, strings cut at 240 characters, and commit/confirmed keys removed.
3. The server executes each accepted call with its own deterministic logic over the permitted department and term timetable; no result is taken from the service.
4. With no key, a refusal, a timeout or invalid output, a rule parser extracts the intent, course number, day and time and produces the same kinds of calls; the response states the source.
5. A move request returns a before/after preview (conflicts, regulations, quality) and requires a separate explicit confirmation through the usual move path.

**Inputs**

The user's sentence, the user's scope (college, department, term), and the service key when configured.

**Output**

A sanitised list of calls with their source (service or rule parser), the deterministic check results, and a move preview with no write.

The service only identifies intent: it never decides, writes or confirms; any write happens only after a person confirms in a second step.

Function-call budget 45 seconds; temperature 0.1 · Up to 8 calls, 24 arguments, 240 characters per string

`src/utils/geminiScheduleLayer.ts#sanitizeGeminiScheduleCalls` `src/utils/geminiScheduleLayer.ts#deterministicSchedulingCalls` `src/server/core/gemini.ts#requestGeminiScheduleLayer` `src/utils/naturalQuery.ts#parseNaturalQuery` `tests/gemini-schedule-layer.ts`

FR-INT-009 FR-INT-010 FR-INT-011 FR-INT-012 IR-INT-002

ALG-INT-04 · Analytics Center and Guide

### Guide question understanding by lexicon and weights

Deterministic

*Which system feature is the user asking about in standard Arabic, Kuwaiti dialect or English, and is the match confident enough to answer?*

1. Text is normalised, dialect phrases replaced, Kuwaiti, English and standard words mapped to one concept through the internal lexicon, the rest stemmed; stop-words and negated words («مو», «not») are dropped.
2. A compound question is split into at most three parts at punctuation and connectors.
3. An out-of-vocabulary word of 5+ letters is corrected to the nearest vocabulary word within edit distance 1 (2 for 8+ letters), weighted ×0.85.
4. Term weight = 1 + ln((N+1) ÷ number of features mentioning it) over the knowledge bank, so rare words weigh more.
5. Score of each permitted feature = 0.62 × best phrase overlap (Dice) + 0.30 × coverage + 0.12 × title hits, with small boosts for the current screen (+0.025), suggested (+0.05) and recent (+0.012).
6. An answer is given at a score of 0.34 or more; «did you mean?» alternatives are added below 0.55, with unknown words, or when a rival is within 90%; otherwise «unsure» with up to three closest.

**Inputs**

The question text, the knowledge bank, the features the user's role can reach, and the current screen.

**Output**

Per part: an answer with a feature, its confidence and alternatives, a live question, or «unsure» with the closest features.

Runs entirely in the browser with no network request; only features the role can reach are ranked; nothing of the lexicon is shown, and unknown words are masked in the anonymous log.

Answer threshold 0.34; weak-understanding threshold 0.55 · Edit distance 1 (5–7 letters) and 2 (8+ letters)

`src/guide/brain/engine.ts#understand` `src/guide/brain/engine.ts#rank` `src/guide/brain/engine.ts#maskUnknownWords` `src/guide/brain/normalize.ts` `src/guide/brain/lexicon.ts` `tests/guide-brain-audit.ts`

FR-INT-024 FR-INT-025 FR-INT-028

### 3.12.7 Edge cases

**⚠ No graduates report**

**Scenario** Only the general report was uploaded.

**Behaviour** No graduates' clash and no pre-save note; no verdict without data.

**⚠ A college with no boys or girls track**

**Scenario** The college name carries neither «boys» nor «girls» (the demo).

**Behaviour** One track serves all students, with no move suggestion.

**⚠ Gemini service absent or failing**

**Scenario** No key is configured, the service refused the request, or the 45-second timeout elapsed during a natural-language query.

**Behaviour** The server parses the sentence with the rule parser and completes the same preview, declaring its source deterministic-parser; if nothing is extracted it returns a hint, not an error.

**⚠ A proposal that asks to write**

**Scenario** The service returns a call named updateSchedule, or an allowed call with a commit:true or save:true argument.

**Behaviour** The disallowed call is dropped entirely, the write argument is removed from the allowed one and the rest stays; nothing reaches a write.

**⚠ A course code with several appointments**

**Scenario** The user types «move 101 to 11:00» and the department has three sections of that course.

**Behaviour** The server picks no section; it returns ambiguous with up to 6 options (section, days, time) so the user chooses the section or day.

**⚠ A department with no appointments in the term**

**Scenario** The department head opens the decision room, the optimiser or the auto proposal for a term whose schedule is not yet built.

**Behaviour** A 200 response returns with empty:true and a message pointing to «start of term from the previous term» (a draft that changes nothing before publishing) or to schedule import, not an error.

**⚠ Short history for the forecast**

**Scenario** A course with only one term in history, or no term and no live wishes.

**Behaviour** A one-term confidence is capped at 0.34 so the one-click action stays disabled with its reason shown; zero terms with no live signal groups the course under «insufficient data» with no expected figure.

**⚠ A Guide question about live data or outside its world**

**Scenario** The user asks how many students are registered now, asks about today's weather, or names a person after a title.

**Behaviour** The Guide does not read data and points to the screen that holds the answer; an out-of-world question is answered honestly as outside what it knows; the name after a title is removed before logging.

**⚠ A tour element does not appear**

**Scenario** The tour navigates to a screen and the required element does not appear within 7 seconds.

**Behaviour** The tour reports «missing» and offers what can be done (retry or skip the step) while it keeps looking quietly; it closes only by the user's hand.

**⚠ A named instructor outside the department scope**

**Scenario** The user asks the assistant about the gaps of an instructor who is in the university directory but has appointments only in another department.

**Behaviour** It answers that the instructor has no data in this department and term, and does not mix another department's schedule into the answer.

**⚠ An empty suggested cell in the demand report**

**Scenario** The graduates report prints one suggested boys' section for 0109114 and leaves the girls' cell empty.

**Behaviour** The girls' cell reads as zero in its column, and the total is not shifted into it.

### 3.12.8 Standing owner decisions

- Course numbers are 7 digits only: college (2) + department (2) + course (3), for example 0109105; the stored three-digit tail and AdCourseId are never shown on any screen of this module.
- The Gemini service reads the text and proposes; execution is always through the deterministic validators and an explicit confirmation by the user.
- Printed reports keep their design: fixes go in values and data, not layout.

↑ Contents

3.13 · RPT

# Reports, queries, printing and export

One question, many lenses; A4 landscape sheets in their approved design; Excel files with seven-digit course numbers.

| 66 | 100% | 17 | 37 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.13.1 Overview

This module covers the queries-and-reports screen, which has ten entry points (search and report for instructor, room, time and room-and-time, advanced search, and the department report). All of them open on one shared filter set and fifteen display lenses. Sheets print on A4 landscape without any change to their approved design, and Excel export uses the same filters. It also covers the report data sources on the server: department balance, room load, the visiting-instructor roster and history, the schedule-changes report, the Authority file comparison, and the plan-sheet badge bridge shared by several screens. Every course number shown is seven digits.

Department head · Schedule committee chair · College dean · Vice dean for academic affairs · Registration officer · College registrar · Dean of Admission and Registration · University registrar · Department advisor · System administrator · Root administrator · The system (automatic)

## 3.13.2 User journeys

**Department head** — **Printing the comprehensive department report**

1. Opens the department report from the reports menu and picks college, department and term.
2. Presses the comprehensive-report print button; the sheet list offers this site, with the changes appendix, or all branches when the department has more than one site.
3. Selects a sheet with the arrow keys or a click, then presses Print or Enter.
4. The system opens the print dialog on A4 landscape; each page is measured and scaled to fill the sheet.
5. When printing ends the print attributes are removed and the screen returns to normal.

**Schedule committee chair** — **Finding a room at a given time and exporting the result**

1. Opens room-and-time from the queries menu.
2. Sets building, hall, days and a time window from a list in half-hour steps.
3. Results and filter chips update immediately from a single set of conditions.
4. Presses Export Excel and receives a file with the same filters and seven-digit course numbers.

**College dean** — **Reading the department balance**

1. The dean opens the queries screen and it starts on the department balance lens.
2. Reads one line per department: appointments, instructors, halls, morning and evening shares, fairness and conflicts.
3. Only departments with approved schedules count, and only within the dean's college.
4. Prints the lens with the Print this view button.

### 3.13.3 Diagrams

**Print command flow**

Every step before the print dialog runs synchronously in the same tap; print attributes are lifted only when printing has really ended.

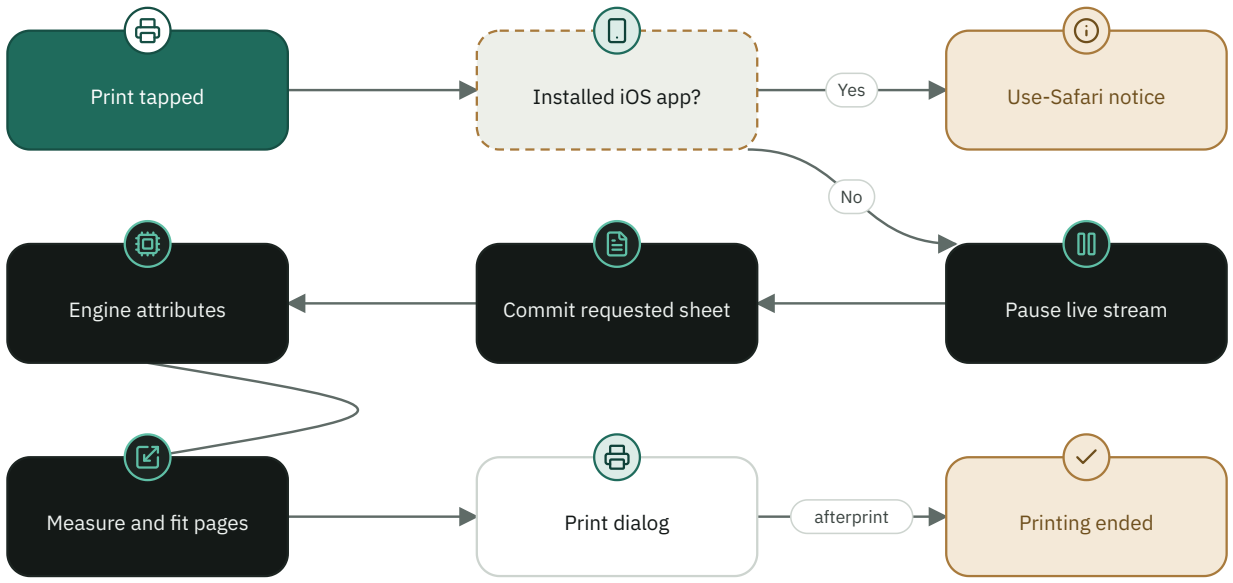

### Choosing the opening lens

The opened screen's lens outranks the saved one, except for the department report and advanced search where the saved one wins, and deans start on the department balance.

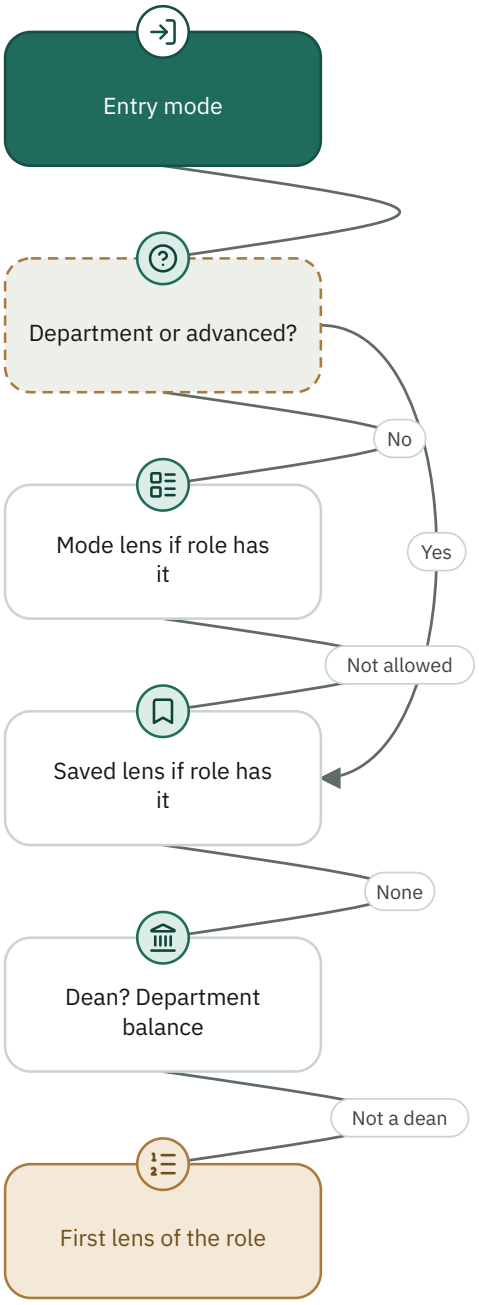


## 3.13.4 Screens

**Queries and reports center**
A single screen with ten entry modes (ReportMode), a lens bar, one filter bar, and the print and export buttons.`src/components/Reports.tsx`

**Report sheet chooser**
One row per sheet, a single selection, one print button, with keyboard navigation.`src/components/ReportChoicePanel.tsx`

**Printed schedule-changes report**
A document comparing the current schedule with the imported Authority file, using the same head as the comprehensive report.`src/components/AuthorityPdfReport.tsx`

**Official document head**
A head shared by the comprehensive report and the changes report.`src/components/PrintComprehensiveHead.tsx`

**Occupancy rate grid**
A day-by-hour heat map with five levels.`src/components/OccupancyHeatGrid.tsx`

## 3.13.5 Requirements

### FR-RPT-001 Ten entry modes on one screen

The system shall provide ten entry modes for queries and reports, all opening on the same screen on the lens that fits the mode's question, and shall show only the modes the user holds permission for.

Implemented · Must · Functional · Department head, Schedule committee chair, Registration officer

**RATIONALE**

> Each mode used to carry its own filters, layout and print path; unifying them keeps deep links and permissions unchanged.

**ACCEPTANCE CRITERIA**

1. The modes are searchInstructor, searchRoom, searchTime, searchRoomTime, searchAdvanced, reportDepartment, reportInstructor, reportRoom, reportTime and reportRoomTime.
2. Permissions: instructor 8, room 9, time 10, room-and-time 16, advanced search 17, department report 14.
3. The time and room-and-time modes open on the Times lens unless the role lacks it, in which case the Rooms by times lens is used.

**EVIDENCE**

`src/components/Reports.tsx` `src/App.tsx` `tests/report-print-menus-audit.ts`

### FR-RPT-002 One filter set

The system shall apply the same filter set to every lens: college, department, term, instructor, civil number, instructor name, building, hall, course, course number, time window and days.

Implemented · Must · Functional · Department head, Schedule committee chair, Registration officer, Department advisor

**ACCEPTANCE CRITERIA**

1. The time window matches any appointment that overlaps it by at least one minute; touching edges do not count.
2. Selecting several days keeps an appointment that falls on any of them.
3. An instructor query written in Arabic-Indic or Persian digits is read as ordinary digits and searches the civil number.
4. The course, instructor, building and hall lists narrow to the other chosen filters.
5. The time window applies only when complete and start precedes end; a half window says «also pick ‹to› to apply the period», and an inverted one says «the start is after the end, so the period was not applied» with a «swap the times» button.
6. «More» holds a «search by name or civil number» field: text matches part of the instructor name and digits match part of the civil number.

**EVIDENCE**

`src/components/Reports.tsx` `tests/course-number-seven-digit-audit.ts` `tests/query-center-plus-audit.ts`

### FR-RPT-003 24-hour time options

Inferred

The system shall list the start and end time options of the query screen in half-hour steps, from the start of the schedule day to its end.

Implemented · Should · Functional · Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. With the default window 08:00-20:00, 25 values are listed from 08:00 to 20:00 in 30-minute steps.
2. The empty value shows as --:-- and the filter stays inactive until both start and end are set.

#### EVIDENCE

`src/components/Reports.tsx` `src/utils/scheduleTime.ts`

### FR-RPT-004 Fifteen display lenses

The system shall provide fifteen lenses, each answering one specific question from the same filtered results, and every lens shall have a print sheet with content.

Implemented · Must · Functional · Department head, Schedule committee chair, College dean, Registration officer

#### ACCEPTANCE CRITERIA

1. The lenses are: All, Week, Instructors, Courses by sites, Rooms, Occupancy rate, Rooms and instructors, Courses by rooms, Rooms by times, Times, Visiting instructors, All terms, Load fairness, Department balance, Decision board.
2. No lens prints a blank sheet titled undefined; every print kind has an entry in the title table.

#### EVIDENCE

`src/components/Reports.tsx` `tests/report-print-menus-audit.ts`

### FR-RPT-005 Role-based lens lists

Inferred

The system shall shorten the visible lens list for the deans and registration roles to what concerns them, without the server blocking anyone, and shall open each on the first lens of its list.

Implemented · Should · Functional ·

College dean, Vice dean for academic affairs, Dean of Admission and Registration, University registrar, College registrar, Registration officer

#### ACCEPTANCE CRITERIA

1. The dean sees 7 lenses starting with the department balance; the vice dean sees 13.
2. The dean of registration, university registrar and college registrar see 7 lenses; the registration officer sees 6 (no Rooms by times).
3. Everyone else sees all lenses except All terms (a second face of Visiting instructors), Department balance for non-administrators, and Decision board for non-eligible roles.
4. A saved lens the role does not hold falls back to the first available lens.

#### EVIDENCE

`src/components/Reports.tsx`

### FR-RPT-006 Department balance

The server shall return one line per department in the reader's scope with appointments, instructors, halls, morning and evening shares, fairness, quality and conflicts, and departments outside the scope shall not enter the calculation or the totals.

Implemented · Must · Functional · College dean, Vice dean for academic affairs, Dean of Admission and Registration, System administrator

#### ACCEPTANCE CRITERIA

1. GET /api/reports/department-balance requires permission 14.
2. Morning means starting before 14:00 (840 minutes), counted per appointment day; departments are sorted by appointment count, descending.
3. For the dean and vice dean only final schedules count, and a department with none is omitted.
4. The totals' scope label is the university, the college or the scope, depending on the reader.
5. Without termId the balance is computed for the newest term; halls count every hall the department actually teaches in after folding legacy spellings onto the registered hall and dropping blanks and «---», returned beside the number verified in the registry (verifiedRooms), the heaviest instructor's name and the count of late appointments.

#### EVIDENCE

`src/server/routes/reportsRoutes.ts#/api/reports/department-balance` `src/components/Reports.tsx` `tests/dean-notify-audit.ts` `tests/role-scope-audit.ts`

### FR-RPT-007 Room load and free windows

The server shall return the occupancy of the reader's halls computed from the whole term without revealing any course or instructor of another department, and shall count only verified official halls.

Implemented · Must · Functional · Schedule committee chair, Department head, College dean, Vice dean for academic affairs

#### ACCEPTANCE CRITERIA

1. Each hall carries day, start and end in minutes and a mine flag, together with the day start and end.
2. A non-administrator with no college, or a department outside the scope, receives 403; a reader covering the whole college reads its halls without choosing a department.
3. A row pending room confirmation occupies nothing, while an unlinked text booking occupies the same hall.
4. Ordering is by building then hall, numerically: 7/31 before 8/22 and 9 before 10.

#### EVIDENCE

`src/server/routes/reportsRoutes.ts` `tests/room-occupancy-audit.ts`

### FR-RPT-008 Load fairness from one formula

The load fairness lens shall compute its index from the same fairness engine as the department balance, shall exclude records that are not persons, and shall show the average load in credit hours.

Implemented · Must · Functional · Department head, College dean

#### ACCEPTANCE CRITERIA

1. A faculty-placeholder record does not enter the index, and two instructors with equal load score at least 90.
2. The unit is written as average load (credit hours).

#### EVIDENCE

`src/components/Reports.tsx` `src/server/routes/reportsRoutes.ts` `tests/dean-notify-audit.ts`

### FR-RPT-009 Occupancy rate

The occupancy rate lens shall show, for each day-by-hour cell, the number of lectures and occupied halls in five color levels, plus each day's hall occupancy rate, for the site or for the department family across all its colleges.

Implemented · Should · Functional · Schedule committee chair, College dean, Registration officer

**ACCEPTANCE CRITERIA**

1. Level 1 to 5 is ceil(lectures / grid maximum x 5); an empty cell is level 0.
2. Pressing a cell opens its lectures, and the lens prints 18 halls per page.

**EVIDENCE**

`src/utils/occupancyHeat.ts` `src/components/OccupancyHeatGrid.tsx` `src/components/Reports.tsx` `tests/occupancy-heat-audit.ts`

### FR-RPT-010 Visiting-instructor query across department colleges

The system shall read the visiting instructors of a scientific department and their teaching across every college holding a matching department the reader may access, and shall mark the total incomplete and name what is not accessible instead of presenting a partial total as complete.

Implemented · Must · Functional · Department head, College dean, Vice dean for academic affairs

**ACCEPTANCE CRITERIA**

1. The visiting-roster, visiting-teaching and visiting-history routes accept permissions 7, 8, 9, 10, 14, 16 and 17.
2. visiting-teaching without college, department or term returns 400, and an unauthorised scope returns 403.
3. A section is (college, department, course, section code); a lecture and a lab appointment of one section count as one section and their hours add up.
4. Weekly hours = appointment duration x number of days, and a row arriving from two sources is not counted twice.

**EVIDENCE**

`src/server/routes/reportsRoutes.ts` `src/server/visitingTeachingRead.ts` `src/utils/visitingTeaching.ts` `tests/visiting-teaching-audit.ts` `tests/visiting-family-audit.ts`

### FR-RPT-011 Visiting history across terms

The system shall show the visiting-instructor history across terms as one year matrix shared by screen and sheet, and shall keep anyone delegated in a past term even if they have left the department directory since, with a mark.

Implemented · Should · Functional · Department head, College dean

**ACCEPTANCE CRITERIA**

1. The detailed year window defaults to 6; choices are 4, 6, 10 and all years, and a choice that changes nothing is not offered for a shorter archive.
2. A term with no visiting instructor does not become a column.
3. An instructor no longer in the directory carries listedNow = false.
4. Nobody missing from the instructor list loaded on screen is dropped from the matrix: they stay under the name kept in the history and are marked «no longer in the department directory» on both screen and sheet; only someone who carried no section in any term is left out.

**EVIDENCE**

`src/utils/visitingHistory.ts` `src/server/routes/reportsRoutes.ts` `src/components/Reports.tsx` `tests/visiting-teaching-audit.ts` `tests/analytics-reports-review-audit.ts`

### FR-RPT-012 Courses by rooms

The courses-by-rooms lens shall list appointments whose registered room type differs from the course's room type, grouped by course.

Implemented · Should · Functional · Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. If either the course or the room has no type there is no comparison and no mismatch.
2. Sorting is by Arabic name then section code.

**EVIDENCE**

`src/components/Reports.tsx` `tests/course-room-type-sync-audit.ts`

### FR-RPT-013 Read-only decision board

The decision board lens shall appear only to the department head, dean, vice dean and top administrator, read-only and within their scope.

Implemented · Should · Functional · Department head, College dean, Vice dean for academic affairs, Root administrator

**ACCEPTANCE CRITERIA**

1. The department head sees the chosen department only; the deans see the college departments their scope covers.
2. Anyone else does not see the lens at all, and the server still checks every request by scope.

**EVIDENCE**

`src/utils/decisionBoardScope.ts` `src/components/Reports.tsx` `tests/decision-surfaces-audit.ts`

### FR-RPT-014 Seven-digit course number

The system shall show the course number in every printed report, on the query screen and in the Excel file as seven digits (college 2 + department 2 + course 3), built with authorityCourseCode and authorityDepartmentCode, and shall never show the stored three-digit code or AdCourseId.

Implemented · Must · Functional · Department head, Schedule committee chair, Registration officer

**RATIONALE**

> Owner decision: the full Authority number is how the reader identifies a course.

**ACCEPTANCE CRITERIA**

1. Code 105 with department key 0109 is shown as 0109105, and code 5 as 0109005.
2. Arabic digits are read as digits; a code containing letters or of unusual length stays as stored and no number is invented.
3. All code chips on screen come from courseNumberOf, and the course-number filter matches both it and the stored code.

**EVIDENCE**

`src/components/Reports.tsx` `src/utils/authorityAcademicCodes.ts` `src/server/routes/reportsRoutes.ts` `src/components/AuthorityPdfReport.tsx` `tests/course-number-seven-digit-audit.ts`

### FR-RPT-015 Excel export with screen filters

The system shall generate an Excel (xlsx) file from /api/reports/excel/:type using the same filters as the screen, with a seven-digit course number column.

Implemented · Must · Functional · Department head, Schedule committee chair, Registration officer, College dean

**ACCEPTANCE CRITERIA**

1. Types are ListofTeacherCourseExcel (permission 14), TeacherWithCourseExcel (8) and ScheduleExcel (7); any other type returns 400 and a missing permission returns 403.
2. There are 13 columns in this order: college, department, course number, course name, section, units, hours, instructor, civil number, time, days, building, hall.
3. The sheet is named the schedule sheet, in a right-to-left workbook with an auto-filter, sorted by course name, section, then start time.
4. A visiting instructor's name carries the visiting suffix, and the default term is the newest.
5. Building and hall are matched by registry id (buildingId and roomId) as the screen sends them, with the code text kept for old links; a building filter showing 37 appointments on screen exports 37 rows.
6. The time window is compared in minutes and never applied inverted; instructorQuery matches the name or civil number as on screen; the file is named «schedule - department - term - date.xlsx» through filename*.

**EVIDENCE**

`src/server/routes/reportsRoutes.ts` `src/components/Reports.tsx` `tests/course-number-seven-digit-audit.ts` `tests/dean-notify-audit.ts` `tests/query-center-plus-audit.ts`

### FR-RPT-016 Export through the request reader

The export route shall read rows through the same request reader as the screen, so deans receive final schedules only, and the civil number shall not be exported to view-only roles.

Implemented · Must · Functional · College dean, Vice dean for academic affairs, Registration officer

**ACCEPTANCE CRITERIA**

1. A dean's file contains no drafts that the screen does not show to the dean.
2. The civil-number column passes through instructorsForReader and is empty for readers who are not entitled.

**EVIDENCE**

`src/server/routes/reportsRoutes.ts` `src/server/core/scheduleReads.ts` `tests/dean-notify-audit.ts`

### FR-RPT-017 A titled sheet for every lens

The system shall print every lens on a sheet whose document title starts with SCHEDULE followed by the report name, and shall restore the original title after printing.

Implemented · Must · Functional · Department head, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. The two comprehensive kinds have separate titles: the comprehensive schedule report and the same with all branches.
2. Printing one document clears the other documents (changes report and book) before the print command.

**EVIDENCE**

`src/components/Reports.tsx` `tests/report-print-menus-audit.ts`

### FR-RPT-018 A4 landscape on every engine

The system shall print every report on A4 landscape with margins of 10 mm top, 8 mm sides and 14 mm bottom, shall paint the sheet rotated inside the portrait page of Safari and Chrome on iOS, and shall pin the geometry on desktop Chromium.

Implemented · Must · Functional · Department head, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. The @page rule states A4 landscape explicitly rather than millimetres alone.
2. The root is stamped data-print-rotate for Safari and iOS Chrome, and data-print-chromium for desktop Chromium.
3. The attributes are removed on afterprint or when the reader returns to the page, never by a timer during preview.

**EVIDENCE**

`src/styles/08-print.css` `src/components/Reports.tsx` `tests/print-fit-audit.ts`

### FR-RPT-019 Filling the sheet without clipping

The system shall measure every print page with the print rules before the print command, enlarging it up to 1.8 or shrinking it down to 0.6 of its size so that it fits a full A4 sheet.

Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Media are evaluated against the sheet, not the window: a (max-width:640px) rule does not apply to a 297 mm sheet.
2. A comprehensive page rotated in Safari is not enlarged a second time (ceiling 1).
3. Sheet fonts (weights 300-700 and Mono 400-600) are preloaded when reports open, before the first measurement.

**EVIDENCE**

`src/utils/printFit.ts` `tests/print-fit-audit.ts`

### FR-RPT-020 Printed page row budgets

The system shall distribute each sheet's rows over pages with a capacity measured on A4 landscape so that no sliver spills onto a blank sheet, and shall keep a comprehensive-report row on the same page as on the registration sheet.

Implemented · Must · Functional · Department head, Registration officer

**ACCEPTANCE CRITERIA**

1. List 10 rows, instructors 7, room occupancy 18, room free windows 14, room directory 17, times 10, fairness 11, department balance 14, visiting 7, all terms 11.
2. A comprehensive page holds 28 rows, on the first page and every following one.
3. Week 4 appointments per day per page, rooms by times 4 lines, courses by rooms and the decision board 10, courses by sites 9 instructors, rooms and instructors 12 (rooms then instructors), and in all terms ten years per page with the rest on a following page that repeats the identity columns.
4. The changes appendix holds 21 lines on its first page and 23 on later ones, a change touching more than one field counting 1 + 0.7 per extra field.

**EVIDENCE**

`src/components/Reports.tsx` `src/utils/printFit.ts` `tests/print-fit-audit.ts`

### FR-RPT-021 Instructor report scope

The system shall print the instructor report for the chosen instructor, or, when none is chosen, for all instructors in the current view with their full load in the requested scope (the selected college or all colleges within permissions), and shall state the reason when nobody qualifies.

Implemented · Must · Functional · Department head, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. With no chosen instructor the view's instructors enter the report and a row with no instructor does not.
2. A name query matches across colleges; a civil-number query with no results in view gives a message, not an empty sheet.
3. The displayed count is unique instructors, not rows.

**EVIDENCE**

`src/utils/instructorReportScope.ts` `src/components/Reports.tsx` `tests/report-print-menus-audit.ts`

### IR-RPT-001 Sheet chooser for the two composite reports

The interface of the comprehensive report and the schedule-changes report shall show a single list with one row per sheet, one selection and one print button, without losing any sheet that was available before unification.

Implemented · Should · Interface · Department head, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. Comprehensive: this site, with the changes appendix, and all branches when the department has more than one site.
2. Changes report: this site and all branches, each also with the civil number after the instructor name.
3. Arrows navigate (left is next in RTL), Home and End jump to first and last, Enter prints, Escape closes and restores focus.
4. The saved choice stays if still available, otherwise the first is chosen.

**EVIDENCE**

`src/components/ReportChoicePanel.tsx` `src/utils/reportChoices.ts` `src/styles/48-report-choice.css` `tests/report-choices-audit.ts`

### FR-RPT-023 Changes report and Authority comparison sources

The server shall provide the changes report for one department and a comparison of the current schedule with the approved Authority file, within the reader's scope, and shall limit deans to an approved schedule.

Implemented · Must · Functional · Registration officer, College registrar, Department head, College dean

**ACCEPTANCE CRITERIA**

1. schedule-changes without term, college or department returns 400, outside scope returns 403, and is limited to 90 requests per minute.
2. Deans cannot read the report of an unapproved schedule: 403 with a message saying it is shown after approval.
3. authority-pdf-diff returns 404 when no copy exists, and with meta=1 returns a null draftId instead of 404.
4. A currently empty table is still compared and every original row is classified deleted, so the report is not suppressed.
5. On the printed sheet, a section the coordinator created by hand whose number changed from the original (501 to 515, for example) ← a «changed» row with only the section-number cell coloured yellow, and the number cell of an imported row is not coloured; the printed design itself does not change.
6. The colour key in the footer of every page of the schedule-changes report carries the count of each status (added, deleted, changed) for the document, a zero count is hidden; the header and columns are unchanged.
7. The last page of the comprehensive and schedule-changes reports carries no bottom padding and no break after it, so no blank trailing sheet comes out in Safari; the coordinates of every earlier page do not change.
8. Safari sheets (the rotate path) print at 97% instead of 100% (owner decision), so nothing leaves the paper edge; the scale is one variable that the slot, offset and attestation strip all follow, and the row count, orientation and columns do not change.
9. In Safari's rotated path the sheet is offset toward its top by whatever page width remains after scaling (6.3 mm at 97%), so its bottom is no longer clipped at the paper edge; the bottom and top margins stay close (4.5 and 5.0 mm), the attestation strip follows, and nothing else changes.

**EVIDENCE**

`src/server/routes/reportsRoutes.ts` `src/components/AuthorityPdfReport.tsx` `src/utils/authorityReportOrdering.ts` `tests/schedule-changes-audit.ts` `tests/changes-baseline-audit.ts` `tests/authority-net-diff-audit.ts` `tests/authority-recreated-section-audit.ts`

### FR-RPT-024 Authority report row ordering

The system shall order the rows of the Authority file report in the original PDF order, and shall place all true additions after all source rows while keeping the site sequence.

Implemented · Must · Functional · Registration officer, College registrar

**ACCEPTANCE CRITERIA**

1. A moved or renumbered original row stays in position by its original sourceOrder.
2. An invalid sourceOrder (negative, at least 1,000,000 or not a number) is treated as missing and sorted last.

**EVIDENCE**

`src/utils/authorityReportOrdering.ts` `tests/authority-net-diff-audit.ts`

### FR-RPT-025 Plan-sheet badge bridge

The system shall provide a single server-side bridge whose source is set by plan-sheet review and read by the other screens, so every screen shows a course's sheet badge and requirement type from the same source, and the client shall make one shared fetch.

Implemented · Must · Functional · Department head, Schedule committee chair, Standard user

**ACCEPTANCE CRITERIA**

1. GET /api/plan-badges requires sign-in, returns only what falls inside the account's scope, and sets Cache-Control: no-store.
2. A badge does not cross department boundaries: the key is department:course, and the owner department's sheet is not overwritten by a service sheet.
3. A missing or failing source yields an empty result and does not break the screen.
4. Badges are refetched without cache on the schedule:plan-review-updated event.
5. A course side (new, old or shared) is read for several departments in one read, and returns null for a department with no new/old pairing so it stays one list.

**EVIDENCE**

`src/server/planBadgeShared.ts` `src/utils/planBadges.ts` `src/server/planReviewRoutes.ts` `tests/consistent-badges-audit.tsx` `tests/sheet-membership-audit.ts`

### NFR-RPT-001 Printed sheet design is preserved

The system shall fix errors in printed reports by correcting values and data rather than layout, and shall reuse existing print classes when a layout change cannot be avoided.

Implemented · Must · Non-functional · Department head, Registration officer

**RATIONALE**

> A standing owner decision; his feedback on the instructor report (load, hours, course numbers) was resolved in the data, not the design.

**ACCEPTANCE CRITERIA**

1. Any unavoidable change is checked on a Chrome-printed A4 landscape PDF before merging.
2. The head is shared by the comprehensive report and the changes report through one component.

**EVIDENCE**

`src/styles/08-print.css` `src/components/PrintComprehensiveHead.tsx` `tests/print-fit-audit.ts`

### NFR-RPT-002 Print command in the same tap

The system shall not place a network read or timer between the tap and the print command; it shall pause the live stream, commit the sheet and measure pages synchronously, and then request printing.

Implemented · Must · Non-functional · Department head, Schedule committee chair

**RATIONALE**

> Some browsers silently ignore the command if it comes later than the tap, and Safari may not print while a live stream is open.

**ACCEPTANCE CRITERIA**

1. Approval state is read with the scope before printing, not at print time, and a failed read prints the document without a stamp.
2. The appendix is fetched and awaited before printing is requested, and its failure prints the comprehensive report alone.
3. If the browser swallows the command, the stream resumes, the title returns and appendices are lifted without removing the sheet attributes.
4. Printing has a single path (invokePrint) used by the lenses, the comprehensive report, the all-branches document and the changes report: the stamp is recorded there and the sheet geometry is removed on afterprint only.

**EVIDENCE**

`src/components/Reports.tsx` `tests/print-fit-audit.ts`

### NFR-RPT-003 Printing from the installed iOS app

Inferred

The system shall detect the iOS app installed on the home screen, shall not attempt to print, and shall show a notice for 5 seconds asking the user to open the schedule in Safari or use a computer.

Implemented · Should · Non-functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The notice has role=status and aria-live=polite, and any previous notice is removed before a new one is shown.
2. In any other environment the function returns false and printing continues.

**EVIDENCE**

`src/utils/pwaPrintHelp.ts`

### DR-RPT-001 Report data sources

The query screen shall read its appointments from /api/schedules, which restricts them to the account's permissions, and shall read room load, department balance, visiting instructors and the changes report from /api/reports/* routes, so no reading falls outside the reader's scope.

Implemented · Must · Data · Department head, College dean, Registration officer, The system (automatic)

**ACCEPTANCE CRITERIA**

1. The routes are visiting-roster, visiting-teaching, visiting-history, schedule-changes, authority-pdf-diff, excel, department-balance and room-load.
2. College level: a reader covering the whole college reads the visiting instructors of all its departments without choosing one; a reader who does not cover it receives 403.

**EVIDENCE**

`src/server/routes/reportsRoutes.ts` `src/components/Reports.tsx` `tests/role-scope-audit.ts`

### IR-RPT-002 Export Excel button

The queries toolbar shall show an Export Excel button as a direct download link carrying the current view's filters, omitting empty, zero or false values.

Implemented · Should · Interface · Department head, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. The link requests ListofTeacherCourseExcel and sends the time window only when complete with start before end, together with instructorQuery.
2. Days are sent as sun=true, mon=true through thr=true.
3. The link sits in the list, week, rooms-by-times and decision lenses; the others export their own sheet (FR-RPT-045). Both buttons carry the words «print» and «Excel» beside the icon.

**EVIDENCE**

`src/components/Reports.tsx` `tests/dean-notify-audit.ts` `tests/query-center-plus-audit.ts`

### IR-RPT-026 Visiting-instructor query routes

The system shall serve to holders of one of the report permissions (7, 8, 9, 10, 14, 16 or 17) three routes: GET /api/reports/visiting-roster returns the department's visiting instructors in the term (or those of every department of the college for someone covering it all) and an empty list without a college or term; GET /api/reports/visiting-teaching reads the teaching of the scientific department's visiting instructors in every college holding a matching department the reader may access, requiring college, department and term; and GET /api/reports/visiting-history returns the term matrix newest first with each visiting instructor's presence per term and a «still in the department directory» flag, the family with its allowed and other departments, and complete = false when a department is missing; the civil ID is hidden from those not entitled in all three routes.

Implemented · Should · Interface · Department head, College dean, Vice dean for academic affairs, System administrator

**ACCEPTANCE CRITERIA**

1. visiting-teaching without a department ← 400 «specify college, department and term»; a department outside scope ← 403.
2. visiting-history without a college ← 400 «specify the college»; an instructor who left the directory stays in past terms with listedNow = false.

**EVIDENCE**

`src/server/routes/reportsRoutes.ts#/api/reports/visiting-roster`
`src/server/routes/reportsRoutes.ts#/api/reports/visiting-teaching`
`src/server/routes/reportsRoutes.ts#/api/reports/visiting-history` `src/server/visitingTeachingRead.ts`
`src/utils/visitingHistory.ts` `tests/dean-notify-audit.ts` `tests/role-guard-audit.ts`

### IR-RPT-027 The changes report and Authority-file comparison routes

The system shall serve GET /api/reports/schedule-changes for a department and term in scope, limited to 90 requests a minute, accepting a round number not beyond the current round (otherwise the current one is read) and a baseline that is the Authority file when asked explicitly or when no round is requested, otherwise the round snapshot, reading a past round between its baseline and its end rather than against the live schedule, and refusing an unapproved schedule to the two deans; and shall serve GET /api/reports/authority-pdf-diff comparing the live schedule with the saved Authority-file baseline (an empty live schedule means every row was deleted), answering the meta=1 setup question with draftId = null instead of 404 when no file exists.

Implemented · Must · Interface · Department head, Registration officer, College dean

**ACCEPTANCE CRITERIA**

1. round = 9 with current round 2 ← round = 2 is read without an error.
2. authority-pdf-diff with no saved file ← 404; with meta=1 ← {draftId:null}.
3. The ninety-first request in a minute to schedule-changes ← 429.

**EVIDENCE**

`src/server/routes/reportsRoutes.ts#/api/reports/schedule-changes`
`src/server/routes/reportsRoutes.ts#/api/reports/authority-pdf-diff` `tests/role-scope-audit.ts` `tests/relay-fixes-audit.ts`
`tests/server-route-parity-audit.ts`

### IR-RPT-028 The printed-sheet stamp registration route

The system shall register a printed sheet's stamp through POST /api/report-stamps after the print command, for a signed-in user limited to 60 requests a minute, with a known kind, a term, up to 12 sites all within scope, up to 12 Authority drafts and up to 3000 rows with their fingerprints, recomputing the code and refusing a mismatch, reading row values from the schedule itself, and counting a new print for an existing stamp; the public page /v/:code and the full stamp rules are described in the approval module (FR-APR-027).

Implemented · Should · Interface · Department head, Registration officer

**ACCEPTANCE CRITERIA**

1. A stamp with no rows or more than 3000 rows ← 400 «incomplete stamp»; a site outside scope ← 403.
2. A code not matching its rows ← 409; a new stamp ← 201 with staleRows.

**EVIDENCE**

`src/server/routes/reportsRoutes.ts#/api/report-stamps` `src/utils/reportStamp.ts` `tests/report-stamp-audit.ts`

### IR-RPT-029 The room-load route

The system shall serve GET /api/reports/room-load to holders of a report permission: the approved official halls the reader uses and their busy times across the whole term (theirs and others', with no course or instructor of others), with the start and end of the teaching day; it shall accept a college without a department for someone covering the whole college, read the newest term when none is given, read final schedules only for the two deans, and order halls by building then hall numerically.

Implemented · Should · Interface · Department head, College dean, Vice dean for academic affairs, System administrator

**ACCEPTANCE CRITERIA**

1. Building 7 hall 31 and building 8 hall 22 ← 7/31 before 8/22, and 9 before 10.
2. A department head without sectionId ← 403 «outside your permitted department».

**EVIDENCE**

`src/server/routes/reportsRoutes.ts#/api/reports/room-load` `tests/dean-notify-audit.ts`

### FR-RPT-030 A plain-Arabic question on the query screen

The query centre shall turn a question typed in Arabic into filters and a lens on the device without sending anything, resolved against the screen's data: day and hour, an instructor by name, a course by name or seven-digit number, and a hall as «7/31» or «901A01-101» from the official registry; it shall offer «did you mean?» choices when a name matches more than one, and change nothing when the question is not understood.

Implemented · Should · Functional · Department head, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. An ununderstood question ← «I did not find ‹…› among the instructors and courses in this scope» or «I did not understand the question» with examples, and the filters do not change.
2. «schedule Ahmad» matching two instructors ← two «did you mean?» buttons; a number in the sentence that matches a number in a name («trial 9») picks that person and is not read as an hour.
3. «0109101» ← the course-number filter and the list lens; «Introduction to digital learning» ← that course; «7/31» ← the building and hall with the rooms lens.
4. A free-rooms question drops the instructor and course filters and opens the rooms on the named day or the whole week; ✕ clears the question and the extra filters while keeping college, department and term.

**EVIDENCE**

`src/components/Reports.tsx#runAsk` `src/utils/queryAsk.ts#resolveAsk` `src/utils/naturalQuery.ts#parseNaturalQuery` `tests/query-center-plus-audit.ts`

### FR-RPT-031 Saved query preferences and filter chips

Inferred

The query screen shall save in the browser the chosen lens and the extra filters under one key per account (schedule-unified-prefs-<account>), leaving college, department and term to the shared scope; every active extra filter shall show as a chip removable on its own with a clear-all button; and each list's options shall be built only from the rows matching the other filters.

Implemented · Should · Functional · Department head, Schedule committee chair, Registration officer, College dean

**ACCEPTANCE CRITERIA**

1. Instructor, name query and civil number are not restored when the screen opens; building and hall are restored after their text is cleaned.
2. Two options differing only by a space, a direction mark, character width or Arabic-Indic or Persian digits show as one option; a course is unified by its department and visible name.
3. The «more» button carries the number of active filters, and the buildings listed are the active official buildings present in the rows.

**EVIDENCE**

`src/components/Reports.tsx#prefKey` `src/components/Reports.tsx#rowsForFacet` `src/components/Reports.tsx#cleanOptionText` `src/components/Reports.tsx#dedupeVisibleOptions` `src/components/Reports.tsx#chips`

### FR-RPT-032 The report knows the schedule changed

The query centre shall listen for the schedules-changed signal and show the line «the schedule changed after this report was opened — press to refresh», keeping it until the reader presses it so the report's rows never change under the reader during reading or printing; it shall re-read once when the page wakes, hide the previous scope's answer and print buttons while a new scope is read, and offer «retry» with any read error.

● Implemented · Should · Functional · Department head, Schedule committee chair, Registration officer

#### ACCEPTANCE CRITERIA

1. A successful read clears the previous read error.
2. The signal shows the line and re-asks only whether an authority file exists; pressing the line or «retry» re-reads the rows, the department balance and room load together.
3. The print command stops the listening and restarts it after printing.

#### EVIDENCE

`src/components/Reports.tsx#openReportEvents` `src/components/Reports.tsx#refreshNow` `src/utils/livePulse.ts#onLiveSignal` `tests/query-center-plus-audit.ts`

### FR-RPT-033 List, week, times and instructors presentation

Inferred

The «all» lens shall show the first 150 appointments then 150 more per press of «more», each row opening by click, Enter or space a side detail panel (instructor and tags, department, days, time, seven-digit course number, college, room, notes); the times lens shall group by start time with the first 4 rooms and the counts of courses, instructors and days, the instructors lens each instructor's appointment count and load in credit hours, and the week lens day by day.

● Implemented · Should · Functional · Department head, Schedule committee chair, Registration officer, College dean

#### ACCEPTANCE CRITERIA

1. On a phone the first 6 rows are shown and the rest fold under «show the rest (n)».
2. On a phone every lens opens: the room-occupancy and rooms-by-times grids scroll sideways inside their own frame with the line «swipe sideways to see every hour», and the page never exceeds the screen width.
3. Escape closes the detail panel, as does switching lens; a row without days reads «no days».
4. The lens bar moves with Home, End and the arrows (left is next); the counter counts departments in the balance, visiting instructors in their lenses and appointments elsewhere, and is not written when zero.
5. The lens strip scrolls the chosen lens into view and fades the edge that hides further lenses.

#### EVIDENCE

`src/components/Reports.tsx#visibleLimit` `src/components/Reports.tsx#QUERY_PHONE_HEAD` `src/components/Reports.tsx#selectLens` `src/components/Reports.tsx#moveLensFocus` `src/components/Reports.tsx#selectedResultDetail` `src/components/Reports.tsx#byTime` `src/components/Reports.tsx#byInstructor`

### FR-RPT-034 Room occupancy lens interaction

The rooms lens shall show each room's occupancy hour by hour for the week or for one day, coloured by the number of busy days (up to 5) with an occupancy rate at the row's end and its average in the key; pressing a room name or a cell shall open a panel with its visible appointments; and free windows shall be listed when a single day is chosen.

Implemented · Should · Functional · Department head, Schedule committee chair, Registration officer, Vice dean for academic affairs

#### ACCEPTANCE CRITERIA

1. A busy cell with no appointment in the reader's scope ← «booked outside your scope … by another department — details are not shown outside your scope, but the booking stands»; an empty cell ← «free at this time — no booking».
2. A row at 60% or more is highlighted, and free windows are shown for the first 40 rooms.
3. The printed sheet: a grid of 18 rooms per page, then «free windows» 14 rooms (single day only), then the «room directory» 17 rooms with their appointment count, weekly hours and busy days.
4. Building and hall filters limit the grid to their rooms, and an instructor, course or name filter to the rooms its appointments use; it reads «showing n of m rooms by the filters», or «no rooms match the filters» when none do.
5. The room panel matches appointments by registry room id, and a booking in the reader's scope hidden by filters reads «booked by your department — hidden by the current filters» with a clear button, not «another department».

#### EVIDENCE

`src/components/Reports.tsx#roomLoad` `src/components/Reports.tsx#roomPick`
`src/server/routes/reportsRoutes.ts#/api/reports/room-load` `tests/query-center-plus-audit.ts`

### FR-RPT-035 Occupancy rate scope: site or department family

Inferred

The occupancy rate lens shall offer «site» (the query rows with their filters) or «department family» (the same department in all its colleges, each read with the reader's permission), showing the number of lectures and rooms, the week's occupancy rate and the peak day and hour, and in the family a grid per college under the combined grid.

Implemented · Should · Functional · Department head, Schedule committee chair, Vice dean for academic affairs, Registration officer

#### ACCEPTANCE CRITERIA

1. «department family» is disabled for a department on one site, and a college whose read was refused is named «partial data: could not read …».
2. Printing is disabled while the family read is in progress, and the sheet starts with the combined grid then one sheet per college.
3. A room is identified with its college: «1/101» in one college is not «1/101» in another.

#### EVIDENCE

`src/components/Reports.tsx#familyScopes` `src/components/Reports.tsx#occupancyHeat` `src/components/Reports.tsx#occupancySites`
`src/components/Reports.tsx#occupancyRoomKey`

### FR-RPT-036 The «courses by sites» lens

Inferred

The «courses by sites» lens shall show, for a chosen department, its instructors across every site where the same department exists: for each instructor his sites with the number of courses at each and his total courses and sections, and on opening a breakdown by course, site and section count, honouring the instructor, name and civil-number filters.

Implemented · Should · Functional · Department head, College dean, Vice dean for academic affairs

#### ACCEPTANCE CRITERIA

1. No department ← «choose the department first»; a site whose read was refused is named «partial data: could not read …».
2. No courses ← «no courses for the department … at the relevant sites this term», and the printed sheet holds 9 instructors per page.

#### EVIDENCE

`src/components/Reports.tsx#siteLoadScopes` `src/components/Reports.tsx#courseLoads`
`src/utils/instructorCourseLoad.ts#instructorCourseLoad`

### FR-RPT-037 The «rooms and instructors» lens

Inferred

The «rooms and instructors» lens shall show two directions with their counters: each room with its building and its instructors alphabetically, and each instructor with the rooms he teaches in ordered by building then hall, from the scope rows that have a building, a hall and an instructor.

Implemented · Could · Functional · Department head, Registration officer, Vice dean for academic affairs

#### ACCEPTANCE CRITERIA

1. The printed sheet holds 12 lines per page: «by room» then «by instructor» with continuous page numbers.

#### EVIDENCE

`src/components/Reports.tsx#roomInstructorDirectory`

### FR-RPT-038 Department balance display and bulletin

The department balance shall show one line per department in scope — including departments not started, with explicit zeros and «no appointments yet» — with sortable columns: department, approval (when its states are read), appointments, instructors, rooms, morning, fairness, quality, blockers, and shall print the «council bulletin — department balance» 14 departments per page with the approval and deadline columns.

Implemented · Should · Functional ·

College dean, Vice dean for academic affairs, Dean of Admission and Registration, University registrar, System administrator

#### ACCEPTANCE CRITERIA

1. Sorting by approval: late, not started, drafting, committee, head, returned, submitted, accepted; a sort on a column that disappeared returns to appointments descending.
2. The deadline reads «deadline passed …» or «n days left · date» and is hidden after handover; its ring warns at 7 days or fewer.
3. Fairness ring: 78 or more fine, 62 or more warning, below that danger; quality ring: 85 and 70.
4. A department the balance was opened on from a notification is highlighted and scrolled to once, and above the balance a read-only submission-deadlines strip appears for those entitled in a non-archived term.
5. Rooms are written with «(verified n)» when any are verified, and a note says the counts include schedules being prepared.
6. The scope line above the balance and on its bulletin names what is shown — «all departments of the university», «all departments of ‹college›» or «all departments in your scope» — not the chosen department; the decision-board sheet names all its departments.

#### EVIDENCE

`src/components/Reports.tsx#BalancePanel` `src/components/Reports.tsx#mergeBalanceDepartments`
`src/components/Reports.tsx#termDeadlineRows` `src/components/Reports.tsx#PrintSheetBody` `tests/dean-notify-audit.ts`

### FR-RPT-039 The «unapproved copy» mark and attestation strip on every sheet

Every sheet printed from the query screen shall carry, when an approval record exists for its department and has not been accepted, the «unapproved copy» mark on every page; non-comprehensive sheets shall carry a footer strip with the approval state and who signed for the schedule committee and the department head with date and verification code, or «no recorded signature»; and the comprehensive report's signature slots shall be filled with what is recorded, the dean's slot always remaining a blank line.

Implemented · Must · Functional · Department head, Schedule committee chair, Registration officer, College dean

#### ACCEPTANCE CRITERIA

1. The state line: «accepted by registration on …», «under registration review — round n», «returned with notes — round n», otherwise the state's name.
2. A recorded signature shows its signer, the date dd/mm/yyyy and the verification code, with «signed aware of n regulation notes» when any.
3. A failed approval read prints the sheet with no mark and no stamp; the decision-board sheet carries the chosen department's stamp only when its departments are that department alone.

#### EVIDENCE

`src/components/Reports.tsx#PrintSheet` `src/components/Reports.tsx#PrintSignatures`
`src/components/Reports.tsx#approvalScopeLine` `src/components/Reports.tsx#SIGNATURE_SLOTS` `tests/report-approval-audit.ts`

### FR-RPT-040 Printed comprehensive report content and its appendix

The comprehensive report shall print twelve columns: course code, section, course, units, hours, capacity, time, days, building, hall, instructor, civil number, ordered by course code, then section, then import position, then time, with days as numbers in reversed order read from the right (5,3,1) and a «1=Sunday …» key, and shall print the changes appendix after it when requested, with signatures, key and stamp on the document's last page.

Implemented · Must · Functional · Department head, Schedule committee chair, Registration officer

#### ACCEPTANCE CRITERIA

1. In the «all branches» document only branch rows carry their site chip, and the first page lists the department's sites with each one's lecture count.
2. The appendix: «added/removed/modified» and «field: before ← after», the summary on its first page, a new schedule described as «no earlier review to compare with», and with no change «nothing changed since the last review».
3. A visiting instructor's name is printed followed by «· visiting».

#### EVIDENCE

`src/components/Reports.tsx#PrintSheetBody` `src/components/Reports.tsx#dayCodeCell`
`src/components/Reports.tsx#paginateComprehensiveRows` `src/components/Reports.tsx#PrintChangesAppendix`
`tests/report-choices-audit.ts`

### FR-RPT-041 Visiting instructors display and history matrix

The visiting lens shall show each visiting instructor with his courses, teaching sites, sections and weekly hours and his appointments on opening; «all terms» shall show a matrix: one academic year per column holding the first, second and summer terms, the cell number being the section count, a folded column for what precedes the year window, and a «department total» row of unique terms and sections.

Implemented · Should · Functional · Department head, College dean, Vice dean for academic affairs

#### ACCEPTANCE CRITERIA

1. Pressing a cell shows that term's sections, and pressing the name shows the full record; someone who left the department directory is marked «no longer in the department directory».
2. The matrix excludes anyone absent from the loaded instructor list, and a term without an actual section is not counted.
3. When the people's sum differs from the department total a note explains the difference, and without permission on some of the department's colleges «the record is incomplete» is written with their names.
4. The sheet: one visiting instructor per page with seven rows and the department sites as chips, and in «all terms» 11 people and ten years per page.

#### EVIDENCE

`src/components/Reports.tsx#visitingTermGroups` `src/components/Reports.tsx#visitingHistoryRows`
`src/components/Reports.tsx#historyYearChoices` `src/components/Reports.tsx#VisitingHistoryTermCard`
`src/utils/visitingHistory.ts#buildVisitingHistoryModel` `tests/visiting-teaching-audit.ts`

### FR-RPT-042 Load fairness display and sheet

Inferred

The load fairness lens shall show the index out of 100, the average load in credit hours to one decimal, the spread and the instructor count, and a ring per instructor filled by his hours relative to the heaviest and coloured by his distance from the average; it shall print 11 instructors per page with each one's difference from the average and the «schedule coordinator» and «department head» signature slots on the last page.

Implemented · Should · Functional · Department head, College dean, Vice dean for academic affairs

#### ACCEPTANCE CRITERIA

1. Ring colour: 1.3 × the average or more «overloaded», 1.1 or more «above», 0.6 or less «light», otherwise «around the average».
2. No real instructors ← «not enough data».

#### EVIDENCE

`src/components/Reports.tsx#fairness` `src/utils/livingSchedule.ts#buildFairnessEngine`

### FR-RPT-043 Answer before the lens

The query centre shall show, above the list, week, instructor, time and room lenses, three cards drawn from the data on screen: the instructor with the heaviest credit-hour load, the busiest hour of the week, and the rooms free now in Kuwait time; each card opens its answer when pressed.

Implemented · Should · Functional · Department head, Schedule committee chair, College dean, Registration officer

**ACCEPTANCE CRITERIA**

1. The heaviest counts people, not «teaching staff» records, ties broken by lecture count then name; pressing opens the instructor lens on that person.
2. Busiest hour counts each lecture in every hour it touches on each of its days; pressing filters that day and hour and opens the time lens.
3. Free-now uses the department's verified rooms and their university-wide bookings; Friday and Saturday read «outside working days», and outside 08:00–20:00 «outside working hours».
4. Each card is an icon and a value; the explanation is in the tooltip, not on screen.

**EVIDENCE**

`src/utils/reportInsights.ts#buildReportInsights` `src/components/Reports.tsx#insights` `tests/query-center-plus-audit.ts`

### FR-RPT-044 My reports: stored on the server, personal or for the department

The query centre shall let the reader save the current query (lens, scope and filters) under a short name on the server, personal or shared with whoever holds the department's permission, with a «notify me if it changes» option, reopen it with one press, and copy a link carrying the same state in parameter r that any account opens within its own scope.

Implemented · Should · Functional · Department head, Schedule committee chair, College dean, Registration officer

**ACCEPTANCE CRITERIA**

1. Up to 30 queries per account in the savedReports collection, names up to 60 characters, saving an existing name replaces it; whatever was saved in the browser is migrated once.
2. Sharing requires the reader's permission on the saved department (403 otherwise); a shared query is visible only to holders of that department's permission; deleting is for the owner and the system administrator.
3. A watched query shows a red dot when its results' fingerprint differs from what the owner last saw (for the department currently loaded).
4. The link carries no permission, r is removed from the address bar once read, and a damaged link is ignored.

**EVIDENCE**

`src/utils/reportShareCore.ts` `src/hooks/useSavedReports.ts` `src/components/query/QuerySaved.tsx`
`src/server/routes/reportsRoutes.ts#/api/reports/saved` `tests/query-center-plus-audit.ts` `tests/query-center-e2e.ts`

### FR-RPT-045 An Excel file per lens

The Excel button in the instructor, room, occupancy, rooms-and-instructors, courses-by-rooms, time, visiting, all-terms, fairness, department-balance and courses-by-sites lenses shall export a file holding that lens's own answer, built on the device from the data on screen with no civil number.

Implemented · Should · Functional · Department head, Schedule committee chair, College dean, Registration officer

**ACCEPTANCE CRITERIA**

1. The balance has one row per department with the screen's columns, and visiting history one column per term holding section counts.
2. The file is named «‹lens› - ‹scope› - ‹term› - ‹date›.xlsx» without characters a file system rejects, as a right-to-left workbook with an auto filter.

**EVIDENCE**

`src/utils/lensExport.ts` `src/components/Reports.tsx#exportLens` `tests/query-center-plus-audit.ts`

### FR-RPT-046 Morning brief

For a chosen department the query centre shall show a «morning brief» as a collapsed strip of four icon-and-number cards (moves in the last 24 hours, approval blockers, regulation notes, days left to the deadline), each card being a button that opens its own detail in the same panel (the latest moves, the blockers with their titles and reasons, the regulation notes, or the deadline with its days and approval state), one at a time, while the sunrise button opens the whole brief: a days ring, change numbers (added/removed/changed), the approval state and the latest moves; printable as one sheet of sentences.

● Implemented · Should · Functional · Department head, Schedule committee chair, College dean, Vice dean for academic affairs

**RATIONALE**

> The server runs no timers, so the brief is built when opened from existing reads (the activity trail and the changes report) and is never sent on its own.

**ACCEPTANCE CRITERIA**

1. A move enters the brief when it carries the shown department's college, department and term (so a deletion counts even after its appointment is gone), or — for an older move without a department — when its appointment is still in the department, and it happened in the last 24 hours; the last 8 moves are listed.
2. A card is green for nothing, amber for what deserves a look and red for what blocks approval; the days ring warns at 7 days or fewer.
3. The brief is read folded when the scope opens and never opens by itself; folding it while loading does not hang it.
4. The «morning brief» sheet prints with the existing print classes on A4 landscape.
5. The blockers and notes cards list up to ten items, each with a title and a short reason, from the same schedule-changes read and the reader's own scope; the number on the card stays the full count, and no room name appears; the «open» button uses the existing appointment detail panel and is absent for an appointment not in the shown results.
6. Each card is a button with aria-expanded, aria-controls and a title; one is open at a time, pressing it again folds it, and the open card carries a distinct ring.

**EVIDENCE**

`src/utils/morningBrief.ts#buildMorningBrief` `src/components/query/QueryBrief.tsx#QueryBrief` `src/components/Reports.tsx#brief` `tests/query-center-plus-audit.ts` `tests/morning-brief-pills-audit.ts`

### FR-RPT-047 Compare with an earlier version

The fairness and occupancy lenses shall let the department head and committee pick a saved version of the department's schedule and compare it with the schedule now as a two-colour map — green for what grew, red for what shrank, grey for what stayed — on a days × hours grid, with three icon-and-number counts and the fairness score before and after.

● Implemented · Could · Functional · Department head, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. The list is the last 30 versions; deans are not offered it (they read final schedules only).
2. A moved appointment shows red in its old cell and green in the new one; the comparison uses the department's whole schedule without filters.

**EVIDENCE**

`src/components/Reports.tsx#historyCompare` `src/server/routes/reportsRoutes.ts#/api/reports/history-points` `tests/query-center-plus-audit.ts`

### IR-RPT-048 Schedule history-point routes

The system shall serve, to a holder of a report permission (7, 8, 9, 10, 14, 16 or 17), GET /api/reports/history-points listing the department's versions in the term (up to 30, without rows) and GET /api/reports/history-points/:id returning one version's rows, within the reader's scope and with no browser caching.

Implemented · Could · Interface · Department head, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. Missing college, department or term ← 400; out of scope ← 403; a missing version ← 404.
2. Deans: the list is empty and a specific version ← 403.

**EVIDENCE**

`src/server/routes/reportsRoutes.ts#/api/reports/history-points`
`src/server/routes/reportsRoutes.ts#/api/reports/history-points/:id` `tests/query-center-plus-audit.ts`

### FR-RPT-049 Global search opens the query with its filter

Choosing an instructor, room or course in global search shall open the query centre filtered by it, even when the screen is already open.

Implemented · Should · Functional · Department head, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. The key schedule-report-prefill is read once and removed; a room arrives as text (building and hall code) and is translated to the registry id once the registry loads.

**EVIDENCE**

`src/components/Reports.tsx#takeReportPrefill` `src/App.tsx` `tests/query-center-plus-audit.ts`

### FR-RPT-050 Today's copy of a stamped sheet

The stamp verification page (/v/:code) shall show a «open today's copy of this report» link to the query centre on the sheet's department and term, for account holders.

Implemented · Could · Functional · Department head, Registration officer

**ACCEPTANCE CRITERIA**

1. The link carries the state in the same r parameter (FR-RPT-044), and the public page still shows no names or civil numbers.

**EVIDENCE**

`src/server/reportStampPage.ts` `src/server/routes/reportsRoutes.ts` `tests/query-center-plus-audit.ts`

### FR-RPT-051 Longest gap and week shape in the instructors lens

The instructors lens shall show beside each instructor the longest wait between two lectures on the same day (one hour or more), and a «week shape» button inside the group shall open a panel that draws, for each teaching day, the lectures where they fall and the long waits between them, with the day count and the longest gap. For holders of the schedule-workspace permission the shape is drawn from the instructor's appointments visible across the reader's whole scope (across the permitted colleges of the department family) with the count of commitments outside that scope; for others it is drawn from the lens rows themselves.

Implemented · Should · Functional · System administrator, Schedule committee chair, Department head, Vice dean for academic affairs

**ACCEPTANCE CRITERIA**

1. A gap of three hours or more is shown as a warning, a gap under one hour is not counted as a wait, and two overlapping lectures do not create a gap.
2. A reader without the schedule-workspace permission sends no server request, and the shape is drawn from the report rows.

**EVIDENCE**

`src/components/Reports.tsx` `src/components/ReportInsightDrawers.tsx` `src/utils/professorWeekShape.ts`
`tests/report-insight-audit.ts`

### FR-RPT-052 Most used rooms and room details

The occupancy rate lens shall show under the grid the eight most used rooms in the chosen scope (the site or the whole department family, with the college name in the family) ranked by occupied hours, each with a bar, the estimated utilisation = its occupied hours ÷ (official day hours × 5 days) and its appointment count, and a room shall open its detail panel. For holders of the schedule-workspace permission the panel — and the «all room appointments» panel in the rooms lens — shows the departments that use the room most and the available windows per day (30 minutes or more) from the server room-detail route, with other departments' bookings counted but without detail.

● Implemented · Should · Functional ·

System administrator, Schedule committee chair, Department head, Vice dean for academic affairs, Registration officer

**ACCEPTANCE CRITERIA**

1. The rate never exceeds 100%, and the list follows the same site / department family switch.
2. A reader without the schedule-workspace permission sees only the rate and appointment count, and no room-detail request is sent.

**EVIDENCE**

`src/components/Reports.tsx` `src/components/ReportInsightDrawers.tsx` `tests/report-insight-audit.ts`

### IR-RPT-054 My-reports routes

The system shall serve every signed-in account GET /api/reports/saved (what it saved and what its department colleagues shared), PUT /api/reports/saved (save or update) and DELETE /api/reports/saved/:id, rate-limited to 90 requests a minute, with state sanitised to the known filter keys only.

● Implemented · Should · Interface · Department head, Schedule committee chair, Registration officer, College dean

**ACCEPTANCE CRITERIA**

1. A query without a name or with an unknown lens ← 400; sharing without the department's permission ← 403; more than 30 ← 409; deleting someone else's ← 403.

**EVIDENCE**

`src/server/routes/reportsRoutes.ts#/api/reports/saved` `src/server/routes/reportsRoutes.ts#/api/reports/saved/:id` `tests/query-center-plus-audit.ts`

### IR-RPT-055 Morning-brief push endpoint

The system shall serve POST /api/internal/morning-brief to an external scheduler with a secret in header x-brief-token matching MORNING_BRIEF_TOKEN, sending each account registered for notifications one notification a day with a line for each of its departments (up to three) holding the blockers and days left, plus a 🔔 line for each report saved with «notify me if it changes» whose department schedule changed since the last brief.

● Implemented · Could · Interface · Department head, Schedule committee chair, The system (automatic)

**RATIONALE**

> The server runs no timers on purpose, so the schedule comes from outside.

**ACCEPTANCE CRITERIA**

1. Without the variable, with a wrong secret, or in the demo ← 404; Friday and Saturday (Kuwait time) ← nothing is sent.
2. Once a day per account, atomically (pushCooldowns); the system administrator, a department without a schedule and one with nothing worth saying receive none.
3. The first brief after saving records the fingerprint without notifying; the next notifies if the department schedule's fingerprint differs, and the fingerprint is stored after the day's claim.

**EVIDENCE**

`src/server/morningBriefPush.ts` `src/server/pushRoutes.ts` `tests/query-center-plus-audit.ts`

### FR-RPT-056 Why no results?

When filters leave the screen empty it shall show each active filter as a chip with its icon and the number of appointments that would appear if it alone were removed, highlight the most useful, and remove it with one press.

Implemented · Should · Functional · Department head, Schedule committee chair, Registration officer

#### ACCEPTANCE CRITERIA

1. A filter that is not enough alone shows disabled with a dot, and «clear all» appears when several are active.

#### EVIDENCE

`src/components/query/QueryEmptyWhy.tsx` `src/components/Reports.tsx#applyFiltersWith` `tests/query-center-e2e.ts`

### FR-RPT-057 Spoken questions and spelling tolerance

The query centre shall let the reader ask by voice where the browser supports speech (a microphone inside the question field, one sentence), and shall match a name typed with a one- or two-letter slip to the nearest instructor or course, asking «did you mean?» without choosing for the reader.

Implemented · Could · Functional · Department head, Schedule committee chair, Registration officer

#### ACCEPTANCE CRITERIA

1. Transcription uses the browser's speech service and no audio is kept; Arabic dictation; Arabic-Indic digits and «9 : 30» are read as ordinary digits.
2. A word shorter than three letters or far from every name is not guessed, and the answer is «not found».

#### EVIDENCE

`src/hooks/useSpeechAsk.ts` `src/utils/queryAsk.ts#fuzzyNames` `tests/query-center-plus-audit.ts`

### FR-RPT-058 Ink-saving print on the same sheet

The query centre shall offer an «ink saver» mode (a drop in the page preview) that prints every sheet in grey without colour while the sheet stays identical to the millimetre: no margin, padding, font size, border width, order or page count changes; the choice persists in the browser, and without it the sheet prints as before.

Implemented · Should · Functional · Department head, Schedule committee chair, Registration officer

#### ACCEPTANCE CRITERIA

1. The styles are confined to @media print and the data-print-ink attribute and carry only paint properties (colour, background, filter), guarded structurally.
2. What carries meaning is not erased: the five occupancy levels, the bars, the visiting history and added/deleted/changed in the changes report stay distinguishable in greys.
3. The coordinates of every word on every sheet (the fourteen lenses and the comprehensive report) are identical to the normal mode in a real browser.
4. All print buttons and report menus (comprehensive, changes, instructor) share one style: after choosing the report two icon tiles appear (normal with coloured dots, ink saver with grey dots) and pressing one prints; this covers the lenses, occupancy, balance, course distribution and the morning brief; the choice is remembered and marked, and nothing sits outside the menu.

#### EVIDENCE

`src/styles/59-print-ink.css` `src/components/Reports.tsx#invokePrint` `src/components/query/QueryPrintMenu.tsx` `src/components/ReportChoicePanel.tsx` `tests/print-ink-audit.ts` `tests/query-center-e2e.ts`

### FR-RPT-059 What was not counted

The rooms, occupancy and rooms-by-times lenses shall show beside the counter a chip (a struck-through eye and a number) for the appointments that did not enter the room calculation and why, and shall not appear when nothing was excluded.

Implemented · Should · Functional · Department head, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. Reasons: room awaiting confirmation, room needing review, invalid historical room, no room, no valid time, no days.
2. The first 8 appointments are listed with «+n» for the rest.

**EVIDENCE**

`src/utils/excludedRows.ts` `src/components/query/QueryExcluded.tsx` `tests/query-center-plus-audit.ts`

### FR-RPT-060 Open it in the schedule

The query centre shall give whoever holds the schedule permission (screen 7, not a viewer role) an «open it in the schedule» button on the appointment detail, on the excluded list and on the «what if I moved» card, opening that appointment in the schedule workshop on its department and term, while reports stay read-only.

Implemented · Should · Functional · Department head, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. It writes the shared scope and the key schedule-open-context-id, then navigates; it is not shown to a viewer role.

**EVIDENCE**

`src/components/Reports.tsx#openInSchedule` `src/App.tsx` `tests/query-center-plus-audit.ts`

### FR-RPT-061 If I moved it, what clashes?

The query centre shall answer a decision-form question («if I moved section 101 to Tuesday 10», «move 0109101 Monday 9:30») with a card of icons and numbers for each section of the course: no clash, room booked, instructor busy, booking from outside the department, or outside working hours; without changing anything in the schedule.

Implemented · Should · Functional · Department head, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. The section keeps its duration with the day and hour as asked; the instructor and room are checked against the department read and the room against university bookings (no names from another department).
2. No such course ← «no course with this number in the department»; a move with neither day nor time is not a decision question.

**EVIDENCE**

`src/utils/queryWhatIf.ts` `src/components/query/QueryWhatIf.tsx` `src/utils/queryAsk.ts#resolveAsk` `tests/query-center-plus-audit.ts` `tests/query-center-e2e.ts`

### FR-RPT-062 Share the link from a phone

On touch devices the link button shall open the device's share sheet (WhatsApp and others) when available, otherwise copy the link.

Implemented · Could · Functional · Department head, Schedule committee chair, Registration officer

**ACCEPTANCE CRITERIA**

1. The reader cancelling the sheet is neither an error nor a copy.

**EVIDENCE**

`src/components/Reports.tsx#copyShareLink` `tests/query-center-plus-audit.ts`

## 3.13.6 Algorithms

ALG-RPT-01 · Reports, queries, printing and export

**Load fairness index**

Statistics from history

*Is the teaching burden spread fairly among the scope's instructors, and who carries clearly more than average?*

1. Records that are not persons («faculty» placeholder, rows without an instructor) are excluded.
2. Instructor burden = 8 × attendance days + 5 × gap hours + 2.5 × meetings starting before 09:00 + 4 × meetings starting at 16:00 or later + 1.2 × weekly teaching hours.
3. Fairness score = clamp(100 − 72 × coefficient of variation of burdens, 0, 100).
4. Labels: 90+ very fair, 78+ balanced, 62+ needs balancing, otherwise unfair; a warning (up to 5) for anyone above average by more than max(8, 28% of the average).
5. Department balance reuses the same engine per department, alongside the morning share (start before 14:00, per meeting day) and conflicts.

**Inputs**

The scope's appointments with days and times, and the instructor registry.

**Output**

The score and label, average burden and spread, instructor profiles ranked by distance from the average, and warnings.

One formula for the fairness lens and for department balance; departments outside the scope do not enter the calculation.

Coefficient-of-variation multiplier 72 · Label thresholds 90, 78 and 62 · Morning cut-off 14:00

`src/utils/livingSchedule.ts#buildFairnessEngine` `src/server/routes/reportsRoutes.ts#registerReportsRoutes` `tests/dean-notify-audit.ts`

FR-RPT-006 FR-RPT-008

ALG-RPT-02 · Reports, queries, printing and export

**Occupancy rate grid**

Deterministic

*How many lectures fall in each hour of each day, and how many of the scope's halls are occupied?*

1. Lectures with a valid day and time are kept; the hour axis runs from day start to day end, widened for any lecture outside it.
2. A lecture occupies every hour it intersects (09:30–10:45 falls in both the 9 and 10 o'clock hours).
3. Cell: number of lectures and distinct halls; a hall counts once per hour, and a lecture without a hall counts as a lecture but occupies none.
4. Day rate = occupied hall-hours ÷ (halls in scope × hours); the week rate likewise.
5. Colour level = ⌈count ÷ grid maximum × 5⌉, zero for an empty cell, and the peak is reported.

**Inputs**

Rows of the scope (the site or the department family across its colleges) and a hall key that distinguishes two halls with the same number at two sites.

**Output**

A day × hour grid with count, halls, rate and level, each day's and the week's rate, and the peak.

Pure function; no existing lecture is hidden after the day window is narrowed.

5 colour levels and a 60-minute cell

`src/utils/occupancyHeat.ts#buildOccupancyHeat` `tests/occupancy-heat-audit.ts`

FR-RPT-009

## 3.13.7 Edge cases

### ⚠ Instructor report with no instructor chosen

**Scenario** The user opens the screen and prints the instructor report before choosing anyone.

**Behaviour** A sheet is printed for all instructors in the current view; if there are none a message says there are no instructors in view, and the menu does not stay open silently.

### ⚠ Stored course code with letters or another department key

**Scenario** The catalogue holds a code such as ENG101, or 0102102 for a course of a department other than the one shown.

**Behaviour** A code with letters is shown as stored, a course of another department is not rebound to the displayed department, and with no department key the stored code stays and no number is invented.

### ⚠ Dean opens the screen before any schedule is approved

**Scenario** The dean's saved lens is All and nothing is approved yet, so results are empty.

**Behaviour** The department balance lens opens automatically once instead of an empty screen, and a dean who later returns to the list by choice is not moved again.

### ⚠ Hall not yet linked to the registry

**Scenario** An imported row carries building and hall as text only, or a row is pending room confirmation.

**Behaviour** Normalised text (spacing, case) occupies the same hall, whereas a pending row occupies nothing and does not inflate occupancy rates.

### ⚠ Visiting instructors in a college the reader cannot access

**Scenario** The matching department has appointments in another college outside the reader's scope.

**Behaviour** Only allowed colleges are counted, the inaccessible ones are named, and the total is marked incomplete (complete = false).

### ⚠ Excel file for a dean

**Scenario** A dean exports the schedule of a department that has an unapproved draft.

**Behaviour** The file contains final schedules only, like the screen, and the civil-number column is empty for readers who are not entitled.

### ⚠ A question with a shared name

**Scenario** The department head types «schedule Ahmad» and two instructors share the name.

**Behaviour** Neither is picked silently: «did you mean?» shows two buttons and the pressed one opens; filters do not change before the press.

## 3.13.8 Standing owner decisions

- Course numbers are seven digits only: college (2), department (2), course (3), for example 0109105, in every printed report, query screen and Excel file; the stored code and AdCourseId are never shown.
- Printed reports keep their design: fix values and data, not layout; an unavoidable change reuses the existing print classes and is checked on a Chrome-printed A4 landscape PDF before merging.
- The header decides the department in the Authority file (SWRSCHA): department and branch come from the page header even if a course number carries another department's code, and a three-digit tail alone never links a course.

↑ Contents

3.14 · NTF

# Notifications, activity and live channel

A bell derived from state, a live channel that announces change, an immutable trail, and a calendar you subscribe to.

| 33 | 100% | 19 | 38 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.14.1 Overview

The module gathers everything that tells a user what happened without being asked: the notification center and bell, push notifications (Web Push) for department coordinators and faculty cards, the live channel that broadcasts schedule changes across screens and instances, presence and team colleagues, stale-write protection through Refresh-and-retry, the immutable activity trail, row memory, and public subscription calendars (ICS). All of it relies on the server remaining the arbiter of scope and permission and on notification staying light: news without rows, and a short pulse instead of a stream held open all day.

Schedule committee chair · Department head · College dean · Vice dean for academic affairs · University registrar · College registrar · Registration officer · Department advisor · Faculty member · Student · Public visitor · Standard user · System administrator · The system (automatic)

## 3.14.2 User journeys

**Schedule committee chair** — **An instructor request reaches the bell at once**

1. The instructor sends a request from the card and the server emits a notify pulse.
2. The chair's open screen asks the pulse within seconds and finds notifiedAt has advanced.
3. The bell reads /api/notifications after 700 ms and a "just arrived" line floats for 9 seconds.
4. If phone alerts are active on the device the notice arrives there instead of a desktop notification.
5. Pressing the notice marks it read and opens the workspace on the department.

**Faculty member** — **The department's decision reaches the instructor's phone**

1. The instructor opens the card and presses the bell, grants permission, and the subscription is saved under the card.
2. The department fixes three items of the request within 10 minutes.
3. The server checks the text carries no room trace and sends one notice "3 appointments fixed".
4. The instructor taps the notice and the worker opens the same card.

**Department advisor** — **A colleague got to the same request first**

1. The advisor opens a section request and sees a colleague in the chip with a working-on-this mark.
2. The colleague saves a decision and the request's version number rises.
3. The advisor saves with the old stamp and the server answers 409 stale-write, touching nothing.
4. The bar "your colleague edited this before you" appears; the advisor presses Refresh, sees the decision and retries.

**Faculty member** — **A calendar subscription that does not break**

1. The instructor adds the /api/public/cal/... link from the card to the phone's calendar.
2. The phone re-reads the file every 6 hours and the server answers 304 when nothing changed.
3. The department publishes a new card and the same link stays valid because its key follows the instructor.
4. If no live card link remains an empty calendar with a stopped description arrives and lectures clear quietly.

College dean

### The dean reads the trail

1. The dean opens the trail sheet and the server fixes the audience: the vice dean and department heads of the college.
2. Their faces appear with a ring measuring the last 7 days and a timeline for the two terms.
3. Filtering by person or kind makes the server re-apply the verdict on each line.
4. Opening a line shows "before ← after" with no edit button.

### 3.14.3 Diagrams

**Path of a schedule-change announcement**

The news carries no rows; each screen re-reads its own scope through the scoped road.

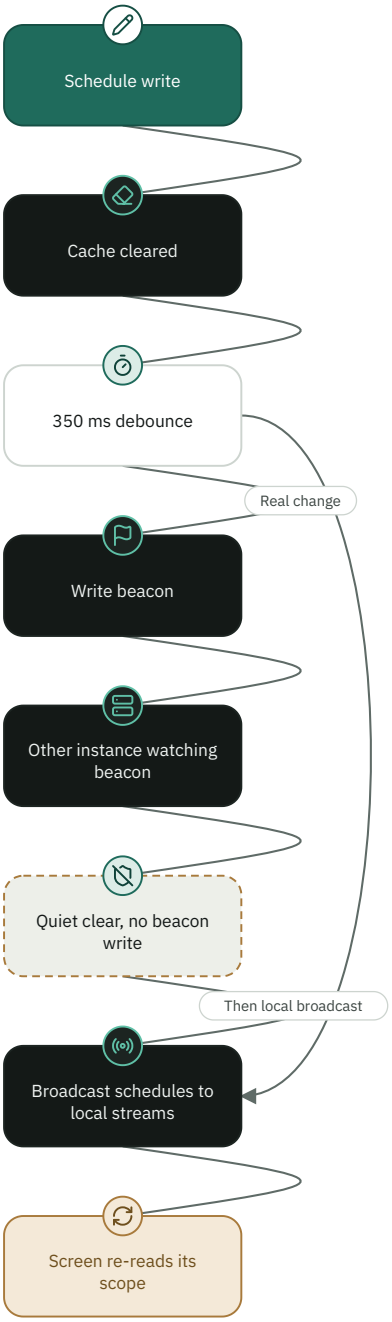

## Pulse or stream?

A tab alone on its board holds no open stream.

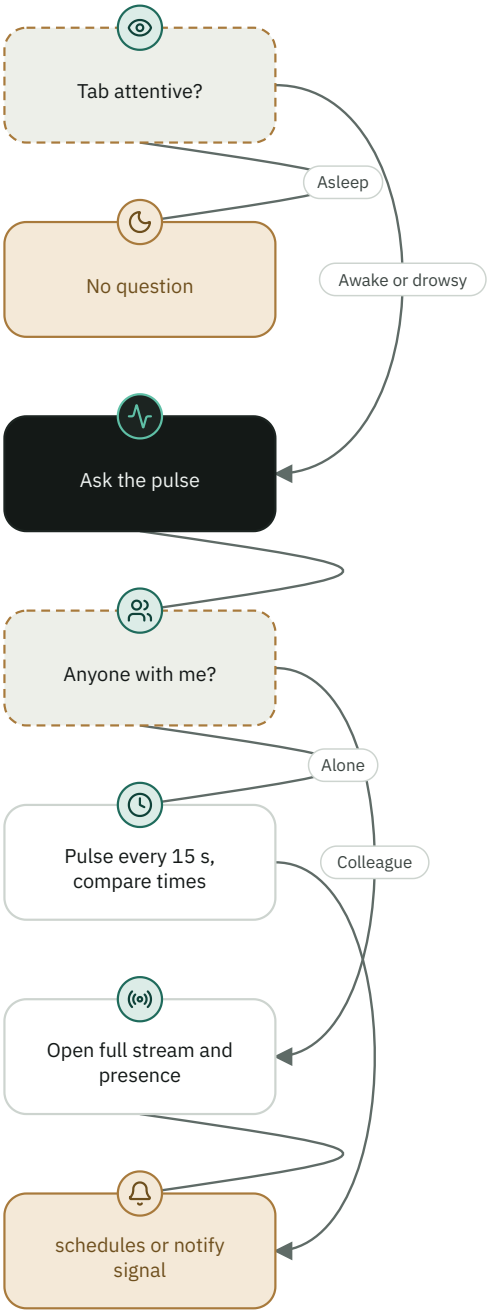

## Life of a phone notice

A notice waits only for its own owner and never carries a room trace.

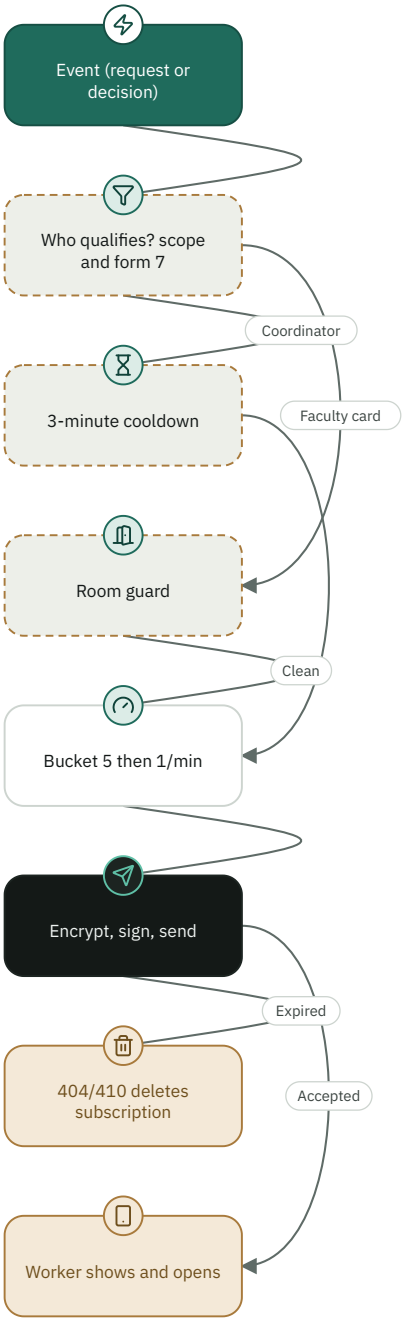

**Stable calendar subscription**

The key belongs to the instructor, not the link; no live card pauses without breaking.

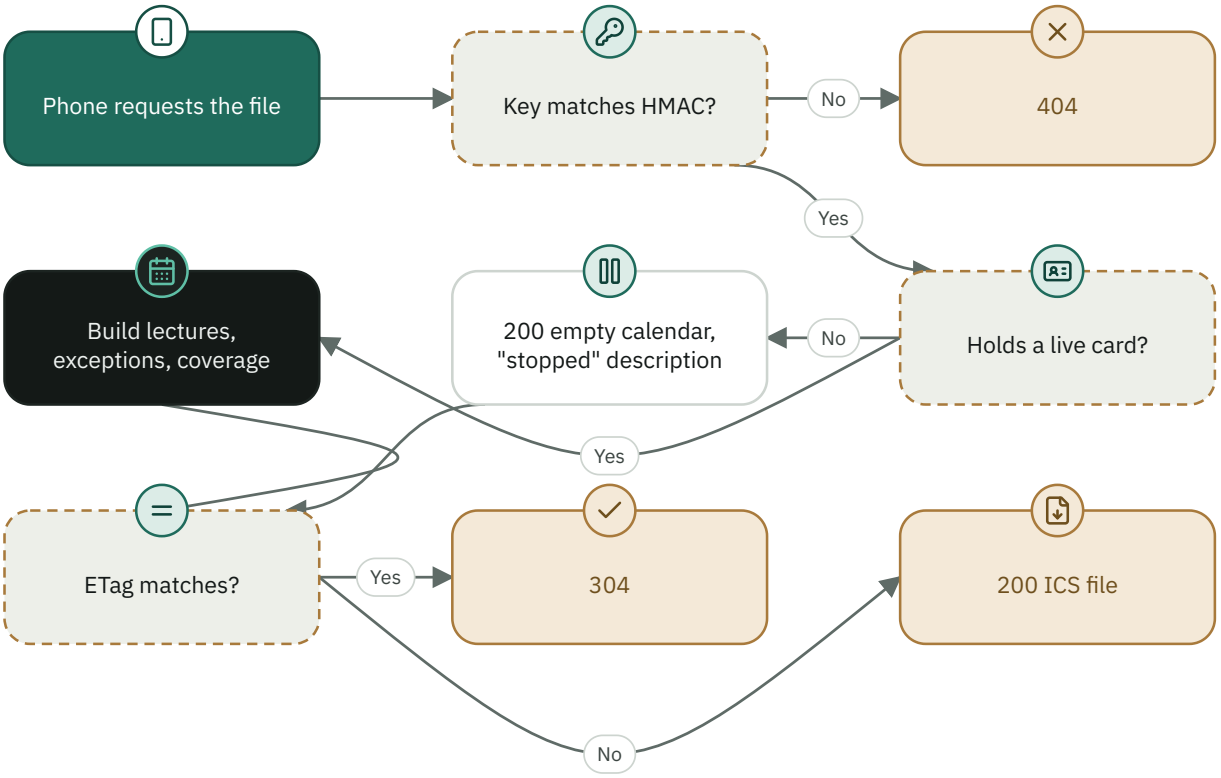


### 3.14.4 Screens

**Notification center (bell)**

A bell, badge, three-group panel and floating notice, holding the "enable alerts on your phone" card.`src/components/NotificationCenter.tsx`

**Phone alerts card**

Enable, test and stop the subscription, plus a three-step iPhone guide.`src/components/PushCard.tsx`

**Activity trail (side sheet)**

Faces of who worked, a timeline, and person and kind filters; read-only.`src/components/trail/TrailSheet.tsx`

**Last-edit stamp**

"Last edit: person · yesterday 10:20" on hovering a row.`src/components/trail/TrailStamp.tsx`

**Row "Why?"**

The row's origin, its change history and its facts.`src/components/RowHistory.tsx`

**Colleague faces**

Up to 5 faces, "+N", and the list of those present.`src/components/ColleagueFaces.tsx`

**Refresh-and-retry bar**

A calm amber bar with a Refresh button.`src/componen ts/StaleWriteToast.tsx`

### 3.14.5 Requirements

**FR-NTF-001** **Bell derived from current state**

The system shall derive bell notifications from the live state of schedules and requests at the moment GET /api/notifications is called, and shall not store any notification, so that no notice survives the removal of its cause.

Implemented · Must · Functional · Schedule committee chair, Department head, College registrar, College dean

**ACCEPTANCE CRITERIA**

1. After a department schedule is accepted and the bell is queried again, the pending-approval notice is gone and an accepted notice with the done tone appears.
2. A request with no current term and no explicit term returns { termId: 0, items: [] }.

**EVIDENCE**

`src/server/routes/notificationsRoutes.ts` `src/utils/notificationCenter.ts` `tests/notification-center-audit.ts`

**FR-NTF-002** **Notification scope and tones**

The system shall build each role's notifications (committee chair, department head, registration, deans, dean of registration) inside that role's scope only, and shall order them by tone (alert, action, waiting, done) and then by most recent time.

Implemented · Must · Functional · Schedule committee chair, Department head, Registration officer, College dean

**ACCEPTANCE CRITERIA**

1. A user scoped to one department receives no notice about another department.
2. An alert-tone notice precedes an action-tone notice even if it is older.
3. A returned schedule idle for more than 3 days raises an alert-tone notice for the dean or vice dean.

**EVIDENCE**

`src/utils/notificationCenter.ts` `src/server/routes/notificationsRoutes.ts` `tests/notification-center-audit.ts` `tests/dean-notify-audit.ts`

**FR-NTF-003** **Two-term bell**

The system shall read the bell for both the current term and the planning term (the newest unfinished term with activity), shall prefix planning-term item ids with term-<number>: and carry the term name, and shall answer for one explicit term alone when termId is passed.

Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. When the planning term differs from the current one, its item detail is prefixed with the term name.
2. With an explicit termId no planning term is read and no item carries the term- prefix.

**EVIDENCE**

`src/server/core/notifications.ts` `src/server/routes/notificationsRoutes.ts` `tests/notification-center-audit.ts`

### FR-NTF-004 Feature notices and fault isolation

The system shall append to the bell notices for plan sheets under review (up to 4 groups, then a single "more" item), the registration radar, students who got stuck, Masari students' section needs (up to 4 departments out of the first 30), section requests, and advertising campaigns for the root administrator account outside the demo sandbox, and a failure in any one of them shall not drop the bell.

● Implemented · Should · Functional · Schedule committee chair, Department head, College dean

**ACCEPTANCE CRITERIA**

1. A department with two sheets of the same kind yields one notice, not two.
2. When the radar read fails the error is logged and the bell still returns the remaining items.

**EVIDENCE**

`src/utils/featureNotifications.ts` `src/server/routes/notificationsRoutes.ts` `tests/feature-notifications-audit.ts`

### DR-NTF-005 Server-side read marks

The system shall store read marks per user on the server through POST /api/notifications/seen, keyed by term (seenKey), capped at 1000 ids with the newest kept and at most 200 characters per id, and shall permit the write for every role, read-only roles included.

● Implemented · Must · Data · Standard user, Schedule committee chair, College dean

**ACCEPTANCE CRITERIA**

1. Sending 1050 ids keeps the last 1000 and drops the oldest.
2. A previous-term notice with the same id does not hide the new badge of the current term's notice.
3. Re-sending what is already stored writes nothing.

**EVIDENCE**

`src/utils/notificationSeen.ts` `src/server/routes/notificationsRoutes.ts` `src/server/roleGuard.ts` `tests/notification-center-audit.ts`

### IR-NTF-006 Bell interface

Inferred

The system shall present one bell with a badge counting unread items that are required of the user (capped at 99+) and a panel with three groups ("Required of you", "Waiting on others", "Done"), shall float a newly arrived urgent notice for 9 seconds, and shall carry the count in the window title.

● Implemented · Should · Interface · Schedule committee chair, Department head, Registration officer

**ACCEPTANCE CRITERIA**

1. Three unread required items show 3 on the bell; after "mark all as read" the badge disappears.
2. The page title becomes "(3) ..." and returns to its original when nothing unread remains.

**EVIDENCE**

`src/components/NotificationCenter.tsx` `tests/notify-bell-yield-audit.ts` `tests/notification-center-audit.ts`

### FR-NTF-007 Opening a notice on its department

When a notice is pressed the system shall mark it read and navigate to the screen it belongs to, carrying its college and department so the screen opens on it, and shall not route a role to a screen it does not hold.

● Implemented · Should · Functional · Department head, College dean, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A department head's notice about registrar notes opens Schedule Changes, not the schedule workspace.
2. Instructor-request items are not shown to a role without the schedule screen (form 7).

**EVIDENCE**

`src/utils/notificationCenter.ts` `src/utils/notifyFocus.ts` `src/components/NotificationCenter.tsx` `tests/dean-notify-audit.ts` `tests/notification-center-audit.ts`

### NFR-NTF-008 Bell cost

The system shall memoise the student-queue aggregate and the blocking-conflict count for an accepted department for one minute (60,000 ms), shall clear them when a schedule changes or the queue is written, and shall coalesce notify pulses caused by registration-queue decisions into one pulse every 3 seconds.

Implemented · Should · Non-functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. Twenty consecutive queue decisions emit one notify pulse, not twenty.
2. A failed read is not cached, and a read begun before invalidation is not kept after it.

#### EVIDENCE

`src/server/notificationCache.ts` `src/server/core/notifications.ts` `src/server/core/liveChannel.ts` `tests/student-journey-audit.ts`

### FR-NTF-009 Live schedule channel

The system shall broadcast a light event (schedules, with changedAt) to every open screen through GET /api/schedules/events after any schedule write with a 350 ms coalescing delay, carrying no rows, shall restrict the route to forms 7, 8, 9, 10, 14, 16 and 17, with a cap of 400 connections, a keep-alive ping every 25 seconds and a 4000 ms retry.

Implemented · Must · Functional · Schedule committee chair, Department head, Department advisor

#### ACCEPTANCE CRITERIA

1. Saving six cards in one drag reaches each subscriber as one schedules message.
2. The 401st connection is closed at once and its screen falls back to reading on demand.
3. The event payload contains no rows: each screen re-reads its own scope through the normal scoped road.

#### EVIDENCE

`src/server/routes/scheduleLiveRoutes.ts` `src/server/core/liveChannel.ts` `src/components/Schedules.tsx` `tests/live-pulse-http-audit.ts` `tests/live-pulse-audit.ts`

### FR-NTF-010 Cross-instance change broadcast

The system shall write a beacon document on every real change and watch it in every server instance; when a change arrives from another instance it shall clear the schedule, queue and bell caches and rebroadcast locally without rewriting the beacon, to prevent an endless echo.

Implemented · Must · Functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. A write on a second instance reaches a screen held on the first instance as a schedules message.
2. The instance that wrote does not receive its own write back from the beacon.
3. A change made inside a demo sandbox does not write the beacon.

#### EVIDENCE

`src/server/core/liveChannel.ts` `src/db/beaconEcho.ts` `tests/live-pulse-audit.ts`

### FR-NTF-011 Board presence

Inferred

The system shall keep each user's position on a board (cell under the pointer, card in hand, row open in the editor) in memory only and shall broadcast the roster to members of that same board only, as named fields with no password hash or login name; a mark is stale after 45 seconds and a silent connection is dropped after 90 seconds.

Implemented · Must · Functional · Schedule committee chair, Department advisor, Department head

#### ACCEPTANCE CRITERIA

1. A user from another college, an administrator included, does not see the names of those present on a board they are not scoped to.
2. A tab frozen for more than 45 seconds has its mark emptied and stays listed until 90 seconds.
3. POST /api/auth/presence only alters the calling user's own stream.

#### EVIDENCE

`src/server/core/liveChannel.ts` `src/server/routes/scheduleLiveRoutes.ts` `src/server/routes/authRoutes.ts` `src/components/schedulePresence.ts` `tests/live-pulse-http-audit.ts` `tests/colleague-guard-measure-audit.ts`

### FR-NTF-012 Presence and change pulse

The system shall answer GET /api/schedules/pulse from memory with no database read, returning { company, changedAt, notifiedAt } and a no-store header, shall count in company the other people at their screens on the same board (not tabs), and shall return 403 to an account without permission so that the tab stops asking.

Implemented · Must · Functional · Schedule committee chair, Department advisor

#### ACCEPTANCE CRITERIA

1. A colleague with three tabs counts as one, and my own second tab counts as nobody.
2. A tab untouched for a while (active=0) or whose last pulse is older than 90 seconds is not company.
3. A pulse without conn, or for a scope not allowed, is answered with company = 0.

#### EVIDENCE

`src/server/routes/scheduleLiveRoutes.ts` `src/server/livePulse.ts` `tests/live-pulse-audit.ts` `tests/live-pulse-http-audit.ts`

### NFR-NTF-013 Browser pulse cadence

The browser shall ask the pulse every 15 seconds while awake, every 8 seconds for a team that has company, every 60 seconds while drowsy, and never while asleep, shall open the full stream only when company exists, and shall tell the server it is leaving with sendBeacon.

Implemented · Should · Non-functional · Schedule committee chair, Department advisor

#### ACCEPTANCE CRITERIA

1. A sleeping tab sends no pulse, and the first look back asks at once.
2. An answer older than the latest the tab has seen does not make old news look new (the largest value is kept).

#### EVIDENCE

`src/utils/livePulse.ts` `src/utils/pageAwake.ts` `tests/live-pulse-audit.ts`

### FR-NTF-014 Advising and registration team presence

The system shall tell members of the same team and scope (team + college + department + term) who is working now and on what (a section request, advisor seats, or a student case), with a "working on this" hold that expires 120 seconds after the last touch, at most 40 colleagues per answer, and each person listed once however many tabs they hold.

Implemented · Should · Functional · Department advisor, College registrar, Registration officer, Schedule committee chair

#### ACCEPTANCE CRITERIA

1. An advisor does not see the registration team and vice versa.
2. Two colleagues meeting on the same section request raises a notice and does not block saving.
3. The answer carries no account number or connection id: the peer id is derived and irreversible.

#### EVIDENCE

`src/server/teamPresence.ts` `src/utils/teamWork.ts` `src/server/routes/scheduleLiveRoutes.ts` `tests/colleagues-advising-registration-audit.ts`

### IR-NTF-015 Colleague faces chip

Inferred

The system shall present presence as one chip for all teams: up to 5 faces with the name's initial and colour followed by "+N", where one tap opens the list of those present, most recently active first, with what each is working on, closed by Esc or a tap outside.

Implemented · Should · Interface · Schedule committee chair, Department advisor, College registrar

**ACCEPTANCE CRITERIA**

1. Seven colleagues appear as five faces and "+2".
2. A colleague in a background tab is shown as away and ordered after those at their screens.

**EVIDENCE**

`src/components/ColleagueFaces.tsx` `src/components/ColleagueHoldNotice.tsx` `src/utils/colleagueFace.ts` `tests/colleagues-advising-registration-audit.ts` `tests/colleague-guard-measure-audit.ts`

### FR-NTF-016 Stale-write protection

The system shall answer 409 with the code stale-write and the message "A colleague edited this before you. Refresh and retry." to any write on section requests, advisor seats or registration-queue decisions that carries a version stamp older than the current one, touching nothing, and the screen shall show a calm bar with a "Refresh" button that re-reads; a write without a stamp proceeds as before.

Implemented · Must · Functional · Department advisor, College registrar, Registration officer, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. A decision on a section request with rev + 7 returns 409 with stale-write and leaves the request unchanged.
2. An empty text stamp "" is valid and means nothing decided yet; 1.5, "1e3" or a negative number counts as not sent.
3. The Refresh button is disabled while reading and then folds the bar.

**EVIDENCE**

`src/utils/staleWrite.ts` `src/components/StaleWriteToast.tsx` `src/server/sectionRequestsRoutes.ts` `tests/colleagues-advising-registration-audit.ts`

### FR-NTF-017 Push subscription

The system shall accept a Web Push subscription for an account (POST /api/push/subscribe) or for a faculty card by its token, after verifying that the endpoint is https on port 443 with no credentials and at most 2048 characters and that the p256dh key is an uncompressed P-256 point, shall bind the device to the login session, and shall delete a subscription only for its owner.

Implemented · Must · Functional · Standard user, Schedule committee chair, Department head, Faculty member

**ACCEPTANCE CRITERIA**

1. An http endpoint, one on port 8443, or one with user and password is rejected with 400.
2. One device is one record: subscribing the same endpoint twice updates rather than duplicates.
3. A stopped or expired card answers 404 and accepts no subscription.

**EVIDENCE**

`src/server/pushRoutes.ts` `src/server/webPush.ts` `src/utils/pushClient.ts` `src/components/PushCard.tsx` `tests/web-push-audit.ts`

### FR-NTF-018 Department coordinator push

The system shall push to the devices of users who hold the request inbox (form 7 or system administration) within the item's scope a notice when an instructor sends a request or reply, carrying the count present at send time, replacing the previous one by a department tag, with a 3-minute cooldown per department and kind stored in the database rather than in one instance's memory.

● Implemented · Should · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. Three requests within 3 minutes for one department produce one notice.
2. An inactive, locked or form-7-less user receives no notice.
3. Two server instances share the same cooldown.

**EVIDENCE**

`src/server/pushRoutes.ts` `src/server/pushMessages.ts` `tests/web-push-audit.ts`

### FR-NTF-019 Faculty card push

The system shall push to a faculty card a single notice that replaces the previous one (fixed, rejected, alternatives, department reply, study proposal sent or committed, training window opened), never repeating the same text within a minute, which gathers department decisions of the last 10 minutes and counts them ("3 appointments fixed"), shall not send any notice carrying a room trace in its title or body, and shall not push to a stopped card but erase its subscriptions.

● Implemented · Must · Functional · Faculty member

**ACCEPTANCE CRITERIA**

1. Three items fixed together arrive titled "3 appointments fixed" with the card-decisions tag.
2. A request naming room B-204 in any field sends no notice and the reason is logged.
3. A mixed-kind batch is summarised as icons with counts.
4. «Remind those who have not replied» in publishing pushes to each non-replier's card (where notices are enabled) «🔔 a reminder about your schedule request» with the body «your reply has not arrived yet · closes <day and date>» and the card-reminder tag; nothing is pushed in the demo.
5. Sending a study proposal (or a revised version) pushes «📝 a study proposal from the department» to its owner's card with the card-proposal tag and the proposal page link, and committing it pushes «📌 the proposal was fixed in your schedule» with the card-decisions tag; generic text with no course, time or room, and nothing is pushed in the demo.
6. The same notice (title, body and link) to the same card within one minute is not repeated: one decision batch arrives once.

**EVIDENCE**

`src/server/pushRoutes.ts` `src/server/pushMessages.ts` `src/server/pushMessages.ts#cardReminderMessage` `src/server/pushMessages.ts#proposalSentMessage` `src/server/pushMessages.ts#proposalCommittedMessage` `src/server/pushCard.ts` `tests/web-push-audit.ts` `tests/publish-cards-per-person-audit.ts`

### NFR-NTF-020 Delivery limits

The system shall limit delivery with a bucket per subscription (5 consecutive notices, then one per minute), at most 50 devices per delivery, a 10-second call timeout and a 24-hour TTL, shall encrypt the payload (RFC 8291) to at most 3,993 plaintext bytes and sign it with VAPID, and the route shall wait for the hook at most 2,500 ms without throwing.

● Implemented · Must · Non-functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. Pressing Test six times in a row sends 5 and answers 429 "wait a minute".
2. A 404 or 410 from the push service deletes the subscription, while a 429 is a transient failure that does not.
3. A slow push service delays the route's reply by no more than 2.5 seconds.

**EVIDENCE**

`src/server/webPush.ts` `src/server/pushRoutes.ts` `tests/web-push-audit.ts`

### FR-NTF-021 Subscription rotation and sign-out

The system shall accept a browser's subscription rotation (POST /api/public/push/rotate) by proof of ownership with the old endpoint and its secret in a constant-time comparison, moving the record to the new one under the same owner, and shall drop device subscriptions bound to a session on explicit sign-out but not on idle expiry.

● Implemented · Should · Functional · Standard user, Faculty member

**ACCEPTANCE CRITERIA**

1. A rotation with a wrong old secret answers 404 and changes nothing.
2. A rotation for a card that was stopped answers 410 and deletes the subscription.
3. An explicit sign-out removes only that session's devices.

**EVIDENCE**

`src/server/pushRoutes.ts` `public/push-sw.js` `tests/web-push-audit.ts`

### IR-NTF-022 Push service worker

The push service worker (/push-sw.js) shall run with scope /push/ in the app and /r/<token> on a faculty card, shall clip the title to 120 characters, the body to 240 and the tag to 64, shall open only a same-origin link, shall focus an open tab instead of opening a new window, and shall cache no page nor answer from memory except the "updating" page on 500, 502, 503, 504 or a network failure.

● Implemented · Must · Interface · Faculty member, Standard user

**ACCEPTANCE CRITERIA**

1. A notice with a cross-origin link opens the worker's scope start, not that link.
2. Unregistering app workers during recovery keeps the push worker.
3. A 503 on a card navigation is replaced with the updating page, status 503 and header Retry-After: 5.

**EVIDENCE**

`public/push-sw.js` `src/utils/pushClient.ts` `src/server/pushCard.ts` `tests/web-push-audit.ts` `tests/updating-page-audit.ts`

### FR-NTF-023 Activity trail recording

The system shall write one trail line after every successful write request (status below 300 and not a dry run) on a route in a closed list: who, which team, which scope, what, on what, and before ← after, with maximum lengths of 90 for target, 220 for detail, 90 for each of before/after, 80 for name and 120 for seat, and shall record no opens, views or calculate-only calls.

● Implemented · Must · Functional · The system (automatic), Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A conflict-check or preview POST writes no line; PUT /schedules/<id> writes an edit line carrying the row id.
2. A request refused with 409 records nothing.
3. A re-save with no difference (skip) is not written.

**EVIDENCE**

`src/server/activityTrail.ts` `src/utils/activityTrail.ts` `src/db/demoActivityTrail.ts` `tests/activity-trail-audit.ts`

### FR-NTF-024 Who sees the trail

The system shall read the trail for the current and previous terms only and apply the owner's decision to the audience: the dean sees the vice dean and department heads, the vice dean nothing, a department head sees the department and its teams, a committee chair, advising head or college registrar sees their own team, the university registrar sees registration heads and their teams, a member sees only their own actions, and a system administrator sees all, with the verdict re-applied to each line before it is sent.

● Implemented · Must · Functional ·

College dean, Vice dean for academic affairs, Department head, Schedule committee chair, University registrar, System administrator

**ACCEPTANCE CRITERIA**

1. A vice dean receives audience = none and an empty list.
2. A deputy sees the team but not the head's own actions.
3. A response carries at most 160 lines (truncated = true beyond), a read budget of 240 spread over keys, and a person filter reads up to 200 lines for that key.

**EVIDENCE**

`src/utils/activityTrail.ts` `src/server/activityTrail.ts` `src/components/trail/TrailSheet.tsx` `tests/activity-trail-audit.ts`

### FR-NTF-025 Read-only trail and last-edit stamp

The system shall answer 405 with Allow: GET to any non-GET method under /api/activity-trail, a system administrator included, and shall serve GET /api/activity-trail/stamp/<row> as a last-edit stamp to anyone whose scope contains the row, naming the person for those entitled to see them and otherwise the team.

● Implemented · Must · Functional · College dean, Department head, Schedule committee chair, System administrator

**ACCEPTANCE CRITERIA**

1. A DELETE or PUT on a trail line answers 405 and the line count is unchanged.
2. A stamp for a row outside scope returns 403, and for a missing row 404.
3. A dean sees the team name in the stamp, not a member's name they are not entitled to see.

**EVIDENCE**

`src/server/activityTrail.ts#/api/activity-trail/stamp/:rowId` `src/components/trail/TrailStamp.tsx` `src/components/trail/TrailButton.tsx` `tests/activity-trail-audit.ts`

### FR-NTF-026 Row memory: why is it here

The system shall show on each row a "Why?" button that reads GET /api/schedules/<id>/history on open (up to 12 events from the audit log with a truncated flag), the row's origin badge if an approval door wrote it, and computed fact chips, shall show nothing when there is nothing to say, and shall refuse with 403 a row outside scope.

● Implemented · Should · Functional · Schedule committee chair, Department head

**RATIONALE**

> No new storage: it reads what was already written.

**ACCEPTANCE CRITERIA**

1. A row with no history, origin or facts renders nothing.
2. A row that came from the registration radar carries the Registration Radar badge with who applied it and when.
3. More than 12 events show "and older than that...".

**EVIDENCE**

`src/components/RowHistory.tsx` `src/server/insightRoutes.ts` `tests/row-reasons-audit.ts`

### FR-NTF-027 Public subscription calendar (ICS)

The system shall serve a public schedule link as a calendar file (GET /api/public/ics/<token>) as text/calendar, inline, with a weak ETag computed without DTSTAMP and Cache-Control: no-cache so that unchanged content returns 304, as a weekly recurrence between the declared term bounds (otherwise 16 weeks with an "estimated" tag in the name), an optional reminder of 0 to 120 minutes, a suggested refresh every 6 hours, and shall remove a lecture cancelled on a specific date from that date only.

● Implemented · Must · Functional · Public visitor, Student, Faculty member

**ACCEPTANCE CRITERIA**

1. A second request with If-None-Match for an unchanged file returns 304 with no body.
2. ?alarm=500 is clamped to 120 minutes and ?alarm=-5 to 0.
3. A staff-card, survey, students or request link returns 404 and serves no calendar.
4. With no current term an instructor feed answers 409.

**EVIDENCE**

`src/server/routes/publicCalendarRoutes.ts` `src/utils/icalendar.ts` `tests/calendar-ics-audit.ts` `tests/term-calendar-audit.ts`

### FR-NTF-028 Stable instructor feed and quiet pause

The system shall serve GET /api/public/cal/<token>/p<id>-<key>.ics with a key that follows the instructor (a 32-hex-character HMAC) so that republishing the card does not break it, shall drop dates the instructor is absent from (cancelled or handed to a colleague) and add dates they cover as single days, and when no live card link remains shall answer 200 with a valid empty calendar of the same name and a description saying the subscription stopped, resuming by itself when a new card is issued.

● Implemented · Must · Functional · Faculty member

**RATIONALE**

> Owner decision of 2026-10-29.

**ACCEPTANCE CRITERIA**

1. A key with or without the .ics suffix is accepted, and a key altered by one character returns 404.
2. After the last live link is revoked: 200 with no VEVENT and the REFRESH-INTERVAL kept.
3. The key reveals no civil ID and cannot be guessed without the secret.

**EVIDENCE**

`src/server/routes/publicCalendarRoutes.ts` `src/server/calendarSecret.ts` `src/server/core/shareLinks.ts` `tests/calendar-ics-audit.ts`

### NFR-NTF-029 Calendar key secret

The system shall derive the calendar key from CALENDAR_SECRET when the operator sets it and otherwise from the stored shared secret under a calendar-specific label, lazily and once per instance, and shall not keep a failed read, so that no cold start generates a new secret and kills subscriptions on phones.

● Implemented · Must · Non-functional · The system (automatic), System administrator

**ACCEPTANCE CRITERIA**

1. With CALENDAR_SECRET set, existing subscriptions stay exactly as they are.
2. Two instances reading the same shared secret return the same key for the same card.
3. Rotating CALENDAR_SECRET invalidates every key.

**EVIDENCE**

`src/server/calendarSecret.ts` `src/server/core/shareLinks.ts` `tests/calendar-ics-audit.ts`

### FR-NTF-030 One-day reminder file

The system shall serve GET /api/public/me/reminder?kind=next|round with a Masari session as an inline all-day text/calendar file that opens an "add to calendar" dialog, with the title, date and note built by the server: next = the next stop in the term journey, round = the registration window day from the ticket (otherwise 404 no-date); any other kind ← 400, with no session ← 401, and no title or date is read from the link; with a UID stable from date and title, two alarms — 9 AM the day before (-PT15H) and 8 AM on the day (PT8H) — and Cache-Control: no-store, with no name or number.

● Implemented · Could · Functional · Student

#### ACCEPTANCE CRITERIA

1. kind=anything ← 400 bad-kind; with no session ← 401.
2. t=… and d=… in the link never appear in the file.
3. The two alarms are TRIGGER:-PT15H and TRIGGER:PT8H (not -PT3H = 9 PM).
4. Re-adding the same reminder updates the entry rather than duplicating it (stable UID).

#### EVIDENCE

`src/server/studentDoorRoutes.ts#/api/public/me/reminder` `src/utils/icalendar.ts#buildReminder` `tests/calendar-ics-audit.ts` `tests/student-recovery-audit.ts` `tests/masari-return-audit.ts`

### IR-NTF-031 Mobile alert routes for an account and a faculty card

The system shall serve: GET /api/public/push/key with the public key without sign-in (no-cache, 503 when unavailable); GET /api/push/status for the account (whether alerts are configured, the key, whether the account has an alert audience, its device ids and those bound to the current session); POST /api/push/subscribe and POST /api/push/unsubscribe (deleting only the account's own subscription), both written to the audit log under «mobile alerts» with the device type; POST /api/push/test with an urgent test alert; and for a faculty card by its token: GET and POST /api/public/request/:token/push, POST …/push/off (only the card's own subscription) and POST …/push/test; and GET /r/:token/manifest.webmanifest, the «my card» manifest for installing it on the home screen.

● Implemented · Should · Interface · Department head, Schedule committee chair, Faculty member

#### ACCEPTANCE CRITERIA

1. test with no subscribed device ← 409 «enable alerts on this device first»; a second test right after the allowance runs out ← 429 «you just tried; wait a minute».
2. A card token not matching the pattern or stopped ← 404 «the link does not exist or was stopped»; a manifest with an invalid token ← 404 Not found.
3. unsubscribe for another account's subscription ← {ok:true} without deleting anything.

#### EVIDENCE

`src/server/pushRoutes.ts#/api/public/push/key` `src/server/pushRoutes.ts#/api/push/status` `src/server/pushRoutes.ts#/api/push/unsubscribe` `src/server/pushRoutes.ts#/api/push/test` `src/server/pushRoutes.ts#/api/public/request/:token/push` `src/server/pushRoutes.ts#/api/public/request/:token/push/off` `src/server/pushRoutes.ts#/api/public/request/:token/push/test` `src/server/pushRoutes.ts#/r/:token/manifest.webmanifest` `src/server/pushCard.ts` `tests/web-push-audit.ts`

### IR-NTF-032 Public schedule and calendar routes by link

The system shall serve GET /api/public/schedule/:token with the shared department link's schedule without caching, refusing with 404 and a message naming its kind a faculty card link, a survey link, a student schedule link and a faculty request link; shall serve GET /api/public/ics/:token as the same link's calendar, refusing the four kinds with 404 Not found and removing from each lecture the dates cancelled by week exceptions while keeping covered dates; shall serve GET /api/public/ics/:token/:key as the calendar of the instructor whose key matches an HMAC of the link and number, and GET /api/public/cal/:token/:key as the stable calendar that follows the instructor; each records the link's last use without delaying the answer.

● Implemented · Must · Interface · Public visitor, Faculty member, Student

**ACCEPTANCE CRITERIA**

1. A survey link on /api/public/schedule ← 404 «this link is a student survey».
2. A key matching no instructor on ics/:token/:key ← 404 Not found.
3. A lecture cancelled on one date ← that date alone disappears from the subscribed calendar.

**EVIDENCE**

`src/server/routes/publicCalendarRoutes.ts#/api/public/schedule/:token`
`src/server/routes/publicCalendarRoutes.ts#/api/public/ics/:token`
`src/server/routes/publicCalendarRoutes.ts#/api/public/ics/:token/:key`
`src/server/routes/publicCalendarRoutes.ts#/api/public/cal/:token/:key` `tests/calendar-ics-audit.ts`
`tests/section-plan-audit.ts`

### FR-NTF-033 Student phone notifications in Masari

The system shall reuse the Web Push infrastructure (same VAPID keys and RFC 8291 encryption) to notify a Masari student on their device: the subscription lives on the student profile keyed by the fingerprint, and the scheduled sender sends three messages, each once per term, with no names or numbers; tapping opens /me.

● Implemented · Must · Functional · Public visitor, Faculty member, Student

**ACCEPTANCE CRITERIA**

1. No keys means no sending and no error.

**EVIDENCE**

`src/server/studentExtras.ts#scheduleStudentPush` `src/utils/studentPush.ts` `src/server/studentExtrasScript.ts`
`tests/student-push-audit.ts` `tests/student-extras-live-audit.ts`

## 3.14.6 Algorithms

ALG-NTF-01 · Notifications, activity and live channel

**Live broadcast coalescing, foreign-write detection and stale-write refusal**

Deterministic

*When are open screens told of a change, and when is a write that did not see the latest edit refused?*

1. Every schedule write is coalesced into a 350 ms window so each subscriber receives one row-less event.
2. The beacon document counts all writes and each instance's writes; foreign writes = (total delta) − (this instance's delta).
3. A counter going backwards counts as a foreign write; an instance never rewrites the beacon on receiving another's change, so there is no echo.
4. A write whose version stamp differs from the current one is refused with 409 and code stale-write, touching nothing; a write without a stamp proceeds.

**Inputs**

Write events, beacon counters, the sent stamp and the current version.

**Output**

One broadcast event per window, or a stale-write refusal.

A change is announced across all instances once; no write lands over an unseen colleague edit; the event carries no data.

350 ms coalescing, 400-connection cap, 25-second keep-alive.

`src/server/core/liveChannel.ts#listenForScheduleChangesAcrossInstances` `src/db/beaconEcho.ts#foreignWrites` `src/utils/staleWrite.ts#expectedRev` `src/server/sectionRequestsRoutes.ts` `tests/live-pulse-audit.ts` `tests/live-pulse-http-audit.ts`

FR-NTF-009 FR-NTF-010 FR-NTF-016

## 3.14.7 Edge cases

### ⚠ Stream cap reached

**Scenario** A 401st live-channel connection arrives while the instance holds 400 streams.

**Behaviour** The connection is closed at once without being registered; its screen falls back to reading on demand and to asking the pulse, and no error is shown.

### ⚠ Beacon echo

**Scenario** Two server instances watch the same beacon and one writes a change.

**Behaviour** The writing instance does not receive its own write and the other clears its caches quietly and broadcasts locally without writing the beacon, so the news does not bounce between instances forever.

### ⚠ Calendar with no live card

**Scenario** The instructor has no live card link left (stopped or expired) while the phone is still subscribed.

**Behaviour** The server answers 200 with a valid empty calendar of the same name and a description that the subscription stopped, so lectures clear quietly instead of a failure keeping them, and it resumes alone when a new card is issued.

### ⚠ Room name in notice text

**Scenario** An instructor-request item mentions a room (such as B-204) in the course name or alternatives.

**Behaviour** Room tokens are scrubbed from the course name and, if any trace remains in the final text, the notice is not sent and the reason is logged: the rule is never left to the text alone.

**⚠ Stamp invalid or absent**

**Scenario** An old tab or internal tool sends a write with no stamp, or a stamp like 1.5 or "1e3".

**Behaviour** An invalid stamp is treated as not sent so the write proceeds as before, whereas a valid but older stamp is refused with 409 stale-write and no change.

**⚠ Deputy and the trail**

**Scenario** A team head's deputy opens the trail sheet.

**Behaviour** The deputy sees the team's actions and their own but not the head's own actions (hideHolder), the sender's name is withheld in the send log, and the decision is made on the server, not in the interface.

### 3.14.8 Standing owner decisions

- The trail is read-only: no line is edited or deleted, not even by a system administrator, and who sees it is decided by role and scope under the owner's decision.
- The stable subscription pauses quietly (200 with an empty calendar) when no live card remains and resumes alone (owner decision of 2026-10-29).
- Nothing is pushed to a phone except what awaits its own owner, and a faculty notice never carries a room trace.
- Every course number a reader sees has seven digits (college 2 + department 2 + course 3, such as 0109105), and the printed reports keep their design.

↑ Contents

3.15 · ENG

# Engagement and public presence

Student survey, partner advertising, audience dashboard and the public pages.

| 37 | 100% | 40 | 43 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.15.1 Overview

This module covers everything that faces people who have no account: the student survey and the case-status page, advertising on public pages, partnership profiles and campaign reports for companies, the shared kit of public pages (colours, fonts, security policy, invalid-link page), the landing page and the presentation deck. For the main administrator it covers the Ads and Audience dashboard screens and the story mode. Measurement is anonymous by design: no name, civil ID or network address is stored, and the figures shown to companies are aggregated. No advertisement is ever shown on a page that asks for an identity.

Student · Public visitor · Partner organisation · Root administrator · The system (automatic)

## 3.15.2 User journeys

**Student** — **A student submits a course request and follows its status**

1. Opens the department link and enters the 12-digit civil ID; Arabic-Indic and Persian digits are accepted.
2. If a request already exists in this survey, the case number is requested; before it only the first letter of the name is revealed.
3. Chooses the request type (new course, conflict between two courses, or graduate) and then the courses from the list the department has actually taught.
4. Submits and receives a case number derived from the stored request itself.
5. Opens /m on the same link, enters the civil ID and the case number, and sees what arrived, when, and the committee and registration decisions if any.

**Root administrator** — **Creating and approving an advertising campaign**

1. Opens Ads and presses New campaign; the wizard opens on its first step.
2. Sets company, category, slot, dates and the destination link (public https).
3. Sets the target seasons, colleges or courses; the campaign is saved as a draft.
4. Uploads an image of the exact slot size; if rejected for quality he decides explicitly whether to override the warning.
5. Accepts the advertising rules and approves; if capacity or category conflicts, approval is refused with a written reason.
6. Sends the report link to the company, or rotates it so that the old link stops working.

**Partner organisation** — **A company opens the partnership profile and asks for a campaign**

1. Opens its private link; the first open is recorded for the administration without tracking any person.
2. Reads the aggregated audience figures, the ad slots with their capacity and the season calendar.
3. Picks a slot, season and number of weeks in the What will you get calculator and sees estimates drawn from the site record.
4. Presses New campaign and fills in name, mobile number and an optional email.
5. Returns with a success notice; the administration receives a bell notification until contact is recorded.

**Root administrator** — **Presenting the audience in a company meeting**

1. Opens the Audience dashboard and reviews the headline numbers, peak times and what students request.
2. Starts story mode; it enters full screen with five slides advancing every 8 seconds.
3. Pauses the autoplay with the space bar, or navigates with arrows or swipes.
4. Ends on Your next step (a free 7-day trial) and closes with Esc.

### 3.15.3 Diagrams

**Campaign lifecycle**

A campaign is shown only when approved and within its dates; changing its slot, category, dates, seasons or colleges after approval returns it to draft.

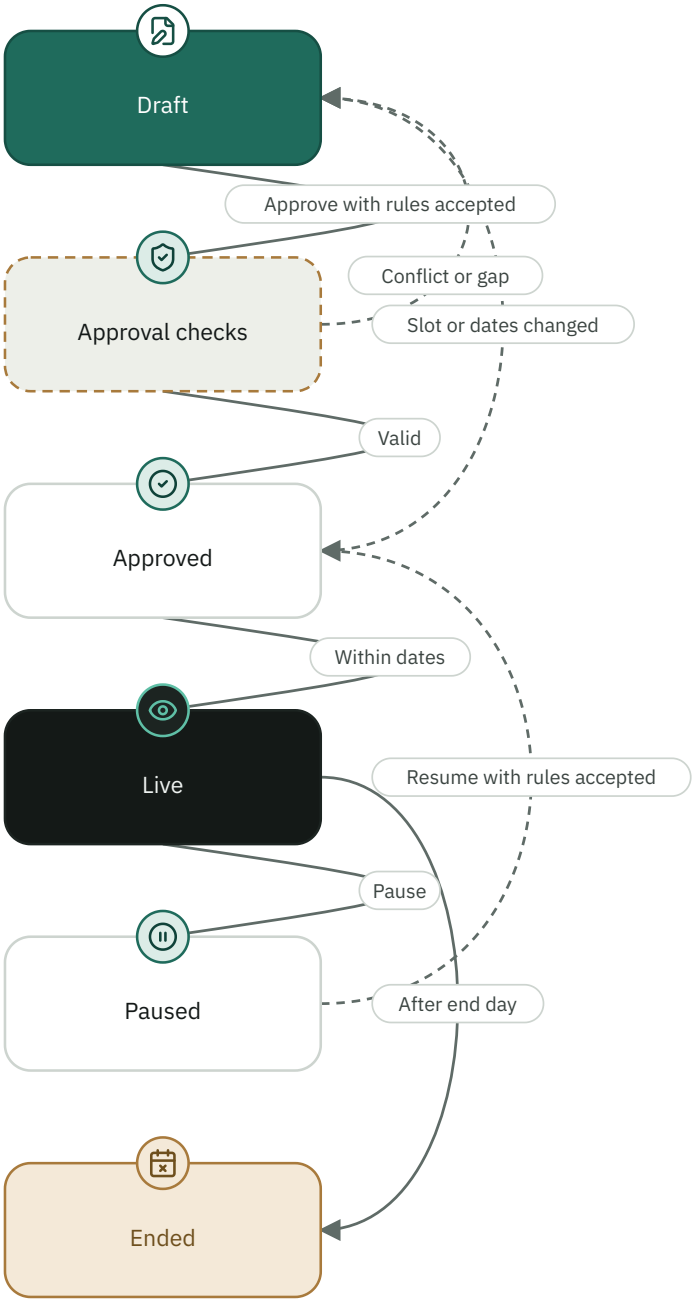

## Serving and measuring an ad

The public page carries one script; the server sends eligible campaigns and personal targeting conditions are evaluated in the student's browser.

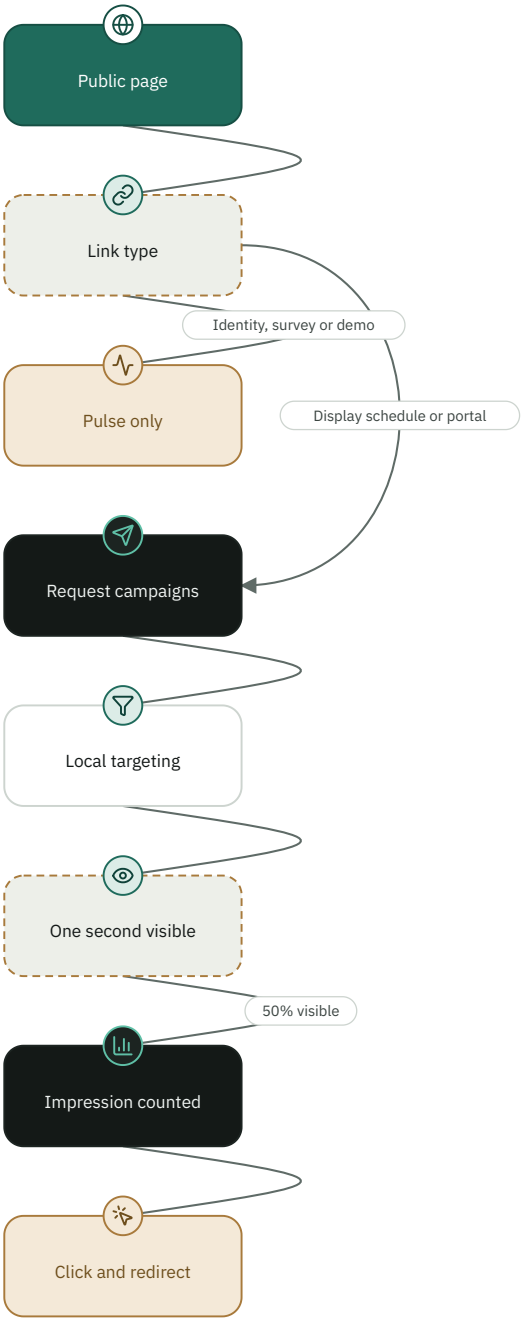

### Survey submission

The civil ID alone never opens an existing request: replacing it also needs the case number.

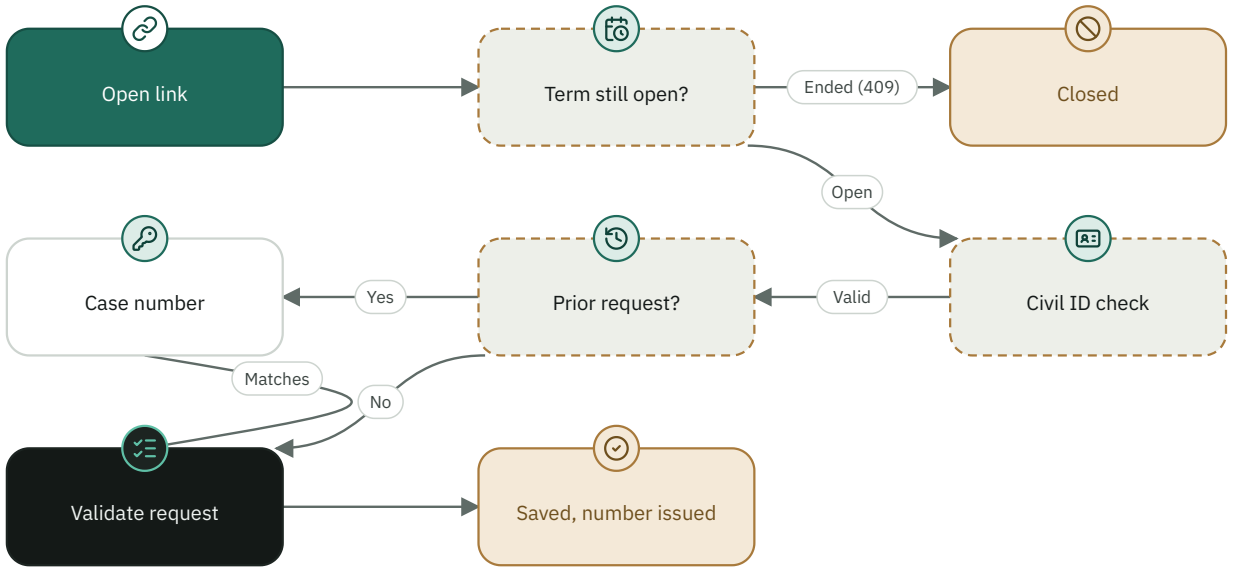


### Who reaches what

| | Survey and case status | Ad display | Campaign management | Audience dashboard | Partnership profile and report |
|---|---|---|---|---|---|
| Student | ✎ | 👁 | — | — | — |
| Public visitor | — | 👁 | — | — | — |
| Partner organisation | — | — | — | — | ✎ |
| Root administrator | — | — | ✎ | 👁 | ✎ |

✎ Write 👁 Read — No access

## 3.15.4 Screens

**Ads manager**

Four tabs: campaigns, requests, placements and seasons, partnership profile. Main administrator only and not available in the demo.`src/components/AdsManager.tsx`

**Campaign wizard**

Four steps: company and slot, audience, image, review and approval.`src/components/ads/CampaignWizard.tsx`

**Audience dashboard**

Aggregated anonymous figures refreshed every minute, with a print profile for companies.`src/compone`

**Audience story mode**

Five full-screen slides for a company meeting.`src/components/AudienceStory.tsx`

nts/AudienceDashboard.tsx

**Staff dashboard ad slot**
A hidden element that appears only when a campaign arrives; not mounted in the demo.`src/components/AdSlot.tsx`

**Student survey page**
Public page keyed by civil ID; in production the old link opens the student portal instead.`src/server/pages/surveyPages.ts`

**Invalid-link page**
One look for every public link: the SCHEDULE mark and the message only.`src/server/pages/publicInvalidLinkPage.ts`

**Landing page**
Served at /landing and on the home sub-domain.`public/landing/index.html`

**Presentation deck**
Full-screen slides with live numbers from two public endpoints.`public/schedule-presentation.html`

### 3.15.5 Requirements

**FR-ENG-001** **Survey payload**

The system shall serve a survey link of kind survey only, and return to the page the link's department, college, term and the courses the department has actually taught and that are still operational, answering term-ended instead of the payload once the link's term has ended. The payload is cached for 10 minutes while term end is checked on every open outside that cache.

Implemented · Must · Functional · Student, The system (automatic)

**RATIONALE**

> A course nobody has taught for years is not something to ask a student about.

**ACCEPTANCE CRITERIA**

1. A link of another kind returns 404 with the message that the link is not a survey.
2. A link whose term has ended returns termEnded=true with the /m link and is sent with Cache-Control: no-store.
3. The cached payload expires after 600000 ms and the cache is cleared when it exceeds 200 entries.

**EVIDENCE**

`src/server/routes/surveyRoutes.ts` `tests/student-case-status-audit.ts` `tests/student-journey-audit.ts`

**FR-ENG-002** **Request validation on submit**

On survey submission the system shall accept a 12-digit civil ID with a valid checksum and a name of at least 3 characters (up to 60), and enforce by request type: at least one course for a new course, exactly two courses for a conflict, an approved reason and notes of 3 to 600 characters for a graduate, with no more than 12 courses stored.

Implemented · Must · Functional · Student

**ACCEPTANCE CRITERIA**

1. A civil ID failing the checksum returns 400 with the invalid-civil-ID message.
2. A conflict request with one course returns 400 asking for exactly two conflicting courses.
3. A graduate request with notes shorter than 3 characters returns 400; longer notes are cut at 600 characters.
4. Success returns 201 with name, count, type and case number.

**EVIDENCE**

`src/server/routes/surveyRoutes.ts` `tests/student-journey-audit.ts` `tests/student-needs-scale-audit.ts`

### FR-ENG-003 Case number as second key and identity lock

The system shall read, edit or replace an existing request only with the civil ID together with the case number (normalised to at most 16 alphanumeric characters), reveal before that only that a request exists and the first letter of the name, and refuse changes to a previously verified name or home department.

Implemented · Must · Functional · Student

**RATIONALE**

> A civil ID is known to colleagues and relatives, so it cannot be the only key.

**ACCEPTANCE CRITERIA**

1. Submitting for a civil ID with a prior request and no case number returns 409 with code case-ref-required.
2. The identity-status endpoint without a case number returns only exists and initial; with a wrong number it returns 403 with code case-ref-mismatch.
3. A name or department different from the verified one returns 409.

**EVIDENCE**

`src/server/routes/surveyRoutes.ts` `tests/student-journey-audit.ts` `tests/student-case-status-audit.ts`

### FR-ENG-004 Graduation-sheet proof

The system shall accept a graduation-sheet upload for a graduate request up to 14 MB, answer 413 with code file-too-large beyond it, reuse an earlier proof for the same student, department and term while re-applying the current academic rule every time, and accept no upload after the term has ended.

Implemented · Must · Functional · Student

**ACCEPTANCE CRITERIA**

1. A file larger than 14×1024×1024 bytes is answered 413 with a message naming the size.
2. A prior proof is reused only for the holder of the case number, and not when the degree units in the rule changed or the passed units fall below the required threshold.
3. An upload after the term has ended is answered 409 with code term-ended.

**EVIDENCE**

`src/server/routes/surveyRoutes.ts` `tests/student-case-status-audit.ts` `tests/student-journey-audit.ts`

### FR-ENG-005 My request status

The system shall let a student read the status of his request from the same link (/m) with the civil ID and case number, keep reading open for 30 days after the later of link expiry and term end, answer someone with no request or a wrong number with one identical answer, and never claim a registration or a seat.

Implemented · Must · Functional · Student

**RATIONALE**

> A difference between no request and wrong number would reveal to someone guessing who filled the survey.

**ACCEPTANCE CRITERIA**

1. A civil ID of a length other than 12 or with a wrong checksum returns 400.
2. A missing request or wrong case number returns found=false with only the term name.
3. After the 30-day grace the answer is 410 saying the follow-up period for the term has ended.
4. A committee approval while the department schedule is not fully signed appears as awaiting signatures, not as awaiting registration.
5. No name and no fingerprint appear in the payload.

**EVIDENCE**

`src/server/routes/surveyRoutes.ts` `tests/student-case-status-audit.ts`

### FR-ENG-006 Legacy survey link

Inferred

The system shall redirect the previously printed /q link to the student portal (/me) with a 302 for real tokens, keep the standalone survey page for demo tokens only, and answer 404 for a token that is not a survey.

Implemented · Should · Functional · Student, Public visitor

#### ACCEPTANCE CRITERIA

1. A real token of kind survey answers 302 to /me.
2. A demo token shows the survey page with the fictitious-number hint.

#### EVIDENCE

`src/server/routes/surveyRoutes.ts` `src/server/core/publicPages.ts`

### NFR-ENG-007 Attempt limit on survey endpoints

The system shall limit requests to the survey endpoints (submit, identity status, proof status, sheet upload, my request status) by a key made of the link and the network address, answering 429 when exceeded; the default is 10 attempts in a 10-minute window and is adjustable through environment settings.

Implemented · Must · Non-functional · Student, The system (automatic)

#### ACCEPTANCE CRITERIA

1. The eleventh attempt within the window returns 429 with a wait message.
2. The key combines the link token and the network address.

#### EVIDENCE

`src/server/routes/surveyRoutes.ts` `src/server/core/shareLinks.ts` `tests/student-case-status-audit.ts`

### NFR-ENG-008 Public page security policy

The system shall send with every public page a strict content security policy with a fresh nonce per response: default-src 'none', script-src by nonce only, connect-src 'self' and base-uri 'none', and forbid framing (frame-ancestors 'none') unless running inside an external applet host, and every visitor-supplied text displayed shall be escaped.

Implemented · Must · Non-functional · Public visitor, Student, Partner organisation

#### RATIONALE

> These pages are the only surface an unauthenticated stranger reaches, and they display text the system did not author.

#### ACCEPTANCE CRITERIA

1. The header contains a different nonce in each response and script-src does not include unsafe-inline.
2. A script without the nonce does not run.
3. The status page carries a robots meta tag with noindex,nofollow.

#### EVIDENCE

`src/server/core/publicPages.ts` `tests/public-pages-syntax-audit.ts` `tests/student-case-status-audit.ts`

### IR-ENG-009 Public page kit and invalid link

Public pages shall use colours derived from the application's own tokens (light by default with a dark palette under the same names), the Plex font in both Arabic and Latin faces, a text time field with English digits that accepts 930 and writes 09:30, accepts Arabic-Indic and Persian digits and rejects times outside 08:00 to 20:00 by default, and one shared invalid-link page that shows only the message.

Implemented · Should · Interface · Public visitor, Student

#### ACCEPTANCE CRITERIA

1. The norm function turns "930" and 1530 written in Arabic-Indic digits into 09:30 and 15:30 and rejects "0700" and "2560".
2. The time field is of type text with ltr direction and no input of type time exists in a public page.
3. The invalid-link page carries the SCHEDULE mark and the message with no button or menu.

#### EVIDENCE

`src/server/publicKit.ts` `src/server/publicTheme.ts` `src/server/pages/publicInvalidLinkPage.ts` `tests/public-kit-audit.ts` `tests/public-pages-syntax-audit.ts`

### FR-ENG-010 Where the script and ad are injected

The system shall inject the measurement script into successful HTML responses of public pages before </body> with the page's nonce, with an ad slot only for the public schedule (/s and /t), a pulse without an ad for /me, /m, /q and /r, and nothing for demo tokens, non-GET requests or non-200 responses.

Implemented · Must · Functional · The system (automatic), Student

#### ACCEPTANCE CRITERIA

1. injectPlanFor("/t/abc") returns pulse=schedule and slot=schedule; "/m/abc" returns pulse=status and an empty slot.
2. "/s/demo.abc", "/" and "/api/..." are not injected.
3. An injection failure does not prevent the original page from being sent.

#### EVIDENCE

`src/server/adsRoutes.ts` `tests/ads-audit.ts`

### DR-ENG-011 Ad slots and image rules

The system shall define eight active slots with sizes and capacity: season sponsor 640×80 (exclusive, 1), student portal 640×200 (5), public schedule 640×160 (3), free time, after last lecture and between two lectures 480×160 (3 each), course sponsor 480×80 (8), and faculty and administrators 480×160 (3), with the order-status slot retired; and accept a PNG, JPEG or WebP image of exactly the slot size and at most 300 KB, up to two images per campaign.

Implemented · Must · Data · Root administrator

#### ACCEPTANCE CRITERIA

1. A 640×200 image for the public schedule slot is refused with a message naming the required 640×160.
2. A GIF or text file is refused as unsupported and a file over 300 KB is refused.
3. Adding a third image returns 409 with a maximum of two.
4. A new campaign on the order-status slot is refused because it is retired.

#### EVIDENCE

`src/utils/adsEngine.ts` `src/server/adsRoutes.ts` `tests/ads-audit.ts`

### FR-ENG-012 Campaign validation and placement conflicts at approval

The system shall validate on save the company, category, start and end days (Kuwait time, end inclusive, one year at most), a public https link of up to 600 characters, and a free trial of at most 7 days once per company; and check at approval day by day: capacity per possible viewer (season, college), exclusivity of the season sponsor, a competitor of the same category in the same slot, and another sponsor of the same course.

Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. 30 February, an end before the start and a period over one year are refused.
2. A link using http, localhost, an IP address or embedded credentials is refused.
3. A sixth company in the student portal slot (capacity 5) in the same period is refused with 409 full.
4. The same category in another slot is allowed, and in the same slot with overlapping seasons or colleges is refused.
5. A course-sponsor campaign without a course, or targeted by near-graduation, is refused.

**EVIDENCE**

`src/utils/adsEngine.ts` `src/server/adsRoutes.ts` `tests/ads-audit.ts`

### FR-ENG-013 Campaign state management and audit

The system shall allow only the main administrator to approve or resume a campaign on condition that the rules are accepted, an image exists and no conflict remains, to pause it immediately, return it to draft, and delete it unless it is live now; to return an approved campaign to draft when its slot, category, dates, seasons or colleges change; and to record every operation in the audit trail under entity ads with no person name or number.

Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Approval without rulesAccepted returns 400 and without an image returns 409.
2. Deleting a live campaign returns 409 asking to pause it first.
3. Changing the slot after images were uploaded returns 409; deleting the only image of an approved campaign returns 409.
4. Rotating the report token invalidates the old link.
5. A user other than the main administrator cannot reach /api/admin/ads routes.

**EVIDENCE**

`src/server/adsRoutes.ts` `src/components/AdsManager.tsx` `tests/ads-audit.ts` `tests/ads-preview-audit.ts`

### FR-ENG-014 Image quality check

The system shall measure an uploaded image from its pixels and refuse it with 422 and written reasons if opacity is below 90%, one colour covers more than 97%, the WCAG contrast between the 5th and 95th percentiles is below 2, or clear edges are under 0.4%; the administrator may override the warning with an explicit header that marks the creative and is logged in the audit, and the check is skipped when the image-decoding library is absent.

Implemented · Should · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. A single-colour image returns the nearly-empty reason and a transparent image returns the transparent reason.
2. An upload with X-Quality-Override: 1 is accepted and carries qualityOverride=true.
3. An image over 4,000,000 pixels is refused as having invalid dimensions.

**EVIDENCE**

`src/utils/adQuality.ts` `src/server/adQuality.ts` `src/server/adsRoutes.ts` `tests/ads-audit.ts`

### FR-ENG-015 Choosing ads to serve

The system shall send for each serve request only approved, running campaigns matching the active season and the page's college, send no ad for an unknown link or a kind that asks for identity, shuffle them in every request with a rotation of 9000 ms, send the course and near-graduation targeting conditions (30 units or fewer) to be evaluated in the browser, and not serve draft images to the public.

Implemented · Must · Functional · The system (automatic), Student

**ACCEPTANCE CRITERIA**

1. A survey, staff-card or schedule-request token returns empty items.
2. A campaign targeted by college does not appear in the student portal for a visitor who did not send a college number, and only numbers from 1 to 99999 are accepted.
3. A draft campaign's image returns 404 from /_ads/img.
4. Campaigns are cached for 15 seconds so a pause takes effect within them.

**EVIDENCE**

`src/server/adsRoutes.ts` `src/utils/adsEngine.ts` `src/utils/adSeasons.ts` `tests/ads-audit.ts`

### IR-ENG-016 Browser rendering and impression counting

The ad script shall render images with a fixed Ad label and rel=sponsored links, never use innerHTML for server text, count an impression after one second with at least half of the ad visible while the page is shown, stop automatic rotation for users who prefer reduced motion and provide a pause button, cap impressions at 60 per day per browser across all campaigns and 10 per campaign, and not repeat the sponsor bar in the ticket stations.

Implemented · Must · Interface · Student, Public visitor

**ACCEPTANCE CRITERIA**

1. After 60 impressions in a day no ad is requested until the next day (key adx:t:date).
2. An impression counts once per image per page load, and events are sent in batches of up to 20.
3. Under every ad a link How we measure leads to /measurement, a static public page explaining what is and is not measured, cached for 600 seconds and sent with X-Robots-Tag: noindex, nofollow.
4. Ads are hidden when printing.

**EVIDENCE**

`src/server/adClientScript.ts` `src/components/AdSlot.tsx` `src/server/adsRoutes.ts#/measurement` `src/server/adsPages.ts#measurementPage` `tests/ads-audit.ts`

### FR-ENG-017 Clicks and filtering of automated and repeated

The system shall redirect an ad click to the company's destination with 302 and the utm_source=schedule, utm_medium=banner, utm_campaign and utm_content tags unless its link already carries any utm_*, and count the click as filtered rather than valid when it comes from an automated agent, repeats for the same campaign from the same address and agent within 4 seconds, or exceeds 120 clicks per minute per address.

Implemented · Must · Functional · Student, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A link https://a.example.com/x?y=1 gains utm tags while keeping y=1.
2. A link already containing the company's UTM_source stays unchanged.
3. An ended or unapproved campaign redirects to / and is not counted.

**EVIDENCE**

`src/server/adsRoutes.ts` `src/utils/adsEngine.ts` `tests/ads-audit.ts`

### FR-ENG-018 Anonymous audience pulse

The system shall record one anonymous visit per day per page kind (student portal, schedule, order status, survey, staff card, app, install) per browser, count returning, mobile and peak hour for students only, accumulate counters in memory and write them every 30 seconds, on an administrator read and on shutdown, and store no name, civil ID or network address.

Implemented · Must · Functional · The system (automatic), Student

**ACCEPTANCE CRITERIA**

1. An unknown kind posted to /_pulse is not recorded.
2. A staff pulse does not add to returning, mobile or hours.
3. A failed write is merged with new pulses and not dropped.
4. Rate-limit keys (which contain the address) are swept every 30 seconds after their window ends.
5. POST /_pulse sits outside /api without a session, accepts a body up to 1kb and always answers 204 with no content; it ignores automated agents and anything above 3000 pulses per minute from one address.
6. A schedule pulse carrying a link token is attributed to the link's real kind: a staff or request link counts as staff, a survey link as survey.

**EVIDENCE**

`src/server/adsRoutes.ts#/_pulse` `src/server/adsRoutes.ts` `src/utils/audienceStats.ts` `tests/ads-audit.ts`

### FR-ENG-019 Unique coupon and store verification page

The system shall issue each device a unique coupon for a campaign that enabled it (an 8-character device key generated by the browser with a 6-character signature computed by the server) without any identity, the store page /verify/<id> shall check the signature and record the first use atomically, and the id shall be derived from the report token so that it does not open it.

Implemented · Could · Functional · Student, Partner organisation, The system (automatic)

**ACCEPTANCE CRITERIA**

1. The same device always receives the same coupon, and altering one character makes it invalid.
2. The first use shows done and the second shows already used.
3. Verification is limited to 60 requests a minute per address and issuing to 600.

**EVIDENCE**

`src/utils/adCoupons.ts` `src/server/adsRoutes.ts` `src/server/adsPages.ts` `tests/ads-audit.ts`

### FR-ENG-020 Campaign report for the company

The system shall show at /ad-report/<token>, with no account, a single campaign's impressions, clicks, click-through rate, daily performance, week-over-week comparison, comparison of the two images, an A/B recommendation (at least 500 impressions per image, two-proportion z at 1.96) and a wrap-up of an ended campaign, allow daily reporting of code usage (unverified and excluded from any marketing total), a calendar subscription, and a script-free SVG badge for a campaign that has started.

Implemented · Should · Functional · Partner organisation, Root administrator

**ACCEPTANCE CRITERIA**

1. A token shorter than 20 characters or unknown returns a non-indexed 404 page.
2. A report dated outside the campaign, in the future, or with a count above 100,000 returns ?red=bad.
3. A difference under the significance threshold is shown as no significant difference and nothing is applied automatically.
4. The badge is not issued for a draft or a campaign that has not started, and its id does not reveal the report token.
5. No author name appears on the page.

**EVIDENCE**

`src/server/adsRoutes.ts` `src/server/adsPages.ts` `src/utils/adInsights.ts` `src/utils/adBadge.ts` `src/utils/adCalendar.ts` `tests/ads-audit.ts`

### FR-ENG-021 Partnership profile and its links

The system shall let the main administrator create a partnership-profile link with a random token and an optional validity of 1 to 365 days and revoke it, and /partners/<token> shall show aggregated audience figures, ad slots with their capacity, the season calendar and an estimate calculator, compare the token in constant time, and record the first open excluding bots, administrator preview (?preview=1) and repeats within 30 seconds from the same browser.

Implemented · Should · Functional · Root administrator, Partner organisation

**ACCEPTANCE CRITERIA**

1. An expired, revoked or shorter-than-20-character token returns 404.
2. An unknown slot, season or weeks value in the calculator is ignored; accepted weeks are 1, 2 and 4.
3. The bell alerts the administration of a first open for one week.

**EVIDENCE**

`src/server/adsRoutes.ts` `src/server/adsPages.ts` `src/utils/partnerLinks.ts` `src/utils/adForecast.ts` `src/components/ads/PartnerLinks.tsx` `tests/ads-audit.ts`

### FR-ENG-022 Campaign request from the profile

The system shall receive the New campaign form from a company as a plain script-free form and redirect with 303 to ?lead=ok, bad or rate, store it for the administration only after cleaning the fields (company up to 80 characters, name 60, mobile 8 to 15 digits, note 300), ignore the trap field website, limit to 5 requests per hour per address, create no second request for the same mobile and company within 24 hours, and cap new requests at 200.

Implemented · Should · Functional · Partner organisation, Root administrator

**ACCEPTANCE CRITERIA**

1. Filling the website field returns ?lead=ok without storing.
2. The sixth request in an hour returns ?lead=rate.
3. Indian digits in the mobile number are converted to Latin and symbols are removed.
4. The Contacted button removes the notification from the bell.

**EVIDENCE**

`src/server/adsRoutes.ts` `src/utils/adLeads.ts` `src/components/ads/LeadsPanel.tsx` `tests/ads-audit.ts`

### FR-ENG-023 Optional email and administrator alerts

The system shall send no email unless AD_MAIL_API_KEY and AD_MAIL_FROM are set; once set it sends a weekly report on Sunday after 09:00 Kuwait time and a renewal reminder once in the last week (replacing the weekly one that Sunday) with an atomic claim before sending to prevent duplicates, and shall raise a bell notification for the main administrator for a campaign ending within 7 days or ended 3 days ago or less.

Implemented · Could · Functional · The system (automatic), Root administrator, External service

**ACCEPTANCE CRITERIA**

1. mailConfig without a key or sender returns null and an invalid email is rejected.
2. The week key starts on Sunday (2026-11-11 gives 2026-11-08).
3. A manual send bypasses an earlier claim, and the mail provider timeout is 10 seconds.
4. The company email appears in no public page and not in the audit trail.

**EVIDENCE**

`src/server/adMailer.ts` `src/server/adsRoutes.ts` `tests/ads-audit.ts`

### FR-ENG-024 Audience dashboard

The system shall present to the main administrator only aggregated audience figures (daily visits, peak times, returning and mobile, survey growth, student continuity, most requested courses and the distribution over colleges under anonymous names by size), with a print profile and a refresh every minute, and add the administration-approved baseline (about 80,000 students, 5.3 million visits, 786 faculty members, 75 thousand opens) to what was measured after 2026-10-17, and show no course requested by fewer than two students.

Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. A section with two students appears in demand; fewer is counted in hidden and not shown.
2. The baseline is shown once with the about label, and the faculty count is fixed and does not grow by measurement.
3. The term shown is the requested one, otherwise the operational current term, not the last term with answers.
4. The screen is unavailable in the demo and to anyone but the main administrator.

**EVIDENCE**

`src/utils/audienceStats.ts` `src/utils/audienceBaseline.ts` `src/components/AudienceDashboard.tsx` `src/server/adsRoutes.ts` `tests/ads-audit.ts`

### FR-ENG-025 Audience story mode

The system shall provide a full-screen story mode of five slides (size, peak, what students request, slots, next step) advancing every 8000 ms without wrap-around, using the same figures as the dashboard, supporting pause with the space bar, navigation with arrows, PageUp/PageDown, Home/End and horizontal swipe (48 pixels or more), and starting paused for users who prefer reduced motion.

Implemented · Could · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Advancing from the last slide and going back from the first do not wrap.
2. Autoplay stops at the last slide and when paused.
3. Swiping right advances in the Arabic page, and the left arrow is next.
4. Leaving full screen closes the mode, and Esc closes it.

**EVIDENCE**

`src/utils/audienceStory.ts` `src/components/AudienceStory.tsx` `tests/ads-audit.ts`

### FR-ENG-026 Landing page and presentation deck

Inferred

The system shall serve the landing page from memory at /landing and on the home sub-domain without touching system routes, and serve the presentation deck with live figures from /api/public/audience-headline and /api/journey, keeping the printed numbers when a read fails or returns zero, and the public figures endpoint shall be cached for 10 minutes and answer 503 if the computation fails.

Implemented · Could · Functional · Public visitor, The system (automatic)

**ACCEPTANCE CRITERIA**

1. /landing and any path under it that is not a static asset returns the landing page, and the page's assets are served without an index.
2. The public endpoint returns only since, asOf, students, visits, instructors and instructorOpens.
3. The deck's full screen: left arrow, space and PageDown for next, key f for full screen, n for notes and r for reading mode.

**EVIDENCE**

`src/server/adsRoutes.ts` `public/landing/index.html` `public/schedule-presentation.html` `server.ts`

### FR-ENG-027 Delivery of a landing-page inquiry

The system shall deliver a «request a walkthrough» inquiry from the landing page to the system administration so it is never lost: it is validated, size- and rate-limited, stored in the landingInquiries collection, and shown in the notification bell to the system administrator only; and it shall show the visitor an honest result, saying «sent» only after an actual save.

● Implemented · Should · Functional · Public visitor, The system (automatic)

#### RATIONALE

> The request used to be written to the server log only and answered with success, so it was lost while the visitor was told it was sent.

#### ACCEPTANCE CRITERIA

1. A valid inquiry is stored (201) and appears in the system administrator’s bell with institution, name and email, and no academic role sees it.
2. If saving fails or the database is down the server answers 503 and the page says «your request was not sent» and asks the visitor to send again from the same form (the page carries no personal email address), keeping the form.
3. An over-long field is refused (400), an oversized body (413), the sixth within ten minutes from one address (429), and a duplicate within an hour creates no second record.

#### EVIDENCE

`src/server/landingInquiry.ts` `server.ts#/api/landing/inquiry` `src/db/repository.ts#createLandingInquiry` `src/server/routes/notificationsRoutes.ts` `public/landing/index.html` `tests/landing-inquiry-audit.ts`

### IR-ENG-028 Legacy survey and request-status routes

The system shall serve a survey link (of kind survey only, otherwise 404 «this link is not a survey») through these routes: GET /api/public/survey/:token with the link college's departments and each one's courses ordered by last taught, with whether a graduation rule is saved and its threshold when there is a single one; POST /api/public/survey/:token/identity-status only after a complete valid civil ID; POST …/proof-status to reuse an earlier proof (requiring the ID and department); POST …/proof uploading the sheet with the name, ID and department in the x-student-name, x-student-civil and x-student-section headers; POST /api/public/survey/:token to submit; POST …/my-case to read the case; GET /m/:token, the «my request status» page; and GET /q/:token, the old printed link.

● Implemented · Must · Interface · Student

#### ACCEPTANCE CRITERIA

1. proof after the link's term has ended ← 409 term-ended; with a two-character name ← 400.
2. proof-status without a department ← 400 «complete the civil ID and department first».
3. A link of kind students on GET /api/public/survey ← 404.

#### EVIDENCE

`src/server/routes/surveyRoutes.ts#/api/public/survey/:token`
`src/server/routes/surveyRoutes.ts#/api/public/survey/:token/identity-status`
`src/server/routes/surveyRoutes.ts#/api/public/survey/:token/proof-status`
`src/server/routes/surveyRoutes.ts#/api/public/survey/:token/proof`
`src/server/routes/surveyRoutes.ts#/api/public/survey/:token/my-case` `src/server/routes/surveyRoutes.ts#/m/:token`
`src/server/routes/surveyRoutes.ts#/q/:token` `tests/student-journey-audit.ts` `tests/student-case-status-audit.ts`

### IR-ENG-029 Ad serving and counting routes

The system shall serve without an account: GET /_ads/ad.js, the rendering script, publicly cached for an hour; GET /_ads/serve? slot for a known slot other than the season sponsor (no caching, a 9000 ms rotation and a random image of each campaign's images), accepting a bare college number (c from 1 to 99999) only without a link token and for a slot covering the whole university; GET /_ads/img/:id, an image of a campaign that is not a draft; GET /_ads/c/:cid/:crid for the click with no referrer and noindex, redirecting to «/» when the campaign is not live or the image is not its own, and counting clicks beyond 120 from one address as filtered; and POST /_ads/e accepting up to 20 view events in a body of up to 8 KB and answering 204, counting only for a live campaign and its images, ignoring automated agents and anything beyond 2400 events from one address.

● Implemented · Should · Interface · Public visitor, Student, The system (automatic)

#### ACCEPTANCE CRITERIA

1. serve?slot=sponsor ← {items:[], sponsor:null, rotateMs:9000}.
2. An image of a draft campaign on /_ads/img ← 404.
3. An event for an image not belonging to the campaign ← not counted, and the answer is 204.

#### EVIDENCE

`src/server/adsRoutes.ts#/_ads/ad.js` `src/server/adsRoutes.ts#/_ads/serve` `src/server/adsRoutes.ts#/_ads/img/:id` `src/server/adsRoutes.ts#/_ads/c/:cid/:crid` `src/server/adsRoutes.ts#/_ads/e` `tests/ads-audit.ts`

### IR-ENG-030 Unique coupon, verification page and partner badge routes

The system shall issue the coupon through GET /_ads/coupon (and 404 {error:"no"} for a campaign that is not live or does not enable unique coupons) and its QR code through GET /_ads/coupon.svg, which opens the store verification page with the coupon filled in, limited to 600 requests per address; the verification page GET and POST /verify/:vid shall accept a 32-hex-character id derived from the report token that does not open the report, limited to 60 per address, showing one of the states empty, invalid, used, done now and valid, redirecting with 303 after recording; and GET /partner-badge/:id.svg shall serve a «partner» badge with a derived id that does not reveal the token, not issued for a draft or a campaign not yet started, downloaded as a file with dl.

● Implemented · Could · Interface · Partner organisation, Student

#### ACCEPTANCE CRITERIA

1. A verification id that is not 32 hex characters ← the «invalid link» page 404.
2. The same coupon twice ← the first done and the second used.
3. The store verification page has a coupon field of up to 24 characters and a «verify» button, shows the coupon formatted, offers the «confirm use» button only for a valid coupon, and states that the coupon carries no student name and is accepted only once.

#### EVIDENCE

`src/server/adsRoutes.ts#/_ads/coupon` `src/server/adsRoutes.ts#/_ads/coupon.svg` `src/server/adsRoutes.ts#/verify/:vid` `src/server/adsRoutes.ts#/partner-badge/:id.svg` `src/utils/adCoupons.ts` `src/utils/adBadge.ts` `tests/ads-audit.ts`

### IR-ENG-031 Campaign report routes for the company

The system shall accept a report token of 20 characters or more, and serve GET /ad-report/:token as the report page after flushing counters, with the weekly comparison, the slot's average click-through rate, the number of live campaigns in it, the sponsored courses and the days of verified coupons; GET /ad-report/:token/calendar.ics as the campaign calendar (private caching 600 seconds, downloaded with dl); and POST /ad-report/:token/redemptions for the company to report code use on a day within the campaign and not after today with a count from 0 to 100000, shown as «reported», unverified, limited to 60 per address, redirecting with 303 to ?red=ok or bad.

● Implemented · Should · Interface · Partner organisation

#### ACCEPTANCE CRITERIA

1. A report for a day after today or with a count of 100001 ← 303 to ?red=bad without saving.
2. After rotating the report token ← the old link returns the «invalid link» page 404.

#### EVIDENCE

`src/server/adsRoutes.ts#/ad-report/:token` `src/server/adsRoutes.ts#/ad-report/:token/calendar.ics` `src/server/adsRoutes.ts#/ad-report/:token/redemptions` `src/utils/adCalendar.ts` `tests/ads-audit.ts`

### IR-ENG-032 Partnership profile and campaign request routes

The system shall serve GET /partners/:token as the partnership profile, recording its opening for the company except for an automated agent, an administration preview (preview=1) or a repeat from the same browser within 30 seconds, and computing «what will you get?» for a known slot, season and number of weeks (default two weeks) from the site's record; and shall accept POST /partners/:token/lead as a script-free form of up to 4 KB, limited to 5 requests an hour per address, creating no second request for the same company and mobile within a day, storing nothing new when new requests reach 200, and emailing the owner without waiting when mail is configured.

● Implemented · Should · Interface · Partner organisation, Root administrator

#### ACCEPTANCE CRITERIA

1. The sixth request in an hour from the same address ← 303 to ?lead=rate.
2. An administration open with preview=1 ← no open is recorded.

#### EVIDENCE

`src/server/adsRoutes.ts#/partners/:token` `src/server/adsRoutes.ts#/partners/:token/lead` `src/utils/adLeads.ts` `src/utils/adForecast.ts` `tests/ads-audit.ts`

### IR-ENG-033 Ads and audience administration interface

The system shall restrict to the root administrator (sign-in + root permission) the routes: GET /api/admin/audience-stats (after flushing counters, with a term choice), GET /api/admin/ads/demand (most requested courses above the privacy floor), POST /api/admin/ads/leads/:id/contacted, POST /api/admin/ads/campaigns (create or edit; changing slot, category, dates, seasons or colleges returns an approved campaign to draft, and changing the slot after images were uploaded is 409), POST .../campaigns/:id/send-report (503 without mail enabled, 400 without an email for the campaign, 502 on failure), POST .../campaigns/:id/creatives (two images at most, the quality warning overridden with the header x-quality-override: 1, the label from x-label up to 40 characters), GET /api/admin/ads/creatives/:id/img to preview draft images, DELETE .../creatives/:crid (deleting the only image of an approved campaign is refused), POST .../status, DELETE /api/admin/ads/campaigns/:id (refused for a live one), POST .../rotate-report, and POST /api/admin/ads/partner-links and .../:id/revoke; every write is logged in the audit trail with entity ads and an Arabic description of up to 400 characters.

● Implemented · Must · Interface · Root administrator

#### ACCEPTANCE CRITERIA

1. Uploading a third image ← 409 «the maximum is 2 images for comparison».
2. Deleting a live campaign ← 409 «the campaign is running now; pause it first».
3. An unknown status action ← 400; a partner link with a one-character company name ← 400.

#### EVIDENCE

`src/server/adsRoutes.ts#/api/admin/audience-stats` `src/server/adsRoutes.ts#/api/admin/ads/demand` `src/server/adsRoutes.ts#/api/admin/ads/leads/:id/contacted` `src/server/adsRoutes.ts#/api/admin/ads/campaigns` `src/server/adsRoutes.ts#/api/admin/ads/campaigns/:id/send-report` `src/server/adsRoutes.ts#/api/admin/ads/campaigns/:id/creatives` `src/server/adsRoutes.ts#/api/admin/ads/creatives/:id/img` `src/server/adsRoutes.ts#/api/admin/ads/campaigns/:id/creatives/:crid` `src/server/adsRoutes.ts#/api/admin/ads/campaigns/:id/status` `src/server/adsRoutes.ts#/api/admin/ads/campaigns/:id` `src/server/adsRoutes.ts#/api/admin/ads/campaigns/:id/rotate-report` `src/server/adsRoutes.ts#/api/admin/ads/partner-links` `src/server/adsRoutes.ts#/api/admin/ads/partner-links/:id/revoke` `src/components/AdsManager.tsx` `tests/ads-audit.ts`

### FR-ENG-034 Contents of the company campaign report page

The campaign report page shall show a «print / save PDF» button hidden when printing; status chips (draft, paused, scheduled, live now, ended), the trial chip, the slot, «reaches every student in the university», the two dates and the days left; five figures (visible impressions, estimated viewers, reach when known, valid clicks, click-through rate); a «your campaign ends in N days» banner when live with 7 days or fewer left; the free-trial summary compared with the site average; the wrap-up of an ended campaign that had impressions (best day, the most-viewed weekday when its share is 20% or more, the most-clicked image, and the comparison with the average when impressions reach 200); the daily performance chart; the expected impression share when more than one campaign rotates in the slot; the two-image comparison with a star on the most clicked; a «discount code use» card for a coupon campaign that is neither draft nor scheduled, picking a day among the campaign's last 14 days up to today and listing the last 10 reports labelled «reported by you»; the verified-coupons card with the store verification link; the partner badge with its download and copy code for a campaign that has started and is not a draft; the calendar subscription card unless the campaign has ended; and «how do we count?» with the number of excluded clicks.

● Implemented · Should · Functional · Partner organisation

#### ACCEPTANCE CRITERIA

1. A live campaign with 5 days left ← the «your campaign ends in 5 days» banner.
2. An ended campaign with 150 impressions ← no comparison-with-average sentence in the wrap-up.
3. A scheduled campaign with a code ← no code-use reporting card.

#### EVIDENCE

`src/server/adsPages.ts#campaignReportPage` `src/server/adsPages.ts#wrapUpCard` `src/server/adsPages.ts#trialCard` `src/server/adsPages.ts#weeklyCard` `src/server/adsPages.ts#barChart` `tests/ads-audit.ts`

### FR-ENG-035 Contents of the partnership profile page and its script-free form

The partnership profile page shall show: «prepared for <company>» with its category and seasons when the owner set them; four figures labelled «about» (students served, student visits, faculty members from the fixed baseline, faculty opens); a «when do students open the program?» card when visits exist; the top 6 requested courses when there are at least 3, with approximate counts (below 100 as is, then rounded down to 50 under 1,000, to 100 under 10,000 and to 500 beyond, with «+»); the season calendar of up to 8 upcoming seasons tagged «now» and «★ for you»; a card per slot with its size and the tags «whole university», «exclusive» and «available/taken» (an exclusive slot is taken by one live campaign, others when live campaigns reach capacity); the «what will you get?» calculator as a GET form (slot excluding the season sponsor, season, and duration defaulting to two weeks) showing a rounded range or «not enough data yet»; and a «new campaign» window opened by the #new link without JavaScript and closed by #, with fields company 2–80 characters (prefilled), name 2–60, mobile up to 20, optional email up to 120, slots, season, a note up to 300, a hidden trap field, and an ok, rate or bad result banner.

● Implemented · Should · Functional · Partner organisation

#### ACCEPTANCE CRITERIA

1. Only two requested courses ← the «what students look for» card is not shown.
2. 1,234 students ← shown as «1,200+».
3. An exclusive slot with a live campaign ← tagged «taken».

#### EVIDENCE

`src/server/adsPages.ts#partnerKitPage` `src/server/adsPages.ts#calculatorHtml` `src/server/adsPages.ts#seasonCalendarHtml` `src/server/adsPages.ts#approx` `src/server/adsPages.ts#niceNumber` `tests/ads-audit.ts`

### FR-ENG-036 Sponsored placements inside Masari

The Masari page shall show no ad before sign-in, and after it shall mount the «me» slot on the «Now» tab and, in the suggested schedule when its times are visible: a «break» slot on the longest gap between two lectures of a day when it reaches 60 minutes, a «nearby» slot on a 30 to 180 minute gap between consecutive lectures in the same building unless it is that longest gap, an «afterclass» slot at the end of lectures on the earliest-ending day, and a «course» slot matched in the browser against the schedule's course codes; the targeting context (college, wish codes, remaining units) stays in the browser, and mounting waits for the shared script when it arrives after the page.

● Implemented · Could · Functional · Student, Partner organisation

#### ACCEPTANCE CRITERIA

1. Only a 20-minute gap ← no «break» slot.
2. Times not visible to the student ← no gap or after-class slots.

#### EVIDENCE

`src/server/studentHomePage.ts#tkLongestGap` `src/server/studentHomePage.ts#tkMoments` `src/server/studentHomePage.ts#adxMountLater` `src/server/studentHomePage.ts#adxCtx` `src/server/studentHomePage.ts#paintTicket` `tests/ads-audit.ts`

### FR-ENG-037 Interactive sections of the landing page

Inferred

The landing page shall offer navigation links to its sections (benchmark, shift, governance, gallery, pulse) and an «enter the system» button to /, a switch between the live view and the screenshot in the hero, a comparison with six published studies of timetabling effort each picked by a touch, a simulation labelled as such with four stations every 700 ms ending at 3:24 and a «reset» button, the three-stage governance flow (suggestion, deterministic check, explicit approval) played once when it scrolls into view and not animated for reduced motion, a room-code anatomy switcher (college, building, room), a filter by the four audit colours (white, green, gold, red), a gallery of 11 screenshots in 5 categories with a lightbox closed by Escape or a touch, and weekly load bars and health meters that count up once when they appear; the figures in these sections are fixed values in the page, not read from the system, and the hero dashboard and the pulse section are labelled explicitly as illustrative examples, not live readings; it shall also offer WhatsApp links and two «contact us through the form» buttons leading to the request form instead of any personal email, and the walkthrough request form with the institution (prefilled), name and email required and notes optional, sending the phone as email-only.

● Implemented · Could · Functional · Public visitor

#### ACCEPTANCE CRITERIA

1. Pressing «reset» during the simulation ← the timer stops and the stations return complete at 3:24.
2. Choosing a gallery category ← cards of other categories hide, and «all (11)» restores them.

#### EVIDENCE

`public/landing/index.html#startLiveProcessingSim` `public/landing/index.html#filterGallery` `public/landing/index.html#filterAuditColor` `public/landing/index.html#switchRoomCode` `public/landing/index.html#handleInquiry` `tests/handover-fixes-audit.ts`

## 3.15.6 Algorithms

ALG-ENG-01 · Engagement and public presence

**Deterministic**

### Ad image quality check from its pixels

*Is the uploaded ad image fit for display: opaque, not empty, of readable contrast, and with visible detail?*

1. The image is decoded into RGBA pixels and refused above 4,000,000 pixels.
2. Opacity = share of pixels with alpha ≥ 250.
3. Emptiness = share of the most common colour after quantising each channel to 16 levels.
4. Contrast = (95th-percentile luminance + 0.05) ÷ (5th-percentile luminance + 0.05), using WCAG relative luminance.
5. Detail = share of pixels whose brightness differs from the right or lower neighbour by more than 32.

**Inputs**

The uploaded image file.

**Output**

The four measurements and Arabic refusal reasons ordered by severity, or an empty list when the image passes.

Pure function; if the decoding library is unavailable the check is skipped and said so, rejecting no one for it; the administrator may override the warning.

Opacity ≥ 90% · Dominant colour ≤ 97% · Contrast ≥ 2 · Edges ≥ 0.4%

`src/utils/adQuality.ts#measureQuality` `src/utils/adQuality.ts#qualityProblems` `src/server/adQuality.ts#analyzeCreative` `tests/ads-audit.ts`

FR-ENG-014

ALG-ENG-02 · Engagement and public presence

**Statistics from history**

### Aggregated anonymous audience statistics

*What is the size and activity of the system's audience, in honest aggregate figures that identify no one?*

1. A student = a unique survey fingerprint; a visit = one browser once per day per page kind; page opens are not counted.
2. Per term: answers and distinct students; funnel: created → setup done → wishes sent → returned after 24 hours or more; active within 7 and 30 days.
3. Continuity between consecutive terms is shown only when the earlier term has 30 or more students; requested courses appear only with two or more distinct students, top 8.
4. Colleges are anonymised as «college 1, college 2…» in order of size.
5. Headline totals = the administration-approved opening baseline up to 2026-10-17 + what was measured after it; instructor open rate = max(90%, measured).

**Inputs**

Survey answers and student profiles with fingerprints, daily visit counters, instructor requests, and ad campaigns with their statistics.

**Output**

A figures board: 30-day daily visits, peak times, returning and mobile shares, survey growth, continuity, most-requested courses, college distribution, and headline totals.

Counts only, no names or civil numbers; one function feeds both the dashboard and the partnership profile, so no figure differs between the two.

Per-course privacy floor: 2 students · Continuity floor: 30 students · Opening baseline: about 80,000 students, 5,300,000 visits and 75,000 card opens

`src/utils/audienceStats.ts#buildAudienceStats` `src/utils/audienceStats.ts#headlineTotals` `src/utils/audienceBaseline.ts#AUDIENCE_BASELINE` `tests/ads-audit.ts`

FR-ENG-018 FR-ENG-021 FR-ENG-024

### 3.15.7 Edge cases

#### ⚠ A civil ID known to someone else

**Scenario** A colleague who knows the civil ID of a student with a submitted request tries to open the survey with it.

**Behaviour** Only the existence of a request and the first letter of the name are revealed; submission returns 409 case-ref-required and a wrong case number returns 403; ten attempts in a 10-minute window stop the guesser with 429.

#### ⚠ Term ended while the link still circulates

**Scenario** A survey link's term ends or the link is revoked after the drop-and-add week, before registration decides.

**Behaviour** Submission and upload answer 409 term-ended, while reading My request status stays open for 30 days after the later of link end and term end and then answers 410.

#### ⚠ Two competing campaigns in one slot

**Scenario** A Restaurants and cafés campaign is approved in the student portal and then another of the same category with overlapping dates is approved.

**Behaviour** The second approval is refused with 409 naming the rival company and its dates; the same category in the public schedule is allowed, and also in the same slot when the two campaigns' seasons or colleges do not overlap.

#### ⚠ Editing an approved campaign that is live

**Scenario** The dates, slot, category, seasons or colleges of an approved campaign are changed.

**Behaviour** The campaign returns to draft and stops serving until a new approval that re-checks conflicts and re-accepts the rules; changing the slot after images were uploaded is refused outright because the image size is tied to it.

#### ⚠ Two identical clicks from the university network

**Scenario** Two students behind one network address with an identical browser agent click an ad within 4 seconds.

**Behaviour** The second is counted as a filtered click, not a valid one; this is a deliberate conservatism because the network is one address for thousands of students.

### 3.15.8 Standing owner decisions

- No advertisement on a page that asks for an identity (survey, staff card, schedule request, order status), nor on approval, print and calendar pages.
- Measurement is anonymous: no name, civil ID or network address in any figure, and colleges are shown as College 1, 2… by size.
- A course number is always seven digits (college 2 + department 2 + course 3); the stored three-digit tail and the AdCourseId are never shown.
- Printed reports keep their design; the audience print profile is corrected through values, not by changing its layout.

- The numbers approved by the system administration (the baseline) are not modified and no unapproved numbers are added to them.

↑ Contents

3.16 · DSH

# Dashboards and term awareness

The home dashboard, term story, semester readiness and the welcome tour.

| 30 | 100% | 4 | 21 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Algorithms · 7. Edge cases · 8. Standing owner decisions

↑ Contents

## 3.16.1 Overview

This module gathers what a user sees first on entering: the home dashboard with its scope, displayed term, figures and day-and-week reading; the Term story card of the approval cycle; the Semester readiness panel of the rehearsal radar; the period-balance drawing; the mini rings and other helper drawings; the public Journey reading; the global search and sentence search; the welcome tour by role; and the safety net that redraws a screen after a rendering fault. Every number is read from the data at request time, and scope and term are decided on the server, not in the screen.

Schedule committee chair · Department head · College dean · Vice dean for academic affairs · University registrar · College registrar · Registration officer · Dean of Admission and Registration · System administrator · Root administrator · Standard user · Faculty member · Public visitor

## 3.16.2 User journeys

**Schedule committee chair** — **Reading the dashboard in the morning**

1. Opens the home dashboard; three requests start together: the dashboard and two analytics readings.
2. Sees the operationally current term and a badge naming the upcoming term in preparation, if any.
3. The decision card states what needs his attention most (up to three items) or that the schedule is sound.
4. Reads today's lecture track and the current or next lecture, then the load by day, hour and hall.
5. Presses an item to go to the schedule screen and handle it.

## College dean — A dean opens the dashboard while a new term is in preparation

1. Opens the dashboard; the current term is shown, not the newest in the list.
2. Sees his college's figures from the accepted version only.
3. A badge appears with the upcoming term's name; he presses it and the dashboard opens on it.
4. If nothing is approved in it the dashboard says the term's schedule has not been approved yet, not that the schedule is sound.
5. Returns to the original term through the default badge.

## Department head — First login and the role tour

1. After login there is no seen-tour mark for this role, so the tour starts.
2. Sees the steps of his own work (schedule changes, notes, signing, additions) as a list, not a building stage.
3. Moves with the tabs or the Next button and closes with Esc at any moment.
4. On Start work the mark is saved for his role so the tour does not repeat.
5. Replays the tour whenever he wants from the menu; the mark is removed and it starts again.

## University registrar — Reading semester readiness in the radar

1. Opens the registration radar; the readiness ring, number and tier appear.
2. Reads the share reaching 12 units, the share of demand that found a seat and the count of full and not-offered courses.
3. Reads the biggest shortfall cause in the stacked bar.
4. If unknown exceeds 20% he reads the weak-estimate warning before basing a decision on the number.

### 3.16.3 Diagrams

**Choosing the dashboard term**

The decision is on the server: the reader's explicit choice first, then the operationally current term, then the newest term with something visible, then the current term even if empty.

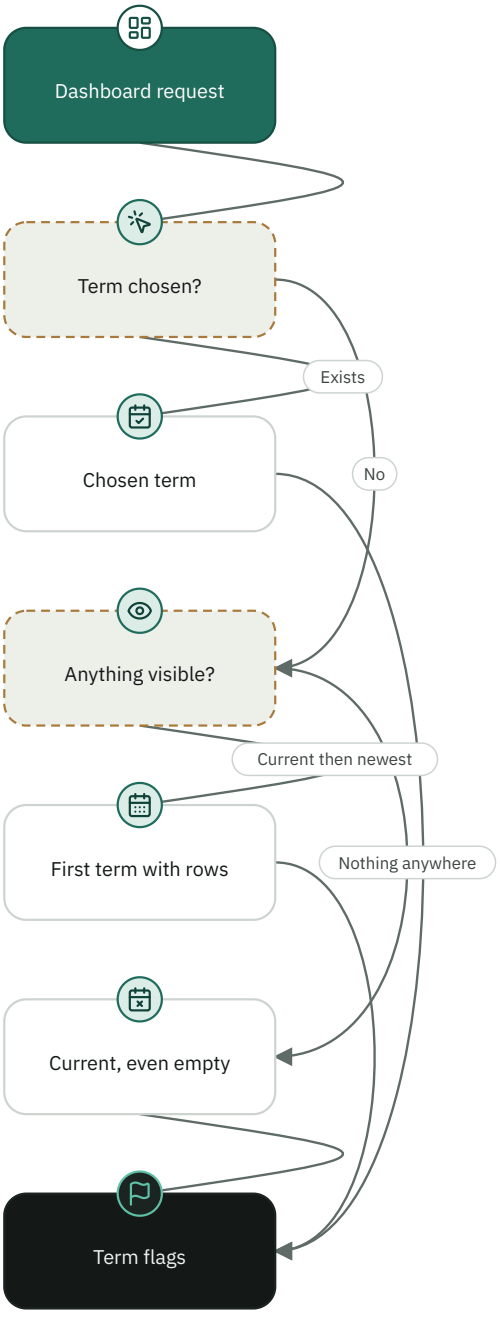

## Computing semester readiness

Score = 60% share reaching 12 units + 40% share of demand that found a seat; unknown is left out of the denominator and only reported when large.

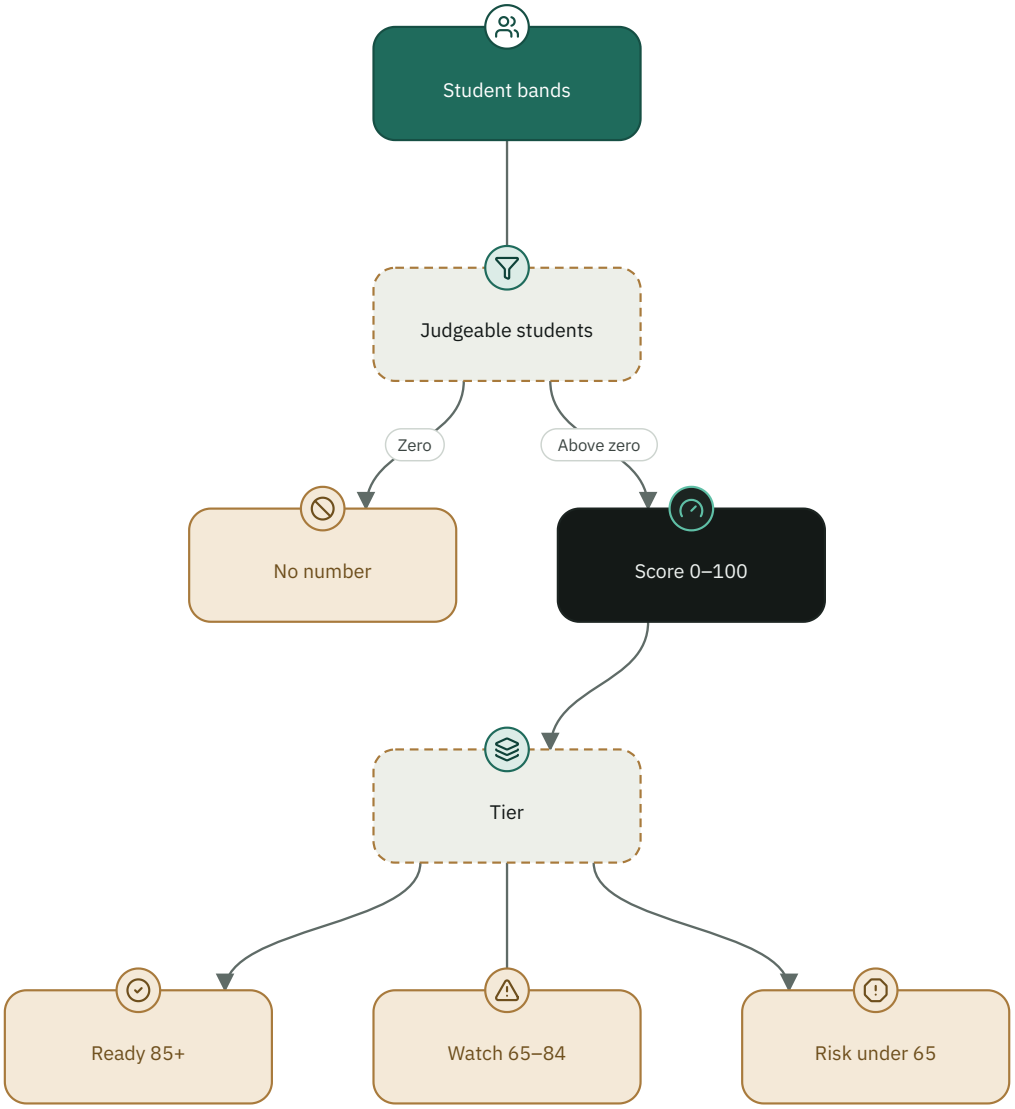

### Welcome tour flow

The mark carries the user id and the role; whoever finished the old general tour is not shown it again unless his role now has its own tour.

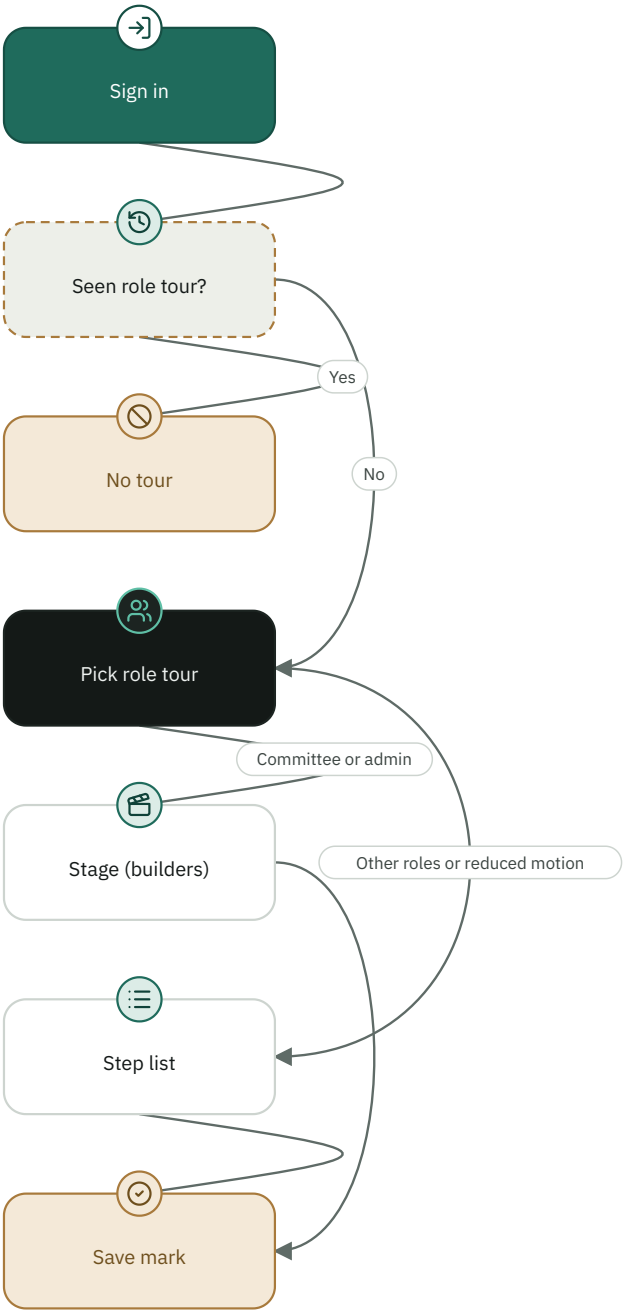

**What each role reads on the dashboard**

| | Scope figures | Personal figures | Readiness analytics | Public journey |
|---|---|---|---|---|
| Root administrator | 👁 | — | 👁 | 👁 |
| Schedule committee chair | 👁 | — | 👁 | 👁 |
| Department head | 👁 | — | — | 👁 |
| College dean | 👁 | — | — | 👁 |
| Faculty member | — | 👁 | — | 👁 |
| Public visitor | — | — | — | 👁 |

✎ Write 👁 Read — No access

### 3.16.4 Screens

**Home dashboard**
Account and scope bar, decision card, readiness signals, today's lecture track, scope figures and the week-load reading.`src/components/Dashboard.tsx`

**Term story**
A card in the schedule-changes screen: appointments, what moved, rounds, notes and blockers, with a copy-as-sentence button for the dean.`src/components/TermStory.tsx`

**Semester readiness**
A ring and number at the top of the registration radar, three explanatory figures and a shortfall-cause bar.`src/components/SemesterReadiness.tsx`

**Period balance**
A strip of cells per rule 7/2 with a gauge for morning and one for evening.`src/components/PeriodBalanceInfographic.tsx`

**Mini ring**
A ring for a figure out of 100 with a colour tone.`src/components/MiniRing.tsx`

**Visual bits**
Building travel map, equation chips and a travel heat matrix.`src/components/VisualBits.tsx`

**Welcome tour**
A stage for those who build the schedule and a step list for other roles.`src/components/Onboarding.tsx`

**Render recovery**
Remounts the failed part in place, then shows one line and a Retry button.`src/components/ErrorBoundary.tsx`

## 3.16.5 Requirements

### FR-DSH-001 Term shown on the dashboard

The system shall decide on the server the term the home dashboard opens on: the reader's explicit choice as long as the term exists, otherwise the operationally current term if the reader has something visible in it, otherwise the newest term with something visible within 6 earlier terms, otherwise the current term even if empty, and return the flags explicit, fallback, currentTermId and defaultTermId with it.

Implemented · Must · Functional · Schedule committee chair, Department head, College dean, University registrar

**RATIONALE**

> A term just being prepared used to open an empty home for a dean.

**ACCEPTANCE CRITERIA**

1. The operationally current term is tried first even when a newer term exists in the list.
2. An explicit choice of an empty term is respected and the default is kept to return to.
3. A saved term that no longer exists falls back to the default with explicit=false.
4. Nothing for the reader in any term: the current term stays.

**EVIDENCE**

`src/utils/homeTerm.ts` `src/server/routes/dashboardRoutes.ts#/api/dashboard` `src/server/core/scheduleReads.ts` `tests/dashboard-home-term-audit.ts`

### FR-DSH-002 Empty term state and upcoming term

The system shall return with the dashboard the flags empty, awaitingApproval and upcoming, and for a term with no visible row the screen shall show a card saying there are no appointments yet or the term's schedule is not yet approved instead of the schedule being sound, with no day or week figures built from zero, a badge opening the nearest upcoming term in preparation, and a badge to return to the default.

Implemented · Must · Functional · College dean, Vice dean for academic affairs, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. empty=true when no row is visible; awaitingApproval=true when the reader sees approved rows only and an unapproved row exists.
2. upcoming names a term later than the one shown and not the shown term itself, or null.
3. The decision card and attention list are emptied for an empty term.

**EVIDENCE**

`src/server/routes/dashboardRoutes.ts` `src/components/Dashboard.tsx` `src/utils/homeTerm.ts` `tests/dashboard-home-term-audit.ts`

### FR-DSH-003 Scope of what the dashboard shows

The system shall show the whole university to the administrator, the personal rows to an account linked to a faculty member, and only the permitted department rows to anyone else, deans and the dean of registration reading the accepted version only, and return workspace.mode with one of admin, personal or scope.

Implemented · Must · Functional · System administrator, Root administrator, Faculty member, College dean, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The administrator account sees the day's lectures from the whole university, not an empty list beside a large figure.
2. A dean does not see a second or summer term before it is accepted.
3. The administrator receives metrics with the total of schedules, terms and instructors, and others receive figures for their scope.

**EVIDENCE**

`src/server/routes/dashboardRoutes.ts` `src/server/core/scheduleReads.ts` `src/server/core/scope.ts` `tests/dashboard-home-term-audit.ts` `tests/role-scope-audit.ts`

### FR-DSH-004 Today's lectures and the weekend

Inferred

The system shall return today's lectures sorted by start time for Sunday to Thursday, and on Friday and Saturday not show another day's lectures but return weekend=true and an empty list, and the screen shall say that Friday and Saturday are a holiday with no lectures today.

Implemented · Must · Functional · Schedule committee chair, Department head, Root administrator

**ACCEPTANCE CRITERIA**

1. On Friday or Saturday: today is empty and weekend=true with dayName Friday or Saturday.
2. Each row carries the instructor, course, start and end times and the hall.

**EVIDENCE**

`src/server/routes/dashboardRoutes.ts` `src/components/Dashboard.tsx`

### FR-DSH-005 Scope load reading

The system shall compute for the scope's rows in the shown term: appointments per day from Sunday to Thursday, the 5 busiest start hours, the 5 most used halls, the unique hall count, and the room-occupancy peak as the percentage of the most halls occupied in any half-hour slot over all halls.

Implemented · Should · Functional · Schedule committee chair, Root administrator, Department head

**ACCEPTANCE CRITERIA**

1. weekdayLoad has five items keyed fsunday to fthursday.
2. busiestHours and busiestRooms are each at most 5, sorted by count descending.
3. Rows without a verified hall are excluded from hall occupancy.

**EVIDENCE**

`src/server/routes/dashboardRoutes.ts` `tests/dashboard-home-term-audit.ts`

### FR-DSH-006 Trend over the last terms

The system shall return a trend line of up to 4 points in chronological term order (appointments, halls, instructors) ending with the shown term, examining up to 8 terms back, skipping a term in which the reader had nothing, and return previous (the preceding point); the screen shall show the figure's difference from the previous term with an arrow and show no mark when nothing changed.

Implemented · Should · Functional · Schedule committee chair, Department head, College dean

**ACCEPTANCE CRITERIA**

1. The order is chronological, not by id: an archive term with a larger id does not drop out of the line.
2. A point with zero appointments is dropped unless it is the shown term.
3. The line and the difference are not drawn for fewer than two points.

**EVIDENCE**

`src/server/routes/dashboardRoutes.ts` `src/components/Dashboard.tsx` `tests/dashboard-home-term-audit.ts`

### FR-DSH-007 Dashboard loading and enrichment

The screen shall start the dashboard and the two analytics readings together for those who manage the schedule, an optional reading's failure shall not empty the dashboard, the previous term's data shall be cleared on a term switch before the answer arrives, and awaited items shall hold their space with a dash rather than a zero or a gap that pushes the page later.

Implemented · Should · Functional · Schedule committee chair, Root administrator

**ACCEPTANCE CRITERIA**

1. A failure of the analytics overview reading does not prevent the figures and lectures from showing.
2. The two optional readings carry home=1 so they resolve the same term.
3. A pending indicator exposes aria-valuetext as reading in progress, not a zero value.

**EVIDENCE**

`src/components/Dashboard.tsx` `tests/dashboard-home-term-audit.ts`

### FR-DSH-008 Decision card and signals

Inferred

The dashboard shall show a decision card with the most important alert (up to 3 items, in critical, warning or info tone), an attention list for the rest, and a signal strip: today's lectures, critical conflicts (hidden at zero), occupied halls, average gap, readiness as a ring, and a health ribbon with quality, resilience, fairness and occupancy; analytics signals are not shown to those who do not manage the schedule.

Implemented · Should · Functional · Schedule committee chair, Root administrator

**ACCEPTANCE CRITERIA**

1. An item is critical when its severity is critical, danger, error, high or blocker.
2. The readiness ring shows quality as a percentage and turns good from 85 upward.
3. The handle button on an item navigates to the schedule screen.

**EVIDENCE**

`src/components/Dashboard.tsx`

### IR-DSH-009 Today's lecture track

Inferred

The dashboard shall draw today's lectures over the working-hours axis, mark the current or next lecture with its time, give each hour column a readable description (lecture count or no lectures), and format its numbers as Latin digits in Kuwaiti Arabic locale (ar-KW-u-nu-latn).

Implemented · Should · Interface · Schedule committee chair, Department head, Faculty member

**ACCEPTANCE CRITERIA**

1. The current lecture is the one started and not ended at the current minute; otherwise the first later lecture.
2. The track's description states the day's pressure over its hours.

**EVIDENCE**

`src/components/Dashboard.tsx` `src/utils/scheduleTime.ts`

### FR-DSH-010 Public journey reading

The system shall return at /api/journey aggregated figures computed at request time with no identity: counts of terms, appointments (counted on the server), courses, instructors, departments and colleges, the first academic year on record, and the newest term's unique figures, without authentication, and without inheriting a demo sandbox in a real deployment.

Implemented · Should · Functional · Public visitor, Schedule committee chair, Root administrator

**ACCEPTANCE CRITERIA**

1. The payload returns scoped=false, lifetime and current and carries no name or civil ID.
2. Adding a term raises terms by one on the next request without a code change.
3. since is the earliest start year among the term names.

**EVIDENCE**

`src/server/routes/dashboardRoutes.ts` `src/components/ScheduleJourney.tsx` `server.ts` `tests/journey-reveal-audit.ts`

### FR-DSH-011 Global search

The system shall answer /api/search with a minimum of two characters about appointments (12), instructors (8), courses (8) and halls (8) in the newest term, for those holding any of screens 7, 8, 9, 10, 16 or 17, limit each category to its permission, scope and the dean's accepted version, and not expose instructor data the reader's scope does not allow.

Implemented · Should · Functional · Schedule committee chair, Department head, College dean, Root administrator

**ACCEPTANCE CRITERIA**

1. A one-character query returns empty lists.
2. Search reads by scope and gives a dean the final version only.
3. Instructor results pass through a reader-appropriate view (civil ID hidden from those not permitted).

**EVIDENCE**

`src/server/routes/dashboardRoutes.ts` `src/server/core/scope.ts` `tests/dean-notify-audit.ts`

### FR-DSH-012 Sentence search

The system shall interpret an Arabic sentence by fixed rules with no external service, answering free halls (up to 60), a hall's appointments, an instructor's gaps between lectures (30 minutes or more, up to 30), and an instructor's or a time's appointments (up to 40 rows), refuse with 403 a college or department outside the reader's scope, and return intent unknown with no rows for a sentence it cannot parse.

Implemented · Could · Functional · Schedule committee chair, Department head, College dean

**RATIONALE**

> The same sentence always resolves to the same rows, offline.

**ACCEPTANCE CRITERIA**

1. A free hall is one that no row occupies in the whole term at the stated day and time.
2. Rows are read with the request's own reader (scope and final version for a dean), not raw.
3. A gap under 30 minutes is not counted.

**EVIDENCE**

`src/server/routes/dashboardRoutes.ts` `src/utils/naturalQuery.ts` `tests/dean-notify-audit.ts` `tests/input-hardening-audit.ts`

### FR-DSH-013 Term story

Inferred

The Term story card shall summarise a department's approval cycle in five figures (appointments, what moved or first review, rounds, notes handled out of the total, blockers) with a rounds strip showing its steps (sent, returned with its note count, accepted), and one ready sentence copyable for the dean with a button, and shall name the comparison basis: the approved authority version, the last registration review, or the last snapshot.

Implemented · Should · Functional · Department head, Schedule committee chair, College dean

**ACCEPTANCE CRITERIA**

1. A first review shows a dash and first review rather than moved 0.
2. The authority basis says it matches the approved authority version or that N differ from it.
3. Rounds count at least one, and zero blockers show no blockers.
4. After copying the button reads Copied for 2.2 seconds.

**EVIDENCE**

`src/components/TermStory.tsx` `src/components/ScheduleChanges.tsx`

### FR-DSH-014 Semester readiness score

The system shall compute semester readiness = 60% × the share reaching 12 units or more (reaching 15, 12 to 14, or a graduate below 12) of those who can be judged + 40% × the share of demand that found a seat, classify it ready from 85, needs attention from 65, at risk below that, and invent no number when there are no students to measure (score=null).

Implemented · Must · Functional · University registrar, College registrar, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. 80/10/10 with demand 100 and seats 95: score 92, tier ready.
2. 10/10/80 with demand 100 and seats 50: score 32, tier risk.
3. Unknown above 20% sets weak=true.
4. No radar or no students: no score and no tier.

**EVIDENCE**

`src/utils/semesterReadiness.ts` `tests/registration-causes-audit.ts`

### IR-DSH-015 Semester readiness panel

The panel shall show the readiness ring with a readable description (semester readiness N out of 100: tier) and figures: the share reaching 12, the share of demand that found a seat, the counts of full and not-offered courses, a stacked bar of shortfall causes for those not reaching 12 with the largest named, a warning when precision is weak, a button leading to the list of courses needing a decision, and shall not draw when there is no score.

Implemented · Should · Interface · University registrar, College registrar, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. The bar shows the six shortfall causes in proportion to their counts and states it is an estimate, not proof of one cause.
2. When the unknown share exceeds 20% a weak-estimate line appears.
3. A waiting skeleton shows while the analysis loads and not when it fails.

**EVIDENCE**

`src/components/SemesterReadiness.tsx` `src/components/RegistrationRehearsal.tsx` `src/utils/semesterReadiness.ts` `tests/radar-insight-audit.ts`

### IR-DSH-016 Period-balance drawing

The drawing shall represent each appointment as a cell in one strip (morning 8 to 2 and evening 2 to 8), show two gauges for the limits of rule 7/2: morning 50% to 70% and evening 30% to 50%, compute the limit with whole numbers (upper = floor of 70%, lower = ceiling of 50%), colour the excess cells and write how many sections move and to which side.

Implemented · Should · Interface · Schedule committee chair, Department head, Registration officer

**ACCEPTANCE CRITERIA**

1. 90 appointments all in the morning: 27 move, not 28 (limit 63).
2. 35 with 26 in the morning: 2; 20 with eight: 2; 10 with six: 0 (within range).
3. The strip is tightened when appointments exceed 60.
4. The drawing has a role=img description stating both percentages and the move count.

**EVIDENCE**

`src/components/PeriodBalanceInfographic.tsx` `src/components/ScheduleReview.tsx` `src/components/ScheduleChanges.tsx` `tests/decision-1913-audit.ts` `tests/lecture-length-audit.ts`

### IR-DSH-017 Mini ring

Inferred

The mini ring shall draw a figure out of 100 clamped between 0 and 100, with a good tone from 85, warning from 70, bad below, and neutral (empty) when the value is absent, be read to a screen reader as its name and N out of 100 unless decorative beside an already-read number, and turn text of the form NN/100 into a ring and anything else into nothing.

Implemented · Could · Interface · Schedule committee chair, Root administrator

**ACCEPTANCE CRITERIA**

1. miniRingTone(85) is good, (70) warning, (69) bad and null neutral.
2. ringFromScoreText("80/100") returns a ring and a non-matching text returns null.

**EVIDENCE**

`src/components/MiniRing.tsx` `src/components/Dashboard.tsx`

### IR-DSH-018 Helper drawings

Inferred

The helper drawings (building travel map, equation chips a – b = c, travel heat matrix) shall draw figures the screen already holds, with no fetching, saving or new computation, make the travel line's thickness follow walking minutes and colour tiring hops in the danger colour.

● Implemented · Could · Interface · Schedule committee chair, College dean, Root administrator

**ACCEPTANCE CRITERIA**

1. The map places buildings on an ellipse and the line thickness grows from 2 in proportion to minutes against the largest.
2. The matrix is read-only and the input fields stay where they are.

**EVIDENCE**

`src/components/VisualBits.tsx` `src/components/Colleges.tsx` `src/components/IntelligenceWorkspace.tsx`

### FR-DSH-019 Welcome tour by role

The system shall show each role its own tour: committee, administrator and a role-less account see the building stage with its six scenes, the department head four steps, the registration officer and college registrar four, the registrar head five (with the deadline), the dean and dean of registration five, and the vice dean six, and show in a role's tour nothing that role does not do, and store the seen-tour mark by account id and role.

● Implemented · Should · Functional ·

Schedule committee chair, Department head, University registrar, Registration officer, College registrar, College dean, Dean of Admission and Registration, Vice dean for academic affairs

**ACCEPTANCE CRITERIA**

1. The key is schedule-onboarding-v5-<id>-<role>: dean number 7 gives schedule-onboarding-v5-7-dean.
2. Whoever finished the old v4 tour is not shown it again unless his role has its own tour.
3. The deadline and extension step is in the registrar head's tour only.
4. Replaying from the menu removes both the new and the old mark and starts from the first scene.

**EVIDENCE**

`src/components/Onboarding.tsx` `src/utils/onboardingKey.ts` `src/App.tsx` `tests/dean-notify-audit.ts`

### IR-DSH-020 Tour playback and accessibility

The staged tour shall autoplay only through the third scene with a per-scene hold that depends on its text length between 3200 and 5000 ms, then leave the pace to the reader, scenes shall be shown as a motionless list for users who prefer reduced motion and for every role that does not build the schedule, Esc shall close it at any moment, and the narration shall announce itself politely while the stage is decorative to a screen reader.

● Implemented · Should · Interface · Schedule committee chair, Department head, College dean, University registrar

**ACCEPTANCE CRITERIA**

1. The hold is clamped between 3200 and 5000 for 900 + (word count ÷ 4) × 1000.
2. A manual press on a scene stops the autoplay.
3. Reading the reader's real week (/api/schedules/workspace) fails silently and the sample remains.

**EVIDENCE**

`src/components/Onboarding.tsx` `tests/dean-notify-audit.ts`

### FR-DSH-021 Render fault recovery

When part of a screen fails to render the system shall remount that part in place silently for up to 3 attempts (the first at once and the others after 120 ms), with no navigation, reload or cache clearing, and if all fail shall show one line saying this part could not be shown with a Retry button that restarts the full cycle, and report each stage to telemetry without showing the reader anything.

● Implemented · Must · Functional · Schedule committee chair, Department head, College dean, Standard user

**ACCEPTANCE CRITERIA**

1. The quiet cover applies only while attempts are not exhausted.
2. The stuck state carries role=alert and the text that the data is saved and unaffected.
3. The retry button resets the counter, and no window.location.reload or assign is used.
4. The events are ui.render.recovery, ui.render.unrecovered and ui.render.manual-retry.
5. If the part survives 1500 ms after recovery with no new fault the attempt count is forgotten, so a later fault again gets the full three silent attempts.

**EVIDENCE**

`src/components/ErrorBoundary.tsx` `tests/run-tests.ts`

### IR-DSH-022 General dashboard presentation constraints

Inferred

The screens of this module shall present numbers as Latin digits in ar-KW format, give drawings that carry meaning a readable description (role=img with aria-label) and treat decoration as hidden from screen readers, announce live states (loading, data updated) with status roles, and never display a three-digit course number.

● Implemented · Should · Interface · Schedule committee chair, Department head, College dean, University registrar

**ACCEPTANCE CRITERIA**

1. Loading shows role=status with the text that the command dashboard is loading.
2. Any course number shown in side lists passes through the seven-digit function.

**EVIDENCE**

`src/components/Dashboard.tsx` `src/components/SemesterReadiness.tsx` `src/components/MiniRing.tsx`

### FR-DSH-023 Demo limits

Inferred

The demo guide shall describe what the demo opens on: one college and three departments, with the scope preselected (the demo college → one of its departments → first term 2026/2027), roles the user switches from the side bar, and state that real administration (users, permissions, backup) cannot be modified from the demo and that the audience dashboard and ads are unavailable in it.

● Implemented · Could · Functional · Public visitor, System administrator

**ACCEPTANCE CRITERIA**

1. Administration (users, permissions, user-scopes, system-backup) answers 403 to writes in the demo.
2. The audience and ads screens return unauthorised for a demo account.

**EVIDENCE**

`docs/DEMO_GUIDE.md` `src/server/core/auth.ts` `src/App.tsx` `tests/demo-complete-audit.ts`

### FR-DSH-024 Day list, legacy total and the instructor's personal day

Inferred

The system shall, at /api/dashboard, return today's lectures of the shown term in full for the administrator and limited for anyone else to the departments of their scope (and to the final version for the two deans), compute dashboardTotal by the legacy rule (the administrator: the count of today's rows; others: the count of their scope's rows in the whole term), return metrics.courses as the number of courses registered to the scope's departments for non-administrators, and, for an account linked to a faculty member, return personalToday with that member's lectures today sorted by start time with their days, hall, department and college name, the member's name in linkedInstructorName, and the account's scope count in scopeCount.

Implemented · Should · Functional · System administrator, Root administrator, Department head, College dean, Faculty member

#### ACCEPTANCE CRITERIA

1. The administrator sees today's lectures from every department, and a department head sees only his departments' lectures from the same list.
2. metrics.terms is the total number of terms for everyone; metrics.schedules is the server-side total for the administrator and the scope's rows in the shown term for others.
3. An account not linked to a faculty member receives an empty personalToday and an empty linkedInstructorName.

#### EVIDENCE

`src/server/routes/dashboardRoutes.ts#/api/dashboard`

### FR-DSH-025 Dashboard header and term badge

Inferred

The home dashboard header shall show a greeting by the hour (good morning before 12 noon and good evening after), the user's name, today's date (weekday, day and month in Latin digits) and the shown term's name, and exactly one badge: Return to <default term> when the shown term is not the default, otherwise Upcoming term in preparation — open it when an upcoming term exists, and pressing the badge shall only switch the shown term in the shared scope with no write to the data.

Implemented · Could · Functional · Schedule committee chair, Department head, College dean, System administrator

#### ACCEPTANCE CRITERIA

1. A reader who chose a non-default term sees only the return badge even when an upcoming term exists.
2. The chosen term is kept in the shared scope so the other screens open on it too.
3. The data-updated indicator carries role=status.

#### EVIDENCE

`src/components/Dashboard.tsx` `src/utils/sharedScope.ts`

### FR-DSH-026 Scope figures and main-administrator panels

Inferred

The dashboard shall show the scope figures (courses, appointments, instructors, halls), hiding each figure whose value is zero and the whole row when all are empty, with a trend line under appointments, instructors and halls and a caption naming the first and last term of the line and the number of terms (or Compared with <previous term> when there is a single earlier point), draw the Week load chart with a one-letter mark per day, and restrict the Details section (scope, active appointments, instructors, occupancy peak x / y) to the main administrator (an administrator account or account number 1). The dashboard shows no Peak hours or Most used halls panel: those readings live in the query centre (the times, rooms and occupancy rate lenses).

Implemented · Should · Functional · System administrator, Root administrator, Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. A department head does not see the Details section, and nobody sees Peak hours or Most used halls panels on the dashboard.
2. Health ribbon tones: below 30 bad (occupancy below 30 calm), 85 or above good, otherwise middle.
3. The View all · N button in the attention list opens the Analytics Center for those who manage the schedule and the schedules screen for others, and each hour column of the day strip opens the schedules screen.

#### EVIDENCE

`src/components/Dashboard.tsx` `tests/report-insight-audit.ts`

### FR-DSH-027 Global search result categories by permitted screens

Inferred

/api/search shall match the text as a case-insensitive substring and return: appointments to holders of screen 7, 10 or 17 (the instructor's name in their line, with the visiting suffix, for holders of 7, 8 or 17; the hall for holders of 7, 9, 16 or 17; then the time range), instructors to holders of 7, 8 or 17, limited to those teaching in the visible rows, matched by name or by the civil ID visible to the reader and sorted alphabetically, courses to holders of 7 or 17 among those appearing in the visible rows by name or code, and halls to holders of 7, 9, 16 or 17 among verified halls only, titled Building x — Hall y with their appointment count.

Implemented · Should · Functional · Schedule committee chair, Department head, College dean, Registration officer

#### ACCEPTANCE CRITERIA

1. A holder of screen 9 alone receives halls only, with empty appointment, instructor and course lists.
2. An appointment without a verified hall creates no hall result.
3. A holder of screen 10 sees appointments without the instructor's name or the hall in their line.

#### EVIDENCE

`src/server/routes/dashboardRoutes.ts#/api/search` `src/server/core/scope.ts` `tests/dean-notify-audit.ts`

### FR-DSH-028 Sentence search parsing rules

/api/search/natural shall read the sentence by fixed rules: convert Arabic-Indic and Persian digits to Latin and drop diacritics and tatweel, recognise Sunday to Thursday with or without the article, read the time as h:mm or a single hour from 1 to 23, an hour from 1 to 6 without the morning marker counting as afternoon and the evening or afternoon markers adding 12 below noon, then choose the intent in order: move (a move verb, a 2-to-4-digit number and a time or day), free halls, gaps, a hall code (1 to 3 letters, a dash and 1 to 4 digits), an instructor's schedule (schedule, appointments, lectures, period, load), a time or day, otherwise unknown; it shall resolve college, department and term from the request context, return empty rows when there is no term, and not execute a move but answer it as a reading of appointments at the requested time.

Implemented · Should · Functional · Schedule committee chair, Department head, Registration officer

#### RATIONALE

> The same sentence always gives the same answer, and no data leaves the server.

#### ACCEPTANCE CRITERIA

1. «free halls Sunday 2» and «2:00 pm» read as 14:00, «9:30 am» stays 09:30, and «3:30» without a marker reads as 15:30.
2. A long run of spaces does not slow parsing (no quadratic backtracking).
3. Gaps and free halls are computed from the whole term's rows because they are time and place with no course or department, while hall, instructor and time readings come from the reader's scoped rows.

#### EVIDENCE

`src/utils/naturalQuery.ts#parseNaturalQuery` `src/server/routes/dashboardRoutes.ts#/api/search/natural`
`tests/input-hardening-audit.ts` `tests/standard-arabic-ui-audit.ts` `tests/dean-notify-audit.ts`

### IR-DSH-029 The tour stage on the department's own week

Inferred

The welcome-tour stage shall build its miniature week (five days × six hours) from the reader's real week when the reader may read the schedule and it holds at least three usable appointments: one lecture per day, preferring courses not yet shown, and six hours starting from the earliest lecture within the teaching day, then a single invented «example lecture» carrying the instructor of the lecture it lands on to stage the conflict and its repair; otherwise it runs on the illustrative sample.

● Implemented · Could · Interface · Schedule committee chair, System administrator, Standard user

#### ACCEPTANCE CRITERIA

1. The stage corner states «your department's week — one example lecture added» or «illustrative example», so the example is not read as a real conflict.
2. Each lecture's colour comes from the same course-colour function the schedule uses, and the repair moves the example to the lowest two free slots in its column.
3. A «skip» button shows until the last scene, the main button reads «next» then «start working», and the greeting follows the role (such as «your college is in your hands to view» for the dean).
4. An account that cannot read the schedule, or prefers reduced motion, does not request the week at all.

#### EVIDENCE

`src/components/Onboarding.tsx#stageFromWorkspace` `src/components/Onboarding.tsx#repairSlot` `src/components/Onboarding.tsx#ROLE_GREETING` `src/components/Onboarding.tsx#Stage`

### IR-DSH-030 Shared display primitives (the DNA kit)

The shared display primitives — stepper, timeline, status header, ring, segmented switch, sparkline, stat tile, heat strip, hub map and empty state — shall be presentation only, taking every value from the host screen and neither reading nor writing data, and their states shall be read to a screen reader in words: complete, current, later, returned, stopped.

● Implemented · Could · Interface · The system (automatic)

#### ACCEPTANCE CRITERIA

1. A ring without a value draws a dashed track and «—», and with a value shows the rounded percentage unless given a label.
2. The sparkline is not drawn with fewer than two values, the heat strip scales each cell to the highest, and the hub map shrinks its elements below 520 pixels wide.
3. A completed stage with a signature shows its initials as a stamp, the current stage carries aria-current=step, and the optional journey intro changes nothing when not requested.

#### EVIDENCE

`src/components/dna/DnaKit.tsx#DnaStepper` `src/components/dna/DnaKit.tsx#DnaRing` `src/components/dna/DnaKit.tsx#DnaSpark` `src/components/dna/DnaKit.tsx#DnaHeat` `src/components/dna/DnaKit.tsx#DnaHubMap` `tests/journey-reveal-audit.ts`

## 3.16.6 Algorithms

ALG-DSH-01 · Dashboards and term awareness

**Term early warning**

Deterministic

*What are the three most important risks in the term timetable right now: missing sections, an instructor over load, or sections without a hall?*

1. Demand = the campus students who need each course from the demand report (SWRDASH) only; with no report there is no forecast.
2. Required = ⌈demand ÷ capacity⌉ and shortage = required − scheduled sections.
3. Demand coverage % = covered seats ÷ total demand over courses with known capacity; an unknown capacity is reported on its own and never assumed.
4. Instructor overload = weekly credit hours above the recorded load allowance; a section without a hall = at least one row with no location.
5. Highlights (up to 3): the largest shortage, then instructor overload, then sections without a hall, then other shortages, then unknown capacity.

**Inputs**

The term's sections, course capacities, instructor load allowances, and the stored demand report.

**Output**

Status, coverage percentage and seats, number of short courses, up to three highlighted risks with tone, and the rest under «all details».

Fixed rules over stored data; anything without data is reported as unknown, never guessed, and no percentage is shown without seats.

Up to 3 highlighted risks

`src/utils/termForecast.ts#computeTermForecast` `src/server/routes/planningRoutes.ts#registerPlanningRoutes` `tests/section-plan-audit.ts`

FR-DSH-008

## 3.16.7 Edge cases

### ⚠ A dean opens the dashboard when a new term has nothing approved

**Scenario** A new term in preparation has been created and registration has not accepted it; the dean sees approved rows only.

**Behaviour** The dashboard opens on the current term with its week and figures and names the new term in a badge; if the dean opens it, it says its schedule is not yet approved and never that the schedule is sound.

### ⚠ Friday and Saturday

**Scenario** A user opens the dashboard on a holiday.

**Behaviour** Today's list is empty with weekend=true and the screen writes that Friday and Saturday are a holiday, so Sunday's lectures are not stamped with another day's date.

### ⚠ Optional analytics read fails

**Scenario** One of the two companion analytics readings fails while /api/dashboard succeeds.

**Behaviour** The dashboard keeps its figures and lectures, and the awaited signals (gap, readiness, health) drop out once waiting ends instead of the screen being emptied by an error banner.

**⚠ Readiness with no judgeable students**

**Scenario** All student files are unknown or there are no students in the radar.

**Behaviour** No number and no ring is shown (score=null); if a little is judged with unknown above 20% the number is shown with the weak-estimate warning.

**⚠ A render fault that does not heal**

**Scenario** A part of the screen fails all three automatic attempts.

**Behaviour** No invisible cover over a blank screen: one line and a Retry button appear with an accessible announcement, and the user is not navigated away and the application is not reloaded.

### 3.16.8 Standing owner decisions

- The displayed term is decided by the server: the operationally current term unless the reader chooses another.
- Deans read the accepted version only on every screen.
- A course number is always seven digits (college 2 + department 2 + course 3).
- Printed reports keep their design; fixes are in values, not layout.
- Every tour shows only features that are switched on; a tour showing what its owner cannot find is worse than none.

↑ Contents

3.17 · OPS

# Operations

From server boot to release: runtime, backups, the demo sandbox and the installable app.

| 59 | 100% | 6 | 82 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Edge cases · 7. Standing owner decisions

↑ Contents

## 3.17.1 Overview

This module describes how the server is composed, booted and protected; how the database target is chosen and a wrong target refused; and how the whole system is exported and restored in resumable steps by the root administrator alone. It also covers the per-visitor demo sandbox, the installable app with its 'we are updating' page during a switch-over, and the build, check and release pipeline with its guards. Every other module depends on it, because a fault here is seen by every user.

Root administrator · System administrator · The system (automatic) · Public visitor

## 3.17.2 User journeys

**Root administrator** — **Export a full backup, then restore it**

1. The root account opens the system vault and starts an export job; the server answers 202 with the job.
2. The job advances in short steps (6500 ms budget each) and its chunks are staged in Firestore, so closing the browser loses nothing.
3. When ready, a gzip file is downloaded with its SHA-256 and document count in the response headers.
4. Later the administrator previews the file; the server checks format and digest and returns per-collection counts without writing anything.
5. Import starts with an explicit confirmation header; the server takes a safety export first, then replaces data at resumable checkpoints.
6. If the result is not what was wanted, the administrator returns to the safety restore point with 'undo'.

### Public visitor — Trying the system in an isolated sandbox

1. The visitor presses 'try the system'; a sandbox is created in server memory and a session cookie starting with demo_ is set.
2. Sign-in opens at once on the preset department and term while the larger stories (64 student profiles and more) are seeded in the background, shown as 'preparing'.
3. He switches role from the bar (30 switches per minute) and sees the screens with that role's real scope and permissions.
4. Trying to edit an administrative screen (users, permissions, system vault) is refused with 403 and a note that it is display-only.
5. He resets with the reset button; the sandbox is replaced by a fresh one and the one-hour lifetime renews.

### The system (automatic) — Releasing a new build to the official site

1. A change request runs the quick CI (skipping the seven slow tests) after the target and hygiene guards.
2. After the merge into main the full CI runs every test; only a commit that passed it can be released.
3. The release pipeline refuses any commit the full CI has not passed, and checks the kill switch and the owning repository.
4. One immutable image is built and pushed, then only the official service's image is changed, never its settings.
5. The pipeline compares the build id in sw.js on the official domain and on the service address, failing if they still differ after 20 tries.
6. Open pages notice the new build through /api/version and reload themselves.

### 3.17.3 Diagrams

**Server boot**

A fixed order: environment first, then the database; in production the port is never opened without one.

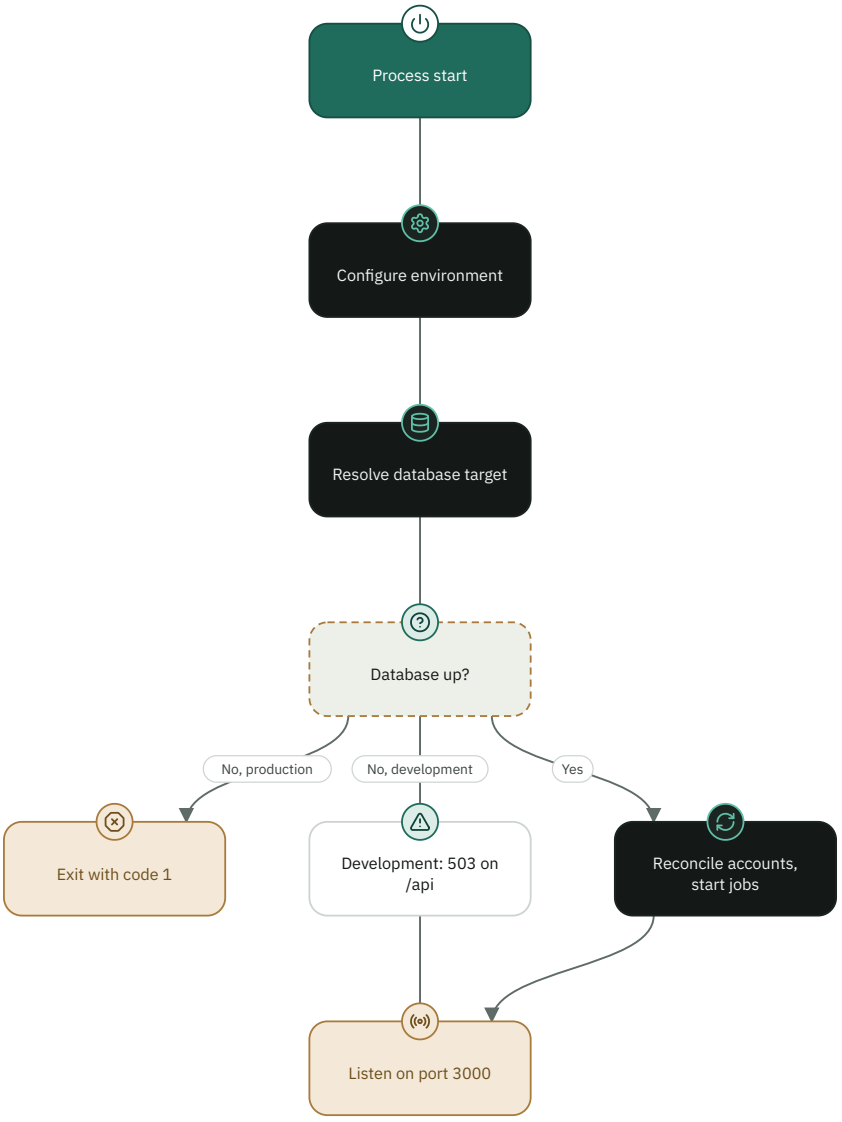

## Release path

Only a commit that passed the full CI on main reaches the official site, and service settings are never touched.

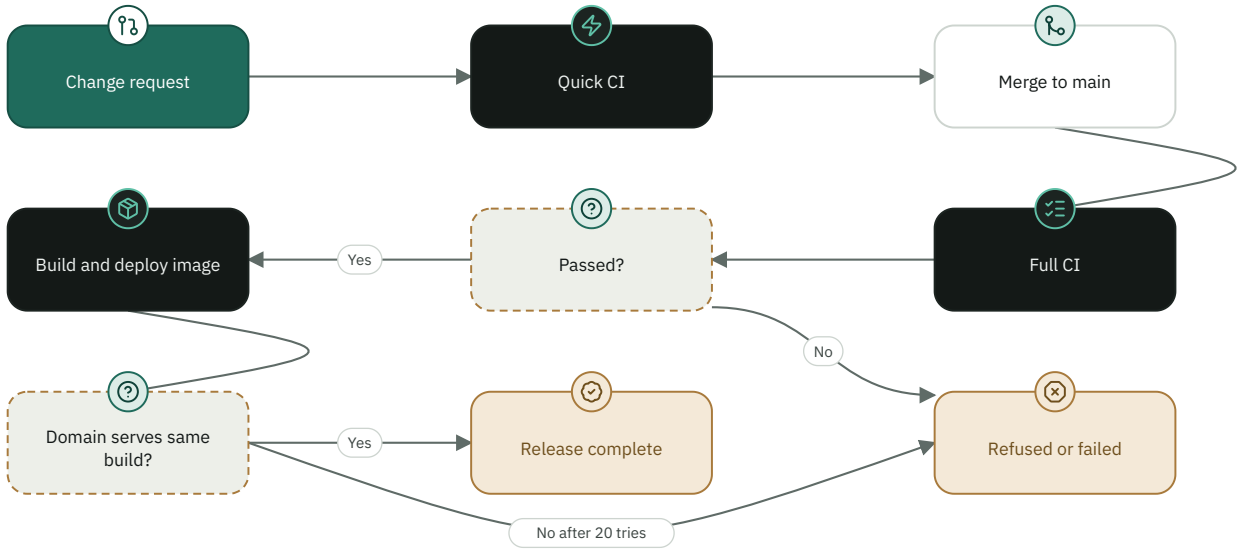

**Full backup import**

Each step is a durable checkpoint; the safety export precedes any replacement.

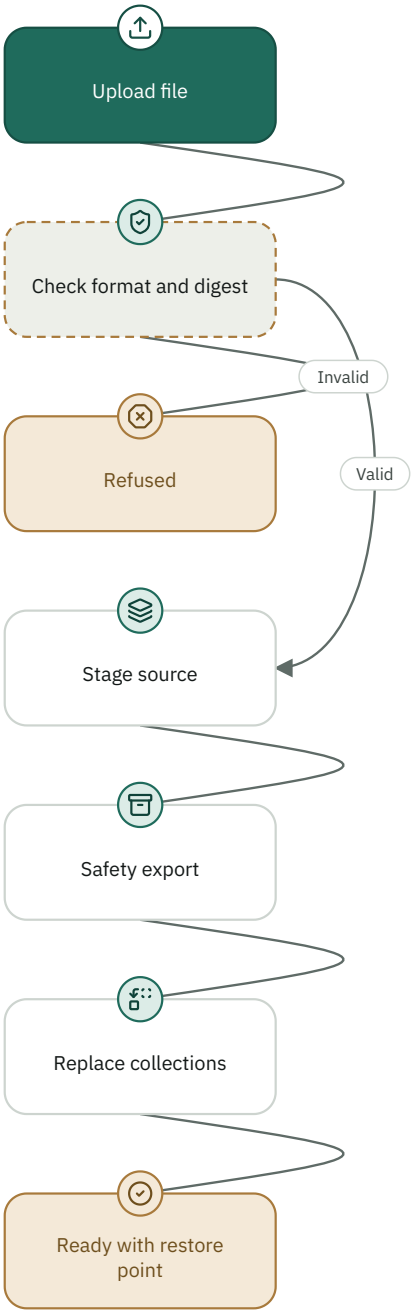


## 3.17.4 Screens

**System vault**

Full export, import, reset and undo, for the root account only.`src/server/routes/adminRoutes.ts`

**'We are updating' page**

A standalone page with no external request that replaces the platform's error during a release.`public/updating.html`

**Demo entry and role bar**
Starts the visitor sandbox, switches role and resets it.`src/server/routes/authRoutes.ts`

**System health**
One-glance traffic-light cards for the root account.`src/components/SystemHealth.tsx`

## 3.17.5 Requirements

### FR-OPS-001 Boot order, private directory and environment file

The system shall configure the runtime environment before any server module is loaded (the boot module remaining the first import in server.ts), read the environment file from a private directory outside the release folder (by default a schedule-private sibling, and under /tmp on Cloud Run), copy a local .env into it once with mode 600 without overwriting, and in production refuse a private directory inside the release folder.

● Implemented · Must · Functional · The system (automatic), System administrator

**RATIONALE**

> Many modules read variables at load time; loading them before configuration yields a silently different setup.

**ACCEPTANCE CRITERIA**

1. The first line of server.ts imports core/boot, which calls configureRuntimeEnvironment() after the original modules and before any core or routes module.
2. The route table and middleware order after the split equal the snapshot taken before the split (server parity).
3. On Cloud Run with SCHEDULE_PRIVATE_DIR set to a temporary folder, the file is read from there and nothing is written into the application folder.
4. In production the repository throws 'SCHEDULE_PRIVATE_DIR must be outside the application release directory in production' when it lies inside the release.

**EVIDENCE**

`server.ts` `src/server/core/boot.ts` `src/server/runtimeEnv.ts` `src/db/repository.ts` `scripts/protect-private-state.mjs` `docs/SAFE_DEPLOYMENT.md` `tests/server-route-parity-audit.ts` `tests/firestore-target-audit.ts`

### FR-OPS-002 Cloud Run production mode

When the system detects it runs on Cloud Run (K_SERVICE, K_REVISION or K_CONFIGURATION) outside the preview environment, it shall force NODE_ENV=production, DATA_MODE=firestore and AUTO_IMPORT_LEGACY_DATA=false, with the sole exception of a dedicated demo service declaring SCHEDULE_DEMO_SERVICE=true, which runs on in-memory demo data.

● Implemented · Must · Functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. With K_SERVICE=schedule, DATA_MODE becomes firestore even when the file says otherwise.
2. With SCHEDULE_DEMO_SERVICE=true, DATA_MODE becomes demo and the service never opens the business store.

**EVIDENCE**

`src/server/runtimeEnv.ts` `tests/firestore-target-audit.ts`

### FR-OPS-003 Firestore target selection and refusal of an implicit target

The system shall resolve the Firestore project and database by a fixed precedence: on Cloud Run the application config file wins and the environment fills gaps, elsewhere the environment wins and the file fills gaps; it shall warn when an environment value contradicts the file and log the target actually used at boot, and shall refuse to start on Cloud Run when the project id or database id is missing or is '(default)', so it never connects to a database other than the one holding the university's records.

● Implemented · Must · Functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. On Cloud Run a FIREBASE_DATABASE_ID that contradicts the file yields the file's value and exactly one warning; agreement yields none.
2. With FIREBASE_CONFIG_SOURCE=environment on Cloud Run both ids are required, and boot is refused if the file contradicts them.
3. An empty database id or '(default)' in any letter case throws 'Refusing to start on Cloud Run'.

#### EVIDENCE

`src/server/firestoreTarget.ts` `src/server/runtimeEnv.ts` `docs/DELIVERY_OPERATIONS.md` `src/db/repository.ts` `tests/firestore-target-audit.ts`

### FR-OPS-004 No service without a database

When database initialisation fails, the system shall exit with code 1 in production so the previous revision keeps serving; in development it shall stay up and answer every /api request with 503 and an 8-hex-character reference without the driver's error text, and never fall back to packaged substitute data.

● Implemented · Must · Functional · The system (automatic), System administrator

#### RATIONALE

> A site that answers while showing a schedule that is not the university's is more dangerous than a site that is down.

#### ACCEPTANCE CRITERIA

1. With state.databaseDown set, any /api path (except /api/landing/inquiry and those registered ahead of the guard such as health and version) answers 503 JSON containing ref.
2. The body contains no hostnames or credential paths; the full text is in the server log under the same reference.

#### EVIDENCE

`server.ts` `src/server/core/state.ts` `tests/run-tests.ts`

### FR-OPS-005 Account reconciliation and scheduled jobs at boot

After the database comes up the system shall migrate accounts without a role to the schedule committee chair role (except the root account), remove the workshop screen (7) from department-head accounts, and start the automatic next-term job, the expired-student-profile purge (every 6 hours, first run one minute after boot) and the automatic radar job; all are idempotent and a failure never blocks boot.

● Implemented · Should · Functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. Restarting the server does not change an account that already has a role and writes nothing when there is nothing to migrate.
2. A migration failure is logged and boot continues.

#### EVIDENCE

`server.ts` `tests/role-guard-audit.ts` `tests/term-calendar-audit.ts`

### IR-OPS-001 Health interface

The system shall provide an unauthenticated GET /api/health that needs no session lookup and returns JSON with ok, database (up or down) and, when down, a ref, and keeps answering even while the rest of /api answers 503.

Implemented · Must · Interface · The system (automatic), Public visitor

#### ACCEPTANCE CRITERIA

1. With a healthy database: ok=true, database=up, no ref.
2. With state.databaseDown: ok=false, database=down and ref taken from state.databaseDownRef.
3. GET /api/health?warm=1 (the scheduled warm-up call, unauthenticated) refreshes only short-memory entries with 90 seconds or less left to live, is ignored when a warm-up ran less than 60 seconds earlier, never waits more than 8 seconds, and answers the same health check in every case.

#### EVIDENCE

`src/server/routes/systemRoutes.ts` `src/server/core/state.ts` `src/db/referenceCache.ts#expireForWarmup` `src/db/referenceCache.ts#beginWarmup` `tests/updating-page-audit.ts` `tests/instructor-offering-flow-audit.ts` `tests/final-audit-gaps-audit.ts`

### IR-OPS-002 Build identity and version interface

The system shall stamp every build with one identifier (timestamp plus random part) carried by the client bundle, the server bundle and the service worker, expose it through GET /api/version with a no-store header, and have an open page reload itself whenever the server's identifier differs from its own.

Implemented · Must · Interface · The system (automatic)

#### ACCEPTANCE CRITERIA

1. After stamp-sw, dist/sw.js no longer contains the text __BUILD__ and holds the same identifier as the bundle.
2. If /api/version is answered by an error page (not ok), the page takes no decision and asks again later.
3. A tab that already reloaded for a build and still runs old code clears every cache and drops service workers (except the push worker), then reloads.

#### EVIDENCE

`src/server/routes/systemRoutes.ts` `scripts/stamp-build.mjs` `scripts/stamp-sw.mjs` `src/main.tsx` `tests/updating-page-audit.ts`

### FR-OPS-006 Security headers on every response

Inferred

The system shall add to every response: X-Content-Type-Options=nosniff, Referrer-Policy=same-origin, a Permissions-Policy denying camera, microphone and geolocation, a CSP forbidding plugins (object-src 'none') and restricting base-uri and form-action to the same origin, X-Frame-Options=DENY with frame-ancestors 'none' outside the embedded preview environment, and Strict-Transport-Security for 31536000 seconds in production only; it shall disable the X-Powered-By header.

Implemented · Must · Functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. A request to any path returns the headers above, and HSTS appears only when NODE_ENV=production.
2. A full CSP is deliberately not imposed on the application shell; the server-built public pages carry a strict nonce policy (see NFR-NFR).

#### EVIDENCE

`server.ts` `tests/ads-audit.ts` `tests/room-door-audit.ts`

### FR-OPS-007 Compression and request size limits

Inferred

The system shall compress text responses over 1024 bytes (never SSE or NDJSON streams), accept JSON up to 1 MB in general and 4 MB for the drafts path only, and accept a raw body up to 30 MB for the backup preview and import paths only.

Implemented · Must · Functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A JSON request over 1 MB to an ordinary path is refused with 413 and code PAYLOAD_TOO_LARGE.
2. A text/event-stream or x-ndjson response leaves uncompressed.

**EVIDENCE**

`server.ts` `tests/student-journey-audit.ts`

### FR-OPS-008 Refuse cross-site write requests

Inferred

The system shall refuse with 403 any POST, PUT, PATCH or DELETE to /api whose Sec-Fetch-Site is outside {same-origin, same-site, none} or whose Origin host differs from the request host or cannot be parsed; it enables CORS for no other origin.

Implemented · Must · Functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A POST with Origin: https://other.example to a different host is refused with 403 and 'الطلب غير مسموح'.
2. GET requests and requests with neither Origin nor Sec-Fetch-Site (server tools) are not refused by this rule.

**EVIDENCE**

`server.ts`

### FR-OPS-009 Public-surface and teacher-card rate limits

The system shall limit /api/public requests to 60 per window (60000 ms) per address, tunable by PUBLIC_RATE_LIMIT_MAX and PUBLIC_RATE_LIMIT_WINDOW_MS (0 disables it), answering 429 with a Retry-After in seconds when exceeded; and limit the teacher card path /api/public/request/:token to 240 requests per minute per link (keyed by a truncated sha256 fingerprint, never the token) with a ceiling of 1500 per address, tunable by PUBLIC_REQUEST_PER_LINK_PER_MINUTE and PUBLIC_REQUEST_PER_IP_PER_MINUTE, exempting the student journey path (/api/public/me), which has its own limits.

Implemented · Must · Functional · The system (automatic), Public visitor

**ACCEPTANCE CRITERIA**

1. The 61st request from one address inside the window returns 429 with a Retry-After between 1 and the window length.
2. Expired windows are swept once per window so address rows do not accumulate.
3. 130 requests spread over four links from one address all pass.
4. A single link repeating without pause stops at its own limit with 429.

**EVIDENCE**

`src/server/core/rateLimits.ts` `server.ts` `tests/run-tests.ts` `tests/student-door-shared-network-audit.ts` `tests/teacher-card-flow-audit.ts`

### FR-OPS-010 Anonymous-door guard

The system shall look up a session only for an id shaped sess_ or demo_ followed by 64 hex characters; remember dead ids for 30 minutes (capacity 20000); limit failed lookups per address to 120 per 10 minutes (hard ceiling 1200); and limit unmatched tokens on link pages (/s /q /r /m /t) to 40 per 10 minutes (hard ceiling 400), answering 429 with Retry-After=600; failures are counted, never successes, and each success earns credit.

Implemented · Must · Functional · The system (automatic), Public visitor

**ACCEPTANCE CRITERIA**

1. Hundreds of valid links with the odd mistake from one address are never blocked.
2. An address that only fails stops at its limit and is read as signed out without asking Firestore.

**EVIDENCE**

`src/server/anonymousGuard.ts` `src/server/publicAttemptLimiter.ts` `server.ts` `tests/anonymous-guard-audit.ts`

### FR-OPS-011 Sign-in attempt limit

Inferred

The system shall answer 429 with 'too many sign-in attempts' when one address reaches five attempts within a minute on sign-in, password change, demo entry and the /i/:username link.

Implemented · Must · Functional · The system (automatic), Public visitor

#### ACCEPTANCE CRITERIA

1. The sixth attempt within 60 seconds from the same address is refused, and the window reopens after the minute passes.
2. The counter counts every attempt including successful ones and demo entry, and lives in instance memory.

#### EVIDENCE

`src/server/routes/authRoutes.ts`

### FR-OPS-012 Document reading gate

The system shall allow two concurrent scanned-document reads (PDF or image), queue further ones in a queue of 8, answer 503 when it is full, and release the slot when the request finishes or the client closes.

Implemented · Must · Functional · The system (automatic)

#### RATIONALE

> Each page is rendered in process memory; four reads together took the server down for lack of memory.

#### ACCEPTANCE CRITERIA

1. The third read waits, and the eleventh (two active, eight waiting) is refused with 503.

#### EVIDENCE

`src/server/core/http.ts` `src/server/routes/pdfImportRoutes.ts` `tests/section-plan-audit.ts`

### FR-OPS-013 Static serving and cache policy

Inferred

In production the system shall serve the dist folder with index.html and sw.js uncached, content-hashed js and css immutable for a year, other js and css always revalidated, and fonts and images cached for a year; it shall answer a plain 404 for any path under /assets/ or ending in a file extension and return the application shell only for navigation paths.

Implemented · Must · Functional · The system (automatic)

#### RATIONALE

> A missing chunk answered with HTML means a blank page with nothing wrong in the network log.

#### ACCEPTANCE CRITERIA

1. A request for a non-existent /assets file returns 404 with Cache-Control: no-store.
2. A file whose name matches -[A-Za-z0-9_-]{8,}.js is returned with public, max-age=31536000, immutable.
3. The catch-all GET * route in production returns index.html uncached for every navigation path and is registered after every /api route, the landing page and the requirements page so it never swallows them.
4. Outside production the interface is served by the Vite server in middleware mode instead of the dist folder.

#### EVIDENCE

`server.ts` `vite.config.ts` `server.ts#GET *` `tests/updating-page-audit.ts`

### FR-OPS-014 Error contract

The system shall catch every route error in one handler that logs a reference of the form E plus 8 characters with the method and URL (as an argument, never as a format string), answering 413 with PAYLOAD_TOO_LARGE for oversize bodies, 400 with BAD_JSON for invalid JSON, 409 for a request-reservation conflict, and otherwise 500 with INTERNAL and the reference without internal text; any unmatched /api path answers a JSON 404.

Implemented · Must · Functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A request URL containing %s does not swallow the error text in the log.
2. The 500 body carries code=INTERNAL and ref and no collection name or document path.

**EVIDENCE**

`server.ts` `src/server/core/http.ts` `tests/input-hardening-audit.ts`

### FR-OPS-015 Resumable full-system export

Inferred

The system shall let the root account alone export all durable documents through a job that advances in steps of at most 6500 ms over pages of 250 documents, with its gzip chunks staged in Firestore, excluding sessions, client telemetry, secrets, restore points and export/import jobs, and the output downloaded with X-Backup-SHA256 and X-Backup-Documents headers without walking the database.

Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Any account other than the root receives 403 'this vault is for the root administration account only'.
2. Closing the browser mid-job and reopening the vault resumes the same job from its last cursor.
3. The download carries Cache-Control: private, no-store, and the old GET /api/system-backup/export answers 409.

**EVIDENCE**

`src/server/routes/adminRoutes.ts` `src/db/repository.ts` `src/server/core/auth.ts` `tests/role-guard-audit.ts`

### FR-OPS-016 Backup preview, import, system reset and undo

Inferred

The system shall preview a backup before any write by checking its format (schedule-system-backup/1) and SHA-256 digest, decompress gzip with an 80 MB cap enforced during expansion rather than after, require the header x-schedule-confirm=FULL-SYSTEM-IMPORT for import and take a safety export before replacing data at durable checkpoints; reset business data only with the header FULL-SYSTEM-RESET and the Arabic confirmation phrase for 'reset the system' (keeping the root account and creating a restore point); and return to the safety point only with the header FULL-SYSTEM-UNDO.

Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. A file with one altered byte is refused with 'backup integrity check failed (SHA-256)' and nothing is written.
2. An import request without the header answers 409 'full import needs explicit confirmation'.
3. The old POST /api/system-backup/import answers 409 and points to the stepped import.
4. A reset with the right header and the wrong phrase answers 409 'type the reset phrase to confirm'.
5. After undo the response carries restored and redoPoint.

**EVIDENCE**

`src/server/routes/adminRoutes.ts` `src/db/repository.ts` `tests/role-guard-audit.ts` `tests/safety-net-restore-audit.ts`

### FR-OPS-017 An isolated demo sandbox per visitor

The system shall bind every request carrying a demo session cookie (demo_ + 64 hex characters) to a private in-memory data copy lasting 60 minutes, sweep expired ones at most once a minute, never let a demo request read or write Firestore or process-wide caches, build every cache key with a real or demo:<session> prefix, and answer 404 on demo entry when SCHEDULE_DEMO_ENABLED=false.

Implemented · Must · Functional · Public visitor, The system (automatic)

**RATIONALE**

> Marking the registration radar stale reached Firestore from a demo edit and changed real results.

**ACCEPTANCE CRITERIA**

1. Editing a slot inside a sandbox is invisible to every other visitor and to the real system.
2. Every repository branch that writes to Firestore checks for the absence of a sandbox context (firestoreDb && !demoSandboxContext).
3. Lifetime expiry or a server restart shows 'the demo session has ended' rather than 'sign in'.

**EVIDENCE**

`src/db/repository.ts` `src/server/dataContextCache.ts` `src/server/routes/authRoutes.ts` `src/server/core/auth.ts` `server.ts` `tests/demo-firestore-isolation-audit.ts` `tests/demo-complete-audit.ts` `tests/review-audit-2026-10-28.ts`

### FR-OPS-018 Demo sandbox limits and management

The system shall refuse with 403 every write inside the demo sandbox to users, permissions, scopes, the system vault, teaching load and university day, expose GET /api/demo/config (enabled, 60 minutes, isolated, administration read-only), and allow role switching limited to 30 per minute and reset.

Implemented · Must · Functional · Public visitor, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A POST to /api/system-backup/reset inside the sandbox answers 403 with a display-only notice.
2. The 31st switch within a minute answers 429.
3. Logout, heartbeat, reset and role are exempt from the write guard.

**EVIDENCE**

`server.ts` `src/server/core/auth.ts` `src/server/routes/authRoutes.ts` `src/server/routes/systemRoutes.ts` `tests/demo-roles-audit.ts` `tests/demo-screens-audit.ts`

### FR-OPS-019 Demo seeding and role stories

The system shall prepare the core sandbox at sign-in and seed the larger stories in the background, serialised per session (role stories, other departments, 64 radar student profiles, student-journey demand, section requests, the two actual-demand reports, activity trail), expose the preparation state (preparing, ready or failed), never open a role on an empty screen, and keep every name, civil number and figure synthetic.

● Implemented · Should · Functional · Public visitor, The system (automatic)

#### ACCEPTANCE CRITERIA

1. Sign-in does not wait for the large seeding, and /api/demo/seed-status returns the current state.
2. A reset during an older seed does not leave the new sandbox half-populated because jobs are serialised.
3. After preparation, every role in the switcher has non-empty lists on its main screens.
4. The showcase scene: the first course in the demo schedule list has exactly at its time two other courses (one of its level and one of another); two co-requisite pairs in the active sheet, one with no alternative section and one with an alternative so the note stays silent; an «unlocks» example and a general workshop outside the sheets; a demo college on another campus whose meeting follows a main-campus meeting by half an hour, with a 60-minute travel policy for the three pairs; all added without touching what was placed, so every hall and instructor in it is free at its hour.
5. Actual demand in the demo: two reports (general and graduates) are stored for the story department's family in its term, derived from the sandbox's courses, capacities, sections and times rather than typed figures, so section planning opens on graduates without a seat, a shortage needing an extra section, a surplus and a balanced course, and the student pulse shows a green slot, a red one naming the clashing course and the graduate count, and a middle one; deterministic with no randomness, and written only to the visitor's sandbox so neither the real store nor another sandbox reads it.
6. Demo hall types: «lecture hall» and «computer lab» are general for every department, and «workshop» and «production studio» belong to the demo department alone.

#### EVIDENCE

`src/server/routes/authRoutes.ts` `src/server/demoRadarSeed.ts` `src/server/demoPreviousTermSeed.ts` `src/server/demoSectionRequestsSeed.ts` `src/server/demoActualDemandSeed.ts` `src/server/core/demo.ts` `src/db/demoSandbox.ts` `src/db/demoShowcase.ts` `tests/demo-every-role-audit.ts` `tests/demo-cases-audit.ts` `tests/demo-showcase-audit.ts` `tests/demo-actual-demand-audit.ts`

### FR-OPS-020 Service worker and offline behaviour

The service worker shall, at install, store 10 shell files plus the shell page and the updating page; serve navigation network-first and fall back to the stored shell when offline; cache GET responses for exactly fifteen named /api prefixes and replay them when offline; never cache /api/auth, /api/users or the two personal paths /api/schedules/demand and /api/student-registration; serve content-hashed files from cache without the network; and leave public link pages, the room door and advertisements to the network alone.

● Implemented · Must · Functional · The system (automatic), System administrator

#### ACCEPTANCE CRITERIA

1. A cached read while offline returns the last successful copy; if none exists it returns 503 JSON with the X-Schedule-Offline header.
2. On activation every cache other than the current three is deleted, and the API cache is cleared when the user identity changes.
3. The first offline launch after install opens the stored shell, otherwise a 'no internet connection' page.

#### EVIDENCE

`public/sw.js` `src/App.tsx` `src/main.tsx` `tests/updating-page-audit.ts` `scripts/verify-pwa.mjs`

### FR-OPS-021 The 'we are updating' page

The system shall serve /updating.html in place of any 500, 502, 503, 504 or dropped connection on a GET navigation (not /api, not non-GET, not a successful answer) with status 503 and Retry-After=5; the page asks /api/health every 3 seconds, slowing to 15, reopens the requested link when it answers, and after three stalls in two minutes slows to once every 30 seconds without looping.

● Implemented · Must · Functional · The system (automatic), Public visitor

**ACCEPTANCE CRITERIA**

1. No 5xx answer is stored in any cache, and neither /api nor POST requests are answered with the page.
2. The page makes no external request, is RTL and in standard Arabic, and says there is no connection when navigator.onLine is false.

**EVIDENCE**

`public/updating.html` `public/sw.js` `src/utils/updatingNotice.ts` `tests/updating-page-audit.ts`

### IR-OPS-003 Installable-app manifest

The manifest shall declare a standalone app (display=standalone) with scope /, language ar, direction rtl and start URL /?source=pwa, with 192 and 512 icons, an svg icon and maskable 192 and 512 icons, and the verify:pwa check shall guard these on every build.

● Implemented · Should · Interface · The system (automatic), Public visitor

**ACCEPTANCE CRITERIA**

1. The listed icons exist with the right dimensions (the check reads the PNG header).
2. A verify:pwa failure stops npm run build before building.
3. verify:pwa fails when the apple-touch-icon is transparent at its edges, when one file is declared both any and maskable, or when a splash element sits inside #root (unless PWA_GUARD_SPLASH_IN_ROOT=ok is set).

**EVIDENCE**

`public/manifest.webmanifest` `scripts/verify-pwa.mjs` `index.html` `package.json` `scripts/verify-pwa.mjs`

### FR-OPS-022 Continuous-integration pipeline

The CI pipeline shall run on every push to main and every change request against it with a 20-minute timeout, Node 22 and Python 3.12, in this order: deploy target guard, repository hygiene guard, dependency install, type check (tsc with no emit), tests (quick on change requests, full on main), production build, then start the built demo server and verify the Analytics Center scopes through its API; a run on main is never cancelled by a newer one.

● Implemented · Must · Functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A change request runs npm test -- --quick skipping 7 slow tests; main runs them all.
2. A server left on port 3000 by an earlier test is killed before the final verification step.

**EVIDENCE**

`package.json` `tsconfig.json` `tests/repo-hygiene-guard.mjs`

### FR-OPS-023 Deploy target guard and release pipeline

Deployment shall happen only from the owning repository with PRODUCTION_DEPLOY_ENABLED=true and only for a commit the full CI on main passed (the pipeline waits up to 60 checks 30 seconds apart); it shall change only the image of the official service in europe-west1, never the service account, variables, secrets or memory, never return to the retired europe-west2, and never touch the domain mapping; CI fails if the pipeline violates any of this, and after release the pipeline verifies the official domain and the service address serve the same build identifier from /sw.js.

● Implemented · Must · Functional · The system (automatic), Root administrator

**RATIONALE**

> One commit pointed every deploy at another project while CI stayed green, so the official site missed releases for a day; recreating the domain mapping took HTTPS down while a certificate was issued.

**ACCEPTANCE CRITERIA**

1. Any command touching the domain mapping in any yaml, js, ts, sh, json or py file fails the guard.
2. Adding --memory, --set-env-vars or --service-account to the deploy command fails the guard.
3. Verification failing after 20 tries 30 seconds apart fails the release with a message forbidding any change to the domain mapping.

**EVIDENCE**

`tests/deploy-target-guard.mjs` `docs/DELIVERY_OPERATIONS.md` `tests/deploy-target-guard.mjs`

### FR-OPS-024 Repository hygiene guard

The guard shall scan text files and path names in the repository and fail on a reference to a banned development tool, an instruction or prompt file, or leftover scratch audit files, skipping the excluded folders (.git, node_modules, dist, coverage, build, database).

● Implemented · Should · Functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. The guard exits with code 1 listing the offending path, and with code 0 and a success message when there is none.

**EVIDENCE**

`tests/repo-hygiene-guard.mjs` `tests/repo-hygiene-guard.mjs`

### FR-OPS-025 Test runner policy

npm test shall run every script listed in tests/suite.txt (252 scripts) even when some fail, count as failed any test that exits non-zero, skipped its live part because the port was busy, or left a server listening (killing that server), skip tests/slow.txt under --quick, reject a script that does not exist, is duplicated or is slow but unlisted, and fail a known failure that now passes until it is removed from known-failures.txt.

● Implemented · Must · Functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. Port 3000 busy before the start stops the run with a message to close whatever holds it.
2. No active known failure exists today in known-failures.txt (comments only).

**EVIDENCE**

`scripts/run-tests.mjs` `tests/suite.txt` `tests/slow.txt` `tests/known-failures.txt` `scripts/run-tests.mjs`

### NFR-OPS-001 A small, fail-early runtime image

Inferred

The image shall be built in two stages from node:22-bookworm-slim so the runtime stage carries the package file, dist, only the dependencies the server bundle names, the Firestore target file and the two OCR language files; the build shall fail on the runner (never on the live site) if a package is missing (--smoke load check); it shall set MALLOC_ARENA_MAX=2 and run node dist/server.cjs on port 3000.

Implemented · Must · Non-functional · The system (automatic)

**RATIONALE**

> Scan reading starts about 11 workers each with its own memory arena; on a 4 GiB server it was killed for lack of memory.

**ACCEPTANCE CRITERIA**

1. A package required by dist/server.cjs and missing fails the npm prune --omit=dev && node scripts/runtime-deps.mjs --prune --smoke step.
2. Procfile and CMD both run the same node dist/server.cjs.

**EVIDENCE**

`Dockerfile` `Procfile` `scripts/runtime-deps.mjs`

### FR-OPS-026 Backup and recovery procedure

The system shall ship with a documented, executable procedure to protect the production database: enabling point-in-time recovery (7-day PITR), delete protection and scheduled exports to a storage bucket, with the steps to restore and verify, and the system itself shall protect its data in local mode and in the system vault.

Implemented · Should · Functional · Root administrator

**RATIONALE**

> Turning these options on is the hosting party’s decision on its own project because some carry a cost; the document commits to the ready procedure, and activation is listed under assumptions and dependencies.

**ACCEPTANCE CRITERIA**

1. The procedure gives the complete enable, restore and verify commands, and runs as written on any project.

**EVIDENCE**

`scripts/firestore-backup.md` `tests/firestore-backup-procedure-audit.ts`

### FR-OPS-027 University working day read before every request

Inferred

The system shall answer GET /api/university-day without an account and with Cache-Control: no-store with the working day's start and end times (default 08:00 and 20:00), and every request shall, before any gate, pass a read of the setting stored in universityDay/global when 30 seconds have passed since the last read, waiting at most 2 seconds after which the request proceeds with the last value, and a failed read shall keep the last known value rather than the default.

Implemented · Should · Functional · The system (automatic), Standard user, Public visitor

**ACCEPTANCE CRITERIA**

1. The answer carries only startTime and endTime and no other data.
2. A hanging database does not delay any request by more than 2 seconds.
3. The read happens outside the demo sandbox so a visitor sees the same real working day.

**EVIDENCE**

`src/server/routes/systemRoutes.ts#/api/university-day` `src/server/core/universityDay.ts#universityDayFresh` `src/utils/scheduleTime.ts` `server.ts` `tests/role-scope-audit.ts`

### FR-OPS-028 Data mode, port and client address

Inferred

The system shall accept DATA_MODE with only two values: firestore (the default when absent) and demo, refuse any other value at start-up with a «DATA_MODE not supported» message naming the two accepted values, print a banner in the log in demo mode stating the data is synthetic and not the university's, always listen on port 3000 except in demo mode where a positive PORT is honoured, and trust exactly one proxy in front of it (trust proxy = 1) so the real client address is the rate-limit key.

Implemented · Must · Functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. DATA_MODE=local opens no data: in production the server exits with code 1, and in development every /api request answers 503 with a reference number.
2. PORT=4000 with DATA_MODE=firestore keeps the server on 3000.
3. Two requests from two different addresses behind the hosting platform are counted in two separate buckets.

#### EVIDENCE

`src/db/repository.ts#initDatabase` `server.ts`

### FR-OPS-029 Local data files in demo and development mode

Inferred

The system shall, when not running on Firestore, keep its data in db.json inside the private directory (SCHEDULE_PRIVATE_DIR), copying the packaged snapshot (database/db.json or db.json.gz) there once without overwriting, restoring db.json from db.json.backup when it is missing, writing every save to a temporary file and replacing it atomically after moving the previous copy to db.json.backup, and stopping start-up when the file cannot be read; when the file is absent altogether it shall refuse to start in production, and in development only it shall create the system administrator account (admin) with DEFAULT_ADMIN_PASSWORD, or admin123 when that is unset, with a log warning to change it.

Implemented · Should · Functional · The system (automatic), System administrator

#### ACCEPTANCE CRITERIA

1. A corrupt db.json stops start-up with the message that the local data file could not be read and start-up was stopped to protect the data.
2. In production an admin/admin123 account is never created.
3. Files are written with mode 600 and the directory with mode 700.
4. Demo sandbox requests never write the file.

#### EVIDENCE

`src/db/repository.ts#initDatabase` `src/db/repository.ts#saveDatabase` `src/db/snapshot.ts#materializePackagedSnapshotOnce`

### FR-OPS-030 Private-state protection script

Inferred

npm run protect:data shall move the private state into the private directory outside the release folder: copy the data snapshot (or unpack db.json.gz), the vault key legacy-password-vault.key and the .env file once without overwriting what exists (reporting when it differs), create db.json.backup, an immutable timestamped copy in backups/db-<time>.json, and a protection-manifest.json holding the SHA-256 digests of the database and the copy, then ask for SCHEDULE_PRIVATE_DIR to be set before the next upload.

Implemented · Could · Functional · System administrator

#### ACCEPTANCE CRITERIA

1. Running it twice does not replace the stored db.json and only adds a new timestamped copy.
2. A snapshot missing in both forms stops it with «Required source snapshot is missing».

#### EVIDENCE

`scripts/protect-private-state.mjs` `package.json`

### FR-OPS-031 Shared failure limit for public doors

The system shall limit guessing on public doors (the teacher-card civil-ID lookup, signing a teacher request, signature verification and the student survey) with one counter keyed by «link|address»: 10 failures in 10 minutes by default, tunable with PUBLIC_ATTEMPT_MAX_FAILURES (an integer from 1) and PUBLIC_ATTEMPT_WINDOW_MINUTES, holding at most 5000 keys in memory; an attempt shall be reserved before the first wait so it counts as a failure and only success returns it, so parallel requests cannot exceed the limit; the survey counts every request.

● Implemented · Must · Functional · External service, Faculty member, Student

**ACCEPTANCE CRITERIA**

1. PUBLIC_ATTEMPT_MAX_FAILURES=25 and PUBLIC_ATTEMPT_WINDOW_MINUTES=5 give 25 failures in 300000 ms.
2. A non-numeric value or one below 1 falls back to 10.
3. A teacher opening his card many times with the right number is never blocked.

**EVIDENCE**

`src/server/publicAttemptLimiter.ts#limiterOptionsFromEnv` `src/server/core/shareLinks.ts` `src/server/routes/publicStaffRoutes.ts` `src/server/routes/verifyRoutes.ts` `src/server/routes/surveyRoutes.ts` `tests/doctor-journey-audit.ts`

### FR-OPS-032 Upload package audit

Inferred

npm run audit:deploy shall check the upload package before a source deployment and fail when database/db.json.gz is missing or does not hold 15430 rows in schedules, when its content differs from database/db.json where both exist, when node_modules is inside the package, or when .gcloudignore lacks database/db.json and dist/, and it shall print a JSON report with the sizes, warnings and errors.

● Implemented · Could · Functional · System administrator

**ACCEPTANCE CRITERIA**

1. A compressed snapshot with a different row count ends the audit with code 1.
2. A missing db.json alone is a warning, not an error.

**EVIDENCE**

`scripts/deployment-audit.mjs` `package.json`

### FR-OPS-033 The system vault screen and its in-browser job driver

Inferred

The «Backup» screen shall open for the root administration account only (telling anyone else «this vault is for the root administration account only»); the export button shall resume an unfinished job (queued, running, finalizing or failed) instead of starting another; the browser shall drive the job step by step with 140 ms between steps (180 for import), retry a transport error up to 12 times waiting 350 ms × 2^(n−1) capped at 5 seconds (400 ms base for import), retry a failed step up to 8 times waiting 900 ms × n, and then say that progress is saved and can be resumed; it shall show export progress between 2% and 97% while collecting, 99% while finalizing and 100% when ready, with the record count, stages, size and SHA-256 digest, and the buttons «download the copy» (default name schedule-full-backup.json.gz, with its size in MB), «create a newer copy», «resume from x/y», «start a new export» and «reset the jobs» behind a confirmation; it shall not allow import before «check the copy» on a .gz or .json file, which shows its date, record count, collections ordered by count, source and digest, then uploads the file once with a visible percentage; it shall ask for confirmation in a dialog for import, reset and undo, enable «reset» only when the Arabic phrase for «reset the system» is typed exactly, show the latest restore point for undo and the last 6 points marking consumed ones, and lock every button while a job runs; leaving the screen stops only the browser driver, not what the server saved.

● Implemented · Should · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. An export stopped at 7/40 then the button pressed ← «resume from 7/40» continues the same job.
2. The phrase with a trailing space ← the «reset» button stays disabled.
3. Thirteen consecutive transport errors ← the driver stops with «saved progress was not lost».

#### EVIDENCE

`src/components/AdminUsers.tsx#driveExportJob` `src/components/AdminUsers.tsx#driveImportJob` `src/components/AdminUsers.tsx#exportFullBackup` `src/components/AdminUsers.tsx#importFullBackup` `src/components/AdminUsers.tsx#resetFullSystem` `src/components/AdminUsers.tsx#undoSystemOperation` `src/components/AdminUsers.tsx#uploadBackupJob`

### FR-OPS-034 Print letterhead and shared interface elements

Inferred

Every sheet printed from the interface shall carry a letterhead with the title, the scope, the college emblem (a vector mark in its blue and gold) and the college name with «academic schedule system», or «academic schedule» with «SCHEDULE» when no college name is given, and a footer repeated on every page with the college name or title, the page number and a date and time stamp (day/month/year · time); the console section rail shall scroll the active section into the middle of the view whenever it changes; the small loader shall use role=status with «processing…» by default; and a clickable record card shall open with Enter or Space as with a click.

● Implemented · Could · Functional · System administrator, Schedule committee chair, Department head

#### ACCEPTANCE CRITERIA

1. Printing a report with no college name ← the letterhead reads «academic schedule» and «SCHEDULE».
2. A focused course card and Space ← it is selected as with a click without scrolling the page.

#### EVIDENCE

`src/components/ui.tsx#PrintLetterhead` `src/components/ui.tsx#CollegeEmblem` `src/components/ui.tsx#ConsoleRail` `src/components/ui.tsx#MicroLoader` `src/components/ui.tsx#RecordCard`

### FR-OPS-035 Developer screenshot-capture tools

Inferred

Eight developer tools shall capture visual verification screenshots of specific features on an isolated demo server only, at two widths 390 and 1440 pixels (height 844 for the phone and 900 for the desktop, locale ar-KW), saving PNG files in a dedicated folder under docs/: the activity trail (activity-trail-screens.ts → docs/activity-trail), consistent badges (consistent-badges-screens.ts → docs/consistent-badges), «we have not reached this level yet» and the two sheet tabs in publishing (course-reach-screens.ts → docs/course-reach), tag coverage and sheet membership (course-tags-coverage-screens.ts → docs/course-tags-coverage), the owner notes of 2026-10-28 (owner-1028-screens.ts → docs/owner-1028 with a _log.txt log), the «not reached yet» sheet before sending the teacher card (prepublish-reach-screens.ts), «publish → teacher card → selected teachers» (publish-pick-teachers-screens.ts) and academic ranks and load (ranks-load-screens.ts → docs/ranks-load); each tool shall start its own server (DATA_MODE=demo, NODE_ENV=development) on a random port between 3000 and 3899 unless SCREENS_PORT names a running server (the owner-notes and ranks tools always start one, on 3461 and 3473 by default, and the tags tool only uses a running server, default port 3000), wait for it up to 180 seconds through /api/demo/config, sign in through the demo entry, wait for the data to be ready, switch the role, most of them dismissing the onboarding tour, and kill the server's process group at the end and on error; they shall read PLAYWRIGHT for the library path and SCREENS_ONLY to limit the run to named parts, the tags tool also reading SCREENS_PREFIX (before or after, default after), SCREENS_OUT, SCREENS_WIDTHS and SCREENS_DEBUG; they write only to the demo sandbox's data (opening the training phase, approving a sheet rule, adding seats…) and never touch a real database.

● Implemented · Could · Functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. Running the trail tool without SCREENS_PORT ← a demo server starts on a port between 3000 and 3899 and is stopped at the end, with two images per shot (390 and 1440).
2. SCREENS_ONLY=triage for the tags tool ← only the planning cards are captured.
3. A server not answering within 180 seconds ← «server did not start» and exit code 1.

#### EVIDENCE

`scripts/activity-trail-screens.ts` `scripts/consistent-badges-screens.ts` `scripts/course-reach-screens.ts` `scripts/course-tags-coverage-screens.ts` `scripts/owner-1028-screens.ts` `scripts/prepublish-reach-screens.ts` `scripts/publish-pick-teachers-screens.ts` `scripts/ranks-load-screens.ts`

### FR-OPS-036 Server-split tooling

The scripts/split-server tools shall split the monolithic server.ts into modules under src/server/core, routes and pages as an unchanged move: analyze.mjs reads the file with the TypeScript checker into units (each top-level statement, consecutive overloads of one function being one unit) with their names, references (value or type, write, load-time read) and route paths; mapping.mjs sets each unit's destination (routes path prefix → module, place, keep, regions, stmts); plan.mjs places routes by path and declarations where named, with their users or in their region, keeps what touches app in server.ts, moves a let variable written outside its unit to core/state.ts, splits a registration function when a route overlaps a route in another module, and records problems (no rule for a path, a missing name, use of a name left in server.ts); routeOverlap.mjs answers whether one request can match two layers by testing sample URLs against Express's own two expressions; generate.mjs copies each statement's text byte for byte with its comments, changing only an added export and x → state.x, and stamps every generated file with the move mark; rewriteTests.mjs turns reads of the server.ts text in tests and scripts into readServerSource() and prints what needs review. split.mjs shall be the runner: --plan (default) reports sizes, registration functions, state variables and problems, exiting with 1 if any, and --write writes unless a problem exists, with --source, --phase (pages, helpers or routes, default routes), --out, --verbose and --all-patches; it shall refuse an already split file, clear the module folders only if every file in them carries the move mark, and apply the manual patches from patches/<phase> with git apply, stopping if one fails. The router parity test judges that the split changed neither the route table, the order of overlapping layers nor the page outputs.

● Implemented · Should · Functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. Running split.mjs --write on the current split server.ts ← «server.ts is already split» and exit code 1.
2. A file in src/server/routes without the move mark ← it is not deleted and the run stops.
3. Two routes GET /api/x/:id and GET /api/x/list in two modules ← treated as overlapping and their order kept.

#### EVIDENCE

`scripts/split-server/split.mjs` `scripts/split-server/analyze.mjs#analyzeServer` `scripts/split-server/plan.mjs#planSplit` `scripts/split-server/mapping.mjs` `scripts/split-server/generate.mjs#generate` `scripts/split-server/rewriteTests.mjs#rewriteTests` `scripts/split-server/routeOverlap.mjs#layersOverlap` `docs/SERVER_MAP.md` `tests/server-route-parity-audit.ts`

### FR-OPS-037 Rendering and auditing the brand assets and icons

Inferred

scripts/render-brand.mjs shall draw every standalone brand asset from one source: the same five bars as src/components/BrandMark.tsx (multiplied by 8 on a 512 grid) and the colours --brand-jade, --brand-brass and --brand-ground read from src/styles/01-foundation.css, stopping with an explicit message if one is missing; it writes public/schedule-icon.svg (edge to edge with a ring), public/schedule-maskable.svg (square ground without a ring), scripts/social-card.html (the 1200×630 share card from which public/schedule-social-card-v4.png is drawn by hand with a browser because the text is Arabic) and PNG icons at 192, 512 and 512 maskable; with --check it shall verify without writing: text assets byte for byte, images by pixel at the centre of each bar and two ground points with a tolerance of 6 levels per channel, and that the five places of the product name in the stylesheets use --brand-word-track, --brand-word-weight and --brand-word-family rather than hand-written values; it exits with 1 and suggests regenerating on any difference, and the check runs in every production build (audit:brand). scripts/render-icons.mjs shall remain an older tool that draws only the three PNG images with the same bars and colours fixed in it.

● Implemented · Should · Functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. Editing public/schedule-icon.svg by hand ← --check fails saying it differs from what the script produces.
2. Re-drawing a PNG on another system with different bytes but matching colours ← --check passes.
3. A name site with hand-written letter-spacing ← a failure naming the file and selector.

#### EVIDENCE

`scripts/render-brand.mjs` `scripts/render-icons.mjs` `package.json`

### NFR-OPS-038 The two guide audit gates in the build

Every production build shall run two guide gates (the interfaces and analytics module describes the guide itself): scripts/guide-audit.mjs (audit:guide) reads the guide's feature, action and journey registry from the source tree and fails if a feature lacks an id, title, summary, group, keywords or version number, has a risk level outside read/prepare/write/sensitive, a target or step points to a missing element, data-guide-ignore carries no reason, an action has an undefined feature or permission, no verification or no confirmation policy, or is write/sensitive without mandatory confirmation, a journey lacks success and failure conditions, steps or a timeout, a view in App.tsx lacks a page.<view> definition, a feature has no answer in the knowledge bank, a new button lacks a feature id, target or documented ignore and is not in the baseline scripts/guide-control-baseline.json (rewritten with GUIDE_UPDATE_CONTROL_BASELINE=1), an impactful button (delete, publish, approve, import, export, move…) is unregistered, a core mechanism is missing, the guide depends on a paid external runtime service, or the build does not call the three gates; scripts/guide-behavior-tests.mjs (test:guide) compiles the guide engine into a temporary folder and tests its behaviour: mastery, friction and hesitation, lowering only the mastery of the feature whose version changed, hiding administration features from a standard user, undo in reverse order, an attempt never counting as success, and stable identity of discovered controls, then creates a probe button file, checks that the audit fails on it and deletes it; both exit with 1 listing the failures.

● Implemented · Should · Non-functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. A new unlabelled button ← the audit fails reporting a new interactive control without guide metadata.
2. A write action with requiresConfirmation=false ← the audit fails.
3. All tests passing ← «guide acceptance tests passed: n behavioural tests».

#### EVIDENCE

`scripts/guide-audit.mjs` `scripts/guide-behavior-tests.mjs` `package.json` `scripts/guide-behavior-tests.mjs`

### FR-OPS-039 Generators of test fixtures and example images

scripts/make-scan-pdf.mjs <output.pdf> <page1.jpg>… shall build a scanned PDF 1.4 without a library, one page per JPEG image at a width of 842 points and a height proportional to the image (DCTDecode encoding), stopping with «not a JPEG» for anything else, so the real PDF upload path can be tested with real report photos; scripts/make-graduation-sheet-example.mjs shall produce public/graduation-sheet-example.jpg (945×640, quality 88) shown as the example in the public graduate survey, in the Plex Arabic font, with declared fictional data: «test student», an invented checksum-valid civil ID, the programme «special education — sample», 134 required and 114 passed units, a watermark «illustrative sample — fictional data» and a notice line asking to upload the official page; it is never replaced by a screenshot of a real student portal.

● Implemented · Could · Functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. The example image ← a valid JPEG without EXIF data whose generator contains the fictional student and the fictional-data notice.
2. A PDF from two photos ← two pages read by the report upload path as a user would upload them.

#### EVIDENCE

`scripts/make-scan-pdf.mjs` `scripts/make-graduation-sheet-example.mjs` `tests/student-journey-audit.ts` `tests/section-plan-audit.ts`

### FR-OPS-040 System vault: abandoning a stalled import, and a typed phrase for every replacement

DELETE /api/system-backup/import-jobs/:id with header x-schedule-confirm=FULL-SYSTEM-IMPORT-ABANDON shall let the root account abandon a running or failed import: when replacement had begun the whole system is restored from the safety point the job saved before its first write and that point is marked consumed, otherwise it is cancelled without change; the job is then marked «abandoned» and its staged upload deleted so a new file can be imported, and no step advances an abandoned job. A successful full undo shall mark any open import abandoned. Full import and full undo shall require an Arabic phrase typed exactly (the import phrase in an encoded x-schedule-phrase header, the undo phrase in the body), as reset already requires its phrase. The import confirmation dialog shall state what actually happens: progress is kept when a step stops and can be resumed or abandoned, which returns the system to the safety point. The browser's import driver shall stop when the screen is left, as the export driver does. Reset and full undo now use the same stepped job shape (FR-OPS-041), so no single request can exceed the request deadline.

● Implemented · Must · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. An import stopped in the apply phase then DELETE ← the replaced collections return from the safety point, rolledBack=true, status abandoned, and POST import-jobs with a new file is accepted.
2. POST /api/system-backup/undo without the phrase ← 409; POST import-jobs without x-schedule-phrase ← 409.

#### EVIDENCE

`src/server/routes/adminRoutes.ts` `src/db/repository.ts` `src/utils/vaultPhrases.ts` `src/components/AdminUsers.tsx` `tests/admin-station-audit.ts`

### FR-OPS-041 System vault: reset and full undo as resumable stepped jobs

POST /api/system-backup/reset and /api/system-backup/undo shall, for the root account only, start a persisted job (answering 202) instead of one long request, after checking the typed phrase (the reset phrase or the full-undo phrase) and the x-schedule-confirm header; demo mode refuses. The job first saves a full safety point (a safety export job) and then advances through POST /api/system-backup/op-jobs/:id/step, each call handling one collection (reset deletes the working collections and keeps the root account and its permissions; undo restores the collections from the restore point), with progress readable from GET /api/system-backup/op-jobs/:id and /api/system-backup/status (latestOperation), then a completion step that resets counters and refreshes caches. No operation (import, reset or undo) may start over an open job (running or stalled). A transient failure is retried up to eight times, after which the job stalls and stays resumable from the same collection. DELETE /api/system-backup/op-jobs/:id with header x-schedule-confirm=FULL-SYSTEM-OP-ABANDON abandons it: before the first write with no change, afterwards the system is restored from its safety point, which is marked consumed. Undo remains undo and redo: its safety point (labelled as the redo point) is the next undo target, success consumes its target and abandons any pending import, and start, completion and abandonment are written to the audit log. In local mode the single step performs the safety point and the replacement together and restores the previous state by itself on failure. Abandoning after writing began starts a stepped «rollback» phase inside the same job (one collection per step with persisted progress, using the undo machinery, then the safety point is consumed and the job marked abandoned), so abandoning a reset is no longer one unbounded request; a failed safety export sets the job to «failed» so clients stop polling. Concurrency details are in FR-OPS-043..047.

● Implemented · Must · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. POST reset without the phrase ← 409; with it ← 202 and status running in the safety phase, and each step advances one collection until ready at 100%.
2. A stalled job then reopening the vault ← «resume» appears from the same point; DELETE after writing began ← rolledBack=true and the system as before.
3. POST reset, import-jobs or undo over a running or stalled job ← refused.
4. DELETE after writing began ← 200 with rollingBack=true and phase=rollback; then step until status=abandoned; a failed safety export ← status=failed with the reason.

#### EVIDENCE

`src/server/vaultJobPlanner.ts` `src/server/routes/adminRoutes.ts` `src/db/repository.ts` `server.ts` `tests/vault-jobs-audit.ts`

### FR-OPS-042 System vault: reset and undo screens shaped like import

The «reset» and «full undo» cards shall show a progress bar with percentage and phase (safety point, then wipe or restore, then verification), resume a running or stalled job with a «resume» button after a page reload, offer «abandon» behind its own confirmation that returns the system to the safety point, disable the other operations while a job is open, and stop the browser driver when the screen is left (progress stays on the server). The confirmation dialog says what actually happens: stages whose progress is kept and which can be resumed or abandoned, returning to the safety point. When a step answers busy (another step is running) the card shows «a step is running…» and keeps polling; an abandon refused because a step is running shows its reason so it can be retried; the «return to the safety point» phase is driven by the same driver.

● Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Loading the page with a stalled reset on the server ← «resume reset» and «abandon reset» show and the undo button is disabled.

**EVIDENCE**

`src/components/AdminUsers.tsx` `tests/vault-jobs-audit.ts`

### FR-OPS-043 System vault: one step at a time per job (lease and version)

Every vault job document (import, reset or undo) shall carry a version incremented on every write and a lease (leaseOwner/leaseUntil, about 60 seconds) that a step takes inside a transaction that re-reads the document, and every write to the document within the step shall be conditional on still holding the lease and version. A step that cannot take the lease (another step is running: double-click, second tab, retry after a timeout) does nothing and answers 202 with the job summary and busy: true, so the UI keeps polling and shows «a step is running…». Abandon (DELETE) takes the same lease and is refused with 409 and a clear message while a live lease belongs to a step; a losing write is rejected so «running» is never written over «abandoned». One safety export never yields two safety points. An expired lease (60 seconds without a write) lets a new step take over.

● Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Two concurrent steps on the same job ← one runs, the other answers 202 with busy=true and writes nothing.
2. DELETE during a running step ← 409 «a step of this operation is running now…», then succeeds after it ends.

**EVIDENCE**

`src/server/vaultJobPlanner.ts` `src/db/repository.ts` `src/server/routes/adminRoutes.ts` `src/components/AdminUsers.tsx` `tests/vault-jobs-audit.ts`

### FR-OPS-044 System vault: one lock, one open job

Starting any vault job (import, reset or undo) shall take one lock in a document excluded from export, reset and restore (_systemVaultLock/current) inside a transaction that re-reads the lock and its holding job, so two concurrent starts cannot both pass; the second start is refused with 409 and an Arabic message. The lock is released at every terminal state (ready or abandoned) and when a start fails; an orphan lock of a finished job is reclaimed. Step and abandon verify that the job holds the lock so an older job stays undrivable (a missing lock for a job that predates this release is adopted). These conflicts answer 409 with their message rather than a generic 500.

● Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Two concurrent starts of reset and import ← one passes, the other 409.
2. step on a job that does not hold the lock ← 409 «not the open vault operation».

**EVIDENCE**

`src/server/vaultJobPlanner.ts` `src/db/repository.ts` `src/server/routes/adminRoutes.ts` `tests/vault-jobs-audit.ts`

### FR-OPS-045 System vault: _meta out of scope, counters set only at completion

The backup shall not export, and reset shall not delete, and undo, import or return-to-safety-point shall not replace, the _meta collection (the id counters, the identityGeneration and the schedules beacon), like the other exclusions; older backups containing _meta stay readable and its paths are ignored on apply. Counters are set at completion only: reset with the existing helper, the others by raising each counter to the highest id in the restored data and never lowering it. No other writer can reserve an id from a missing or zeroed counter mid-job, and the identity generation never goes back to a value another instance saw.

● Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Reset ← _meta is not in the wipe queue and counters are set at completion.
2. Importing a backup with ids above the live counter ← the counter is raised to the highest id.

**EVIDENCE**

`src/db/repository.ts` `src/server/vaultJobPlanner.ts` `tests/vault-jobs-audit.ts`

### FR-OPS-046 System vault: stepped return to the safety point after abandoning a reset or undo

Abandoning a reset or undo that began writing (on Firestore) shall start a rollback phase in the same job instead of one unbounded replacement: a queue from the union of current collections and the safety point's collections, applied one collection per step with persisted, resumable progress and the same undo machinery (applyImportedCollection), then a completion that raises counters, consumes the safety point, refreshes caches and marks the job abandoned. In local mode the single small replacement remains. Abandoning an import is still one replacement (deferred: it needs the same phase in the import job).

● Implemented · Must · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Abandoning a reset in the apply phase ← phase=rollback and progress until abandoned with the collections restored.

**EVIDENCE**

`src/server/vaultJobPlanner.ts` `src/db/repository.ts` `src/components/AdminUsers.tsx` `tests/vault-jobs-audit.ts`

### FR-OPS-047 System vault: restore points that are a running job's target are never evicted

Keeping eight restore points shall never evict the running undo target or the newly created safety point (it used to evict everything beyond the newest eight, which could delete the target when seven newer points were consumed), and consumed points shall be evicted before unconsumed ones (oldest first).

● Implemented · Should · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Nine points, the newest seven consumed and the undo target the eighth ← the target is not deleted.

**EVIDENCE**

`src/server/vaultJobPlanner.ts` `src/db/repository.ts` `tests/vault-jobs-audit.ts`

### NFR-OPS-039 Maintenance gate: ordinary writes stop while a vault job is open

Any POST, PUT, PATCH or DELETE from a non-root account shall be refused with 503 and the message «System under maintenance: a backup operation is in progress» (and a Retry-After header) while a vault job (import, reset or undo) has started replacing data or rolling back to its safety point (even when it failed, until the root account finishes or abandons it), or is running in its set-up and safety-point phase and moved within the last ten minutes — a job that failed or was left idle before touching any data does not keep non-root accounts from writing — while reads continue; the root account, /api/system-backup/* and /api/auth/* routes and telemetry pass. The flag is cached in the instance for at most 5 seconds (one read of the lock document every five seconds per instance at most, not per request), a failed read never closes the system, and it is a no-op in demo and local-file modes. It is registered in server.ts with the other global write guards, after the demo guard.

● Implemented · Must · Non-functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Open reset ← POST by a section manager ← 503 and the message; GET passes; POST by the root account passes.
2. An import that failed in its safety-point phase before touching data ← a department head's POST passes; a reset that failed after replacement began ← 503 until abandoned.

**EVIDENCE**

`server.ts` `src/server/vaultJobPlanner.ts` `src/db/repository.ts` `tests/vault-jobs-audit.ts`

### FR-OPS-048 System health: a root-only station with five cards

The «System health» station in the system console (/System/Health) shall show the root account only five traffic-light cards (green, amber, red, and grey for an unreadable probe): age of the newest successful backup (ready export or restore point; green up to 7 days, amber up to 14, red beyond or none) with a «Back up now» button that opens the vault station and adds no write route; vault state (open job amber, failed after touching data red, stale lock amber); the maintenance gate via the very function the gate reads (closed is red); readability of the shared identity-generation document and seconds since this instance last checked it; and the current term (frozen or open) with the age of the last radar run by the radar's own stale flag or 72 hours. An overall banner («All healthy» / «Needs attention») follows the worst card; the page refreshes every 30 seconds while visible and has a manual refresh button. Thresholds and card states live in src/utils/systemHealth.ts.

● Implemented · Should · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. A backup 8 days old is amber; 15 days or none is red.
2. A closed gate turns its card red and the banner reads «Needs attention».
3. A non-root account gets 403 from the route and no station in the rail.

**EVIDENCE**

`src/utils/systemHealth.ts` `src/server/systemHealth.ts` `src/components/SystemHealth.tsx` `src/server/routes/adminRoutes.ts` `src/components/AdminUsers.tsx` `src/App.tsx` `tests/system-health-audit.ts`

### FR-OPS-049 Morning glance and «Check now» for system health

The root account shall see one line at the top of the home page, the morning glance: «All healthy», or the names of the cards needing attention, worst first (red, then amber, then unreadable), with a button that opens «System health». The glance reads the very same route (GET /api/system-health) with no new route and no write, once on open and then every minute while the tab is visible; a failed read shows nothing and never affects the home page. The «System health» station has a visibly labelled «Check now» button that asks for fresh=1 and so bypasses the server's 8-second cache, though the server bypasses it at most once every 3 seconds; the periodic refresh reads from the cache. attentionCards and canBypassHealthCache live in src/utils/systemHealth.ts.

● Implemented · Could · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. All cards healthy: the glance reads «All healthy» with no list.
2. A closed gate and an 8-day-old backup: the glance names «Maintenance gate» then «Backup».
3. Two presses of «Check now» within 3 seconds cause one live read.

**EVIDENCE**

`src/utils/systemHealth.ts` `src/server/systemHealth.ts` `src/components/SystemHealth.tsx` `src/components/HealthGlance.tsx` `src/components/Dashboard.tsx` `tests/system-health-audit.ts`

### FR-OPS-059 Acceptance round: a ten-minute human checklist and an automated demo rehearsal

docs/ACCEPTANCE_ROUND.md shall hold a short human round run on the live site with real devices, grouped by role (student, code recovery, teacher, department, admin); each step has an id, what to do, what should be seen, what to do if it does not happen and whom to tell, with a section for what to do after a failed step and a result table to fill in. The command npm run rehearsal:acceptance (scripts/acceptance-rehearsal.ts) shall run the same steps automatically: it starts its own private local demo server (DATA_MODE=demo) on a free port chosen by the system, refuses to run inside a cloud production environment, verifies the server is an isolated demo before it begins, connects to no other address, sends no real message, and shuts the server down at the end. It drives Chromium at 390x844 (and 1280x900 for the admin screens) and records every step as pass, note, fail or «needs real data or a real device»; whatever the demo cannot prove (real push delivery, iPhone and Safari, issuing a recovery code to a real student across the two stores, a real civil number) is recorded as skipped and never as a pass. It writes a self-contained RTL report (report.html with embedded screenshots, a summary ring, a card per step, and the console, page and rejected-request errors seen) and a JSON summary into a git-ignored folder, and exits non-zero if a step the demo can prove fails. The model, summary, report and the consistency of step ids between the document and the script live in scripts/lib/acceptanceRehearsal.ts and are checked by tests/acceptance-rehearsal-audit.ts with no server and no browser.

● Implemented · Could · Functional · Root administrator, System administrator

#### ACCEPTANCE CRITERIA

1. Every id in the document exists in the script and vice versa, and a manual step is recorded as skipped, never run.
2. A failed demo-provable step gives a non-zero exit code; a note or a skip does not.
3. The report has no external resources, its error texts are escaped and its digits are Latin.

#### EVIDENCE

`scripts/acceptance-rehearsal.ts` `scripts/lib/acceptanceRehearsal.ts` `docs/ACCEPTANCE_ROUND.md` `tests/acceptance-rehearsal-audit.ts`

### NFR-OPS-040 System health: read-only, no personal data, a failed probe never fails the page

GET /api/system-health shall be root-account only (requireAuth then requireRootAdmin) and read-only; its payload shall hold status codes, counts and timestamps only, with no names, person identifiers or free-text errors; each probe shall run in its own try/catch so a failing probe renders a grey «unreadable» card without failing the response; the response shall be cached for at most 10 seconds under a key that carries the demo-session world; demo mode shall return safe values labelled as demo without touching the real vault or shared identity document. No probe reads a full collection.

● Implemented · Should · Non-functional · Root administrator

#### ACCEPTANCE CRITERIA

1. A throwing vault probe leaves its card grey, the rest intact, and the response 200.
2. The payload carries only the approved keys.

#### EVIDENCE

`src/server/systemHealth.ts` `src/utils/systemHealth.ts` `src/server/routes/adminRoutes.ts` `tests/system-health-audit.ts`

### FR-OPS-050 New-features health: six tiles inside system health

The system-health panel shall show, to the root account only, one compact «new-features health» card with six small tiles of aggregate counts for the current term: phone push (profiles enabled, messages sent per kind, devices removed as expired, whether send keys exist — without keys an inert «not enabled: no send keys» shows), advisor share (created, valid now, opened), department recovery codes (issued, used, expired or voided), active confirmed rooms without capacity (count and percent), teacher cards (opened, sent, settled across everything the account sees) and Masari (profiles, and profiles with wishes this term). Each is drawn as a ring, bars, one big number and a short word; the attention tint appears only when needed (a reminder that should have gone out today did not, a recovery code expires within six hours unused, more than 30% of rooms lack capacity). Zeros are dim inert labels, never disabled buttons, and no data shows «no data yet». A «refresh» control has a 44px target and an audible live status; a failing source shows only its own tile as unreadable with a retry. The rooms-without-capacity trend is not shown because no history is stored for it.

● Implemented · Should · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Without send keys the inert not-enabled line shows, with no disabled button.
2. A failing source leaves only its own tile unreadable.

**EVIDENCE**

`src/server/featureHealth.ts` `src/utils/featureHealth.ts` `src/utils/featureHealthView.ts` `src/components/FeatureHealth.tsx` `src/server/routes/adminRoutes.ts` `tests/feature-health-audit.ts`

### FR-OPS-051 Identity-free aggregate counters for feature health

The public advisor page shall increment a per-day aggregate counter (opens) on the link owner's profile for each valid open, link creation shall increment a similar counter (made), and removing a device whose subscription expired (410/404) shall increment a per-day removed-devices counter; all are numbers keyed by day only (last 120 days) with no visitor, address, header or link, are erased with the profile as today, are never shown by the advisor page itself, a failed write never breaks the page, and a refused open is not counted.

● Implemented · Should · Functional · Root administrator

**ACCEPTANCE CRITERIA**

1. Three valid opens make the day counter 3 and store nothing but numbers.
2. Deleting the profile erases the counters with it.

**EVIDENCE**

`src/server/studentExtras.ts` `src/utils/featureHealth.ts` `src/types.ts` `tests/feature-health-audit.ts`

### NFR-OPS-052 Feature health: root only, counts only, lean cached read

GET /api/system-health/features shall use the system-health guard (requireAuth then requireRootAdmin) and be read-only; its payload shall hold counts and booleans only, with no name, civil number, fingerprint, token, subscription, message text or error text; each tile shall run in its own try/catch; student profiles shall be read once per request; the response shall be cached for one minute under a key carrying the demo-session world, with a manual bypass no faster than every 3 seconds; and it shall work on demo data with zeros rather than errors.

● Implemented · Should · Non-functional · Root administrator

**ACCEPTANCE CRITERIA**

1. 401 when signed out and 403 for any other account.
2. No identity key or value anywhere in the JSON.

**EVIDENCE**

`src/server/featureHealth.ts` `src/utils/featureHealth.ts` `src/utils/featureHealthView.ts` `src/components/FeatureHealth.tsx` `src/server/routes/adminRoutes.ts` `tests/feature-health-audit.ts`

### 3.17.6 Edge cases

#### ⚠ Database unreachable at boot

**Scenario** A new revision starts on Cloud Run and Firestore initialisation fails (wrong target or outage).

**Behaviour** The process exits with code 1 so the previous revision keeps serving; the system never falls back to a packaged snapshot. In development the shell runs and /api answers 503 with a reference.

#### ⚠ A release while people are using the system

**Scenario** The platform switches servers and its front end returns an English error page or the request drops.

**Behaviour** The service worker serves the 'we are updating' page and reopens the link when /api/health answers; inside the app a calm banner replaces an error banner, and no 5xx is stored in any cache.

#### ⚠ A stale tab requests a removed chunk

**Scenario** A tab left open from the previous release requests a hashed file that no longer exists.

**Behaviour** The server answers a plain uncached 404 instead of an HTML shell with status 200, so the boot guard recovers the page by clearing caches and reloading.

#### ⚠ A whole campus behind one address

**Scenario** Hundreds of students and teachers open their valid links from one IP address in the same minute.

**Behaviour** Failures are counted, not successes, each success earns credit, and teacher-card limits are per link rather than per address; so no valid-link holder is blocked, while a guesser stops at the hard ceiling.

#### ⚠ A size-bomb backup

**Scenario** A compromised account uploads a small gzip file that expands to several gigabytes.

**Behaviour** Size is measured during expansion and stops at 80 MB, refusing the file before it fills memory or blocks the event loop; the path is in any case limited to the root account.

#### ⚠ Demo session expiry or server restart

**Scenario** The visitor's sandbox expires after an hour or a new release wipes server memory.

**Behaviour** He is told the demo session ended and its data was erased and is asked to start a new trial, not 'sign in' to someone with no account.

### 3.17.7 Standing owner decisions

- The official domain mapping is never deleted, recreated or moved; certificate issuance interrupts the service.
- A normal release changes the service image only; no second service or region without the owner's decision.
- Printed reports keep their design; operational work never touches it and faults are fixed in values and data.

↑ Contents

3.18 · NFR

# Non-functional requirements

Performance, security, privacy, accessibility, Arabic-first design and reliability, with measured figures.

| 44 | 100% | 0 | 7 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Screens · 5. Requirements · 6. Edge cases · 7. Standing owner decisions

↑ Contents

## 3.18.1 Overview

This module gathers the qualities that govern the whole system rather than one screen: response under load, protection of accounts, links and data, the privacy policy, accessibility for every user, Arabic, text direction and numerals, phone layout and printing, write and recovery reliability, and maintainability. Each requirement is tied to an existing measurement, test or audit that fails the build if it regresses.

The system (automatic) · Root administrator · System administrator · Standard user · Faculty member · Student · Public visitor · External service

## 3.18.2 User journeys

**Student** — **A student opens the journey page on registration day from the campus network**

1. The student opens his link on a phone over the campus network, which the server sees as one address.
2. Only failures are counted against the address, so he is not blocked while entering his correct code.
3. His profile is created and his civil number stored sealed with encryption that logs cannot reveal.
4. The page renders in a self-hosted Arabic typeface, right to left, with no horizontal scroll.
5. Each of the eleven journey steps completes in under a third of a second on the server.

**System administrator** — **Auditing an operation after it happened**

1. The system administrator opens the audit log to learn who signed in and who tried and was refused.
2. He finds a line for every successful write: user, method, path, entity and status, without the request content.
3. He finds refused attempts with status 403 or 409 labelled 'outside permission' or 'conflict'.
4. He returns to the schedule version taken before the change and restores it if nobody else changed it afterwards.

## 3.18.3 Diagrams

### Request defence layers

What an anonymous or signed-in request passes before reaching its handler; the server alone is the authority on permission.

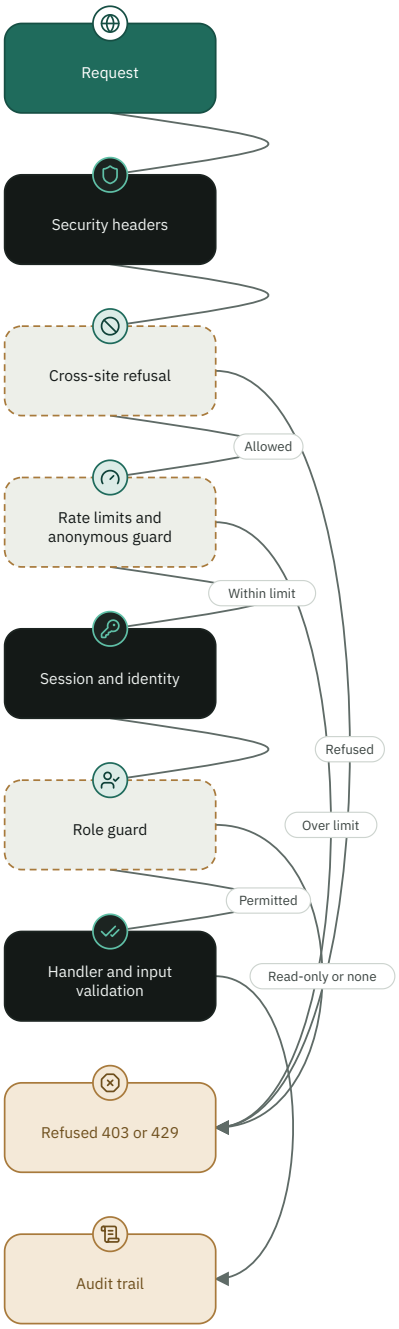


## 3.18.4 Screens

**Privacy policy**

A public page that follows the device's light or dark setting.`public/privacy-policy.html`

## 3.18.5 Requirements

### NFR-NFR-001 Student journey throughput

The system shall serve the student's first-visit journey (11 requests) at 15 students per second, i.e. 54 thousand per hour, without failure, with every step completing on the server in under a third of a second.

Implemented · Must · Non-functional · Student, The system (automatic)

**RATIONALE**

> A wishes or registration day brings twenty thousand students within hours.

**ACCEPTANCE CRITERIA**

1. Measured on 2026-10-24 on a production-built demo copy: 900 of 900 journeys succeeded from distinct addresses, the slowest step being sign-in at 148 ms and home at 107 ms.
2. The measurement shared processors with the emulator and the load generator, and the Firestore emulator is not the real service.

**EVIDENCE**

`scripts/loadtest/student-door.mjs` `src/server/studentDoorRoutes.ts` `docs/LOAD_TEST.md` `tests/student-door-shared-network-audit.ts`

### NFR-NFR-002 Limit fairness on a shared network

Protection limits shall not block students from one address (a campus network or a mobile carrier behind NAT): writes 60 per minute per student rather than per address with a 1200 ceiling per address, identity questions 24000 per 10 minutes, and code errors 600 per 10 minutes with success credit and an absolute ceiling of 3000.

Implemented · Must · Non-functional · Student, The system (automatic)

**RATIONALE**

> Before the fix only 3.3% (20 of 600) of students behind one address completed their journey.

**ACCEPTANCE CRITERIA**

1. 600 students at 5 per second from one address: 600 of 600 after the fix.
2. A single student repeating writes stops at sixty per minute with 429.
3. The shrunken scenario (ceiling 60 instead of 600) blocked 199 valid-code holders on the old code and none on the new.

**EVIDENCE**

`src/server/studentDoorRoutes.ts` `src/server/publicAttemptLimiter.ts` `docs/LOAD_TEST.md` `tests/student-door-shared-network-audit.ts` `tests/student-door-audit.ts`

### NFR-NFR-003 Opening the teacher card and department screen

The teacher card and the department screen shall be read with parallel Firestore reads (the link and its request together, one term context per term, college and department) rather than a chain of sequential trips, with responses identical before and after the change.

Implemented · Should · Non-functional · Faculty member, The system (automatic)

**ACCEPTANCE CRITERIA**

1. On a real database with 300 teachers and reads near 170 ms: opening the card from 1.9 s to 1.2 s, and the department screen (about 108 requests) from 3.5–5.4 s to 1.5 s.
2. Processor cost in the full run (one thousand teachers) was 381 CPU-seconds, under 0.4 s per teacher.

**EVIDENCE**

`src/server/core/instructorRequests.ts` `scripts/loadtest/teacher-card.mjs` `docs/LOAD_TEST.md` `tests/teacher-card-flow-audit.ts`

### NFR-NFR-004 Guide performance budget

Understanding a guide question shall take no more than 8 ms, building its index no more than 300 ms, and the knowledge bank shall not exceed 70000 bytes, with the guide kept in a lazily loaded bundle; the production build fails if the bank size is exceeded, the guide leaves the lazy bundle, or a timing exceeds four times its target, and warns without failing when a timing exceeds only its target.

Implemented · Should · Non-functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. The median over 5 rounds of 200 questions after 200 warm-ups is under 8 ms per question; exceeding 32 ms fails the build.
2. Removing the lazy import of GuideAssistant from App.tsx fails the check.

#### EVIDENCE

`scripts/guide-performance-audit.mjs` `src/guide/bank.ts` `package.json` `scripts/guide-performance-audit.mjs`

### NFR-NFR-005 Database read economy

A query on a large Firestore collection (Enterprise edition, which does not index automatically) shall be added only when its leading field heads an index in firestore.indexes.json, and the wishes counter shall read one department's student files, not a whole college's; the index audit fails when the condition is not met.

Implemented · Must · Non-functional · The system (automatic)

#### RATIONALE

> Before indexes the fifty heaviest queries read about 590 million read units in a week, nearly all full scans; the wishes counter read about 300 thousand reads for a college with ten thousand files.

#### ACCEPTANCE CRITERIA

1. A new query on a counted large collection (such as schedules at about 16,000 rows) without an index fails tests/firestore-index-audit.ts.
2. College reads per counter window became the number of its files (about ten thousand), roughly 30 times fewer.

#### EVIDENCE

`firestore.indexes.json` `docs/LOAD_TEST.md` `docs/DELIVERY_OPERATIONS.md` `tests/firestore-index-audit.ts`

### NFR-NFR-006 Caching layers and delivery weight

Inferred

The server shall hold session identity for 120 seconds (dropped at once on sign-out or account edit), reference data for 90 seconds and schedule rows for 300 seconds with invalidation on any write; text responses over 1024 bytes shall be compressed, hashed files cached for a year, the react and icon bundles and deferred CSS split from the main bundle, and two Arabic font weights preloaded.

Implemented · Should · Non-functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. Editing an account or its scope drops the cached entry so a revoked account cannot keep working from memory.
2. A static request (stylesheet or font) does no identity lookup; only /api is authenticated.

#### EVIDENCE

`src/server/core/auth.ts` `src/db/referenceCache.ts` `server.ts` `vite.config.ts` `index.html` `tests/demo-complete-audit.ts`

### NFR-NFR-007 Permission enforced on the server

The server shall enforce permission at a single point at the entrance of all of /api: any non-read request from a read-only role (dean, vice dean, dean of registration) is refused with 403 whatever buttons the interface hides, and only approval-cycle paths are open to a reader according to the role; hiding an icon in the interface is not permission.

Implemented · Must · Non-functional · The system (automatic), Standard user

#### RATIONALE

> Checking in each route separately lets one omission open a write door nobody knows about.

#### ACCEPTANCE CRITERIA

1. Every combination of method, path and role is tested on the verdict, and the text of server.ts proves the guard is mounted in place.
2. A standard user without the required screen is refused on the server, not only in the interface.

#### EVIDENCE

`server.ts` `src/server/roleGuard.ts` `src/server/core/auth.ts` `docs/SECURITY_NOTES.md` `tests/role-guard-audit.ts` `tests/forbidden-fetch-guard-audit.ts`

### NFR-NFR-008 Password protection

Passwords shall be stored hashed with scrypt and a per-password salt (64 derived bytes) and compared in constant time; sign-in with a legacy non-scrypt hash shall be blocked until reset; a new password shall be 8 to 128 characters; a temporary password shall be 14 characters valid for 24 hours for a single sign-in with no decryptable copy; and a first password (valid 7 days) shall force a change before any path outside /auth.

Implemented · Must · Non-functional · The system (automatic), Standard user, System administrator

#### ACCEPTANCE CRITERIA

1. A 7-character password is refused with an 'at least 8' message and a 129-character one as too long.
2. An account that must change its password reaches nothing but /auth until it does.
3. For the legacy screen the system keeps an AES-256-GCM decryptable copy of the password, protected by a separate key and permission for screen 11, and neither sign-in nor session endpoints return it.

#### EVIDENCE

`src/db/repository.ts` `src/server/accountPassword.ts` `src/server/routes/authRoutes.ts` `src/server/routes/usersRoutes.ts` `docs/SECURITY_NOTES.md` `tests/password-reset-audit.ts` `tests/first-login-password-audit.tsx`

### NFR-NFR-009 Sessions and cookies

Inferred

The session id shall be 32 random bytes (prefix sess_ or demo_), its cookie HttpOnly, SameSite=Lax and Secure in production; a session shall end after 15 idle minutes on the server (renewed at most every 120 seconds), all sessions of an account shall be ended when it is handed over or edited, and abandoned session documents shall be swept by a Firestore TTL policy.

Implemented · Must · Non-functional · The system (automatic), Standard user

#### ACCEPTANCE CRITERIA

1. In production the cookie carries Secure, HttpOnly and SameSite=Lax; outside production without Secure.
2. An id not matching ^(sess|demo)_[0-9a-f]{64}$ is never looked up in Firestore.

#### EVIDENCE

`src/server/core/auth.ts` `src/server/routes/authRoutes.ts` `src/db/repository.ts` `src/server/anonymousGuard.ts` `tests/anonymous-guard-audit.ts`

### NFR-NFR-010 Firestore rules deny every direct connection

Inferred

Firestore rules shall deny every read and write from the browser or client SDK (allow read, write: if false), so only the application server, using Admin SDK credentials that are not evaluated against rules, reaches the data; any later need for direct reads shall arrive as a narrow collection-scoped rule with a documented reason, never by widening this one.

Implemented · Must · Non-functional · The system (automatic)

**RATIONALE**

> The earlier 'authenticated only' rule would have let any identity the project mints read users, sessions and share links.

**ACCEPTANCE CRITERIA**

1. The file contains a single match /{document=**} rule with if false.

**EVIDENCE**

`firestore.rules` `firebase.json` `docs/SECURITY_NOTES.md`

### NFR-NFR-011 Secrets handling

Secrets, vault keys and real snapshots shall not be kept in the repository or the image; external-service keys, the vault secret (PASSWORD_VAULT_KEY) and the calendar secret (CALENDAR_SECRET) shall come from the platform secret manager or private environment variables, and when the calendar secret is absent it shall be derived by HMAC from the stored shared secret under a dedicated label instead of a random key per boot.

Implemented · Must · Non-functional · The system (automatic), Root administrator

**RATIONALE**

> A random key per boot killed every calendar subscription on teachers' phones and gave two instances different keys.

**ACCEPTANCE CRITERIA**

1. An existing calendar subscription stays valid after a server restart and on a second instance.
2. The old administrator password that remained in git history was changed by the owner in the live system (2026-11-07), so it is no longer valid.
3. STUDENT_CASE_SECRET seeds the shared secret once and never changes it afterwards, STAFF_DEVICE_SECRET overrides derivation of the remembered-device key, and the shared secret is not part of the backup (DR-DAT-030 and DR-DAT-031).

**EVIDENCE**

`src/server/calendarSecret.ts` `src/server/runtimeEnv.ts` `SECURITY-TODO.md` `docs/SECURITY_NOTES.md` `tests/credential-audit.ts` `tests/calendar-ics-audit.ts`

### NFR-NFR-012 Public link tokens

A public link token shall be a long random string that expires (a 150-day fallback for term links, with reading until term end for certain kinds) and is revoked on withdrawal, and shall expose no civil number, phone, account or scope beyond its own; a calendar subscription shall carry a key derived by HMAC from the link and the instructor number, not the civil number; and limiter memory shall hold the token's fingerprint, never the token.

Implemented · Must · Non-functional · Faculty member, Student, Public visitor, The system (automatic)

**ACCEPTANCE CRITERIA**

1. An expired link answers 410 and is not counted as a guess; a token matching nothing answers 404 and is counted.
2. A withdrawn link no longer yields its subscription key.

**EVIDENCE**

`src/server/core/shareLinks.ts` `src/utils/shareLinkLifetime.ts` `src/server/calendarSecret.ts` `src/server/anonymousGuard.ts` `src/server/core/rateLimits.ts` `tests/calendar-ics-audit.ts` `tests/staff-device-key-audit.ts` `tests/anonymous-guard-audit.ts`

### NFR-NFR-013 Escaping and content policy for public pages

Every value inserted into server-built public pages (a label, an OCR'd name, a visitor's message) shall be escaped, and every such response shall carry a CSP with a fresh nonce per response: default-src 'none', script-src by nonce alone, connect-src, font-src, manifest-src and worker-src on the same origin, base-uri 'none' and frame-ancestors 'none' outside preview, so an injected script tag does not run.

Implemented · Must · Non-functional · Public visitor, The system (automatic)

#### ACCEPTANCE CRITERIA

1. Every script in the public pages is syntax-checked by the TypeScript parser; an injected script without the nonce does not execute.
2. style-src deliberately stays 'unsafe-inline' because inline styles cannot execute and a nonce cannot cover them.

#### EVIDENCE

`src/server/core/publicPages.ts` `src/server/publicKit.ts` `tests/public-pages-syntax-audit.ts` `tests/student-door-audit.ts`

### NFR-NFR-014 Input validation and bounds

Reference-data inputs shall be accepted as trimmed non-empty text of at most 120 characters for a name and 40 for a code, and as whole numbers within bounds after Arabic-Indic and Persian digits are converted to Latin, with objects, arrays, booleans and NaN refused by one Arabic message naming the field; regular expressions shall not backtrack quadratically on hostile input.

Implemented · Must · Non-functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. '٤٥' is accepted as 45; a 121-character name is refused.
2. Matching the transfer and whitespace-limit expressions on hostile input finishes within a generous time bound the test measures by the clock.

#### EVIDENCE

`src/server/core/input.ts` `src/utils/digits.ts` `tests/input-hardening-audit.ts`

### NFR-NFR-015 Abuse resistance through rate limits

The server shall rate-limit requests in every instance: sign-in 5 per minute, public endpoints 60, and the teacher card 240 per link, with a clear message and a wait period when exceeded, without students on a shared network blocking one another.

Implemented · Should · Non-functional · The system (automatic), Root administrator

#### RATIONALE

> Per-instance limits stop guessing and flooding without any paid service. Unifying the counter at the network edge is a choice for the hosting party, listed under assumptions and dependencies.

#### ACCEPTANCE CRITERIA

1. A sixth sign-in attempt within a minute is refused with a message and a wait period.
2. Many students behind one network address open their cards without blocking one another.

#### EVIDENCE

`src/server/core/rateLimits.ts` `src/server/routes/authRoutes.ts` `SECURITY-TODO.md` `docs/LOAD_TEST.md` `tests/student-door-shared-network-audit.ts`

### NFR-NFR-016 An audit trail without request content

Inferred

The system shall record every successful write through /api (user, method, path, action, entity, status and what changed where possible) and every sign-in, sign-out, refused sign-in attempt and 403 or 409 refusal, without storing the request body, excluding the heartbeat, the 'read' marker, conflict checks and telemetry so the log is not buried.

Implemented · Must · Non-functional · System administrator, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A password sent in a write request appears in no log line.
2. A wrong sign-in is recorded under the targeted account with the action 'refused sign-in attempt'.

**EVIDENCE**

`server.ts` `src/server/routes/adminRoutes.ts` `src/server/routes/authRoutes.ts` `tests/role-guard-audit.ts`

### NFR-NFR-017 External-service boundary

The Gemini service shall only read text and propose; execution shall always go through the deterministic validators and with explicit confirmation from the user; the functions it may propose shall be limited to a fixed list with sanitised output, its key shall stay on the server from the platform secret and never reach the browser, only the data the request needs shall be sent to it, and any failure shall be answered with one uniform message that reveals neither the model nor the key.

Implemented · Must · Non-functional · External service, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A call to a function not in GEMINI_SCHEDULE_FUNCTION_NAMES is dropped from the output.
2. A refusal or timeout is logged on the server with its status code and its text is not shown to the user.

**EVIDENCE**

`src/server/core/gemini.ts` `src/utils/geminiScheduleLayer.ts` `tests/gemini-schedule-layer.ts`

### NFR-NFR-018 A public privacy policy

Inferred

The public page /privacy-policy.html shall publish a policy in Arabic with an English summary stating the data processed and its purpose, the parties processing it on the operator's behalf (Firestore, Cloud Run and the Gemini provider), protection by HTTPS encryption and role-based access, that data is neither sold nor used for advertising, and how to request access, correction or deletion by email.

Implemented · Must · Non-functional · Public visitor, Standard user

**ACCEPTANCE CRITERIA**

1. The page carries a last-updated date (5 November 2026), opens without an account and follows the device's light or dark setting.
2. The page needs no session and caches no personal data.

**EVIDENCE**

`public/privacy-policy.html` `public/robots.txt`

### NFR-NFR-019 Personal data minimisation

A student's civil number shall be sealed with AES-256-GCM under a key derived from the shared secret and never kept as text in memory, log or URL; student profiles shall be deleted automatically when their lifetime ends (expected graduation plus a year, or inactivity), checked every 6 hours; the service worker shall not store on the device the personal case responses (/api/schedules/demand and /api/student-registration), /api/auth or /api/users, and the API cache shall be cleared when identity changes.

Implemented · Must · Non-functional · Student, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A calendar subscription carries a derived key rather than the civil number, and the number does not appear in the server log.
2. Sign-out sends CLEAR_API_CACHE and also deletes the API cache directly.

**EVIDENCE**

`src/server/core/studentIdentity.ts` `src/server/studentDoorRoutes.ts` `public/sw.js` `src/App.tsx` `tests/student-door-audit.ts`

### NFR-NFR-020 44-pixel touch targets

Inferred

Every interactive element on phone and tablet shall have a touch target of at least 44 pixels (coarse pointer and width up to 760 pixels), with a small icon button enlarged by extending its hit area rather than changing its drawing.

Implemented · Should · Non-functional · Standard user, System administrator, Student

#### ACCEPTANCE CRITERIA

1. The src/styles/52-touch-targets.css layer gives buttons, tabs, selects, fields, button links and chips 44 pixels on phones and tablets, and small icon buttons a transparent touch layer reaching 44 without changing their drawing.
2. A sweep of 66 screens across all roles and public pages at 390 and 768 with touch: zero targets under 44×44 (was 322 and 881).
3. No touch layer takes its neighbour's tap: the colour-key eye and the scroll arrow extend into the gap only, the signature buttons in the approval bar take half the gap between icon neighbours so each reaches 44 («withdraw my signature» was 42), and the notification counter over the global search button does not take its tap; drawing, spacing and the desktop mouse are unchanged.

#### EVIDENCE

`src/styles/52-touch-targets.css` `src/index.css` `src/server/studentMapUi.ts` `src/server/staffCardVisual.ts` `public/landing/index.html` `tests/accessibility-audit.ts`

### NFR-NFR-021 Colour contrast to WCAG AA

Normal text contrast shall be at least 4.5:1 under WCAG AA on every calibrated screen, with platform colours managed through variables rather than scattered values, except the course-number colours in plan review, which are the owner’s rule: a number’s colour is the colour of its arrows.

Implemented · Should · Non-functional · Standard user, Student, Public visitor

#### ACCEPTANCE CRITERIA

1. Every light-theme text colour variable reaches 4.5:1 on all five backgrounds and on its own soft tint, and no opacity dimming pushes text below it.
2. A sweep of 66 screens at 390 and 768: zero contrast failures (was 132 and 130).

#### EVIDENCE

`src/styles/01-foundation.css` `src/styles/06-intelligence.css` `src/styles/11-approval.css` `src/server/studentHomePage.ts` `tests/accessibility-audit.ts`

### NFR-NFR-022 Controls with accessible names

Inferred

Every input, drop-down and icon button shall have a name a screen reader reads (label or aria-label), every copy or close button in public pages shall carry an explicit description, and a closed drawer shall not stay in the tab order.

Implemented · Should · Non-functional · Standard user, Student, Public visitor

#### ACCEPTANCE CRITERIA

1. Every field, select and icon button in the interface and in 29 server-built pages has a name a screen reader reads, with no exception list; test:accessibility fails if an unnamed element is added.
2. The closed drawer is visibility:hidden after 280 ms so it leaves the Tab order, and copy and close buttons on public pages carry an explicit description.
3. A sweep of 66 screens at 390 and 768: zero unnamed elements.

#### EVIDENCE

`src/styles/07-responsive.css` `src/components/AdminUsers.tsx` `src/components/ScheduleViewsMenu.tsx` `src/components/PlanReview.tsx` `src/server/pages/instructorRequestPage.ts` `src/server/pages/staffCardPage.ts` `tests/accessibility-audit.ts`

### NFR-NFR-023 Reduced-motion respect

The whole motion layer shall run under prefers-reduced-motion: no-preference so no animation runs when the user asks for less, and motion shall be limited to transform and opacity at 120, 180 and 260 ms with no infinite loops in the student journey.

Implemented · Should · Non-functional · Standard user, Student

**ACCEPTANCE CRITERIA**

1. The number of animations running under reduced motion is zero on every screen at the four widths (320, 390, 768, 1280).
2. The student journey has no animation-iteration-count: infinite.

**EVIDENCE**

`src/styles/30-motion.css` `docs/QUALITY-SCORECARD.md` `docs/VISUAL-POLISH-AUDIT.md` `tests/journey-reveal-audit.ts`

### NFR-NFR-024 Zoom and focus indication

Inferred

The viewport tag shall not disable pinch zoom (no maximum-scale and no user-scalable=no), and every focusable element shall draw a visible focus ring (2 pixels) under keyboard navigation, with form fields keeping the ring through border colour and shadow.

Implemented · Should · Non-functional · Standard user, Student, Public visitor

**ACCEPTANCE CRITERIA**

1. A real keyboard sweep (Tab ×40) on home, schedule, plan review and queries at 390 and 1280: every control draws the ring except text inputs (border colour) and the document body on wrap-around.

**EVIDENCE**

`index.html` `src/styles/02-primitives.css` `public/updating.html` `docs/QUALITY-SCORECARD.md`

### NFR-NFR-025 Arabic-first, right-to-left

The application shell, public pages, updating page and manifest shall declare lang=ar and dir=rtl, styles shall use logical properties (inline-start and inline-end) so the interface does not break with physical offsets, and Latin numbers and codes inside Arabic text shall be isolated (bdi).

Implemented · Must · Non-functional · Standard user, Student, Faculty member, Public visitor

**ACCEPTANCE CRITERIA**

1. html in index.html and updating.html carries lang="ar" dir="rtl", and the manifest has dir=rtl and lang=ar.
2. The demo civil number is shown inside bdi dir=ltr so its digit order never flips.

**EVIDENCE**

`index.html` `public/updating.html` `public/manifest.webmanifest` `src/server/core/publicPages.ts` `tests/updating-page-audit.ts`

### NFR-NFR-026 Self-hosted typefaces

Typefaces (IBM Plex Sans Arabic in weights 300, 400, 500, 600 and 700, and IBM Plex Mono) shall be served from the same server as woff2 with font-display: swap and unicode-range splits for Arabic and Latin, no page shall request a font from an external host, and the updating page shall keep working with a local font when none is stored.

Implemented · Should · Non-functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. public/fonts holds the listed weights, and the public-page CSP is font-src 'self'.
2. The updating page makes no external request.

**EVIDENCE**

`src/styles/01-foundation.css` `index.html` `public/updating.html` `public/sw.js` `tests/updating-page-audit.ts`

### NFR-NFR-027 Numerals and Arabic counts

The system shall accept Arabic-Indic, Persian and Latin digits in any field and convert them at the edge to Latin for storage and comparison, always display the course number as seven digits (college 2, department 2, course 3, e.g. 0109105), form counts in correct Arabic grammar (singular, dual and plural), and never display the stored three digits or the internal course id.

Implemented · Must · Non-functional · Standard user, Student, Faculty member

**ACCEPTANCE CRITERIA**

1. A civil number typed in Arabic-Indic digits matches the same Latin typing at entry.
2. Every course number a reader sees in a printed report, query or Excel export has seven digits.

**EVIDENCE**

`src/utils/digits.ts` `src/utils/arabicCount.ts` `src/utils/authorityAcademicCodes.ts` `tests/arabic-count-audit.ts` `tests/course-number-seven-digit-audit.ts`

### NFR-NFR-028 Standard Arabic and text integrity

Interface text shall be written in standard Arabic with no colloquial words from a list guarded by an automated check, Arabic presentation forms copied from PDFs shall be normalised to ordinary letters with NFKC on write, and name matching shall ignore differences in hamza, ta marbuta and ya.

Implemented · Should · Non-functional · Standard user, The system (automatic)

**ACCEPTANCE CRITERIA**

1. The check fails on a whole colloquial word in interface text and names the file and line.
2. The two spellings of 'Department of Statistics' differing in hamza give one match key.
3. Alphabetical sorting compares the match key under Arabic collation with numbers by value, so «اصول», «أصول» and «إدارة» fall where the reader expects them.
4. Invisible direction marks (U+200B–U+200F, U+202A–U+202E, U+2066–U+2069 and U+FEFF) are removed before storage.

**EVIDENCE**

`src/utils/arabicText.ts` `tests/standard-arabic-ui-audit.ts` `tests/arabic-presentation-audit.ts`

### NFR-NFR-029 Layouts that work from 320 pixels

No content shall overflow the screen width (no horizontal scroll) from 320 pixels up: iOS date and time fields by dropping their native appearance, grids with a minmax(0,1fr) column, a minimum for auto-fit grids written minmax(min(Npx,100%),1fr) when it is 160 pixels or more, and layouts recomposed rather than merely shrunk.

Implemented · Must · Non-functional · Standard user, Student, Faculty member

**ACCEPTANCE CRITERIA**

1. Third-round sweep: no horizontal overflow (H2 = 0) at 320, 390, 768 and 1280.
2. The live sweep covers every screen and default role at two widths (390 and 360) and exits with 1 on a violation.

**EVIDENCE**

`src/styles/46-mobile-overflow.css` `src/styles/07-responsive.css` `scripts/mobile-overflow-sweep.ts` `docs/QUALITY-SCORECARD.md` `tests/mobile-overflow-css-audit.ts` `tests/masari-responsive-audit.ts`

### NFR-NFR-030 A4 landscape printing with a fixed design

Reports shall print on landscape A4 with zero margins governed by @page rules, every page shall be measured with the print rules themselves before the command and scaled between 0.6 and 1.8 to fill the sheet without clipping, and no work shall change the design of printed reports (faults are fixed in values and data).

● Implemented · Must · Non-functional · Standard user, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A teacher report with two lectures fills the sheet instead of a third of it, and seven lectures with long names are not clipped in Safari.
2. Every print path measures before the command, not after; @media rules are evaluated against the paper, not the window.
3. Any unavoidable layout change reuses the existing print classes and is checked on a Chrome-printed landscape A4 PDF before merging.

#### EVIDENCE

`src/utils/printFit.ts` `src/styles/08-print.css` `docs/EXHAUSTIVE_UI_AUDIT_2026-08-12.md` `tests/print-fit-audit.ts` `tests/print-attestation-audit.ts`

### NFR-NFR-031 A deterministic decision engine

Conflict and approval-blocker verdicts shall be computed by deterministic code that returns the same result for the same input from every entry point (the count, the detailed list, the alert and the live board scan), and the fast indexed path shall stay identical to the original all-pairs sweep: no missing or extra conflict and no different reason, severity or order.

● Implemented · Must · Non-functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. The test compares both paths over timetables with shared halls and lecturers, combined delivery, duplicates and whole random terms and fails on the first difference.
2. Instructor identity is compared as a number, not text, so a conflict whose id arrives as text is not missed.

#### EVIDENCE

`src/server/core/scheduleConflicts.ts` `src/utils/scheduleIntelligence.ts` `tests/conflict-parity.ts` `tests/blocker-oracle-audit.ts` `tests/id-type-conflict-audit.ts`

### NFR-NFR-032 Stale-write protection

Every schedule row shall carry a revision number (rev) that increases with each write, a write carrying a revision that is no longer current shall be refused with ScheduleRevisionConflict so no half-write occurs, and an accepted proposal shall be applied atomically, refused with 409 'the slot changed' and nothing written if any slot has changed since it was built.

● Implemented · Must · Non-functional · The system (automatic), Standard user

#### ACCEPTANCE CRITERIA

1. An edit with an old revision answers 409 and leaves the row unchanged.
2. Applying a proposal containing changed slots answers proposal-stale and writes none of them.

#### EVIDENCE

`src/db/repository.ts` `src/server/core/scheduleWrites.ts` `src/server/studyProposalRoutes.ts` `tests/instructor-apply-atomic-audit.ts` `tests/schedule-apply-proposal-audit.ts`

### NFR-NFR-033 Reversibility of change

A snapshot of the schedule scope (college, department, term) shall be captured before each change it protects (editing or moving a slot, publishing, importing, copying), its state after the change shall be recorded from the rows the request itself wrote, so a restore refuses to overwrite a colleague's edit made in between, and the snapshot shall be read from storage, not from the read cache.

Implemented · Must · Non-functional · Standard user, System administrator

**RATIONALE**

> Incident: every snapshot lagged a step because the cache was read before being cleared and held the rows about to be deleted.

**ACCEPTANCE CRITERIA**

1. Publishing a file, undoing it, then undoing a deletion returns each time the state before that operation, not one a step older.
2. A list of scope versions is available and restore requires that nothing else changed.

**EVIDENCE**

`src/server/core/versions.ts` `src/server/core/scheduleWrites.ts` `src/server/timeMachineRoutes.ts` `tests/safety-net-restore-audit.ts` `tests/time-machine-audit.ts` `tests/schedule-versions-list-audit.ts`

### NFR-NFR-034 Process survival on a single request failure

Inferred

A single error in an asynchronous handler or a rejected promise shall not bring the process down: all routing verbs are wrapped so a rejection reaches the error handler, any unhandled rejection or process-level exception is logged and the server continues, so in-flight university requests and the live schedule stream are not cut.

Implemented · Must · Non-functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A route handler whose promise rejects answers 500 with a reference code and does not end the process.
2. A four-argument handler (an error handler) is not wrapped and stays as written.

**EVIDENCE**

`src/server/core/http.ts` `server.ts` `tests/input-hardening-audit.ts`

### NFR-NFR-035 Type checking and parity guards

npm run lint (tsc with no emit) and every test in tests/suite.txt shall pass before each merge, and parity tests shall guard what type checking cannot see: the route table, server middleware order and bytes of server-built pages against stored snapshots, the guide and brand audit (render-brand --check) on every build, and the syntax of public-page scripts.

Implemented · Must · Non-functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. Adding a route, reordering a middleware or changing a byte in a built page fails test:server-parity.
2. Type checking covers the whole repository (only node_modules and dist excluded) with eight strict options: alwaysStrict, noImplicitThis, useUnknownInCatchVariables, noFallthroughCasesInSwitch, strictBuiltinIteratorReturn, noImplicitOverride, strictFunctionTypes and strictBindCallApply; removing an option or adding an exclusion fails test:tsconfig-strictness.
3. The added-lines guard in CI reads only what each pull request adds and refuses reserved wording and owner-private identifiers outside deployment files; an exception passes only with a written reason on the same line, and test:pr-lines-guard pins it.

**EVIDENCE**

`tsconfig.json` `package.json` `tests/suite.txt` `scripts/ci/pr-lines-guard.mjs` `docs/SERVER_MAP.md` `tests/server-route-parity-audit.ts` `tests/public-pages-syntax-audit.ts` `tests/tsconfig-strictness-audit.ts` `tests/pr-lines-guard-audit.ts`

### NFR-NFR-036 Transactional identifier allocation

New identifiers in Firestore shall be reserved by a transaction on a shared counter (_meta/counters) that reserves a block of 32 identifiers per instance, so no two identifiers collide across server instances or during an import, and identifiers shall be compared numerically even when they arrive as text.

Implemented · Must · Non-functional · The system (automatic)

#### ACCEPTANCE CRITERIA

1. Reserving a new block reads and writes the counter in the same transaction.
2. A text instructor id '7' and a numeric 7 are treated as one identity in conflict detection.

#### EVIDENCE

`src/db/repository.ts` `tests/id-type-conflict-audit.ts`

### NFR-NFR-037 Supported browsers

Inferred

The system shall work on modern desktop and phone browsers (Chromium and Safari on iOS) at the ES2022 level with service workers, handle Safari-specific behaviour (date and time fields, ignoring @page size) with dedicated rules, keep the overflow sweep runnable on WebKit, and present a single light interface (the theme is pinned to light).

Implemented · Should · Non-functional · Standard user, Student, Faculty member, Public visitor

#### ACCEPTANCE CRITERIA

1. The sweep runs on the webkit engine with ENGINE=webkit and an iPhone user agent.
2. No browserslist is declared; support is inferred from the TypeScript ES2022 target and Vite defaults.

#### EVIDENCE

`tsconfig.json` `vite.config.ts` `scripts/mobile-overflow-sweep.ts` `src/styles/46-mobile-overflow.css` `index.html` `tests/mobile-overflow-css-audit.ts`

### NFR-NFR-038 Observability

Inferred

Every server error a user sees shall be tied to a reference code that appears in the log with method, URL and error text, boot shall print the database target actually used, the server shall keep the last 5000 performance samples (path, method, duration, status, user and scope) excluding the heartbeat, and /api/telemetry/client shall receive interface errors from authenticated sessions.

Implemented · Should · Non-functional · System administrator, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A 500 carries a ref of the form E plus 8 characters and the same value appears in the log line.
2. Sample number 5001 evicts the oldest so the store never exceeds 5000.

#### EVIDENCE

`server.ts` `src/server/core/http.ts` `src/server/routes/guideRoutes.ts` `src/utils/clientTelemetry.ts` `src/server/runtimeEnv.ts` `tests/input-hardening-audit.ts`

### NFR-NFR-039 A reversible, error-resistant release

A normal release shall change only the official service's image so it can be reversed by routing traffic back to the previous revision with no data movement, only what the full CI passed shall be released, the pipeline shall verify the build identifier on the official domain after release, and production shall stay on the previous revision if the database fails at boot.

Implemented · Must · Non-functional · The system (automatic), Root administrator

#### ACCEPTANCE CRITERIA

1. The rollback procedure is documented as update-traffic to the previous revision and moves, copies or renames no data at any step.

#### EVIDENCE

`docs/DELIVERY_OPERATIONS.md` `tests/deploy-target-guard.mjs` `tests/deploy-target-guard.mjs`

### NFR-NFR-040 Interface fault telemetry without content

Inferred

The interface shall keep per account a local queue (schedule-client-telemetry-v1:<account number>) of at most 60 entries holding: window errors and rejected promises, server requests that failed or took 1800 ms or more, loss and return of the connection, and screen timing milestones; it shall attach to faults only the last 12 actions (the label of the button or link pressed, up to 56 characters, never typed text), cut each message to 320 characters, and send, 5 seconds after an entry is queued, a batch of 20 to /api/telemetry/client when the device is online, keeping locally whatever was not accepted for a later attempt; this is the only path for interface fault reports, and no browser script sends faults or a click trail to a third party.

Implemented · Should · Non-functional · The system (automatic), System administrator

**ACCEPTANCE CRITERIA**

1. A successful request that took 900 ms is not recorded, and one that took 2000 ms is recorded as slow.
2. Switching account saves the previous queue under its number and starts a fresh action trail.
3. A field value the user typed appears in no sent entry.

**EVIDENCE**

`src/utils/clientTelemetry.ts#installClientTelemetry` `src/utils/clientTelemetry.ts#flushTelemetry` `src/server/routes/guideRoutes.ts` `tests/handover-fixes-audit.ts`

### NFR-NFR-041 One message layer and message lifetimes

Inferred

All interface messages shall appear in a single fixed layer at the top of the viewport with four kinds only (success, information, warning, block), each disappearing by itself after a lifetime that grows with its weight; block messages shall be announced to a screen reader immediately and the others politely, each with a «close the message» button.

Implemented · Should · Non-functional · Standard user, The system (automatic)

**ACCEPTANCE CRITERIA**

1. Success and information 3.5 seconds, warning 5 seconds, block and error 6.5 seconds.
2. A block message is role=alert with aria-live=assertive, the others role=status with aria-live=polite.
3. An «inline» message (the sign-in card and a printed sheet) stays in place and does not expire.

**EVIDENCE**

`src/components/ui.tsx#Notice` `src/components/ui.tsx#getToastHost`

### NFR-NFR-042 Keyboard behaviour of dialogs and drawers

Escape shall close the topmost open dialog only, not the one beneath; after closing, focus shall return to the element that opened it; the confirmation dialog shall place focus on «cancel», keep Tab inside it and cancel on Escape or an outside click; side drawers shall keep focus inside and open on the first field rather than the close button.

Implemented · Should · Non-functional · Standard user, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A dialog inside a dialog (the «before you apply» sheet within schedule tools): Escape closes the inner one and the outer stays.
2. The compact delete confirmation appears beside its button and cancels itself after 4.2 seconds without an answer.
3. Typing in a field inside a drawer does not move focus to the close button.

**EVIDENCE**

`src/components/ui.tsx#listenForDialogDismiss` `src/components/ui.tsx#useDialogDismiss` `src/components/ui.tsx#visualConfirm` `src/components/ui.tsx#useDrawerA11y` `tests/time-machine-scope-escape-audit.ts`

### NFR-NFR-043 Field labels and the way out of forms

Every field block's label shall be bound to the first input control inside it programmatically (htmlFor and an id), keeping the control's own id when it has one; the «back» button in form actions shall remain enabled at all times, even while saving; and every number inside Arabic text shall be isolated in its own direction so a /, + or % sign does not move to the wrong end.

Implemented · Should · Non-functional · Standard user, The system (automatic)

**ACCEPTANCE CRITERIA**

1. Clicking the label word focuses the field, and a screen reader reads the field's name, not just «text field».
2. A request that never returns does not trap the user in the form: «back» works and only «OK» is disabled.
3. «58 / 100» and «+11» display as written inside an Arabic sentence.

**EVIDENCE**

`src/components/ui.tsx#Field` `src/components/ui.tsx#withControlId` `src/components/ui.tsx#FormActions` `src/components/ui.tsx#Num` `tests/accessibility-audit.ts`

### NFR-NFR-044 Latin digits (0-9) only

No screen, public page, report or exported file shall show Arabic-Indic digits, the Arabic percent sign or the two Arabic decimal and thousands separators; numbers, percentages and dates are written in Latin digits (0-9). Every number or date formatted for an Arabic locale uses ar-KW-u-nu-latn (the browser renders plain ar-KW with Arabic-Indic digits), and formatting is never left without a locale so that it does not follow the browser's language. Conversion code that reads what a user types in Arabic-Indic digits and turns it into Latin digits remains allowed.

Implemented · Must · Non-functional · Root administrator, System administrator, Department head, Faculty member, Student

**ACCEPTANCE CRITERIA**

1. Code text written in Arabic-Indic digits (for example a label such as 'last 7 days' typed with them) or the Arabic percent sign fails tests/latin-digits-audit.ts.
2. toLocaleDateString with plain ar-KW (no -u-nu-latn) or formatting without a locale fails the same test; and a function that turns Latin digits into Arabic-Indic ones fails it even when it carries the digit set.

**EVIDENCE**

`src/utils/digits.ts` `src/utils/arabicCount.ts` `tests/latin-digits-audit.ts`

## 3.18.6 Edge cases

### ⚠ A whole campus network on registration day

**Scenario** Thousands of students open their journey page from one IP address in the same hour.

**Behaviour** Limits sit on the student, not the address, and failures are counted, not successes; so 600 of 600 journeys pass from one address while someone cycling through many numbers stops at the address ceiling.

### ⚠ A user returns to an old tab after signing out

**Scenario** A tab from a previous account stays on a shared device with responses left in the service worker cache.

**Behaviour** The API store is cleared on the way out and the way in, and personal cases and authentication responses are never stored; so the next account never sees its predecessor's data.

### ⚠ A screen reader facing an unnamed drop-down

**Scenario** A drop-down, field or icon button is added to the interface without a name a screen reader can read.

**Behaviour** The accessibility check (test:accessibility) fails at build time naming the file and line, so the element never reaches users without a name.

### ⚠ Printing on Safari, which ignores page orientation

**Scenario** A user prints a landscape report from Safari, which does not honour @page size.

**Behaviour** The page is measured with the print rules themselves and scaled between 0.6 and 1.8 to fit the sheet, so the report's bottom is not clipped even if the paper stays upright.

### ⚠ Two tabs writing the same slot

**Scenario** Two department members edit one slot and the second saves with a revision that has become stale.

**Behaviour** The second save is refused with a revision conflict and he is asked to refresh; nothing is written and his colleague's edit is not erased.

## 3.18.7 Standing owner decisions

- The course number is always seven digits: college 2, department 2, course 3; the stored code and the internal id are never displayed.
- Printed reports keep their design; fixes go in values and data, not in layout.
- No substitute populated data is added when the database fails; production stays on its previous revision.

↑ Contents

3.19 · DAT

# Data model and integrity

What is stored, how it relates, and what keeps it sound

| 41 | 100% | 0 | 16 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Requirements · 5. Algorithms · 6. Edge cases · 7. Standing owner decisions

↑ Contents

## 3.19.1 Overview

This module describes the entities persisted in Firestore (accounts, permissions, terms, colleges, departments, courses, instructors, class sections, versions, drafts and links), their identifiers, relationships, uniqueness and deletion rules. It also covers compatibility with the data imported from the legacy SQL Server backup, the snapshots that freeze an appointment's academic identity, short-lived read caches, the rule for converting an instructor between visiting and appointed, retention and indexes. The governing principle is that an old record stays valid as it is and every new field is optional.

Root administrator · System administrator · Department head · Schedule committee chair · The system (automatic)

## 3.19.2 User journeys

**Root administrator** — **Importing and verifying the legacy data**

1. The legacy backup is extracted to a JSON snapshot by the extraction script and the table counts are matched against the SQL Server catalogue.
2. When the server starts on an empty database with auto-import enabled, it writes the active tables under their original identifiers.
3. The 28 historical tables are kept under legacyArchive unchanged.
4. Counters are initialised from the highest legacy identifier of each table.
5. The server compares each collection's count with what was written; any mismatch fails startup and no login is accepted.
6. A _meta/legacyImport document records the counts and the backup fingerprint.

**Department head** **Trying to delete a course that is in use**

1. The department head opens the courses screen and chooses a course to delete.
2. The server checks its membership in an academic plan sheet; if found, the delete is refused with 409 suggesting removal from the sheet first.
3. It then checks for appointments in any term that point to the course and refuses the delete in that case too.
4. If nothing refers to it, its document is copied to the deleted-records bin and then removed.

**Department head** **Converting a visiting instructor to appointed**

1. The department head picks the instructor, asks for «appointed» and selects the department(s) the secondment is lifted from.
2. A pure plan of changes is computed: removal from the visiting directory and from the current and every future term roster.
3. A dry-run preview is shown without writing, and the whole plan is blocked if any department has an error.
4. On confirmation only those changes are written; no schedule and no past-term roster is touched.

## 3.19.3 Diagrams

### Entity relationships

Arrows mean «refers to» by numeric id; deletion is refused while an arrow still reaches the record.

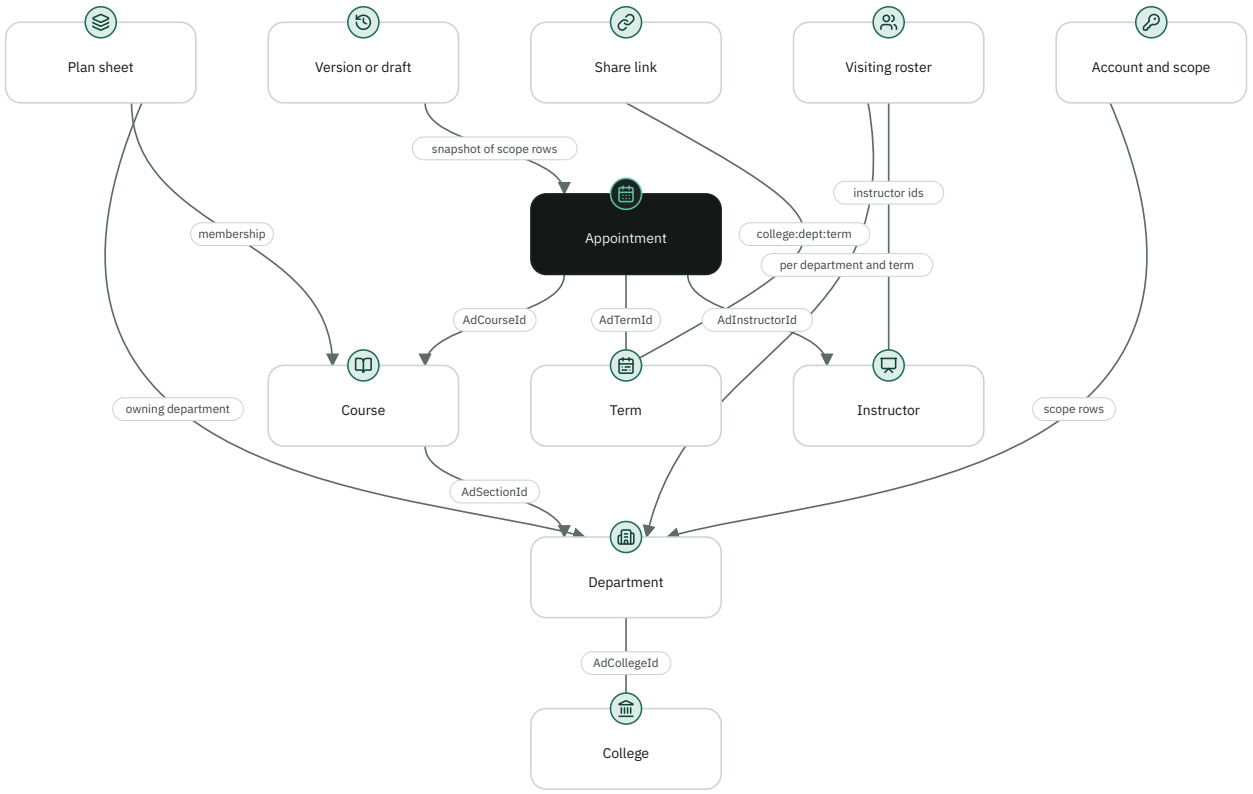


### Visiting ⇄ appointed conversion

The plan is a pure function that reads the state of the records and returns changes or errors; writing happens only afterwards.

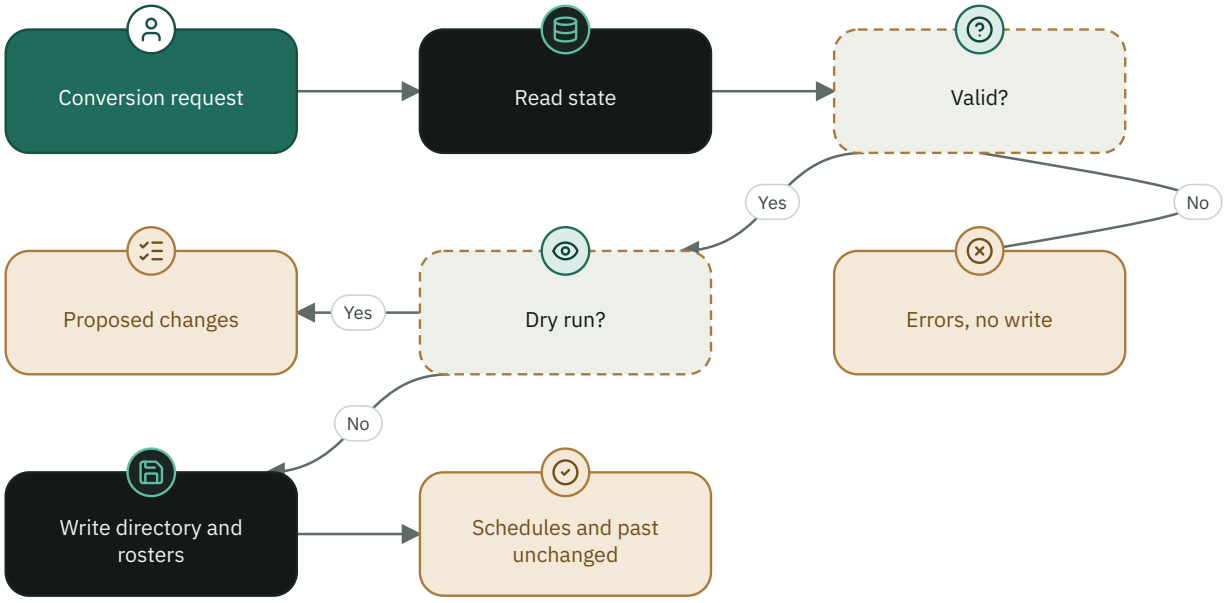

## 3.19.4 Requirements

### DR-DAT-001 One store, closed to clients

All durable data shall be kept in a single Firestore database reachable only by the server through the Admin SDK; the security rules shall deny every direct browser read and write, and the server shall never run on substitute data when the connection fails.

Implemented · Must · Data · The system (automatic), Root administrator

**ACCEPTANCE CRITERIA**

1. The rule match /{document=**} yields allow read, write: if false.
2. When the connection fails /api answers 503 and nothing is read from a packaged snapshot.

**EVIDENCE**

`firestore.rules` `src/db/repository.ts` `src/server/core/state.ts` `tests/demo-firestore-isolation-audit.ts`

### DR-DAT-002 Core entities and identifiers

Each core entity shall have a numeric identifier and a document named prefix plus identifier: user_ for accounts, form_ for screens, permission_ and scope_ for permissions and scopes, and term_, college_, section_, instructor_, course_, schedule_ and room_.

Implemented · Must · Data · The system (automatic)

**ACCEPTANCE CRITERIA**

1. Course 418 is stored in course_418 and appointment 15430 in schedule_15430.
2. The department is stored under the field name AdSectionId and called «القسم» (Department) in the interface.

**EVIDENCE**

`src/types.ts` `src/db/repository.ts` `tests/parity_audit.py`

### FR-DAT-003 Block-based id allocation

Inferred

The system shall allocate new identifiers from a single counter in the _meta/counters document inside a transaction, in blocks of 32 identifiers per collection, and shall never reuse an identifier that was handed out even if it went unused.

Implemented · Must · Functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. Two concurrent course creations never receive the same identifier.
2. A creation that fails after allocation leaves a gap in the numbering and never a duplicate.

**EVIDENCE**

`src/db/repository.ts#reserveFirestoreIds`

### DR-DAT-004 Hierarchy: college, department, course

A department shall refer to its college, a course to its department, and an appointment to its course, term and instructor by numeric identifiers, and the college of a course and the department and college of an appointment shall be derived from the course-to-department relation on every read rather than from a stale stored value.

Implemented · Must · Data · The system (automatic)

**ACCEPTANCE CRITERIA**

1. Moving a course to another department changes the department and college of its appointments on the next read with no write.
2. Every appointment row in the migrated snapshot points to an existing college, department, term, course and instructor.

**EVIDENCE**

`src/db/repository.ts#hydrateSchedules` `src/types.ts` `tests/parity_audit.py`

### FR-DAT-005 Delete refused while referenced

The system shall refuse with 409 the deletion of a college that has departments, a department that has courses, a course that has appointments or plan-sheet membership, a term that has appointments, and an instructor that has appointments.

Implemented · Must · Functional · System administrator, Department head

**ACCEPTANCE CRITERIA**

1. Deleting a college with one department returns 409 and the document remains.
2. Deleting a course attached to a sheet returns 409 with a message suggesting its removal from the sheet first.

**EVIDENCE**

`src/server/routes/referenceRoutes.ts` `src/server/routes/coursesRoutes.ts` `src/server/routes/instructorsRoutes.ts` `tests/parity_audit.py`

### DR-DAT-006 Course code unique within a department

Inferred

A course code shall be unique within its department; the code shall be claimed, in the same transaction that writes the course, through a document in courseCodeClaims, and a stale claim shall be taken over when the course that registered it no longer holds the code.

Implemented · Must · Data · The system (automatic)

**ACCEPTANCE CRITERIA**

1. Two identical create submissions: only one succeeds and the other is refused with «تم تسجيل رمز المقرر الدراسي هذا من قبل».
2. After a course is deleted a new course with the same code can be created.

**EVIDENCE**

`src/db/repository.ts#createCourse`

### DR-DAT-007 Uniqueness of department code and term name

A department created from a file header shall exist once per code within a college (sectionCodeClaims), and an automatic term shall not be created twice for the same name or the same season and years (autoTermClaims keyed by a 32-character digest of the name).

Implemented · Should · Data · The system (automatic)

**ACCEPTANCE CRITERIA**

1. Two concurrent requests for one department code produce one department and the second returns the existing one.
2. A manually entered term named with «2026/2027» prevents creating the automatic term matching it in season and years.

**EVIDENCE**

`src/db/repository.ts#createSectionOnce` `src/db/repository.ts#createTermIfAbsent` `tests/term-calendar-audit.ts`

### DR-DAT-008 Instructor civil number

An instructor's civil number shall be stored in Latin digits only, 12 digits long, and shall pass the checksum inherited from the legacy system; a civil number shall not be registered twice, and an existing instructor is enrolled in the department instead of duplicating the record.

Implemented · Must · Data · System administrator, Department head

**ACCEPTANCE CRITERIA**

1. An 11-digit number is refused with 400 and the message «الرقم المدني 12 رقمًا بالضبط.».
2. Arabic and Persian digits and spaces are normalised to Latin digits before comparison and storage.

**EVIDENCE**

`src/utils/civilId.ts` `src/server/routes/instructorsRoutes.ts` `tests/legacy-data-audit.py`

### DR-DAT-009 Core appointment fields

An appointment row shall carry weekdays as booleans (fsunday to fthursday, Sunday to Thursday), start and end times as text, the class-section code SCode, the building code AdRoomCode and hall AdRoomHall, plus optional references into the location registry (buildingId, roomId, companionRoomId and the locationStatus state).

Implemented · Must · Data · The system (automatic)

**ACCEPTANCE CRITERIA**

1. locationStatus is one of four values: VERIFIED, PENDING_ROOM, LOCATION_REVIEW_REQUIRED and INVALID_HISTORICAL.
2. A legacy row without location references remains valid and is shown with its raw text.

**EVIDENCE**

`src/types.ts#FSchedule` `tests/parity_audit.py`

### FR-DAT-010 Revision number and no overwriting of newer data

Each appointment shall carry a rev field that starts at 1 on creation and increases by one on every write, and a save shall be refused with a revision-conflict error when the stored number is newer than the one the request was based on; absence counts as zero.

Implemented · Must · Functional · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. Two saves based on revision 3: the first succeeds and the revision becomes 4, the second is refused as a conflict.
2. A legacy row without rev accepts a save expecting 0 and takes its first number.

**EVIDENCE**

`src/db/repository.ts` `src/types.ts#FSchedule` `tests/proposal-undo-emulator-audit.ts`

### DR-DAT-011 Academic identity snapshot of an appointment

An appointment shall keep the course code, name and plan-sheet id as they stood when it was created (CourseCodeSnapshot, CourseNameSnapshot, CurriculumPlanIdSnapshot), a later rename of the course shall not rewrite an old term when read, and the displayed course number shall be built as seven digits (college 2 + department 2 + course 3), never from the stored three digits or from AdCourseId.

Implemented · Must · Data · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A renamed course shows its then-name in a 2018 term and its new name in the current term.
2. A stored 105 with college 01 and department 09 is displayed as 0109105.

**EVIDENCE**

`src/db/repository.ts#hydrateSchedules` `src/utils/authorityAcademicCodes.ts` `tests/course-number-seven-digit-audit.ts` `tests/safety-net-restore-audit.ts`

### DR-DAT-012 Scope key

The working scope of a timetable shall be identified by the key «college:department:term», under which versions, drafts, notes, open decisions, publications, share links and registration statistics are stored; the colons are replaced by underscores when the key becomes part of a document name.

Implemented · Must · Data · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A version saved for college 6, department 7 and term 107 carries scopeKey = 6:7:107.
2. The visiting roster for the same scope is stored in a document named 6_7_107.

**EVIDENCE**

`src/db/repository.ts` `tests/schedule-versions-list-audit.ts`

### DR-DAT-013 Timetable versions

Each version shall store a complete snapshot of the scope rows with its label, source (manual, draft, publish, undo, copy or import) and row count; the version list shall read metadata fields only, with no database-side ordering, a default limit of 60 and a maximum of 100; and full snapshots shall be fetched only for the newest (default 12, maximum 24).

Implemented · Must · Data · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. The version list uses no orderBy and does not read the rows field.
2. Requesting 500 versions returns at most 100.

**EVIDENCE**

`src/db/repository.ts#getScheduleVersions` `src/types.ts#ScheduleVersion` `tests/schedule-versions-list-audit.ts`

### DR-DAT-014 Drafts

Inferred

A draft shall carry all its rows, its status (draft, published or archived), its source (what-if, auto, import or manual) and the fingerprint of the scope it was built on; a draft imported from PDF shall keep the scanned original rows unmodified (baselineRows) and the server-signed import receipt.

Implemented · Must · Data · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. Reading a scope's drafts returns at most 100.
2. Editing the draft rows does not change baselineRows.

**EVIDENCE**

`src/types.ts#ScheduleDraft` `src/db/repository.ts`

### DR-DAT-015 Share links in storage

A share link shall be stored under a random 24-byte base64url identifier (32 characters) that is the token itself, carrying its scope, kind (department, staff, survey, request or students), expiry date, revoked flag and view count; a demo-sandbox token is prefixed «demo.».

Implemented · Must · Data · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A department timetable link is created for 30 days by default and at most 180; a students link for 365 days.
2. An instructor's personal card expires at the end of the term, or after 150 days when its dates are unknown.

**EVIDENCE**

`src/db/repository.ts#createShareLink` `src/server/routes/shareRoutes.ts` `src/utils/shareLinkLifetime.ts` `tests/calendar-ics-audit.ts`

### DR-DAT-016 Accounts and passwords

An account shall store its password derived with scrypt and a random salt; the compatibility value for the legacy administration screen shall be stored AES-256-GCM encrypted in a separate field never sent to ordinary clients; plaintext passwords shall not be stored anywhere; the academic role is optional and its absence reads as «committee chair».

Implemented · Must · Data · Root administrator, System administrator

**ACCEPTANCE CRITERIA**

1. All 29 accounts in the original snapshot carry a scrypt-shaped hash.
2. An account created before the Role field existed works with committee-chair permissions without migration.

**EVIDENCE**

`src/types.ts#SystemUser` `src/db/repository.ts` `tests/legacy-data-audit.py`

### DR-DAT-017 Permissions and scopes

A screen permission shall be stored as a row (user, screen) in formSecurity and a data scope as a row (user, college, department) in userScopes, each with a legacyId, and deleting an account shall delete its rows from both collections in one batch; department zero means «the whole college» for roles whose scope is a college only.

● Implemented · Must · Data · System administrator, Root administrator

**ACCEPTANCE CRITERIA**

1. Deleting an account with 4 permissions and 3 scopes leaves zero orphan rows for it.
2. Legacy orphan permission rows (28 in the original snapshot) stay unchanged and have no effect.

**EVIDENCE**

`src/db/repository.ts#deleteUser` `src/server/core/scope.ts` `tests/parity_audit.py` `tests/role-scope-audit.ts`

### DR-DAT-018 Sessions

A session shall be stored in a document named by the session id (sess_ or demo_ followed by 64 hex characters) holding a numeric expiresAt and a timestamp twin expiresAtTtl for the automatic-deletion policy; it shall expire after 15 minutes idle (one hour for demo), an expired session shall be deleted on first read, and sessions shall never be part of any backup.

● Implemented · Must · Data · The system (automatic)

**ACCEPTANCE CRITERIA**

1. An expired session is read, deleted and reported as not found.
2. A password change deletes the account's other sessions and keeps the current one.

**EVIDENCE**

`src/db/repository.ts#createSession` `src/server/core/auth.ts` `tests/anonymous-guard-audit.ts`

### DR-DAT-019 Visiting-instructor model

Secondment shall not be an attribute of the instructor record; it is a name in the department's permanent visiting directory (departmentDelegates, per department and its family across colleges) and a name in the department's roster for a term (visitingRosters), so the instructor is not duplicated in the instructor register.

● Implemented · Must · Data · Department head

**ACCEPTANCE CRITERIA**

1. One instructor appears in the directories of two departments without two records.
2. A new term starts from a copy of the previous term's roster.

**EVIDENCE**

`src/types.ts#VisitingRoster` `src/db/repository.ts` `tests/visiting-conversion-audit.ts`

### FR-DAT-020 Visiting ⇄ appointed conversion rule

When converting an instructor to «appointed» the system shall remove him from the visiting directory of the chosen departments and from the current and every future term roster of those departments; when converting to «visiting» it shall add him to the directory of exactly one department and to the roster of one current or future term; it shall never write a past-term roster, never touch any schedule, and shall offer a dry-run preview.

● Implemented · Must · Functional · Department head, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Converting to appointed with current term 5 and future term 6 removes him from the directory and from rosters 5 and 6 and leaves past roster 4 untouched.
2. Converting to visiting for a past or unknown term, or with no department, is refused and nothing is written.
3. Two departments of one family yield a single directory entry.

**EVIDENCE**

`src/utils/visitingConversion.ts` `src/db/visitingConversion.ts` `tests/visiting-conversion-audit.ts`

### FR-DAT-021 Legacy import under original ids

The system shall import the legacy snapshot only when the users collection is empty and auto-import is not disabled, shall write each active table under its original identifiers (29 accounts, 18 screens, 219 permissions, 189 scopes, 31 terms, 13 colleges, 87 departments, 743 instructors, 1,404 courses, 15,430 schedule rows and 1 room), then match the counts before accepting any login and write _meta/legacyImport.

● Implemented · Must · Functional · Root administrator, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A count short of the expected in any collection ends startup with «فشل التحقق من نقل ...».
2. On Cloud Run with AUTO_IMPORT_LEGACY_DATA=false and an empty database the server refuses to start and writes nothing.

**EVIDENCE**

`src/db/repository.ts#seedFirestoreFromLocalSnapshotIfNeeded` `scripts/import-legacy-json.ts` `scripts/extract-legacy-bak.py` `tests/parity_audit.py` `tests/legacy-data-audit.py`

### DR-DAT-022 Historical table archive

The 28 historical tables of the legacy backup shall be kept under legacyArchive/<table>/rows/row_000000001 onward without modification, with plaintext passwords as the only exclusion, and no screen shall read from it.

● Implemented · Should · Data · Root administrator

**ACCEPTANCE CRITERIA**

1. The document count of each archived table equals the recorded rowCount, otherwise verification fails.
2. Tables empty in the extraction report (such as Student and History) are recorded with zero rows.

**EVIDENCE**

`src/db/repository.ts#seedFirestoreFromLocalSnapshotIfNeeded` `docs/LEGACY_DATA_EXTRACTION_REPORT.json` `tests/parity_audit.py`

### NFR-DAT-023 Short-lived read caches

The process shall keep reference collections (colleges, departments, terms, instructors, courses) for 90 seconds and schedule rows for 300 seconds, every write shall drop them at once, and the _meta/schedulesChanged document shall announce every write with a total counter and a per-writer counter so another instance counts the difference as foreign writes, and any counter that goes backwards counts as a foreign write.

● Implemented · Must · Non-functional · The system (automatic)

**ACCEPTANCE CRITERIA**

1. After a course edit the next read does not return the old value.
2. A snapshot with a total increase of 3 and 1 from this instance yields two foreign writes.

**EVIDENCE**

`src/db/referenceCache.ts` `src/db/beaconEcho.ts` `src/db/repository.ts` `tests/live-pulse-audit.ts`

### DR-DAT-024 Demo world separated from the real one

The demo sandbox shall run on its own in-memory data per session without writing anything to Firestore, and the key of every cache that holds what the repository read shall start with «real|» for the real world or «demo:<session>|» for the demo.

● Implemented · Must · Data · The system (automatic)

**ACCEPTANCE CRITERIA**

1. Editing a sheet in the demo sandbox does not mark real radar runs stale.
2. What a demo request stores in a cache is never read by a real request.

**EVIDENCE**

`src/server/dataContextCache.ts` `src/db/demoSandbox.ts` `src/db/repository.ts` `tests/demo-firestore-isolation-audit.ts` `tests/demo-complete-audit.ts`

### FR-DAT-025 Deleted-records bin

Inferred

Before deleting a college, department, term, instructor or course the system shall copy its complete document to deletedRecords under «<collection>__<document>» with the deletion time, a failed copy shall not block the requested deletion, and merged duplicate courses shall be archived the same way.

Implemented · Should · Functional · System administrator, Department head

**ACCEPTANCE CRITERIA**

1. Deleting course 418 produces a courses__course_418 document with the full payload.
2. No application path reads this collection; restoration is manual from the database.

**EVIDENCE**

`src/db/repository.ts#archiveBeforeDelete`

### DR-DAT-026 Retention and automatic expiry

Inferred

Client diagnostics (clientTelemetry) shall expire after 30 days and be read for 14, sessions and these diagnostics shall declare an expiresAtTtl field, restore points shall keep only eight, and the local mode shall truncate lists to 4,000 diagnostics and 2,000 audit entries; the TTL policies are declared in the file but are not enabled in production, by the owner's decision.

Implemented · Should · Data · The system (automatic), Root administrator

**ACCEPTANCE CRITERIA**

1. The ninth restore point deletes the oldest.
2. firestore.indexes.json declares a TTL policy for sessions and clientTelemetry.

**EVIDENCE**

`src/db/repository.ts` `firestore.indexes.json`

### DR-DAT-027 Indexes

firestore.indexes.json shall declare every index used in production (23 indexes: 5 on schedules, 4 on activityTrail, 2 each on scheduleComments, courses and instructorRequests, and one for the other large collections), every query on a large collection shall start with a field that leads an index, and the test shall fail on a new query without an index.

Implemented · Must · Data · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A schedules query on AdTermId finds an index that starts with it.
2. The file is not deployed automatically: an index is created by hand in the console as the operations guide describes.

**EVIDENCE**

`firestore.indexes.json` `tests/firestore-index-audit.ts`

### DR-DAT-028 Backup and restore

Inferred

The backup export (format schedule-system-backup/1, root administrator only) shall include everything durable and exclude sessions, clientTelemetry, systemSecrets, job collections and restore points, and a safety point shall be taken before any import or reset.

Implemented · Must · Data · Root administrator

**ACCEPTANCE CRITERIA**

1. Importing a backup does not drop the current login sessions.
2. The /api/system-backup/* routes refuse anyone who is not a root administrator.
3. Import and reset never touch systemSecrets, sessions or clientTelemetry in the target database, so the target keeps its own secrets, not the source's.

**EVIDENCE**

`src/db/repository.ts` `src/server/routes/adminRoutes.ts`

### DR-DAT-029 Student data privacy

Inferred

A student's civil number shall not be stored in clear in a need record or profile; instead a keyed HMAC fingerprint serves as the uniqueness key, identity is held in encrypted fields, and the personal code is stored as a scrypt hash with a random salt, a failed-attempt counter and a temporary lock.

● Implemented · Must · Data · Student, The system (automatic)

#### ACCEPTANCE CRITERIA

1. One document per student in studentProfiles whose id is the fingerprint.
2. The service never stores the personal code itself.

#### EVIDENCE

`src/types.ts#StudentNeed` `src/types.ts#StudentProfile`

### DR-DAT-030 The shared server secret: storage and selection

The server shall keep one stable shared secret for all instances: in Firestore in the document systemSecrets/student-case-identity-v1 (fields secret, createdAt, purpose and source set to env or generated), and in local mode in the file student-case-identity.key beside db.json with mode 600; it is created once inside a transaction on first need and the stored value always wins when present; STUDENT_CASE_SECRET is accepted only to seed the secret when nothing is stored or when it equals the stored value, and when it differs it is ignored and a loud error is logged; otherwise a random 32-byte secret (64 hex characters) is generated; CALENDAR_SECRET is never read for this choice, and the real secret is always read outside the demo sandbox.

● Implemented · Must · Data · The system (automatic), Root administrator

#### ACCEPTANCE CRITERIA

1. Stored S with STUDENT_CASE_SECRET=ENV: S is used and «STUDENT_CASE_SECRET differs from the stored student-case secret… IGNORED» is logged.
2. Nothing stored and STUDENT_CASE_SECRET=ENV: ENV is stored with source env and pinned.
3. Two instances starting together on an empty database end with the same secret because the write is a transaction (or a file created with the wx flag).

#### EVIDENCE

`src/server/studentCaseSecret.ts#chooseStudentCaseSecret` `src/db/repository.ts#getOrCreateStudentCaseSecret`
`src/server/core/studentIdentity.ts` `tests/student-journey-audit.ts`

### DR-DAT-031 What must travel with the database for sealed data to stay readable

Inferred

The shared secret shall be treated as part of the data when the data is moved or handed over, because it is excluded from the system backup (systemSecrets) and the following are derived from it: the key sealing a student's name and civil number (AES-256-GCM under an HMAC key labelled student-case-identity-v1), the civil-number fingerprint (HMAC over need|number) that is the student file id in studentProfiles and the duplicate key, the room-door and building-board sticker tokens always, the calendar subscription key when CALENDAR_SECRET is not set, the teacher-card remember-me key when STAFF_DEVICE_SECRET is not set, the chair team-member device key, and the two VAPID push keys when they are not set in the environment; likewise CALENDAR_SECRET when set, because it opens student cases sealed before the shared secret existed.

● Implemented · Must · Data · Root administrator, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A backup imported into a new database without moving systemSecrets/student-case-identity-v1 (or setting STUDENT_CASE_SECRET to the same value before first use): student names and numbers show empty with no visible error, and a student cannot find his file by civil number.
2. After the secret changes, printed door stickers and derived calendar subscriptions no longer match anything, and the derived push public key changes so devices must subscribe again.
3. In local mode the files student-case-identity.key and legacy-password-vault.key travel with db.json from the private directory.
4. Account passwords (salted scrypt) depend on no secret, so sign-in keeps working after the move.

#### EVIDENCE

`src/db/repository.ts#getOrCreateStudentCaseSecret` `src/db/repository.ts`
`src/server/core/studentIdentity.ts#openStudentIdentity` `src/server/roomDoorSecret.ts#deriveRoomDoorKey`
`src/server/calendarSecret.ts#deriveCalendarSecret` `src/server/staffDeviceKey.ts#deriveStaffDeviceSecret` `src/server/seats.ts`
`src/server/webPush.ts#deriveVapidKeys` `tests/student-journey-audit.ts` `tests/room-door-audit.ts`
`tests/doctor-journey-audit.ts` `tests/web-push-audit.ts` `tests/staff-device-key-audit.ts`

### DR-DAT-032 The legacy password vault key

Inferred

The compatibility value SystemUserPassVault shall be sealed with AES-256-GCM and the associated data SCHEDULE-SystemUserPass-v1 in the form aesgcm$<iv>$<ciphertext>$<tag>, under a 32-byte key read from PASSWORD_VAULT_KEY (64 hex characters or base64) or else from the file legacy-password-vault.key in the private directory (copied there once from database/); the value shall be stored empty when no valid key exists, and a temporary password shall have no vault value; no screen opens this vault today, so a missing key after a move does not prevent sign-in.

● Implemented · Should · Data · Root administrator, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A key whose length is not 32 bytes is treated as absent.
2. Reading the old values after a move requires moving PASSWORD_VAULT_KEY or the key file itself.

#### EVIDENCE

`src/db/repository.ts#passwordVaultKey` `src/server/accountPassword.ts` `scripts/extract-legacy-bak.py`

### FR-DAT-033 Legacy snapshot migration script

Inferred

npm run migrate:firestore (scripts/import-legacy-json.ts) shall migrate a JSON or gzipped JSON file into the project and database in FIREBASE_PROJECT_ID and FIREBASE_DATABASE_ID, refuse to write into any non-empty collection unless MIGRATION_ALLOW_NONEMPTY=true, delete with --replace or MIGRATION_REPLACE=true the eleven collections, legacyArchive and _meta/counters before importing, convert every password that is not scrypt to scrypt with a 16-byte salt, write in batches of 400 under the original ids, then verify each collection by count and canonical SHA-256 digest, set _meta/counters to the largest id, and write the report <file>.firestore-verification.json.

Implemented · Must · Functional · Root administrator, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A database holding one user with neither variable set: it stops with «Firestore collection 'users' is not empty».
2. A count or digest mismatch in a collection stops it with «Migration verification failed for <collection>».
3. legacyArchive tables are written row by row from row_000000001 and verified the same way.

#### EVIDENCE

`scripts/import-legacy-json.ts` `package.json`

### FR-DAT-034 Extraction from the legacy system

Inferred

scripts/extract-legacy-bak.py shall extract the legacy data from the SQL Server backup (or a ZIP archive holding it) read-only without modifying the source, writing the application file and a report, converting passwords to scrypt (n=16384, r=8, p=1, 64 bytes), sealing the compatibility copy with the vault key (--vault-key, otherwise legacy-password-vault.key beside the output, generated as 32 bytes when absent) and excluding the plaintext password from the archive; scripts/export-legacy-sql.ps1 shall offer an alternative that reads the eleven tables from a restored read-only copy.

Implemented · Should · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. An existing vault key that is not 64 hex characters stops the extraction with an error.
2. The generated vault key must accompany the data to the private directory (DR-DAT-032).

#### EVIDENCE

`scripts/extract-legacy-bak.py` `scripts/export-legacy-sql.ps1` `package.json` `tests/legacy-data-audit.py`

### NFR-DAT-035 Safeguards of live-data scripts

Inferred

Every script that writes to Firestore shall go through scripts/lib/firestoreScript.ts or repeat its safeguards: writing opens only with --apply and without it not a single document is written; it reads .env, refuses to run when DATA_MODE is set to anything other than firestore, connects with the service account in FIREBASE_SERVICE_ACCOUNT_KEY (JSON), FIREBASE_PROJECT_ID or the default credentials, and to the FIREBASE_DATABASE_ID database when set; it prints the target (project, database and mode: «apply» or «preview only — nothing will be written») before doing anything; it ends with «nothing needs changing», «applied: n» or «preview: n proposed changes. Run again with --apply»; options are read as --name=value, and today's dates are computed in Kuwait time (YYYY-MM-DD). The other repair scripts shall require FIREBASE_PROJECT_ID and FIREBASE_DATABASE_ID explicitly, stopping with a message asking to set both before any connection, while the provisioning scripts read them from firebase-applet-config.json when absent.

Implemented · Must · Non-functional · Root administrator

#### ACCEPTANCE CRITERIA

1. DATA_MODE=demo and running a script ← the error that it is for Firestore data only, and no connection.
2. A run without --apply with 3 changes ← «preview: 3 proposed changes» and no document changed.

#### EVIDENCE

`scripts/lib/firestoreScript.ts#connectFirestore` `scripts/lib/firestoreScript.ts#finish`
`scripts/lib/firestoreScript.ts#kuwaitDate` `scripts/lib/firestoreScript.ts#argValue`

### FR-DAT-036 One-time repairs for one department's two plan sheets

Inferred

Four tools shall be a one-time repair specific to one particular department family, aligning its courses and plan sheets with the references of its two plan sheets, the old 2010 and the new 2026, all previewing by default with a JSON report and none approving any rules: (1) an audit tool, read-only, shows for every department of that family the missing, duplicate and mismatching courses (name, units or hours), the membership of the two sheets (expected, linked, missing, extra), the rule drafts, the capacities differing from the home department 7, and a complete flag; (2) a home-department repair for department 7 only, stopping if the department is not that one, lacks exactly one old (transition) and one new (active) sheet, has a duplicate course code or the two references disagree on a course, and refusing to apply when a rule draft already exists; with --apply it creates a missing course with capacity 0, corrects name, units and hours keeping the capacity, adds each sheet's courses and removes extras, writes two «in review» rule drafts with prerequisites (resolved inside the college when they match exactly one course) and elective groups (minimum courses ceil(units/3), at least 1), then verifies and writes an audit line; (3) an all-departments repair stops unless exactly 4 departments of that family exist, department 7 has a capacity for every reference course and both rule drafts, and each department has single old and new sheets with consistent links; with --apply it re-reads each department before editing, aligns courses on name, units, hours and the capacity copied from department 7, synchronises memberships, copies department 7's draft to a department missing one after translating course ids (keeping an existing draft), then verifies; (4) a seeding tool prepares two pilot departments at the two branch sites (54 and 131) after checking their colleges and department code, refusing a department whose sheets are outside the expected structure; it creates or updates the courses with department 7's capacities (missing ones 0 for the department to fill), creates the programme's 2026/2027 sheet (code <programme>-2026) so the previous one becomes transitional, links each sheet's courses and writes two «in review» rule drafts. All four require FIREBASE_PROJECT_ID and FIREBASE_DATABASE_ID explicitly and relate to the plan-sheet and pathway module.

● Implemented · Could · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. Applying the department 7 repair while a draft exists ← «a rule draft exists; no write was made».
2. Five departments of that family ← the all-departments repair stops before writing.
3. After any applied run ← the drafts are «in review» and the approved sheet is unchanged.

#### EVIDENCE

`scripts/audit-tech-education-curricula.ts` `scripts/repair-tech-education-home-section.ts` `scripts/repair-tech-education-all-sections.ts` `scripts/seed-tech-education-pilot.ts` `src/data/technologyEducationCurricula.ts`

### FR-DAT-037 One-time repair: one department's sheet courses and the test course

Inferred

A tool shall be a one-time repair for every department bearing one particular department name fixed in the tool, in every college (or one department with --section=ID), reading the department id stored as a number or as text, and printing per department its sheets and what it will do: three courses fixed in the tool by number and name (199, 198 and 213) are added to the old (transition) sheet and removed from the current (active) one, their name NFKC-normalised when stored in presentation forms; the course «test» numbered 1111 is deleted with its memberships and code claims after being copied to deletedRecords (courses__<id>) in one batch; a course shall match by the full number or the end of the seven-digit code and by name after normalisation together, anything matching more than one course is left for manual review, --plan=ID is required when the department does not have exactly one old sheet, and deleting a course that has an appointment in any schedule is refused; previewing by default under the safeguards of NFR-DAT-035.

● Implemented · Could · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. The test course has an appointment ← it is not deleted and the operator is told to delete its appointments first.
2. A course matching number 199 but not the name ← untouched.

#### EVIDENCE

`scripts/fix-tech-courses.ts` `scripts/lib/firestoreScript.ts`

### FR-DAT-038 One-time repair: removing signature events recorded in error for one department

Inferred

scripts/remove-signature-events.ts shall be a one-time repair for one department: one specific department in one specific college for the first term 2026/2027; it removes from the events field of scheduleApprovals/<college>_<department>_<term> two «sign» events with two specific verification codes and two «withdraw signature» events by one specific signer on 2026-09-27 Kuwait time, deletes the two «signature …» snapshots in scheduleVersions from which the codes derive (verificationCode, trying every millisecond in the 10 seconds after the snapshot time), and does not touch the audit log; the college, department and term shall each resolve to exactly one result by name or by --college, --section and --term, and --date and --actor are accepted; it shall refuse to write unless it finds exactly two sign and two withdraw events, or if a current signature or a sent round exists (rounds or currentRound > 0); it shall set the status to «drafting», deleting the whole document when nothing non-default remains; and it shall write inside a transaction that checks the revision number, stopping with «the document changed during the run — preview again».

● Implemented · Could · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. Only one sign event found ← «two signs and two withdrawals expected… nothing was written».
2. The document holds an extension request ← it is updated, not deleted, and becomes «drafting».

#### EVIDENCE

`scripts/remove-signature-events.ts` `scripts/lib/firestoreScript.ts#kuwaitDate` `src/utils/approvalWorkflow.ts#verificationCode`

### FR-DAT-039 Clearing one department's term schedule with a backup and restore

Inferred

scripts/clear-term-schedule.ts shall clear the schedule rows of one scope (college + department + term) without touching the department, its courses, its instructors, another term, drafts, approvals, requests or the sibling branch departments (which it only mentions), because the live database has no point-in-time recovery or delete protection; it shall require FIREBASE_PROJECT_ID and FIREBASE_DATABASE_ID explicitly, resolve the scope by --college-id, --section-id and --term-id or by name (by default: a department and college fixed in the script · second term 2026/2027) to exactly one result or stop listing the options; it shall stop if a row from another term is read; the preview shall show the row count per course and delete nothing; it shall execute only with --apply and --expect-rows equal to the current preview count, first writing a JSON copy in --backup-dir (default schedule-backups) named schedule-<college>-<department>-<term>-<stamp>.json and re-reading it to verify its count before any deletion, then deleting, verifying the scope is empty and writing an audit line for clearing a term schedule; --restore <file> --apply shall restore the copy only into the same scope while it is empty (refusing otherwise) with new ids and an audit line for restoring a term schedule.

● Implemented · Should · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. --apply without --expect-rows or with a different count ← it stops and nothing is deleted.
2. Restoring into a scope that has rows ← «the scope is not empty; no restore over data».
3. A backup file of another scope ← «the file does not belong to this scope».

#### EVIDENCE

`scripts/clear-term-schedule.ts` `scripts/firestore-backup.md`

### FR-DAT-040 One-time exceptional import: one specific department's schedule

Inferred

A tool shall be a one-time exceptional import restricted to one specific department (by its official code, department 227 in college 12), accepting no other department, because the normal upload rejects its whole schedule (the stored college code differs from the printed one, most of its instructors have no civil ID and its building is unregistered); it reads the SWRSCHA PDF report (first argument) with the same reader, stopping if its header is not for that department's code, its branch and the first term, if department 227 is not the expected one, or if the department already has rows in the target term (--term=<id>, default 42: first term 2026/2027); it creates a missing course under its printed name with 3 units, 3 hours and capacity 24; it matches an instructor by the first two words of the name after dropping titles, narrowing with the remaining words and accepting only a single candidate, otherwise leaving the class section without an instructor and listing the name; it links a registered room (VERIFIED) and keeps the printed text of any other (LOCATION_REVIEW_REQUIRED); it gives the department's field-training course days 2 to 5 when the days column is empty; the preview lists new courses, matched and unmatched instructors, locations to review and class sections without day or time, and it writes only with --apply. It relates to the import module.

● Implemented · Could · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. A report of another department ← it says the report is not for that department in the first term and exits with 1.
2. The department has rows in term 42 ← «nothing is written over them».
3. A printed name matching two instructors ← the class section has no instructor and the name is under unmatched names.

#### EVIDENCE

`scripts/import-marine-term-schedule.ts` `src/utils/documentOcr.ts#ocrDocument` `src/utils/documentOcr.ts#readAuthorityPdfHeader`

### FR-DAT-041 Legacy client-side migration to Firestore

Inferred

scripts/migrate-client.mjs shall be a legacy migration that connects to Firestore with the client library and the firebase-applet-config.json settings (and its firestoreDatabaseId database), reads the private data export ../schedule-private/db.json outside the repository, and writes eleven collections with fixed ids: users (user_<id>), formNames, formSecurity, userScopes, terms, colleges, sections, instructors, courses, schedules, rooms, in batches of 400 documents, then writes _meta/counters with the highest user id and the highest appointment id; the reader shall know it has no preview, no confirmation and no non-empty-database check, replacing any document with the same id outright, so it is run only on a fresh database by the root administration account; the endorsed import path is scripts/import-legacy-json.ts.

● Implemented · Could · Functional · Root administrator

#### ACCEPTANCE CRITERIA

1. Running it ← a line «Migrated n rows to <collection>» per collection then «Migration finished».
2. 1000 users ← three batches (400, 400 and 200).

#### EVIDENCE

`scripts/migrate-client.mjs` `scripts/import-legacy-json.ts`

## 3.19.5 Algorithms

ALG-DAT-01 · Data model and integrity

**Legacy migration with count parity**

Deterministic

*Has the legacy snapshot been moved completely, under its original identifiers, before the first login is accepted?*

1. It starts only when the users collection is empty and auto-import is not disabled; on the cloud server with auto-import disabled and an empty database, the server refuses to start and writes nothing.
2. Each active table is written under its original identifier in batches of 400 records.
3. Every inactive table is archived row by row with its original name and row count.
4. Eleven collections are counted and compared with the snapshot; any difference ends startup with «فشل التحقق من نقل ...» before any login.

**Inputs**

The local snapshot extracted from the legacy backup, and the auto-import setting.

**Output**

A database whose counts match the snapshot plus a historical archive, or a halted startup naming the short collection.

No login is accepted on an incomplete migration, and the migration never runs over existing data.

Write batch: 400 records · 11 collections count-verified

`src/db/repository.ts#seedFirestoreFromLocalSnapshotIfNeeded` `scripts/import-legacy-json.ts` `tests/parity_audit.py` `tests/legacy-data-audit.py`

`FR-DAT-021`

## 3.19.6 Edge cases

### ⚠ Identifiers of two different types

**Scenario** An instructor identifier arrives as text from the database and as a number from the request.

**Behaviour** Identifiers are compared as numbers, so the instructor conflict is detected despite the type difference.

### ⚠ Reusing the code of a deleted course

**Scenario** A course was deleted and a new course with the same code is created in the same department while the old claim still exists.

**Behaviour** The claim is verified against the course that registered it; if it no longer holds the code the claim is taken over and the creation succeeds.

### ⚠ Converting to appointed while a past roster still holds his name

**Scenario** A visiting instructor is converted to appointed and a past-term roster still contains his name.

**Behaviour** The past roster stays unchanged, the «visiting» badge disappears from the present, and the roster history is kept.

### ⚠ The write-announcement counter goes backwards

**Scenario** The _meta/schedulesChanged document is recreated or the writers map is pruned.

**Behaviour** The regression counts as one foreign write and the instance drops its cache; one needless refresh is cheaper than a missed change.

> ⚠ **Two simultaneous saves of the same appointment**
>
> **Scenario** Two coordinators open the same lecture and each saves a change.
>
> **Behaviour** The first save succeeds and raises rev; the second is refused with a revision conflict and is shown the current row.

### 3.19.7 Standing owner decisions

- A displayed course number is always seven digits (college 2 + department 2 + course 3, e.g. 0109105); the stored CourseCode and AdCourseId are never shown.
- The design of printed reports is not touched: fixes go into values and data, not layout.
- No local data snapshot and no production credential in source control or delivery archives; they are configured in a private environment.

↑ Contents

3.20 · EXT

# External interfaces

Everything the system connects to from outside, and under what contract

| 33 | 100% | 0 | 1 |
|---|---|---|---|
| reqs | done | routes | files |

1. Overview · 2. User journeys · 3. Diagrams · 4. Requirements · 5. Edge cases · 6. Standing owner decisions

↑ Contents

## 3.20.1 Overview

This module fixes the contracts between the system and its surroundings: the Firestore database reached by the server alone, Google Cloud Run hosting and the domain, the Gemini service that only reads and proposes behind deterministic validators and explicit user confirmation, the Arabic and English OCR language packs, mobile notifications (Web Push) and outbound company e-mail, calendar subscription (ICS) and Excel export, the registration authority's timetable file (SWRSCHA) as an input, the browser contract (PWA and service worker), and the public link scheme with its token rules. Every number comes from the actual code.

External service · The system (automatic) · Root administrator · Schedule committee chair · Department head · Faculty member · Student · Public visitor · Partner organisation

## 3.20.2 User journeys

**Faculty member** — **Subscribing to my timetable in the phone calendar**

1. The instructor opens his card through his personal link (/r/<token>) and presses «add to calendar».
2. The server gives him a stable subscription link of the form /api/public/cal/<token>/p<number>-<key>.ics.
3. The calendar app reads the file and re-reads it every 6 hours; the server answers 304 when nothing changed.
4. A lecture cancelled on one date disappears from that date alone in every subscribed phone.
5. If the instructor has no live card left the subscription answers with an empty calendar explaining the pause, and returns on its own once a new card is issued.

**Faculty member** **Enabling mobile notifications for my card**

1. The instructor presses «enable notifications» in his card and the browser registers the push worker /push-sw.js scoped to the card.
2. The browser fetches the public VAPID key from /api/public/push/key and subscribes with the push service.
3. The server checks that the endpoint is https to a known push service and stores the record bound to the card token.
4. When his request is settled the server sends an aes128gcm-encrypted message with a 24-hour TTL and a topic that replaces earlier ones.
5. If the push service answers 404 or 410 the subscription is deleted.

**Root administrator** **Releasing a version and verifying it**

1. The maintainer merges the change into the main branch and the full test run passes.
2. The «Deploy SCHEDULE» pipeline builds the image and replaces the image of the official schedule service only, leaving the domain and secrets untouched.
3. scripts/stamp-sw.mjs stamps the build identifier into sw.js so every open browser sees a real update.
4. The maintainer verifies that the domain and the platform's default service address return the same build identifier from /sw.js.

## 3.20.3 Diagrams

### System context and external parties

The system sits in the middle; people reach it from the browser, and it reaches external services under defined contracts.

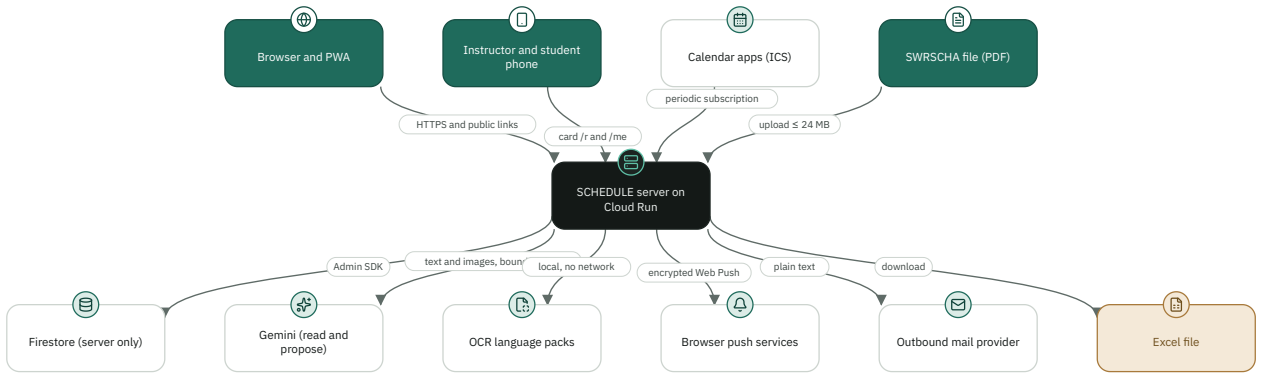

### Opening a public link by token

Failure is counted, not success: someone guessing tokens is stopped after 40 misses, and a campus network opening a thousand valid links is never blocked.

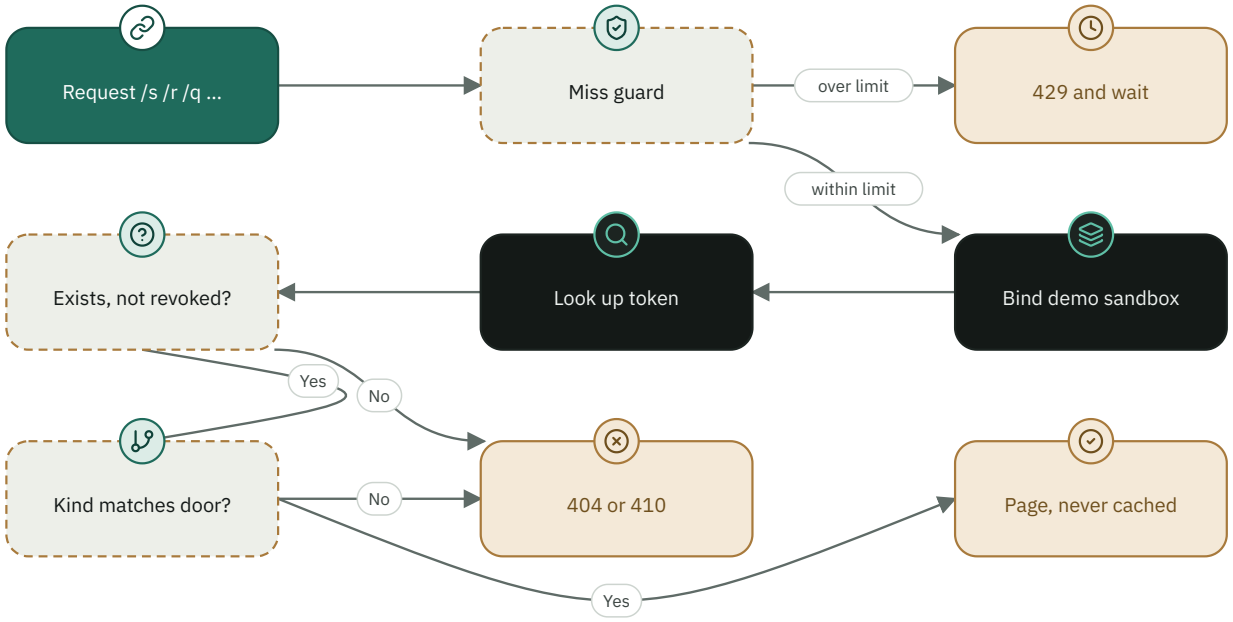


## 3.20.4 Requirements

### IR-EXT-001 Firestore through the server only

The system shall reach Firestore through the server alone, using the Admin SDK and the platform's application identity or a credential file kept outside the repository; it shall perform one real read at startup to verify the target and shall never run on substitute data if that fails: the server stays up and answers /api with 503 and a short reference number, while the full error text goes to the log, not the browser.

● Implemented · Must · Interface · The system (automatic), Root administrator

**ACCEPTANCE CRITERIA**

1. A wrong target or expired credential yields 503 on every /api route except /api/landing/inquiry, while the interface still loads.
2. No credential file exists in the repository or in the container image.

**EVIDENCE**

`src/db/repository.ts` `src/server/core/state.ts` `server.ts` `firestore.rules` `tests/firestore-target-audit.ts`

### IR-EXT-002 Firestore project and database selection

The server shall select the Firestore project and database by one rule: on Cloud Run the application config file takes precedence over environment variables and a conflict is logged; elsewhere the variables win; with FIREBASE_CONFIG_SOURCE=environment the variables become the only source and startup is refused if the file contradicts them; and on Cloud Run it shall not start with a missing or «(default)» database.

● Implemented · Must · Interface · The system (automatic)

**ACCEPTANCE CRITERIA**

1. On Cloud Run a FIREBASE_DATABASE_ID that differs from the file is ignored with an [firestore-target] warning.
2. An empty or «(default)» database throws «Refusing to start on Cloud Run».

**EVIDENCE**

`src/server/firestoreTarget.ts` `src/server/runtimeEnv.ts` `tests/firestore-target-audit.ts`

### IR-EXT-003 Hosting on Cloud Run

The system shall be deployed as a single container (Node 22, port 3000, MALLOC_ARENA_MAX=2) on Cloud Run holding only the bundle, the interface build, the required packages, the config file and the two language packs, without sources or tests; on Cloud Run the runtime shall force production mode, the Firestore data mode and disabled auto-import, except for a dedicated demo service that is enabled explicitly and runs in memory.

Implemented · Must · Interface · Root administrator, The system (automatic)

**ACCEPTANCE CRITERIA**

1. NODE_ENV becomes production, DATA_MODE=firestore and AUTO_IMPORT_LEGACY_DATA=false whenever K_SERVICE is present.
2. SCHEDULE_PRIVATE_DIR inside the release folder in production stops startup.

**EVIDENCE**

`Dockerfile` `src/server/runtimeEnv.ts` `src/db/snapshot.ts` `tests/firestore-target-audit.ts`

### IR-EXT-004 Domain and official deployment

The «Deploy SCHEDULE» pipeline shall publish only the container image to the official schedule service in one region and shall not change the schedule-kw.com domain mapping, the service account, the secrets or the memory; after release the domain and the platform's default service address shall be verified to serve the same build identifier from /sw.js; it is the only deploy path.

Implemented · Must · Interface · Root administrator

**ACCEPTANCE CRITERIA**

1. The deploy-target guard fails if the pipeline points to a project or region other than the official one or to a retired region.
2. The published sw.js carries a build identifier rather than the __BUILD__ placeholder.

**EVIDENCE**

`docs/DELIVERY_OPERATIONS.md` `scripts/stamp-sw.mjs` `tests/deploy-target-guard.mjs`

### IR-EXT-005 Health endpoint

Inferred

GET /api/health shall answer from memory without reading Firestore with JSON holding ok, database («up» or «down») and a reference number on failure, so that it can keep the service warm during working hours.

Implemented · Should · Interface · The system (automatic), External service

**ACCEPTANCE CRITERIA**

1. A healthy database returns ok:true and database:up.
2. The warm-up scheduler asks every 5 minutes from Sunday to Thursday between 08:00 and 15:55 Kuwait time.

**EVIDENCE**

`src/server/routes/systemRoutes.ts` `docs/DELIVERY_OPERATIONS.md`

### IR-EXT-006 Gemini call contract

The Gemini service shall be called with one HTTPS request per read, using a key from GEMINI_API_KEY or GOOGLE_GEMINI_API_KEY (nothing happens when absent) and a model from GEMINI_SCHEDULE_MODEL or GEMINI_MODEL, at temperature 0.1 and low thinking, with a 45-second budget for function calls and 180 seconds for a document read; it reads text and images and proposes alternatives or specific function calls, and never decides or writes.

Implemented · Must · Interface · External service, Schedule committee chair

**ACCEPTANCE CRITERIA**

1. Without a key the function returns null and the deterministic parser takes over.
2. Exceeding the budget returns failed with a «timeout» reason and does not hang the request.

**EVIDENCE**

`src/server/core/gemini.ts` `src/utils/geminiScheduleLayer.ts` `tests/gemini-schedule-layer.ts`

### IR-EXT-007 Gemini output behind validators and confirmation

Nothing the Gemini service proposes shall be stored, published or applied unless it passes the server's deterministic validators and an explicit user confirmation: only five functions are accepted (check_conflicts, find_rooms, check_instructors, check_regulations and simulate_schedule), and any call or field carrying write, delete, publish or approve words is dropped.

Implemented · Must · Interface · Schedule committee chair, External service

**ACCEPTANCE CRITERIA**

1. The nl-schedule route returns a preview only with commitRequired:true and writes nothing.
2. A call named delete_schedule is dropped and never reaches the executor.

**EVIDENCE**

`src/utils/geminiScheduleLayer.ts` `src/server/routes/intelligenceInsightRoutes.ts` `tests/gemini-schedule-layer.ts`

### IR-EXT-008 When Gemini is unavailable

Inferred

When the Gemini service is unavailable (not configured, busy, timed out or refused), assisted timetable import shall return 503 with code GEMINI_SMART_IMPORT_UNAVAILABLE and a calm message stating that the timetable did not change, shall log rather than show the provider's English error text, and understanding of a text request shall fall back to the deterministic parser.

Implemented · Must · Interface · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A 429 from the provider shows the user «the reading servers are busy», not the provider's text.
2. After any failure the schedule row count is unchanged.

**EVIDENCE**

`src/server/routes/smartImportRoutes.ts` `src/server/routes/intelligenceInsightRoutes.ts`

### IR-EXT-009 OCR language packs

Scanned pages shall be read locally by Tesseract using the ara.traineddata and eng.traineddata packs located in the release root, searched in OCR_DATA_DIR, then the working directory, then the bundle folder, so they are never requested from the network, and a pool of workers shall serve one reading at a time.

Implemented · Must · Interface · The system (automatic)

**ACCEPTANCE CRITERIA**

1. Startup from the repository root works with no network connection.
2. The container image copies both files to the application root.

**EVIDENCE**

`src/utils/documentOcr.ts` `Dockerfile` `tests/pdf-import-hardening.ts`

### IR-EXT-010 The authority's SWRSCHA file as an input

The system shall accept an authority timetable PDF (SWRSCHA) of up to 24 MB and 12 pages, reading the embedded text by its coordinates when present and otherwise the scanned page (landscape only), taking term, branch and department from each page header, and shall reject the whole file rather than part of it above 12 pages; scans never create a department or course.

Implemented · Must · Interface · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. A 14-page file is rejected with a message stating the limit of 12 and no row is imported.
2. The department comes from the header even when the course number carries another department's code, and a three-digit tail alone never links.

**EVIDENCE**

`src/utils/documentOcr.ts` `src/server/routes/pdfImportRoutes.ts` `src/utils/authorityAcademicCodes.ts`
`tests/header-department-rule-audit.ts` `tests/authority-course-prefix-audit.ts`

### IR-EXT-011 Web Push protocol

The server shall send mobile notifications per RFC 8030, RFC 8291 and RFC 8292: the payload is aes128gcm-encrypted to the browser's key (single record), the VAPID signature is ES256 valid for 12 hours with the subject https://schedule-kw.com, the TTL header is 86400 seconds, with an Urgency header and a 32-character base64url Topic that replaces a message not yet delivered; the VAPID keys come from VAPID_PUBLIC_KEY and VAPID_PRIVATE_KEY together, otherwise they are derived from the shared secret.

● Implemented · Must · Interface · The system (automatic), External service

**ACCEPTANCE CRITERIA**

1. Setting one key without the other, or two mismatched keys, throws an error.
2. A payload above the size limit is refused before sending.

**EVIDENCE**

`src/server/webPush.ts` `tests/web-push-audit.ts`

### IR-EXT-012 Allowed push destinations and pruning

The server shall send only to https addresses on port 443 without credentials at known push services (FCM, legacy FCM links, Mozilla, Apple and Windows) to prevent internal requests, with a 10-second timeout, shall delete a subscription on a 404 or 410 answer, and shall refuse a subscription tied to a card that was stopped or expired.

● Implemented · Must · Interface · The system (automatic)

**ACCEPTANCE CRITERIA**

1. An http address or an internal host is refused and no request is issued.
2. A 410 answer leaves the record deleted in the same response.

**EVIDENCE**

`src/server/webPush.ts#isAllowedPushEndpoint` `src/server/pushRoutes.ts` `tests/web-push-audit.ts`

### IR-EXT-013 Per-device notification limit

Each subscription shall be limited by a bucket of five consecutive notifications and then one per minute, request-inbox notifications shall be cooled down for three minutes per department with the cooldown kept in the database, and the «try» button shall answer 429 when nothing was sent because of the limit.

● Implemented · Should · Interface · The system (automatic), Faculty member

**ACCEPTANCE CRITERIA**

1. The sixth within one minute is not sent and is counted as limited in the report.
2. After one minute one token returns to the bucket.

**EVIDENCE**

`src/server/webPush.ts#createPushRateLimiter` `src/server/pushRoutes.ts` `tests/web-push-audit.ts`

### IR-EXT-014 Outbound company e-mail

Outbound e-mail shall stay disabled unless AD_MAIL_API_KEY and AD_MAIL_FROM are set; once set, a plain-text message is sent by a JSON POST with Authorization: Bearer to AD_MAIL_API_URL (default a Resend-compatible API) with a 10-second timeout, to the company address stored in its campaign or to the owner's AD_LEAD_NOTIFY_TO, with no personal numbers and no tracking, and a week key (starting Sunday) prevents sending the weekly summary twice.

● Implemented · Could · Interface · Partner organisation, The system (automatic)

**ACCEPTANCE CRITERIA**

1. Without configuration no mail leaves and nothing changes in production.
2. An invalid address or one longer than 120 characters is treated as absent.

**EVIDENCE**

`src/server/adMailer.ts` `tests/ads-audit.ts`

### IR-EXT-015 ICS calendar file for a department timetable

GET /api/public/ics/:token shall serve an RFC 5545 calendar (CRLF endings, line folding at 75 bytes, a VTIMEZONE for Asia/Kuwait, weekly RRULE and EXDATE for cancelled dates) for public department timetables only, with an optional 0–120 minute alarm, a 6-hour refresh interval and a weak ETag answering 304 when unchanged, and a 16-week term length when its dates are not recorded, with an «estimated» label in the calendar name.

● Implemented · Must · Interface · Faculty member, Student, Public visitor

**ACCEPTANCE CRITERIA**

1. A staff-card, survey, students or request link answers 404 on this path.
2. A term without dates shows «(تواريخ الفصل غير مسجّلة)» in the name.

**EVIDENCE**

`src/server/routes/publicCalendarRoutes.ts` `src/utils/icalendar.ts`
`src/server/routes/publicCalendarRoutes.ts#/api/public/ics/:token` `tests/calendar-ics-audit.ts`

### IR-EXT-016 The instructor's stable calendar subscription

The instructor's subscription key shall be of the form p<number>-<32-character HMAC> derived from CALENDAR_SECRET or from the shared secret and stable, not following the link token, so it does not die when the card is republished; when no live card remains it shall answer 200 with a valid empty calendar of the same name and a description stating the pause, and when the key matches nobody it shall answer 404.

● Implemented · Must · Interface · Faculty member

**ACCEPTANCE CRITERIA**

1. Two different tokens for two cards do not change the same instructor's key.
2. Rotating CALENDAR_SECRET invalidates every subscription.
3. The older path /api/public/ics/:token/:key remains for earlier subscriptions: its key is a 32-character HMAC over «token|instructor number», so it dies with the link, and it answers 404 when it matches nobody.

**EVIDENCE**

`src/server/calendarSecret.ts` `src/server/routes/publicCalendarRoutes.ts`
`src/server/routes/publicCalendarRoutes.ts#/api/public/cal/:token/:key` `tests/calendar-ics-audit.ts`

### IR-EXT-017 One-day calendar reminder

GET /api/public/me/reminder?kind=next|round (with a Masari session) shall serve a one-day ICS file whose title and date the server builds, with no-store, carrying no name or personal number; GET /api/public/me/cal/<key>.ics shall serve a stable subscription to «my proposed timetable» that Apple, Google and Outlook read with no cookie; these are Masari's two paths to the calendar (no file is generated in the browser, and no public link accepts free text).

● Implemented · Could · Interface · Student

**ACCEPTANCE CRITERIA**

1. With no session ← 401; a kind other than next/round ← 400.
2. A tampered key, or after a code change ← 404.

**EVIDENCE**

`src/server/studentDoorRoutes.ts` `tests/calendar-ics-audit.ts` `tests/masari-return-audit.ts` `tests/student-recovery-audit.ts`

### IR-EXT-018 Excel export

GET /api/reports/excel/:type shall serve an xlsx file for one of three types (ListofTeacherCourseExcel requiring permission 14, TeacherWithCourseExcel 8, ScheduleExcel 7), with a right-to-left sheet titled in Arabic «Schedule», 13 columns and an auto-filter, carrying all eleven screen filters, the seven-digit course number and the «visiting» suffix on a visiting instructor's name, under the file name schedule_report_<type>.xlsx.

Implemented · Must · Interface · Schedule committee chair, Department head

**ACCEPTANCE CRITERIA**

1. An unknown type returns 400; a user without the permission returns 403.
2. Filtering by Sunday, course 321 and before noon produces the same rows as the screen.

**EVIDENCE**

`src/server/routes/reportsRoutes.ts` `src/utils/authorityAcademicCodes.ts` `tests/course-number-seven-digit-audit.ts`

### IR-EXT-019 Service worker and PWA contract

sw.js shall be stamped with a fresh identifier on every build, cache the application shell and hashed assets (cache-first) and a fixed list of read APIs only when they succeed, never cache /api/auth, the user list and student cases (/api/schedules/demand and /api/student-registration), leave the /r, /s, /q, /m, /t, /me, /d, /b, /plans, /partners and /verify pages to the network without caching, and serve the «updating» page (503) on 500, 502, 503, 504 or a dropped navigation.

Implemented · Must · Interface · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A navigation that returns 502 shows /updating.html with Retry-After: 5 and the failed answer is not cached.
2. An API read while offline returns the stored copy or a 503 with Arabic text.

**EVIDENCE**

`public/sw.js` `public/updating.html` `scripts/stamp-sw.mjs` `tests/updating-page-audit.ts`

### IR-EXT-020 Push worker and manifests

The push worker /push-sw.js shall be independent of sw.js, stable between releases with no build stamp, shall cache no page and answer from no cache, scoped to /push/ in the application and to /r/<token> in the faculty card; the application has the manifest manifest.webmanifest (scope /) and Masari has me.webmanifest (scope /me).

Implemented · Must · Interface · Faculty member, Student

**ACCEPTANCE CRITERIA**

1. Restoring the old version unregisters sw.js and keeps the push worker.
2. The application's start_url is «/?source=pwa» and the student manifest's is «/me?source=pwa».

**EVIDENCE**

`public/push-sw.js` `public/manifest.webmanifest` `public/me.webmanifest` `src/utils/pushClient.ts` `tests/web-push-audit.ts`

### IR-EXT-021 Public link scheme

The server shall serve public pages at: /r/<token> faculty card, /s/<token> department or staff card, /q/<token> legacy survey (redirected to /me), /m/<token> my-request status, /t/<token> approved students timetable, /k/<token> chair team-member entry, /d/<token> room door, /b/<token> building board, /me «Masari», /verify/<token> signature or coupon verification, /partners/<token> partnership profile, /plans/<department>/<sheet>/ published plan sheets, and /landing the landing page; all are sent with no-store.

Implemented · Must · Interface · Public visitor, Faculty member, Student, Partner organisation

**ACCEPTANCE CRITERIA**

1. An /s link of kind request is redirected to its own door and never opens the department timetable.
2. /plans/, /landing and /me carry no token.

**EVIDENCE**

`src/utils/demoLinkToken.ts` `src/server/routes/publicStaffRoutes.ts` `src/server/routes/surveyRoutes.ts` `src/server/routes/publicRequestRoutes.ts` `src/server/routes/verifyRoutes.ts` `src/server/pushCard.ts` `tests/public-pages-syntax-audit.ts`

### IR-EXT-022 Token rules

The tokens of /s, /q, /m, /t and /r (share links) shall be random 24-byte base64url strings (32 characters), prefixed «demo.» in the demo sandbox, and the /r page accepts the form [A-Za-z0-9_-]{16,64}; the /d and /b token is a 16-character base64url string derived by HMAC from the stable room or building identifier and stays valid across releases; the /verify identifier is 32 lowercase hex characters for a coupon and a six-character code for a signature; no token carries a civil number.

Implemented · Must · Interface · The system (automatic), Public visitor

**ACCEPTANCE CRITERIA**

1. A token not matching the form returns the «link not found» page and is counted as a miss.
2. Moving a room between buildings or correcting its printed code does not change its door sticker token.

**EVIDENCE**

`src/server/roomDoorSecret.ts` `src/server/pushCard.ts` `src/utils/demoLinkToken.ts` `src/db/repository.ts#createShareLink` `tests/room-door-audit.ts` `tests/web-push-audit.ts`

### IR-EXT-023 Anonymous door protection

The server shall count failure, not success, on anonymous doors: a link token matching nothing is counted against the address (limit 40 misses in 10 minutes, hard ceiling 400), a non-existent session is counted (limit 120), every success is credited to the address, and no success is ever limited; /api/public is limited to 60 requests per minute per address (configurable) except «Masari» and the faculty card, which have their own limits.

Implemented · Must · Interface · Public visitor, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A campus on one address opens a thousand valid links without being blocked.
2. The forty-first miss within ten minutes answers with a Retry-After header.

**EVIDENCE**

`src/server/anonymousGuard.ts` `src/server/core/rateLimits.ts` `src/server/publicAttemptLimiter.ts` `tests/anonymous-guard-audit.ts`

### IR-EXT-024 Browser contract: security and headers

Inferred

The server shall send on every response nosniff, Referrer-Policy: same-origin, a Permissions-Policy denying camera, microphone and location, a partial CSP (object-src 'none', base-uri 'self', form-action 'self', frame-ancestors 'none') and a one-year HSTS in production; it shall refuse POST, PUT, PATCH and DELETE requests to /api that come from another site (a foreign Sec-Fetch-Site or Origin) with 403.

Implemented · Must · Interface · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A POST with an Origin of a different host returns 403 «الطلب غير مسموح».
2. HSTS is not sent outside production.

**EVIDENCE**

`server.ts`

### IR-EXT-025 Body limits and asset caching

Inferred

JSON bodies shall be accepted up to 1 MB (4 MB for timetable drafts), PDF files up to 24 MB and system backups up to 30 MB; hashed assets shall be served with public, max-age=31536000, immutable, index.html and sw.js with no-store, and a missing file or a path under /assets/ shall answer 404 rather than the application shell.

Implemented · Should · Interface · The system (automatic)

**ACCEPTANCE CRITERIA**

1. A request for a missing /assets/old-chunk-abc12345.js returns 404, not HTML.
2. A 2 MB JSON body on an ordinary route is refused.

**EVIDENCE**

`server.ts` `src/server/routes/pdfImportRoutes.ts`

### IR-EXT-026 Environment variables and secrets

Settings and secrets shall pass through the environment alone under fixed names: DATA_MODE, FIREBASE_PROJECT_ID, FIREBASE_DATABASE_ID, FIREBASE_CONFIG_SOURCE, GEMINI_API_KEY, GEMINI_SCHEDULE_MODEL, VAPID_PUBLIC_KEY, VAPID_PRIVATE_KEY, CALENDAR_SECRET, AD_MAIL_API_KEY, AD_MAIL_FROM, AD_MAIL_API_URL, AD_LEAD_NOTIFY_TO, PASSWORD_VAULT_KEY, SCHEDULE_PRIVATE_DIR, OCR_DATA_DIR and PUBLIC_RATE_LIMIT_MAX and MORNING_BRIEF_TOKEN (the morning-brief scheduler secret); no secret shall be written in the repository, documents or delivery archives.

Implemented · Must · Interface · Root administrator, The system (automatic)

**ACCEPTANCE CRITERIA**

1. A missing CALENDAR_SECRET does not generate a new secret at each start but derives one from the stored shared secret.
2. PUBLIC_RATE_LIMIT_MAX=0 turns the public request limit off.
3. The remaining variables the server reads are described in IR-EXT-028 to IR-EXT-030, and the secrets that must travel with the database in DR-DAT-031.

**EVIDENCE**

`src/server/runtimeEnv.ts` `src/server/calendarSecret.ts` `src/server/core/rateLimits.ts` `tests/firestore-target-audit.ts`

### IR-EXT-027 Database target from environment variables

The server shall accept the Firestore project and database from environment variables alone (FIREBASE_CONFIG_SOURCE=environment with FIREBASE_PROJECT_ID and FIREBASE_DATABASE_ID), so the hosting party connects the system to its own database without editing source files, and it shall refuse to start when a variable is missing or contradicts the config file instead of choosing silently.

Implemented · Could · Interface · Root administrator

#### RATIONALE

> It lets the receiving party connect the system to its database through runtime settings alone, with no data moved and no code edited.

#### ACCEPTANCE CRITERIA

1. With both variables and FIREBASE_CONFIG_SOURCE=environment the server connects to the named database and logs the source «environment».
2. A missing variable, or one contradicting the config file, stops start-up with an explicit message.

#### EVIDENCE

`src/server/firestoreTarget.ts` `src/server/runtimeEnv.ts` `docs/DELIVERY_OPERATIONS.md` `tests/firestore-target-audit.ts`

### IR-EXT-028 Firestore credentials and platform variables

Inferred

The server shall connect to Firestore with the platform identity by default, or with a service account passed as a complete JSON text in FIREBASE_SERVICE_ACCOUNT_KEY (the project taken from FIREBASE_PROJECT_ID, otherwise from project_id in the key), stop start-up with «Invalid FIREBASE_SERVICE_ACCOUNT_KEY JSON format.» when it is not valid JSON, and log the connection to the emulator when FIRESTORE_EMULATOR_HOST is set; it shall consider itself on Cloud Run whenever K_SERVICE, K_REVISION or K_CONFIGURATION is present and APPLET_ID is absent (the embedded preview environment, in which X-Frame-Options and frame-ancestors are not sent), and there place the private directory under TMPDIR (otherwise /tmp) named schedule-private.

Implemented · Should · Interface · The system (automatic), External service

#### ACCEPTANCE CRITERIA

1. A truncated service-account key stops start-up and tries no other identity.
2. With APPLET_ID, NODE_ENV=production and DATA_MODE=firestore are not forced.
3. No service-account key file exists in the repository or the image.

#### EVIDENCE

`src/db/repository.ts#initDatabase` `src/server/runtimeEnv.ts#configureRuntimeEnvironment` `src/db/snapshot.ts#isCloudRunRuntime` `server.ts` `tests/firestore-target-audit.ts`

### IR-EXT-029 Derived secrets and their override variables

Inferred

The server shall derive every key from the stored shared secret under its own label so one key material never serves two purposes: calendar-feed-key-v1 for the calendar, staff-device-key-v1 for remembering a teacher's device, room-door-sticker-v1 for door stickers, a VAPID label for the two push keys, and student-case-identity-v1 for sealing student identity; it shall prefer the configured variable over derivation where one exists: CALENDAR_SECRET for the calendar, STAFF_DEVICE_SECRET for the remembered device (capped at 180 days and never past the link's expiry), and VAPID_PUBLIC_KEY together with VAPID_PRIVATE_KEY for push, while door stickers have no variable; keys shall be resolved once per instance on the first request, and a failed read shall not be kept so it is retried.

Implemented · Must · Interface · The system (automatic), Root administrator

#### ACCEPTANCE CRITERIA

1. Setting or changing CALENDAR_SECRET invalidates every existing calendar subscription and touches no door sticker and no student identity.
2. Setting or changing STAFF_DEVICE_SECRET drops every remembered device, which asks for the civil number again.
3. Setting the VAPID pair after running on the derived pair (or changing the shared secret) changes the public key returned by /api/public/push/key, so existing devices must subscribe again.
4. Two neighbouring instances on Cloud Run yield the same keys.

#### EVIDENCE

`src/server/calendarSecret.ts#createCalendarSecretResolver` `src/server/staffDeviceKey.ts#createStaffDeviceSecretResolver` `src/server/roomDoorSecret.ts#createRoomDoorKeyResolver` `src/server/webPush.ts#vapidKeysFromEnv` `src/server/core/studentIdentity.ts#studentIdentityKey` `src/server/core/shareLinks.ts` `src/server/routes/publicStaffRoutes.ts` `tests/doctor-journey-audit.ts` `tests/staff-device-key-audit.ts` `tests/room-door-audit.ts` `tests/web-push-audit.ts`

### IR-EXT-030 Other operating variables and diagnostic switches

Inferred

The server shall read: ROOT_ADMIN_USER_ID, the number of the main administration account that owns the vault (default 1, never below 1); DEFAULT_ADMIN_PASSWORD, the administrator password for a new local development database only; AD_PUBLIC_ORIGIN, the origin of links in the automatic e-mails checked every hour (default https://schedule-kw.com); SCHEDULE_DEMO_ENABLED=false to close demo entry; and SCHEDULE_DEMO_SERVICE=true for a separate demo service; and diagnostic switches that are off by default: OCR_PROFILE=1 prints each stage's time while reading a scanned page, SMART_IMPORT_ROW_STRIPS=1 sends the requested row strips instead of the full page in assisted import, and ROOM_DOOR_FAKE_NOW starts the door page's clock at a chosen moment in demo mode outside production only.

Implemented · Should · Interface · The system (automatic), Root administrator

#### ACCEPTANCE CRITERIA

1. ROOT_ADMIN_USER_ID=0 or a non-numeric value falls back to account 1.
2. Without SMART_IMPORT_ROW_STRIPS the full page is sent even when specific rows are requested.
3. ROOM_DOOR_FAKE_NOW has no effect with NODE_ENV=production or DATA_MODE=firestore.
4. SCHEDULE_DEMO_ENABLED=false makes demo entry answer 404 and /api/demo/config return enabled=false.

#### EVIDENCE

`src/server/core/auth.ts` `src/db/repository.ts#initDatabase` `src/server/adsRoutes.ts` `src/server/routes/authRoutes.ts` `src/server/routes/systemRoutes.ts` `src/utils/documentOcr.ts` `src/server/routes/smartImportRoutes.ts` `src/server/roomDoorRoutes.ts` `src/server/runtimeEnv.ts`

### IR-EXT-031 Push notification HTTP interface

Inferred

The server shall provide: GET /api/public/push/key with the public key (no-cache); for an account holder GET /api/push/status (enabled, the key, the ids of his devices and those bound to his session), POST /api/push/subscribe, POST /api/push/unsubscribe and POST /api/push/test; for a teacher card by its token GET and POST /api/public/request/:token/push, POST /api/public/request/:token/push/off and POST /api/public/request/:token/push/test; POST /api/public/push/rotate to move a subscription the browser renewed on proof of the old subscription (its endpoint and auth secret together); and GET /r/:token/manifest.webmanifest with the My card app whose start and scope are /r/<token>; a subscription id is the SHA-256 digest of its endpoint.

Implemented · Should · Interface · Faculty member, Schedule committee chair, Department head, The system (automatic)

#### ACCEPTANCE CRITERIA

1. A test with no subscription answers 409 «enable notifications on this device first», and a limited test answers 429 «you just tried, wait a minute».
2. Unavailable keys answer 503 «notifications are not available now, try shortly».
3. Rotating a stopped card's subscription deletes the record and answers 410, and a non-matching proof answers 404.
4. A card token not matching (demo.)?[A-Za-z0-9_-]{16,64} answers 404 for the manifest.
5. Unsubscribing deletes the record only when it belongs to the requester himself.

#### EVIDENCE

`src/server/pushRoutes.ts#/api/push/subscribe` `src/server/pushRoutes.ts#/api/public/push/rotate` `src/server/pushRoutes.ts#/api/public/request/:token/push` `src/server/pushCard.ts#cardManifest` `src/server/webPush.ts#pushSubscriptionId` `tests/web-push-audit.ts`

### IR-EXT-032 Public department timetable read

Inferred

GET /api/public/schedule/:token shall answer without an account and without caching with the department timetable payload for a department-kind link only, refuse with 404 and a message naming the link kind a teacher-card link, a survey link, a students timetable link and a teacher request link, and increase the link's view counter without waiting.

Implemented · Should · Interface · Public visitor, External service

#### ACCEPTANCE CRITERIA

1. An expired or stopped link answers with the status and message returned by token resolution.
2. The answer carries Cache-Control: no-store.

#### EVIDENCE

`src/server/routes/publicCalendarRoutes.ts#/api/public/schedule/:token` `src/server/core/shareLinks.ts`

### IR-EXT-033 No browser error reporting to a third party

Neither the main interface (index.html) nor the landing page shall load any script that sends browser errors or a click trail to a service outside the system; interface faults of a signed-in user shall reach only the system's own server through POST /api/telemetry/client (see NFR-NFR-040), the public landing page shall send none of them, and the public measurement page (/measurement) shall state this explicitly.

Implemented · Should · Interface · Public visitor, The system (automatic)

#### RATIONALE

> What the measurement page promises (no external tracking tools) matches what the pages actually do, and nothing about a user leaves the system.

#### ACCEPTANCE CRITERIA

1. Neither index.html nor public/landing/index.html carries a script tag from outside the site that sends errors.
2. An interface error after sign-in is sent to /api/telemetry/client on the same site, with no request to any other domain.
3. The /measurement page states that interface faults go only to the program's own server and that the landing page sends none.

#### EVIDENCE

`index.html` `public/landing/index.html` `src/utils/clientTelemetry.ts#flushTelemetry` `src/server/routes/guideRoutes.ts` `src/server/adsPages.ts#measurementPage` `tests/handover-fixes-audit.ts`

### 3.20.5 Edge cases

**⚠ Gemini unavailable during a file import**

**Scenario** A coordinator uploads a scanned file while the provider is busy or timed out.

**Behaviour** The server returns 503 with a calm message ending «جدولك لم يتغيّر»; no row is written and the provider text is logged for the operator only.

**⚠ A push address chosen by someone else**

**Scenario** A client submits a subscription with an http address or an internal host.

**Behaviour** The subscription is refused before storing, and if such a record reached sending, no request is issued and it is treated as gone.

**⚠ Calendar subscription after the card ends**

**Scenario** The instructor's card ended without a new card and the phone still reads the subscription.

**Behaviour** The server answers 200 with a valid empty calendar explaining the pause so lectures are cleared quietly, and the subscription returns on its own when a new card is issued.

**⚠ A fourteen-page SWRSCHA file**

**Scenario** A file above the 12-page limit is uploaded.

**Behaviour** The whole file is rejected with a message stating the limit and nothing is read from it, because an incomplete timetable is more dangerous than a refusal.

**⚠ A browser holding an old build during a release**

**Scenario** An open tab requests a hashed file that no longer exists, or a navigation returns 502 while the server is swapped.

**Behaviour** The missing file returns 404 rather than HTML so the boot guard clears the stale copy and reloads; the navigation shows the «updating» page which reopens the address when the server returns.

### 3.20.6 Standing owner decisions

- In a SWRSCHA file the header decides the department even when a course number carries another department's code; a missing department or course is created only after one confirmation, and scans never create anything.
- The course number in every exported file is seven digits (e.g. 0109105).
- A release never changes the domain mapping, the official service or its secrets; only the container image changes.
- The Gemini service only reads and proposes; execution always goes through the deterministic validators and an explicit user confirmation.

↑ Contents

# A Traceability and requirement index

↑ Contents

| Module | Reqs | Done | Tested | Inferred | Routes | Files |
|---|---|---|---|---|---|---|
| Identity, accounts, roles and access scope | **60** | **60** | **48** | **17** | **58** | **39** |
| Academic structure and reference data | **57** | **57** | **40** | **21** | **90** | **77** |
| Locations | **39** | **39** | **34** | **5** | **38** | **50** |
| Deterministic scheduling engine | **78** | **78** | **70** | **15** | **44** | **96** |
| Drafts, scenarios and the time machine | **31** | **31** | **26** | **6** | **29** | **21** |
| Viewing, sharing, copying and transferring schedules | **30** | **30** | **21** | **11** | **7** | **16** |
| Approval cycle | **46** | **46** | **46** | **1** | **18** | **31** |
| Import | **45** | **44** | **40** | **5** | **8** | **31** |
| Faculty requests and public links | **80** | **80** | **79** | **5** | **50** | **85** |
| Section planning and curricula | **55** | **54** | **53** | **4** | **63** | **69** |
| Student and advising services | **93** | **93** | **86** | **7** | **75** | **75** |
| Analytics Center and Guide | **84** | **84** | **54** | **36** | **52** | **43** |
| Reports, queries, printing and export | **66** | **66** | **57** | **9** | **17** | **37** |
| Notifications, activity and live channel | **33** | **33** | **33** | **3** | **19** | **38** |
| Engagement and public presence | **37** | **37** | **35** | **3** | **40** | **43** |
| Dashboards and term awareness | **30** | **30** | **20** | **13** | **4** | **21** |
| Operations | **59** | **59** | **48** | **17** | **6** | **82** |
| Non-functional requirements | **44** | **44** | **40** | **13** | **0** | **7** |
| Data model and integrity | **41** | **41** | **25** | **18** | **0** | **16** |
| External interfaces | **33** | **33** | **27** | **9** | **0** | **1** |

## Requirement index

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-ACC-001 | Sign-in with user name and password | Implemented | Must | **2** | **2** |
| FR-ACC-002 | Rate limiting of anonymous requests | Implemented | Must | **2** | **1** |
| FR-ACC-003 | Idle expiry and presence-based renewal | Implemented | Must | **3** | **0** |
| FR-ACC-004 | Sign-out and session invalidation | Implemented | Must | **2** | **1** |
| NFR-ACC-005 | Anonymous-door limits: count failures, never block success | Implemented | Must | **2** | **1** |
| DR-ACC-006 | Password storage and non-disclosure | Implemented | Must | **3** | **1** |
| FR-ACC-007 | Password-change gate | Implemented | Must | **2** | **1** |
| FR-ACC-008 | New-password rules and change | Implemented | Must | **3** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-ACC-009 | Current-password waiver at first sign-in | Implemented | Must | **2** | **1** |
| FR-ACC-010 | Initial password, flagging and lifetime | Implemented | Must | **3** | **2** |
| FR-ACC-011 | Temporary password for reset | Implemented | Must | **3** | **1** |
| DR-ACC-012 | Catalogue of the ten roles | Implemented | Must | **2** | **2** |
| FR-ACC-013 | Server guard for read-only roles | Implemented | Must | **2** | **1** |
| FR-ACC-014 | Narrow doors for read-only roles | Implemented | Must | **2** | **2** |
| FR-ACC-015 | Role template: screens and scope in one operation | Implemented | Must | **2** | **2** |
| FR-ACC-016 | User administration | Implemented | Must | **3** | **1** |
| FR-ACC-017 | Main-administration screens and the root account | Implemented | Must | **3** | **1** |
| FR-ACC-018 | Permission and scope administration | Implemented | Must | **2** | **2** |
| DR-ACC-019 | Screen and scope records | Implemented | Must | **3** | **1** |
| FR-ACC-020 | The scope decision isScopeAllowed | Implemented | Must | **1** | **2** |
| FR-ACC-021 | Scope filtering and directed reads | Implemented | Must | **2** | **1** |
| IR-ACC-022 | Identity payload sent to the interface | Implemented | Must | **4** | **2** |
| FR-ACC-023 | Hiding instructors' personal data from read-only roles | Implemented | Must | **1** | **1** |
| FR-ACC-024 | Provisioning department-head and advisor accounts from a previewed plan | Implemented | Should | **2** | **1** |
| NFR-ACC-025 | One identity resolution per request with a short cache | Implemented | Should | **1** | **0** |
| FR-ACC-026 | Demo environment and role switching | Implemented | Should | **3** | **2** |
| FR-ACC-027 | Audit trail for sign-in and refusals | Implemented | Should | **4** | **0** |
| FR-ACC-028 | Backup vault for the root account | Implemented | Must | **14** | **0** |
| FR-ACC-029 | Invitation link and access card without sending the password to the server | Implemented | Must | **4** | **2** |
| FR-ACC-030 | Remember-this-device key for the faculty card | Implemented | Should | **1** | **1** |
| FR-ACC-031 | Order of sign-in checks and those that depend on the password | Implemented | Must | **4** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| IR-ACC-032 | The session contract everything after sign-in relies on | Implemented | Must | **6** | **1** |
| FR-ACC-033 | The root administration account and what belongs to it alone | Implemented | Must | **5** | **1** |
| FR-ACC-034 | The administrator flag overrides the role | Implemented | Must | **5** | **1** |
| DR-ACC-035 | The encrypted copy of the password (vault) | Implemented | Should | **4** | **1** |
| FR-ACC-036 | Editing an account and deleting it permanently | Implemented | Must | **3** | **0** |
| FR-ACC-037 | Granting the schedule screen (7) to every account missing it in one call | Implemented | Could | **1** | **0** |
| FR-ACC-038 | Previewing department-head and advisor accounts and consolidating duplicates | Implemented | Should | **6** | **1** |
| FR-ACC-039 | Editing and deleting permission and scope rows | Implemented | Should | **4** | **1** |
| FR-ACC-040 | Administration pick lists: accounts and instructors | Implemented | Could | **3** | **0** |
| FR-ACC-041 | Sections of the system administration screen and who sees them | Implemented | Should | **2** | **2** |
| FR-ACC-042 | Demo session management: reset, story preparation and the faculty card | Implemented | Could | **4** | **1** |
| FR-ACC-043 | Board position beat | Implemented | Could | **2** | **1** |
| FR-ACC-044 | Sign-in screen conveniences | Implemented | Could | **1** | **0** |
| FR-ACC-045 | The account access card: when it is ready and how it is saved | Implemented | Should | **6** | **1** |
| FR-ACC-046 | Welcome tour by role | Implemented | Could | **2** | **1** |
| DR-ACC-047 | Capabilities derived from the role | Implemented | Must | **2** | **2** |
| FR-ACC-048 | The account form and user list on the screen | Implemented | Could | **4** | **0** |
| FR-ACC-049 | Department account provisioning scripts | Implemented | Should | **6** | **1** |
| FR-ACC-050 | Leadership account provisioning script | Implemented | Should | **2** | **0** |
| FR-ACC-051 | One-time repair: consolidating duplicate advisor accounts | Implemented | Could | **2** | **0** |
| NFR-ACC-052 | Live per-role scope leak audit | Implemented | Should | **1** | **0** |
| FR-ACC-053 | Forgot password for all staff by civil ID | Implemented | Must | **4** | **1** |
| FR-ACC-054 | User-screen guards: root account, yourself and the last administrator | Implemented | Must | **4** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-ACC-055 | Permissions of the root account and of yourself | Implemented | Must | **2** | **1** |
| FR-ACC-056 | Audit log: what changed, page by page, and export | Implemented | Should | **5** | **1** |
| NFR-ACC-057 | Identity cache cleared after the write | Implemented | Must | **2** | **1** |
| NFR-ACC-059 | Identity and permission changes reach every server instance within about ten seconds | Implemented | Should | **3** | **1** |
| FR-ACC-058 | Users screen: nothing typed is lost, preview before creating | Implemented | Should | **4** | **1** |
| FR-ACC-059 | What-if-I-delete map before deleting an account | Implemented | Should | **4** | **1** |
| FR-ACD-001 | Term create, update and delete | Implemented | Must | **6** | **1** |
| FR-ACD-002 | Automatic creation of the next term | Implemented | Should | **3** | **1** |
| FR-ACD-003 | Automatic closing of an ended term | Implemented | Must | **2** | **1** |
| FR-ACD-004 | Scope-aware term list | Implemented | Should | **3** | **1** |
| FR-ACD-005 | College CRUD and delete guard | Implemented | Must | **4** | **1** |
| FR-ACD-006 | Department, faculty placeholder and delete guard | Implemented | Must | **5** | **1** |
| DR-ACD-007 | Seven-digit authority course number | Implemented | Must | **2** | **2** |
| DR-ACD-008 | Department key from college and department codes | Implemented | Must | **2** | **2** |
| FR-ACD-009 | Linking a course to its printed number | Implemented | Must | **3** | **1** |
| FR-ACD-010 | Course creation and numeric limits | Implemented | Must | **3** | **1** |
| FR-ACD-011 | Freezing the identity of a course with history | Implemented | Must | **2** | **0** |
| FR-ACD-012 | Block deleting a linked course | Implemented | Must | **2** | **0** |
| FR-ACD-013 | Room type and teaching mode sync across copies | Implemented | Should | **2** | **1** |
| FR-ACD-014 | Course tags in a fixed order | Implemented | Should | **2** | **1** |
| FR-ACD-015 | Duplicate course detection and archived delete | Implemented | Should | **2** | **1** |
| FR-ACD-016 | Spelling-twin merge with confirmation | Implemented | Should | **4** | **2** |
| DR-ACD-017 | Faculty identity: civil number | Implemented | Must | **3** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-ACD-018 | Quick instructor add and department enrolment | Implemented | Must | **4** | **2** |
| FR-ACD-019 | Instructor search by name identity | Implemented | Must | **4** | **1** |
| NFR-ACD-020 | Civil number and phone hidden from non-members | Implemented | Must | **2** | **1** |
| FR-ACD-021 | Instructor status and category | Implemented | Must | **3** | **2** |
| FR-ACD-022 | Rank and teaching load limits | Implemented | Should | **5** | **1** |
| FR-ACD-023 | Load computation and over-load warning | Implemented | Should | **4** | **2** |
| FR-ACD-024 | Visiting status through directory and term roster | Implemented | Must | **5** | **3** |
| FR-ACD-025 | Visiting roster and copy between terms | Implemented | Should | **4** | **1** |
| FR-ACD-026 | Converting an instructor between visiting and appointed | Implemented | Must | **6** | **1** |
| FR-ACD-027 | Visiting instructor becomes faculty placeholder on import | Implemented | Must | **2** | **1** |
| FR-ACD-028 | Course offering state per term | Implemented | Should | **6** | **2** |
| IR-ACD-029 | Scoped course reads with sheet tags | Implemented | Should | **2** | **1** |
| NFR-ACD-030 | Reference-data input validation | Implemented | Must | **3** | **1** |
| FR-ACD-031 | Accounts born with a college or a department | Implemented | Should | **4** | **0** |
| FR-ACD-032 | Travel time between a college's buildings | Implemented | Could | **3** | **0** |
| FR-ACD-033 | Department working hours | Implemented | Should | **3** | **0** |
| FR-ACD-034 | The university day | Implemented | Should | **3** | **0** |
| FR-ACD-035 | University-wide student unit cap in Masari | Implemented | Should | **4** | **1** |
| IR-ACD-036 | Campus travel policy route | Implemented | Should | **3** | **0** |
| FR-ACD-037 | Graduation rules per department | Implemented | Should | **5** | **0** |
| FR-ACD-038 | Managing room types | Implemented | Should | **5** | **1** |
| IR-ACD-039 | Academic sheet and transition routes | Implemented | Should | **9** | **0** |
| FR-ACD-040 | Course-editing window for the committee chair | Implemented | Must | **3** | **0** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| IR-ACD-041 | Visiting directory and instructor affiliation routes | Implemented | Should | **8** | **0** |
| FR-ACD-042 | Not-yet-reached verdict and the open-for-offering decision | Implemented | Should | **3** | **0** |
| FR-ACD-043 | Training phase for teaching assistants in waves | Implemented | Should | **7** | **0** |
| IR-ACD-044 | Advisor seat balance routes | Implemented | Should | **5** | **0** |
| FR-ACD-045 | How many visiting instructors a department needs | Implemented | Could | **3** | **0** |
| FR-ACD-046 | Department instructors in the schedule tools | Implemented | Should | **9** | **3** |
| FR-ACD-047 | Creating a course in the current sheet from the Courses screen | Implemented | Should | **2** | **0** |
| FR-ACD-048 | The course list, its card and its form on the screen | Implemented | Could | **3** | **1** |
| FR-ACD-049 | Provisioning a study programme for a partner college | Implemented | Should | **3** | **1** |
| FR-ACD-050 | Capacity by course nature for a whole department family | Implemented | Should | **3** | **0** |
| FR-ACD-051 | No duplicate college name, term or department code | Implemented | Must | **7** | **1** |
| FR-ACD-052 | Deleting a college or department leaves nothing dangling | Implemented | Must | **3** | **1** |
| FR-ACD-053 | Instructor status and load saved on create, and the load bound | Implemented | Must | **4** | **1** |
| FR-ACD-054 | The academic sheets entry and the seven-digit number on the Courses screen | Implemented | Must | **5** | **1** |
| FR-ACD-055 | One behaviour across the five academic data tabs | Implemented | Should | **5** | **1** |
| FR-ACD-056 | The term form, term deletion and same-building minutes | Implemented | Could | **3** | **1** |
| FR-ACD-057 | What-if-I-delete map before deleting a term, college, department, instructor or course | Implemented | Should | **9** | **1** |
| DR-LOC-001 | Official building identity | Implemented | Must | **2** | **1** |
| DR-LOC-002 | Hall record | Implemented | Must | **2** | **2** |
| DR-LOC-003 | Registry confidence and seed | Implemented | Must | **3** | **1** |
| FR-LOC-004 | Add a building | Implemented | Must | **4** | **1** |
| FR-LOC-005 | Add halls in bulk | Implemented | Must | **3** | **1** |
| FR-LOC-006 | Edit a building | Implemented | Must | **4** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-LOC-007 | Deletion is deactivation | Implemented | Must | **3** | **1** |
| FR-LOC-008 | Rename and move a hall | Implemented | Must | **3** | **1** |
| FR-LOC-009 | The list is the permission | Implemented | Must | **4** | **2** |
| FR-LOC-010 | Location check on every save | Implemented | Must | **2** | **2** |
| FR-LOC-011 | Registry initialisation, migration and health | Implemented | Should | **7** | **1** |
| FR-LOC-012 | Hall type differs by department | Implemented | Should | **4** | **2** |
| FR-LOC-013 | Free-window board for barter | Implemented | Must | **4** | **2** |
| FR-LOC-014 | Boys and girls campuses stay separate | Implemented | Must | **1** | **0** |
| FR-LOC-015 | Requesting and approving a barter | Implemented | Must | **4** | **2** |
| FR-LOC-016 | Cancelling and ending a barter | Implemented | Must | **3** | **2** |
| FR-LOC-017 | Request expiry and inbox counter | Implemented | Should | **3** | **0** |
| FR-LOC-018 | Enforcing loan windows on save | Implemented | Must | **3** | **2** |
| FR-LOC-019 | Loan hours drawing | Implemented | Could | **2** | **1** |
| FR-LOC-020 | Hall door page | Implemented | Must | **6** | **1** |
| FR-LOC-021 | Building board and corridor screen | Implemented | Should | **6** | **1** |
| NFR-LOC-022 | Sticker token is permanent and unguessable | Implemented | Must | **1** | **1** |
| NFR-LOC-023 | Public page privacy and limits | Implemented | Must | **3** | **1** |
| FR-LOC-024 | Door links and stickers | Implemented | Should | **3** | **1** |
| FR-LOC-025 | Seven-digit course number on the door | Implemented | Must | **3** | **2** |
| FR-LOC-026 | Occupancy rate | Implemented | Should | **4** | **3** |
| FR-LOC-027 | Companion facility of a hall | Implemented | Should | **6** | **1** |
| FR-LOC-028 | Travel policy between campuses | Implemented | Must | **6** | **1** |
| FR-LOC-029 | Walking time between buildings on a campus | Implemented | Should | **2** | **0** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| NFR-LOC-030 | One identity for a hall | Implemented | Must | **3** | **2** |
| FR-LOC-031 | Read-only historical room list of a department | Implemented | Should | **1** | **0** |
| FR-LOC-032 | List of appointments awaiting room confirmation | Implemented | Could | **1** | **0** |
| FR-LOC-033 | Who writes to the building and room registry: simple screen and full console | Implemented | Must | **6** | **1** |
| FR-LOC-034 | Hall barter inside the schedule workshop | Implemented | Should | **6** | **1** |
| FR-LOC-035 | Before deactivating a hall or building: how many appointments use it, and reactivation instead of refusal | Implemented | Should | **3** | **2** |
| FR-LOC-036 | What-if-I-delete map before stopping a building or room | Implemented | Should | **5** | **1** |
| FR-LOC-037 | Rooms without capacity: a completeness ring and per-room capacity entry | Implemented | Should | **4** | **1** |
| FR-LOC-038 | Capacity import from a file: strict matching and a write-free preview | Implemented | Should | **4** | **1** |
| FR-LOC-039 | Capacity import: a single approval with an audit entry per room, and an exact undo | Implemented | Should | **4** | **1** |
| FR-SCH-001 | Create an appointment | Implemented | Must | **2** | **2** |
| FR-SCH-002 | Edit and delete with revision check | Implemented | Must | **4** | **1** |
| FR-SCH-003 | Schedule lock after submission and term end | Implemented | Must | **3** | **2** |
| FR-SCH-004 | Scope and course integrity | Implemented | Must | **2** | **1** |
| FR-SCH-005 | Official place and companion facility | Implemented | Must | **2** | **1** |
| FR-SCH-006 | Instructor, hall and duplicate-section conflict detection | Implemented | Must | **3** | **3** |
| FR-SCH-007 | Same section in two places: warning, not a block | Implemented | Must | **3** | **2** |
| FR-SCH-008 | A faculty placeholder is not a person who can be double-booked | Implemented | Must | **3** | **2** |
| FR-SCH-009 | Turnaround gap and student clash: two soft notes | Implemented | Must | **3** | **2** |
| FR-SCH-010 | What blocks a save and what does not | Implemented | Must | **3** | **3** |
| FR-SCH-011 | What is disclosed about another department's appointment | Implemented | Must | **3** | **3** |
| FR-SCH-012 | Other departments' halls and hall barter | Implemented | Must | **3** | **0** |
| FR-SCH-013 | Instructor-request holds awaiting the department | Implemented | Must | **3** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-SCH-014 | Two-minute advisory colleague hold | Implemented | Should | **3** | **1** |
| FR-SCH-015 | University teaching day and department window | Implemented | Must | **6** | **4** |
| FR-SCH-016 | Regulation days, lengths and start ladder | Implemented | Must | **5** | **3** |
| FR-SCH-017 | Approved pattern library | Implemented | Must | **7** | **5** |
| FR-SCH-018 | Weekly-hours ceiling per section | Implemented | Must | **3** | **2** |
| FR-SCH-019 | Inter-campus travel time | Implemented | Should | **4** | **2** |
| FR-SCH-020 | Department rhythm and memory | Implemented | Should | **3** | **2** |
| FR-SCH-021 | Live appointment check before saving | Implemented | Must | **2** | **2** |
| FR-SCH-022 | Atomic batch move | Implemented | Must | **3** | **1** |
| FR-SCH-023 | Approving a proposal into the live schedule | Implemented | Must | **4** | **2** |
| FR-SCH-024 | Assign, swap and replace a faculty-placeholder section | Implemented | Should | **3** | **2** |
| FR-SCH-025 | Replace an instructor across a term | Implemented | Should | **3** | **1** |
| FR-SCH-026 | Convert TA staff to the faculty placeholder or a department member | Implemented | Could | **6** | **3** |
| FR-SCH-027 | Time and hall suggestions | Implemented | Should | **11** | **6** |
| FR-SCH-028 | Common meeting time | Implemented | Could | **5** | **1** |
| FR-SCH-029 | Cancel or cover one date, and rank substitutes | Implemented | Should | **7** | **2** |
| FR-SCH-030 | Cell notes, department rebuttal and registration verdict | Implemented | Should | **7** | **3** |
| FR-SCH-031 | Live push and colleague presence | Implemented | Should | **5** | **2** |
| FR-SCH-032 | Snapshot before every write and no silent overwrite | Implemented | Must | **3** | **2** |
| FR-SCH-033 | Wipe and restore a department schedule | Implemented | Must | **5** | **1** |
| FR-SCH-034 | Copy a term's schedule into another term | Implemented | Should | **2** | **2** |
| FR-SCH-035 | Read boundaries by role and scope | Implemented | Must | **3** | **2** |
| FR-SCH-036 | Arabic ordering of terms, names and courses | Implemented | Should | **3** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-SCH-037 | Teacher mini-week and week window | Implemented | Should | **8** | **5** |
| DR-SCH-001 | Appointment (schedule row) data model | Implemented | Must | **3** | **1** |
| NFR-SCH-001 | Indexed conflict detection with identical results | Implemented | Must | **4** | **1** |
| IR-SCH-001 | Drag preview before the drop | Implemented | Should | **3** | **0** |
| IR-SCH-002 | Saved views, undo and offline work | Implemented | Should | **4** | **1** |
| FR-SCH-038 | Review readiness report | Implemented | Must | **2** | **0** |
| FR-SCH-039 | Instructor's week across the department's colleges | Implemented | Should | **2** | **0** |
| FR-SCH-040 | Course nature from history and hall owner | Implemented | Could | **3** | **0** |
| FR-SCH-041 | Plan facts and the co-requisite note | Implemented | Should | **8** | **4** |
| IR-SCH-042 | The three board views, the phone gate and remembered preferences | Implemented | Should | **4** | **0** |
| FR-SCH-043 | The scope applies itself and the board never shows another term | Implemented | Must | **6** | **1** |
| IR-SCH-044 | List view: ordering, search, paging and the empty state | Implemented | Should | **6** | **2** |
| IR-SCH-045 | Colour legend: meaning, focus and folding | Implemented | Could | **5** | **0** |
| IR-SCH-046 | Week grid: day strip, density, unplaced rows and the now line | Implemented | Should | **7** | **1** |
| IR-SCH-047 | Buildings and halls board | Implemented | Should | **3** | **1** |
| FR-SCH-048 | Drag-and-drop move without a confirmation, and its refusal | Implemented | Must | **7** | **3** |
| IR-SCH-049 | Placement reading before and during a drag | Implemented | Should | **7** | **2** |
| FR-SCH-050 | Keyboard move and keyboard shortcuts | Implemented | Could | **4** | **1** |
| FR-SCH-051 | Command palette and the one-line appointment | Implemented | Could | **5** | **2** |
| FR-SCH-052 | The day's change log: undo and print | Implemented | Should | **5** | **2** |
| FR-SCH-053 | Network failure, the offline queue and changes the server refused | Implemented | Should | **4** | **1** |
| FR-SCH-054 | Appointment editor: four ordered questions, save and continue | Implemented | Must | **11** | **5** |
| FR-SCH-055 | Regulation auto-completion and historical timing in the editor | Implemented | Should | **6** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-SCH-056 | Live check panel in the editor | Implemented | Should | **7** | **2** |
| FR-SCH-057 | Hall helpers in the editor: occupancy, owner, borrowing and suggestions | Implemented | Should | **8** | **1** |
| FR-SCH-058 | Quick «new appointment» card painted on the board | Implemented | Should | **5** | **1** |
| FR-SCH-059 | Appointment context panel | Implemented | Could | **6** | **1** |
| FR-SCH-060 | Opening the editor from an instructor or section request, and the request-hold prompt | Implemented | Should | **6** | **1** |
| FR-SCH-061 | Collaboration and notices on the board | Implemented | Should | **6** | **1** |
| FR-SCH-062 | Presentation and focus modes, and printing the schedule | Implemented | Could | **3** | **0** |
| FR-SCH-063 | The «copy a term's schedule» screen | Implemented | Could | **5** | **1** |
| IR-SCH-064 | Teacher mini-week: visibility, folding, floating and the form's hall | Implemented | Could | **7** | **3** |
| FR-SCH-065 | «Fix the overlap with the least impact» | Implemented | Could | **3** | **2** |
| FR-SCH-066 | The «at the same time» sheet in the appointment form | Implemented | Should | **11** | **2** |
| FR-SCH-067 | The co-requisite card: where the appointment is free | Implemented | Could | **2** | **1** |
| FR-SCH-068 | The end from the approved pattern, and a wrong length blocks | Implemented | Must | **11** | **3** |
| FR-SCH-069 | The new section number and «new section N» | Implemented | Should | **5** | **1** |
| FR-SCH-070 | «Class schedule» from the appointment actions | Implemented | Could | **4** | **1** |
| FR-SCH-071 | No stale read after a schedule write | Implemented | Should | **3** | **2** |
| FR-SCH-072 | Explicit regulation-exception confirmation before saving | Implemented | Must | **7** | **4** |
| FR-SCH-073 | Regulation-compliant candidates from one generator | Implemented | Must | **7** | **4** |
| FR-SCH-074 | «Student pulse»: who the appointment time suits before saving | Implemented | Should | **9** | **3** |
| FR-DRF-001 | Create a schedule draft | Implemented | Must | **2** | **3** |
| FR-DRF-002 | Validate a draft before saving and cap its size | Implemented | Must | **1** | **0** |
| FR-DRF-003 | Edit and delete draft rows | Implemented | Must | **3** | **1** |
| FR-DRF-004 | Start-of-term draft from the previous term | Implemented | Must | **1** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-DRF-005 | Appointment gate for start-of-term drafts | Implemented | Must | **2** | **1** |
| FR-DRF-006 | Publish a draft with explicit confirmation, lock and deadline gates | Implemented | Must | **3** | **2** |
| FR-DRF-007 | Never erase changes made after the draft's base | Implemented | Must | **4** | **1** |
| FR-DRF-008 | Repair time collisions when publishing a start-of-term draft | Implemented | Should | **2** | **0** |
| FR-DRF-009 | Publish every site or nothing | Implemented | Must | **1** | **1** |
| FR-DRF-010 | Safety point before publish and approval-cycle notice | Implemented | Must | **2** | **2** |
| FR-DRF-011 | Version list and two-version comparison | Implemented | Should | **4** | **1** |
| FR-DRF-012 | Restore a previous version | Implemented | Must | **3** | **1** |
| FR-DRF-013 | Compare two terms of a department | Implemented | Should | **3** | **2** |
| DR-DRF-014 | Scenario record | Implemented | Must | **3** | **1** |
| FR-DRF-015 | Who may read and simulate, and who may save and apply | Implemented | Must | **5** | **1** |
| FR-DRF-029 | «Try an alternative» on a changed appointment | Implemented | Should | **5** | **1** |
| FR-DRF-016 | Mask the rest of the term outside the scope | Implemented | Must | **1** | **1** |
| FR-DRF-017 | Apply a scenario atomically | Implemented | Must | **2** | **1** |
| FR-DRF-018 | One-click restore point | Implemented | Must | **4** | **1** |
| FR-DRF-019 | Green, yellow and red impact indicator | Implemented | Must | **2** | **1** |
| FR-DRF-020 | Problem reading and three ranked solutions | Implemented | Must | **2** | **2** |
| FR-DRF-021 | Student impact of a scenario from the radar only | Implemented | Must | **3** | **1** |
| FR-DRF-022 | Notify only the affected instructors | Implemented | Should | **2** | **2** |
| FR-DRF-023 | What-if on a proposal's impact before approval | Implemented | Should | **3** | **1** |
| FR-DRF-024 | Refresh and read the registration radar within scope | Implemented | Should | **4** | **2** |
| FR-DRF-025 | End the previous plan sheet for departments | Implemented | Should | **2** | **1** |
| IR-DRF-026 | The «before apply» sheet | Implemented | Should | **4** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| NFR-DRF-027 | Seven-digit course number on time-machine screens | Implemented | Must | **5** | **2** |
| FR-DRF-028 | Draft list and editing a whole draft | Implemented | Should | **2** | **0** |
| IR-DRF-029 | Difference report between the approved PDF and the live schedule | Implemented | Should | **1** | **0** |
| IR-DRF-030 | Additional radar readings within scope | Implemented | Should | **4** | **0** |
| FR-VIW-001 | Read-only department schedule | Implemented | Must | **1** | **1** |
| FR-VIW-002 | Export the term to a file | Implemented | Must | **2** | **1** |
| FR-VIW-003 | An ended term is read and export only | Implemented | Must | **2** | **0** |
| FR-VIW-004 | Replace an instructor in a term in two steps | Implemented | Must | **2** | **2** |
| FR-VIW-005 | Read what will carry over before copying a term | Implemented | Should | **2** | **1** |
| FR-VIW-006 | Start-of-term screen: build, review, publish and undo | Implemented | Must | **2** | **3** |
| FR-VIW-007 | Living-schedule scenes in Analytics Center cards | Implemented | Should | **3** | **2** |
| FR-VIW-008 | One approval-blocker number everywhere | Implemented | Must | **1** | **1** |
| NFR-VIW-009 | The living reading is computed once, not once per asker | Implemented | Should | **3** | **0** |
| FR-VIW-010 | Last reading of the three indicators | Implemented | Could | **2** | **0** |
| FR-VIW-011 | Previous-term ghost over the schedule | Implemented | Should | **1** | **0** |
| FR-VIW-012 | The «decision now» panel | Implemented | Should | **2** | **0** |
| NFR-VIW-013 | Analysis reads are deferred and quiet on failure | Implemented | Should | **1** | **0** |
| FR-VIW-014 | Issue a share link | Implemented | Must | **4** | **3** |
| FR-VIW-015 | One live department card per term | Implemented | Must | **3** | **2** |
| FR-VIW-016 | Link lifetime: reading until the end of the term | Implemented | Must | **2** | **1** |
| FR-VIW-017 | Opening and stopping a link | Implemented | Must | **1** | **1** |
| FR-VIW-018 | Revoke a link | Implemented | Must | **2** | **1** |
| FR-VIW-019 | Personal instructor links and send tracking | Implemented | Must | **5** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-VIW-020 | The calendar subscription lives while a card link lives | Implemented | Should | **1** | **1** |
| FR-VIW-021 | Saved views | Implemented | Could | **2** | **0** |
| FR-VIW-022 | Warn when a saved view lost its scope | Implemented | Could | **1** | **0** |
| FR-VIW-023 | The journey screen | Implemented | Could | **3** | **2** |
| NFR-VIW-024 | Seven-digit course number on viewing and transfer screens | Implemented | Must | **6** | **1** |
| IR-VIW-025 | «Schedule tools»: three groups | Implemented | Should | **4** | **1** |
| FR-VIW-026 | Visiting tab: term roster and department directory | Implemented | Should | **4** | **2** |
| FR-VIW-027 | Delivery tools in the publish panel | Implemented | Should | **7** | **2** |
| IR-VIW-028 | The publish panel: three steps and the link list | Implemented | Should | **6** | **1** |
| FR-VIW-029 | Faculty-card options in the publish panel | Implemented | Should | **10** | **4** |
| FR-VIW-030 | The «department fingerprint» card | Implemented | Could | **4** | **0** |
| DR-APR-001 | Approval record and its event log | Implemented | Must | **4** | **2** |
| DR-APR-002 | Signature and captured version | Implemented | Must | **2** | **1** |
| FR-APR-001 | Signing order and who may sign | Implemented | Must | **5** | **2** |
| FR-APR-002 | Material conflict blocks signing, sending and acceptance | Implemented | Must | **2** | **3** |
| FR-APR-003 | Other signing gates: capacity, academic rank, requirements, regulation | Implemented | Must | **5** | **3** |
| FR-APR-004 | Head signature, sending and its conditions | Implemented | Must | **3** | **2** |
| FR-APR-005 | A new round for every send | Implemented | Must | **3** | **2** |
| FR-APR-006 | Signature withdrawal and head return to committee | Implemented | Must | **6** | **1** |
| FR-APR-007 | Sections added after the head's signature | Implemented | Must | **5** | **2** |
| FR-APR-008 | Cell notes and their computed state | Implemented | Must | **5** | **3** |
| FR-APR-009 | Department reply, registrar verdict and escalation | Implemented | Should | **4** | **2** |
| FR-APR-010 | Returning a schedule with notes | Implemented | Must | **3** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-APR-011 | Final acceptance by the registrar | Implemented | Must | **3** | **2** |
| FR-APR-012 | Decision serialisation and binding to what was seen | Implemented | Must | **4** | **1** |
| FR-APR-013 | Amendment round after acceptance | Implemented | Must | **3** | **2** |
| FR-APR-014 | Schedule lock after sending | Implemented | Must | **2** | **3** |
| FR-APR-015 | Ended term: the cycle is closed | Implemented | Must | **3** | **1** |
| FR-APR-016 | Past terms frozen read-only | Implemented | Must | **3** | **2** |
| FR-APR-017 | Term deadline and its effect after it passes | Implemented | Must | **8** | **2** |
| FR-APR-018 | Bulk exception grants | Implemented | Must | **4** | **1** |
| FR-APR-019 | Extension request from a department | Implemented | Should | **3** | **2** |
| FR-APR-020 | Term student dates | Implemented | Could | **4** | **1** |
| FR-APR-021 | Registrar inbox, lateness and counter | Implemented | Must | **5** | **4** |
| FR-APR-022 | Term-wide status and department balance | Implemented | Should | **4** | **2** |
| FR-APR-023 | Dean sees the final schedule only; council bulletin | Implemented | Should | **4** | **3** |
| FR-APR-024 | Review readiness and detailed blockers | Implemented | Must | **3** | **2** |
| FR-APR-025 | Approval score as an explicit formula | Implemented | Should | **2** | **1** |
| FR-APR-026 | Approval dossier | Implemented | Should | **3** | **2** |
| FR-APR-027 | Printed sheet stamp and its verification page | Implemented | Should | **6** | **1** |
| FR-APR-028 | Instructor request signature check by civil id | Implemented | Should | **3** | **1** |
| NFR-APR-001 | Scope on every route and inbox performance | Implemented | Must | **4** | **3** |
| NFR-APR-002 | Kuwait-time dates with a single rule | Implemented | Must | **3** | **2** |
| NFR-APR-003 | Privacy and attempt limits on public pages | Implemented | Must | **3** | **2** |
| IR-APR-001 | Approval bar shows only what awaits the viewer | Implemented | Should | **3** | **2** |
| IR-APR-002 | Submission deadlines panel | Implemented | Should | **3** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-APR-029 | Granting or lifting one department's submission exception | Implemented | Should | **3** | **1** |
| FR-APR-030 | Reading notes with their state and deleting a note | Implemented | Should | **3** | **2** |
| IR-APR-031 | Single department approval read | Implemented | Must | **2** | **2** |
| IR-APR-032 | Review routes shared with the schedule editor | Implemented | Must | **3** | **3** |
| IR-APR-033 | The «schedule changes» inbox: question, filters and rows | Implemented | Should | **6** | **2** |
| IR-APR-034 | The department report in «schedule changes»: what moved, the full schedule and the decision | Implemented | Must | **5** | **3** |
| IR-APR-035 | Approval bar: stepper, ring, badges and actions | Implemented | Should | **5** | **1** |
| FR-APR-036 | Completing missing data from the approval bar | Implemented | Should | **4** | **1** |
| IR-APR-037 | The «approval review» sheet and its print | Implemented | Should | **9** | **4** |
| IR-APR-038 | Submission deadlines panel: folding, setting and the exception sheet | Implemented | Should | **6** | **1** |
| FR-APR-039 | Three approval-review notes that do not lower the score | Implemented | Must | **2** | **1** |
| FR-IMP-001 | Authority PDF intake | Implemented | Must | **4** | **2** |
| FR-IMP-002 | Text layer or scanned reading | Implemented | Must | **2** | **2** |
| FR-IMP-003 | Header proof before table reading | Implemented | Must | **2** | **2** |
| FR-IMP-004 | Header decides the department | Implemented | Must | **2** | **1** |
| FR-IMP-005 | Branch match by code | Implemented | Must | **2** | **2** |
| FR-IMP-006 | Accepted source term rule | Implemented | Must | **2** | **1** |
| FR-IMP-007 | Copy into an empty term and trial run | Implemented | Must | **4** | **2** |
| FR-IMP-008 | Refusing unusable scans up front | Implemented | Must | **2** | **1** |
| FR-IMP-009 | Scanned page verdict | Implemented | Must | **2** | **1** |
| NFR-IMP-010 | One scan read at a time | Implemented | Must | **3** | **2** |
| FR-IMP-011 | Reading progress and interruption | Implemented | Should | **3** | **2** |
| FR-IMP-012 | Course identity and section number | Implemented | Must | **3** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-IMP-013 | Instructor identity without guessing | Implemented | Must | **3** | **1** |
| FR-IMP-014 | Building then room from the registry | Implemented | Must | **3** | **3** |
| FR-IMP-015 | Registering branch sites the document proves | Implemented | Should | **1** | **1** |
| FR-IMP-016 | Plausibility checks on scanned rows | Implemented | Must | **3** | **2** |
| DR-IMP-017 | Per-cell evidence on every row | Implemented | Must | **2** | **1** |
| FR-IMP-018 | Creating a missing department after one confirmation | Implemented | Must | **3** | **1** |
| FR-IMP-019 | Creating missing courses after one confirmation | Implemented | Must | **4** | **1** |
| FR-IMP-020 | A three-digit tail never links | Implemented | Must | **2** | **2** |
| DR-IMP-021 | Signed header-check receipt | Implemented | Must | **3** | **0** |
| FR-IMP-022 | Scanned page review confirmation | Implemented | Must | **3** | **1** |
| FR-IMP-023 | Pre-publish check against the whole term | Implemented | Must | **3** | **1** |
| FR-IMP-024 | Single import gate state | Implemented | Must | **3** | **1** |
| FR-IMP-025 | Editable preview and name fill | Implemented | Should | **4** | **2** |
| FR-IMP-026 | Comparing the schedule with the authority file | Implemented | Must | **7** | **5** |
| FR-IMP-027 | Assisted reading through Gemini on explicit choice | Implemented | Should | **5** | **1** |
| FR-IMP-028 | Personal-data redaction and proposal identity | Implemented | Must | **2** | **1** |
| FR-IMP-029 | Assisted proposals never write on their own | Implemented | Must | **3** | **1** |
| IR-IMP-030 | Gemini call interface and limits | Implemented | Should | **1** | **1** |
| FR-IMP-031 | Spreadsheet import | Implemented | Must | **4** | **2** |
| FR-IMP-032 | JSON schedule export and import | Implemented | Should | **4** | **0** |
| FR-IMP-033 | Reading a study-plan sheet | Implemented | Should | **3** | **2** |
| FR-IMP-034 | Reconciling courses with their sheet | Implemented | Should | **3** | **2** |
| NFR-IMP-035 | Import environment variables and receipt secret | Implemented | Should | **5** | **0** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-IMP-036 | Extracting the legacy system backup | Implemented | Could | **3** | **0** |
| FR-IMP-037 | Import from a branch site is redirected to the base college | Implemented | Should | **3** | **2** |
| FR-IMP-038 | Term of a spreadsheet or JSON file: read or asked, then judged | Implemented | Must | **5** | **1** |
| FR-IMP-039 | Recovery cards after a refused PDF | Implemented | Should | **5** | **2** |
| FR-IMP-040 | The trial run on screen: difference, apply and undo | Implemented | Must | **6** | **2** |
| FR-IMP-041 | One sharper reading per file and approving its cells | Implemented | Must | **6** | **3** |
| FR-IMP-042 | Live checks on the preview | Implemented | Must | **6** | **1** |
| FR-IMP-043 | The exported spreadsheet carries its term | Implemented | Should | **2** | **1** |
| FR-IMP-044 | The «place sections» review coming from section planning | Planned | Must | **3** | **2** |
| FR-IMP-045 | Publishing from the import review and its receipt | Implemented | Must | **4** | **1** |
| FR-REQ-001 | Personal request link per faculty member | Implemented | Must | **3** | **3** |
| FR-REQ-002 | Request window and link lifetime | Implemented | Must | **4** | **2** |
| FR-REQ-003 | Link mode: view, edit or training | Implemented | Must | **3** | **3** |
| FR-REQ-004 | Publishing to selected faculty and the send log | Implemented | Must | **6** | **3** |
| FR-REQ-005 | Reopening follows the new deadline | Implemented | Must | **2** | **2** |
| FR-REQ-006 | Individual exception after closing | Implemented | Should | **3** | **2** |
| FR-REQ-007 | Not-yet-reached course state | Implemented | Must | **4** | **2** |
| FR-REQ-008 | Not-yet-reached sheet before sending | Implemented | Should | **2** | **2** |
| FR-REQ-009 | Link resolution and error replies | Implemented | Must | **5** | **2** |
| FR-REQ-010 | Guess limit on wrong links | Implemented | Must | **3** | **1** |
| NFR-REQ-011 | Rate limits on public request APIs | Implemented | Must | **3** | **1** |
| FR-REQ-012 | Civil-ID signature on requests | Implemented | Must | **4** | **3** |
| FR-REQ-013 | Accepting a request and validating its items | Implemented | Must | **4** | **3** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-REQ-014 | Engine verdict on a member's item | Implemented | Must | **3** | **4** |
| FR-REQ-015 | Meeting length and pattern day completion | Implemented | Must | **5** | **5** |
| FR-REQ-016 | Temporary hold and race settlement | Implemented | Must | **5** | **4** |
| FR-REQ-017 | Time map and draft check | Implemented | Should | **5** | **2** |
| FR-REQ-018 | Stick to my lecture | Implemented | Could | **4** | **3** |
| FR-REQ-019 | Choosing a vacant section | Implemented | Must | **2** | **2** |
| FR-REQ-020 | Confirming the schedule unchanged | Implemented | Must | **2** | **2** |
| FR-REQ-021 | Replaying the previous term's request | Implemented | Could | **4** | **3** |
| NFR-REQ-022 | What never reaches the member: rooms and internal history | Implemented | Must | **3** | **4** |
| IR-REQ-023 | Live card stream | Implemented | Should | **5** | **2** |
| FR-REQ-024 | Instructor inbox: decision list and its scope | Implemented | Must | **4** | **3** |
| FR-REQ-025 | Department decision on an item: fix or reject | Implemented | Must | **4** | **3** |
| FR-REQ-026 | Atomic approval of an item | Implemented | Must | **4** | **3** |
| FR-REQ-027 | Item dialogue and accepting an alternative | Implemented | Must | **8** | **3** |
| FR-REQ-028 | Cancelling a department-placed appointment and undoing a fix | Implemented | Should | **4** | **2** |
| NFR-REQ-029 | Request revision stamp against overwriting a colleague | Implemented | Must | **2** | **2** |
| FR-REQ-030 | Faculty card identity gate | Implemented | Must | **4** | **3** |
| FR-REQ-031 | Remember this device | Implemented | Should | **4** | **1** |
| FR-REQ-032 | Member notes from the faculty card | Implemented | Should | **2** | **2** |
| DR-REQ-033 | Family card publication and schedule movement | Implemented | Must | **5** | **2** |
| IR-REQ-034 | Location filter, congestion map and inbox question | Implemented | Could | **5** | **5** |
| IR-REQ-035 | Save-blocker checks for the appointment form | Implemented | Should | **3** | **3** |
| IR-REQ-036 | Faculty mini week in appointment forms | Implemented | Could | **2** | **3** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| DR-REQ-037 | Anonymous appointment-entry measure | Implemented | Could | **4** | **1** |
| DR-REQ-038 | Personal request link token: generation, verification and rotation | Implemented | Must | **5** | **1** |
| FR-REQ-039 | Recipient list and registrar-noted rows | Implemented | Should | **4** | **2** |
| FR-REQ-040 | Individual exception list | Implemented | Should | **2** | **2** |
| FR-REQ-041 | Recording link opens and refreshing an unsent request | Implemented | Should | **3** | **2** |
| FR-REQ-042 | Future-interest star on a course | Implemented | Could | **2** | **1** |
| FR-REQ-043 | Non-blocking academic advice on the request card | Implemented | Could | **1** | **1** |
| FR-REQ-044 | Faculty card contents after verification | Implemented | Should | **4** | **1** |
| IR-REQ-045 | Public doors for the member and the department | Implemented | Must | **5** | **2** |
| FR-REQ-046 | Card notification on department decision and reply | Implemented | Should | **3** | **0** |
| FR-REQ-047 | Item readiness in the inbox and the live check before «fix» | Implemented | Should | **4** | **1** |
| FR-REQ-048 | «Fix everything ready» in the inbox | Implemented | Should | **3** | **1** |
| FR-REQ-049 | Inbox filters, overview and reminders | Implemented | Should | **3** | **2** |
| FR-REQ-050 | Reject, reply and cancel sheets and fix confirmation in the inbox | Implemented | Should | **7** | **2** |
| FR-REQ-051 | The request draft in the browser, the deadline counter and the best three times | Implemented | Should | **9** | **2** |
| FR-REQ-052 | Voice dictation in request fields | Implemented | Could | **5** | **1** |
| FR-REQ-053 | The faculty card in the browser: entry, calendar and tabs | Implemented | Should | **2** | **2** |
| FR-REQ-054 | Resending only for what carries registrar notes | Implemented | Must | **6** | **1** |
| FR-REQ-055 | What a send does to each member's request | Implemented | Must | **4** | **3** |
| FR-REQ-056 | Same-time hints on the faculty card | Implemented | Should | **4** | **2** |
| FR-REQ-057 | Faculty card per person: recipients, courses, preview and follow-up | Implemented | Must | **10** | **1** |
| FR-REQ-058 | Owner notes on faculty requests: pinning, track, stopping and reopening | Implemented | Must | **10** | **4** |
| FR-REQ-059 | Study proposal on an item opens the original appointment in its usual form | Implemented | Must | **3** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-REQ-060 | «What was decided since your last visit» and «add to my calendar» for the member | Implemented | Should | **6** | **1** |
| FR-REQ-061 | «Notify those with new decisions» in the inbox | Implemented | Should | **4** | **1** |
| FR-REQ-062 | Committing a study proposal settles the request items it handled | Implemented | Must | **5** | **1** |
| FR-REQ-063 | Inbox robustness: sheets keep input, reads never blank the screen, counts follow what is shown | Implemented | Should | **6** | **2** |
| FR-REQ-064 | Server edges: view links do not reply, a new round supersedes the old, no decision on what was not asked | Implemented | Must | **6** | **2** |
| FR-REQ-065 | Pilot mode: one pending item at a time with three keyed actions | Implemented | Should | **5** | **1** |
| FR-REQ-066 | Teacher card: one row per course for violations and a planning infographic | Implemented | Should | **4** | **1** |
| FR-REQ-067 | The room the system picks for a member's request fits the section, and the member never sees a room or building | Implemented | Must | **7** | **3** |
| FR-REQ-068 | Undoing an inbox decision within a short window | Implemented | Should | **7** | **2** |
| FR-REQ-069 | Arabic question field in the member inbox: day, period, kind, state, location and name | Implemented | Could | **2** | **1** |
| FR-REQ-070 | Wish prediction before publishing: what instructors asked to change in past terms | Implemented | Could | **4** | **1** |
| FR-REQ-075 | A course not offered this term never enters the request via replay or a restored draft | Implemented | Must | **3** | **2** |
| FR-REQ-076 | The read-only line under an appointment matches the state | Implemented | Must | **1** | **2** |
| FR-REQ-077 | Signature verification lockout is per civil ID, not per address | Implemented | Must | **2** | **2** |
| FR-REQ-071 | The teacher calendar feed is bound to the member's live card | Implemented | Must | **2** | **3** |
| FR-REQ-072 | Two sections of one course at the same time: a warning, never a block, in the card | Implemented | Must | **1** | **2** |
| FR-REQ-073 | «Your next lecture» on the member card | Implemented | Must | **3** | **2** |
| FR-REQ-074 | «My healthy week» on the member card | Implemented | Must | **3** | **2** |
| FR-REQ-080 | Card pulse in the instructors inbox: where each member stands, one tap to filter | Implemented | Should | **4** | **1** |
| FR-REQ-081 | «Remind the rest»: a confirmation sheet with the count, the server decides who, and a send limit | Implemented | Should | **3** | **1** |
| FR-REQ-083 | A one-status teacher registry, «Open editing», a no-room warning, and smarter recipients | Implemented | Should | **6** | **1** |
| FR-PLN-001 | Section planning from the registrar report | Implemented | Must | **3** | **2** |
| FR-PLN-002 | Mismatched report refusal | Implemented | Must | **2** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-PLN-003 | Registration statistics save | Implemented | Must | **3** | **1** |
| FR-PLN-004 | Section count suggestion | Implemented | Must | **2** | **1** |
| FR-PLN-005 | Same-season history and course lineage | Implemented | Must | **2** | **1** |
| FR-PLN-006 | Section gap report | Implemented | Must | **6** | **2** |
| FR-PLN-007 | Surplus and conflict review | Implemented | Must | **1** | **1** |
| FR-PLN-008 | Planning stages: graduates, then other students | Implemented | Must | **3** | **2** |
| FR-PLN-009 | Course offering states | Implemented | Must | **4** | **3** |
| FR-PLN-010 | Offering effect on suggestions | Implemented | Must | **3** | **2** |
| FR-PLN-011 | Not-yet-reached verdict | Implemented | Must | **5** | **2** |
| FR-PLN-012 | Section-build preview | Planned | Must | **4** | **3** |
| FR-PLN-013 | Pending-room sections from history | Implemented | Must | **2** | **1** |
| FR-PLN-014 | Confirmed section apply | Implemented | Must | **3** | **1** |
| FR-PLN-015 | Apply undo | Implemented | Must | **2** | **1** |
| FR-PLN-016 | Plan sheet course rules | Implemented | Must | **2** | **1** |
| FR-PLN-017 | Plan sheet rule checks | Implemented | Must | **1** | **1** |
| FR-PLN-018 | Draft editing with department guard | Implemented | Must | **4** | **1** |
| FR-PLN-019 | Plan sheet approval | Implemented | Must | **2** | **1** |
| FR-PLN-020 | Study plan PDF upload | Implemented | Must | **7** | **3** |
| FR-PLN-021 | Reference sheets and their application | Implemented | Must | **8** | **4** |
| FR-PLN-022 | Sheet membership and badges | Implemented | Must | **7** | **2** |
| FR-PLN-023 | Department plans and transitions | Implemented | Must | **2** | **1** |
| FR-PLN-024 | Public sheet publishing | Implemented | Must | **5** | **1** |
| IR-PLN-001 | Public plan pages | Implemented | Must | **7** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-PLN-025 | Study proposal drafting | Implemented | Must | **5** | **2** |
| FR-PLN-026 | Proposal check with the schedule checker | Implemented | Must | **4** | **2** |
| FR-PLN-027 | Proposal versions and instructor response | Implemented | Must | **5** | **3** |
| FR-PLN-028 | Proposal commit and undo | Implemented | Must | **5** | **2** |
| FR-PLN-029 | Vacancy ranking for the instructor | Implemented | Should | **4** | **1** |
| IR-PLN-002 | Instructor proposal page and alert | Implemented | Must | **5** | **1** |
| NFR-PLN-001 | Department scope and permission | Implemented | Must | **4** | **2** |
| NFR-PLN-002 | Seven-digit course numbers and printed design | Implemented | Must | **3** | **2** |
| DR-PLN-001 | Planning data stores | Implemented | Must | **3** | **1** |
| FR-PLN-030 | Training phase: waves and allowed courses | Implemented | Should | **9** | **1** |
| FR-PLN-031 | Advisor seat ledger | Implemented | Should | **6** | **3** |
| FR-PLN-032 | Offering panel and the open-for-offering decision | Implemented | Should | **4** | **1** |
| FR-PLN-033 | Who teaches each course: counts, not names | Implemented | Could | **2** | **0** |
| FR-PLN-034 | Read-only planning readings | Implemented | Should | **5** | **4** |
| FR-PLN-035 | Build review rows in import form | Implemented | Should | **1** | **2** |
| FR-PLN-036 | Catalogue clean-up tools for the root account | Implemented | Should | **10** | **2** |
| FR-PLN-037 | Sheet upload batch and the previous sheet | Implemented | Should | **8** | **1** |
| FR-PLN-038 | Approving all sheets and importing their rules | Implemented | Should | **4** | **3** |
| IR-PLN-039 | Plan review reads and the publishing list | Implemented | Should | **8** | **1** |
| FR-PLN-040 | Proposal workspace routes and withdrawal | Implemented | Should | **7** | **2** |
| FR-PLN-041 | Collapsed course line with the math as tiles | Implemented | Must | **1** | **1** |
| FR-PLN-042 | Section capacity used in the math | Implemented | Must | **1** | **1** |
| FR-PLN-043 | How many visiting instructors are needed | Implemented | Should | **3** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-PLN-044 | The level map in plan-sheet review | Implemented | Should | **4** | **1** |
| FR-PLN-045 | The issue board and the sheet-approval confirmation | Implemented | Should | **4** | **1** |
| FR-PLN-046 | Course-rule editor and elective groups | Implemented | Should | **4** | **2** |
| FR-PLN-047 | The instructor's response on the proposal page | Implemented | Must | **4** | **1** |
| FR-PLN-048 | Proposal status, reply deadline and sending errors | Implemented | Should | **5** | **1** |
| FR-PLN-049 | Proposal impact, schedule and history on the instructor page | Implemented | Should | **5** | **1** |
| FR-PLN-050 | The week grid in the proposal workspace | Implemented | Should | **5** | **1** |
| FR-STU-001 | Masari entry by civil ID and personal code | Implemented | Must | **3** | **2** |
| FR-STU-002 | Profile lockout after wrong codes | Implemented | Must | **2** | **2** |
| FR-STU-003 | Signed door session | Implemented | Must | **2** | **1** |
| DR-STU-001 | Identity stored sealed | Implemented | Must | **4** | **2** |
| DR-STU-002 | Student profile lifetime and deletion | Implemented | Must | **2** | **1** |
| FR-STU-004 | Profile setup: department, plan, passed courses | Implemented | Must | **3** | **2** |
| FR-STU-005 | Validation of the student-journey dates | Implemented | Must | **3** | **1** |
| FR-STU-006 | Phase reading and door-term choice | Implemented | Must | **2** | **2** |
| FR-STU-007 | Writing wishes during the wishes phase | Implemented | Must | **2** | **2** |
| FR-STU-008 | University-wide student unit cap | Implemented | Should | **8** | **4** |
| FR-STU-009 | Student advice and peer counts | Implemented | Should | **3** | **2** |
| FR-STU-010 | The «suggestions only» acknowledgement | Implemented | Must | **2** | **2** |
| NFR-STU-001 | Aggregated home and no caching | Implemented | Should | **1** | **2** |
| FR-STU-011 | Student request to open a course or review a conflict | Implemented | Must | **4** | **3** |
| FR-STU-012 | The «did you register?» question after a round | Implemented | Must | **3** | **2** |
| FR-STU-013 | Graduate request and graduation-sheet proof | Implemented | Must | **3** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-STU-014 | Request status by case number | Implemented | Must | **4** | **2** |
| IR-STU-001 | Public student schedule page | Implemented | Should | **2** | **0** |
| FR-STU-015 | «Try as a student»: isolated demonstration | Implemented | Could | **2** | **1** |
| FR-STU-016 | Registration sheet: scope and signature gating | Implemented | Must | **4** | **2** |
| FR-STU-017 | Committee first, then registration | Implemented | Must | **2** | **1** |
| FR-STU-018 | Stale-write refusal on decisions | Implemented | Must | **2** | **2** |
| FR-STU-019 | Committee approval with section opening | Implemented | Should | **3** | **2** |
| FR-STU-020 | Advising sends a section request | Implemented | Must | **4** | **1** |
| FR-STU-021 | Section request stages and transitions | Implemented | Must | **3** | **2** |
| FR-STU-022 | Distributing request capacity across sections | Implemented | Should | **3** | **2** |
| FR-STU-023 | Party powers and notifications | Implemented | Must | **2** | **2** |
| FR-STU-024 | Advisor seat balance | Implemented | Must | **4** | **3** |
| FR-STU-025 | Seat, holder and handover | Implemented | Must | **6** | **1** |
| FR-STU-026 | Team member link and deputy | Implemented | Must | **6** | **2** |
| FR-STU-027 | Registration rehearsal engine | Implemented | Must | **2** | **2** |
| FR-STU-028 | Running and refreshing the radar | Implemented | Must | **4** | **3** |
| FR-STU-029 | Why a student does not reach 12 units | Implemented | Should | **2** | **1** |
| NFR-STU-002 | Limits on a shared university network | Implemented | Must | **1** | **3** |
| IR-STU-002 | Academic advice panel for departments | Implemented | Should | **4** | **1** |
| IR-STU-003 | Registration and radar tabs and the phase line | Implemented | Should | **6** | **3** |
| DR-STU-030 | Student identity secret and the keys derived from it | Implemented | Must | **6** | **1** |
| FR-STU-031 | Identity question and entry outcomes | Implemented | Must | **3** | **2** |
| FR-STU-032 | Session check on every request and presence touch | Implemented | Must | **3** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-STU-033 | Code change, name correction and profile deletion | Implemented | Must | **4** | **3** |
| FR-STU-034 | «Forgot my code»: a department code, or deletion after a grace period | Implemented | Must | **4** | **3** |
| IR-STU-035 | Door state, college and department list, and department plans | Implemented | Should | **4** | **3** |
| FR-STU-036 | My map and what changed since the last visit | Implemented | Should | **3** | **2** |
| FR-STU-037 | Offered to me and my cases | Implemented | Should | **4** | **2** |
| FR-STU-038 | Student notices «what's new?» | Implemented | Should | **2** | **2** |
| FR-STU-039 | My ticket: times after signature, alternatives and sharing | Implemented | Should | **4** | **4** |
| FR-STU-040 | Graduation-sheet verification gates | Implemented | Must | **4** | **1** |
| NFR-STU-041 | Read caches in Masari | Implemented | Should | **2** | **0** |
| DR-STU-042 | The civil ID fingerprint as the join key for everything about a student | Implemented | Must | **5** | **2** |
| IR-STU-043 | Section request interface | Implemented | Must | **9** | **1** |
| IR-STU-044 | The registration sheet decision routes | Implemented | Must | **2** | **2** |
| FR-STU-045 | Seat directory and switching between seats | Implemented | Should | **5** | **2** |
| FR-STU-046 | Seat passwords: recording the holder, first password and reset | Implemented | Must | **5** | **2** |
| FR-STU-047 | Team member management, deputy and member limits | Implemented | Must | **8** | **2** |
| FR-STU-048 | College registrar seats | Implemented | Should | **4** | **1** |
| FR-STU-049 | Choosing the new holder at handover | Implemented | Should | **4** | **2** |
| FR-STU-050 | Member link entry page and «remember this device» | Implemented | Must | **4** | **3** |
| FR-STU-051 | Routing Masari requests to the demonstration sandbox and leaving it | Implemented | Could | **2** | **1** |
| FR-STU-052 | Masari entry screens in the browser | Implemented | Should | **5** | **0** |
| NFR-STU-053 | Read and write deadlines in Masari and what the browser keeps | Implemented | Must | **2** | **1** |
| FR-STU-054 | Profile setup wizard in the browser: college, specialisation, plan, passed courses | Implemented | Should | **8** | **3** |
| FR-STU-055 | Home: three tabs and one primary card by phase | Implemented | Should | **8** | **3** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-STU-056 | The «What's new?» and «My cases» cards on the page | Implemented | Could | **3** | **0** |
| FR-STU-057 | Wishes wizard and peer counter on the page | Implemented | Should | **7** | **2** |
| FR-STU-058 | Comparing the three plans and editing the suggested schedule in the browser | Implemented | Should | **6** | **1** |
| FR-STU-059 | «What if?» and the graduation-terms estimate | Implemented | Could | **4** | **2** |
| FR-STU-060 | The «request to the department» sheets on the page | Implemented | Should | **4** | **0** |
| FR-STU-061 | The «did you register?» card on the page | Implemented | Should | **2** | **2** |
| FR-STU-062 | The «My profile» tab: correction, code, sign-out and deletion | Implemented | Could | **4** | **0** |
| NFR-STU-063 | Sheets, messages and accessibility | Implemented | Should | **4** | **1** |
| FR-STU-064 | Phone and desktop view switch in the demonstration, and the page shell | Implemented | Could | **5** | **1** |
| FR-STU-065 | Quick decision, filtering and export in the registration sheet | Implemented | Should | **5** | **0** |
| FR-STU-066 | Quick-decision shortcuts and the reason sheet never write what was not meant | Implemented | Must | **3** | **1** |
| FR-STU-067 | A section opened for a request that was then not approved | Implemented | Should | **3** | **1** |
| FR-STU-068 | The radar suggests a section for every course that needs a decision | Implemented | Should | **7** | **1** |
| FR-STU-069 | Suggestion effect and adoption from the radar | Implemented | Should | **5** | **1** |
| FR-STU-070 | A recovery code for a student from their department | Implemented | Must | **4** | **1** |
| FR-STU-071 | Taking the profile back with the department code | Implemented | Must | **3** | **1** |
| FR-STU-072 | «Keep my profile» for the session holder | Implemented | Should | **2** | **1** |
| FR-STU-073 | Subscribing to «my proposed timetable» in the phone calendar | Implemented | Should | **5** | **2** |
| FR-STU-074 | Session expiry: one state that returns to the door without losing what was typed | Implemented | Should | **4** | **1** |
| FR-STU-075 | The critical course in «My plan» | Implemented | Should | **3** | **1** |
| FR-STU-076 | «Demand analysis» in the registration sheet | Implemented | Should | **6** | **1** |
| FR-STU-077 | Per-course seat balance and the effective balance beside each section | Implemented | Should | **4** | **2** |
| FR-STU-078 | Arrow-key navigation in advising tabs | Implemented | Should | **5** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-STU-079 | Live registration day: an urgency-ordered section board with a ready alternative | Implemented | Should | **7** | **1** |
| FR-STU-084 | Every university college works in Masari | Implemented | Should | **4** | **2** |
| FR-STU-085 | Small fixes to sign-out, privacy, reminders and wishes | Implemented | Should | **4** | **2** |
| FR-STU-080 | Your next lecture | Implemented | Should | **3** | **1** |
| FR-STU-081 | Reminders that arrive by themselves (device opt-in) | Implemented | Should | **3** | **1** |
| FR-STU-082 | Reminder messages: once per student per term | Implemented | Should | **3** | **1** |
| FR-STU-083 | Share with your advisor | Implemented | Should | **3** | **1** |
| IR-STU-084 | Extras routes and the public share page | Implemented | Should | **3** | **1** |
| FR-INT-001 | Analytical overview of the schedule | Implemented | Must | **2** | **1** |
| FR-INT-002 | Reading scope: one college or all colleges of a department | Implemented | Must | **3** | **2** |
| FR-INT-003 | Room insight | Implemented | Should | **1** | **0** |
| FR-INT-004 | Instructor insight | Implemented | Should | **1** | **0** |
| FR-INT-005 | Appointment story and context | Implemented | Should | **3** | **0** |
| FR-INT-006 | Campus movement and safe room swaps | Implemented | Should | **2** | **0** |
| FR-INT-007 | Ripple forecast before a drop | Implemented | Should | **2** | **0** |
| FR-INT-008 | Rule-based analytical assistant | Implemented | Should | **1** | **1** |
| FR-INT-009 | Intent identification by Gemini within allowed functions | Implemented | Must | **3** | **1** |
| FR-INT-010 | Deterministic scoped execution of calls | Implemented | Must | **1** | **0** |
| FR-INT-011 | Fallback to the rule parser | Implemented | Must | **3** | **1** |
| FR-INT-012 | Move preview without writing, separate confirmation | Implemented | Must | **2** | **1** |
| FR-INT-013 | Academic decision lab | Implemented | Should | **3** | **2** |
| FR-INT-014 | Decision room, automatic optimiser and auto proposal | Implemented | Should | **4** | **0** |
| FR-INT-015 | Custom scheduling rules | Implemented | Should | **3** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-INT-016 | Policy simulation | Implemented | Could | **2** | **1** |
| FR-INT-017 | Open decisions | Implemented | Could | **1** | **0** |
| FR-INT-018 | Next-term demand forecast | Implemented | Should | **4** | **2** |
| FR-INT-019 | Forecast confidence and action gate | Implemented | Must | **3** | **2** |
| FR-INT-020 | Radar insight: shortfall causes and offering quality | Implemented | Should | **3** | **1** |
| FR-INT-021 | Live schedule layer | Implemented | Should | **4** | **0** |
| FR-INT-022 | Course impact and appointment memory | Implemented | Should | **2** | **1** |
| FR-INT-023 | Guide knowledge bank | Implemented | Must | **2** | **1** |
| FR-INT-024 | Guide question understanding within role permissions | Implemented | Must | **2** | **1** |
| FR-INT-025 | Kuwaiti-dialect understanding and spelling correction | Implemented | Should | **3** | **1** |
| FR-INT-026 | Guide on-screen tours | Implemented | Should | **4** | **2** |
| FR-INT-027 | Guide situational awareness and quiet hints | Implemented | Could | **4** | **1** |
| FR-INT-028 | Interface telemetry intake and anonymous Guide question log | Implemented | Should | **3** | **1** |
| FR-INT-029 | Guide friction points for the root administrator | Implemented | Could | **3** | **0** |
| FR-INT-030 | Experience health | Implemented | Could | **1** | **0** |
| NFR-INT-001 | Read-only: analytics routes write nothing to the schedule | Implemented | Must | **2** | **2** |
| NFR-INT-002 | Privacy: no civil identity or student list leaves | Implemented | Must | **4** | **2** |
| IR-INT-001 | Analytics Center screen: scenes and scope | Implemented | Should | **3** | **1** |
| IR-INT-002 | Gemini service interface: request constraints and timeout | Implemented | Must | **1** | **0** |
| FR-INT-031 | «Why?» and «why not?» for an appointment | Implemented | Should | **2** | **1** |
| FR-INT-032 | Department decision memory | Implemented | Should | **1** | **0** |
| FR-INT-033 | Contextual decision assistant and emergency plans | Implemented | Could | **2** | **0** |
| FR-INT-034 | The department's time rhythm from its history | Implemented | Could | **1** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-INT-035 | Watching what changed under the settled term | Implemented | Should | **1** | **1** |
| FR-INT-036 | Term rollover reading and the beginning-of-term draft | Implemented | Should | **2** | **1** |
| FR-INT-037 | One-minute brief and decision minutes | Implemented | Could | **2** | **1** |
| FR-INT-038 | Safety net and undoing a decision | Implemented | Must | **2** | **2** |
| FR-INT-039 | Updating open decisions and the operations review | Implemented | Could | **2** | **0** |
| FR-INT-040 | Conflict solutions, spatial alternatives and scenario evaluation | Implemented | Should | **5** | **3** |
| FR-INT-041 | Scheduling rule limits, toggling and deletion | Implemented | Should | **2** | **0** |
| FR-INT-042 | Appointment comments and protecting the registration note | Implemented | Must | **2** | **2** |
| IR-INT-043 | The course impact and appointment history routes | Implemented | Should | **2** | **2** |
| IR-INT-044 | Interface telemetry intake | Implemented | Should | **1** | **1** |
| NFR-INT-045 | Gemini service configuration variables | Implemented | Should | **1** | **0** |
| IR-INT-046 | Reading cards in «decision reading» | Implemented | Should | **5** | **1** |
| FR-INT-047 | The «why this figure» sheet behind indicators | Implemented | Should | **5** | **0** |
| FR-INT-048 | Quality, before-approval, density and movement readings | Implemented | Should | **3** | **0** |
| FR-INT-049 | Rooms and instructors readings and their panels in Reports | Implemented | Should | **4** | **0** |
| FR-INT-050 | System diagnostics for the full administrator | Implemented | Could | **2** | **0** |
| FR-INT-051 | Student requests reading and the survey link (moved to the registration sheet) | Implemented | Should | **3** | **1** |
| FR-INT-052 | Department fingerprint reading and its unwritten rules | Implemented | Could | **2** | **0** |
| FR-INT-053 | The «ask the schedule» screen and printing its results | Implemented | Should | **4** | **0** |
| FR-INT-054 | The trial copy in the «try» scene | Implemented | Should | **5** | **1** |
| FR-INT-055 | Decision-lab tools on screen | Implemented | Should | **6** | **2** |
| FR-INT-056 | The «history» scene: term comparison, drafts, versions and the decision ledger | Implemented | Should | **6** | **1** |
| NFR-INT-057 | Robustness of the Analytics Center screen | Implemented | Must | **3** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-INT-058 | Guide simulation in the trial copy | Implemented | Could | **2** | **0** |
| IR-INT-059 | Health rings above the timetable and decision tools in the Analytics Center | Implemented | Should | **5** | **2** |
| FR-INT-060 | Reviewing and publishing the start-of-term draft in the live layer | Implemented | Should | **6** | **0** |
| IR-INT-061 | Content of the live-layer scenes | Implemented | Could | **6** | **1** |
| DR-INT-062 | Browser session keys of the Analytics Center | Implemented | Could | **2** | **0** |
| FR-INT-063 | The Guide panel screens and tools | Implemented | Should | **5** | **0** |
| FR-INT-064 | The tour card and its controls | Implemented | Should | **4** | **1** |
| FR-INT-065 | Guide commands on the schedule screen | Implemented | Should | **5** | **0** |
| FR-INT-066 | Practice mode on the schedule through the Guide | Implemented | Could | **6** | **1** |
| FR-INT-067 | Previewing a change proposed by the Guide on the schedule | Implemented | Could | **3** | **0** |
| DR-INT-068 | The Guide profile in the browser | Implemented | Could | **4** | **0** |
| FR-INT-069 | Reading the registrar's actual-demand report | Implemented | Must | **2** | **1** |
| FR-INT-070 | Storing actual demand per department family with an upload history | Implemented | Must | **3** | **1** |
| FR-INT-071 | Matching report courses to the catalogue and linking the rest | Implemented | Must | **2** | **1** |
| FR-INT-072 | Red alert for a needed course with no section | Implemented | Must | **3** | **1** |
| FR-INT-073 | Supply against demand per course and track | Implemented | Must | **3** | **1** |
| FR-INT-074 | Section-planning figures in the analytics center | Implemented | Must | **3** | **2** |
| FR-INT-075 | Actual-demand badge in the approval review | Implemented | Must | **2** | **1** |
| FR-INT-076 | The «remove a course» verdict uses the real numbers | Implemented | Must | **3** | **1** |
| FR-INT-077 | Clashes between courses needed by one program's graduates | Implemented | Must | **2** | **1** |
| FR-INT-078 | Impact of an appointment on graduates before saving | Implemented | Must | **5** | **1** |
| FR-INT-079 | The single planning badge on the schedule | Implemented | Must | **3** | **2** |
| FR-INT-080 | Section planning in the schedule tools | Implemented | Should | **2** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-RPT-001 | Ten entry modes on one screen | Implemented | Must | **2** | **1** |
| FR-RPT-002 | One filter set | Implemented | Must | **1** | **2** |
| FR-RPT-003 | 24-hour time options | Implemented | Should | **2** | **0** |
| FR-RPT-004 | Fifteen display lenses | Implemented | Must | **1** | **1** |
| FR-RPT-005 | Role-based lens lists | Implemented | Should | **1** | **0** |
| FR-RPT-006 | Department balance | Implemented | Must | **2** | **2** |
| FR-RPT-007 | Room load and free windows | Implemented | Must | **1** | **1** |
| FR-RPT-008 | Load fairness from one formula | Implemented | Must | **2** | **1** |
| FR-RPT-009 | Occupancy rate | Implemented | Should | **3** | **1** |
| FR-RPT-010 | Visiting-instructor query across department colleges | Implemented | Must | **3** | **2** |
| FR-RPT-011 | Visiting history across terms | Implemented | Should | **3** | **2** |
| FR-RPT-012 | Courses by rooms | Implemented | Should | **1** | **1** |
| FR-RPT-013 | Read-only decision board | Implemented | Should | **2** | **1** |
| FR-RPT-014 | Seven-digit course number | Implemented | Must | **4** | **1** |
| FR-RPT-015 | Excel export with screen filters | Implemented | Must | **2** | **3** |
| FR-RPT-016 | Export through the request reader | Implemented | Must | **2** | **1** |
| FR-RPT-017 | A titled sheet for every lens | Implemented | Must | **1** | **1** |
| FR-RPT-018 | A4 landscape on every engine | Implemented | Must | **2** | **1** |
| FR-RPT-019 | Filling the sheet without clipping | Implemented | Must | **1** | **1** |
| FR-RPT-020 | Printed page row budgets | Implemented | Must | **2** | **1** |
| FR-RPT-021 | Instructor report scope | Implemented | Must | **2** | **1** |
| IR-RPT-001 | Sheet chooser for the two composite reports | Implemented | Should | **3** | **1** |
| FR-RPT-023 | Changes report and Authority comparison sources | Implemented | Must | **3** | **4** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-RPT-024 | Authority report row ordering | Implemented | Must | **1** | **1** |
| FR-RPT-025 | Plan-sheet badge bridge | Implemented | Must | **3** | **2** |
| NFR-RPT-001 | Printed sheet design is preserved | Implemented | Must | **2** | **1** |
| NFR-RPT-002 | Print command in the same tap | Implemented | Must | **1** | **1** |
| NFR-RPT-003 | Printing from the installed iOS app | Implemented | Should | **1** | **0** |
| DR-RPT-001 | Report data sources | Implemented | Must | **2** | **1** |
| IR-RPT-002 | Export Excel button | Implemented | Should | **1** | **2** |
| IR-RPT-026 | Visiting-instructor query routes | Implemented | Should | **5** | **2** |
| IR-RPT-027 | The changes report and Authority-file comparison routes | Implemented | Must | **2** | **3** |
| IR-RPT-028 | The printed-sheet stamp registration route | Implemented | Should | **2** | **1** |
| IR-RPT-029 | The room-load route | Implemented | Should | **1** | **1** |
| FR-RPT-030 | A plain-Arabic question on the query screen | Implemented | Should | **3** | **1** |
| FR-RPT-031 | Saved query preferences and filter chips | Implemented | Should | **5** | **0** |
| FR-RPT-032 | The report knows the schedule changed | Implemented | Should | **3** | **1** |
| FR-RPT-033 | List, week, times and instructors presentation | Implemented | Should | **7** | **0** |
| FR-RPT-034 | Room occupancy lens interaction | Implemented | Should | **3** | **1** |
| FR-RPT-035 | Occupancy rate scope: site or department family | Implemented | Should | **4** | **0** |
| FR-RPT-036 | The «courses by sites» lens | Implemented | Should | **3** | **0** |
| FR-RPT-037 | The «rooms and instructors» lens | Implemented | Could | **1** | **0** |
| FR-RPT-038 | Department balance display and bulletin | Implemented | Should | **4** | **1** |
| FR-RPT-039 | The «unapproved copy» mark and attestation strip on every sheet | Implemented | Must | **4** | **1** |
| FR-RPT-040 | Printed comprehensive report content and its appendix | Implemented | Must | **4** | **1** |
| FR-RPT-041 | Visiting instructors display and history matrix | Implemented | Should | **5** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-RPT-042 | Load fairness display and sheet | Implemented | Should | **2** | **0** |
| FR-RPT-043 | Answer before the lens | Implemented | Should | **2** | **1** |
| FR-RPT-044 | My reports: stored on the server, personal or for the department | Implemented | Should | **4** | **2** |
| FR-RPT-045 | An Excel file per lens | Implemented | Should | **2** | **1** |
| FR-RPT-046 | Morning brief | Implemented | Should | **3** | **2** |
| FR-RPT-047 | Compare with an earlier version | Implemented | Could | **2** | **1** |
| IR-RPT-048 | Schedule history-point routes | Implemented | Could | **2** | **1** |
| FR-RPT-049 | Global search opens the query with its filter | Implemented | Should | **2** | **1** |
| FR-RPT-050 | Today's copy of a stamped sheet | Implemented | Could | **2** | **1** |
| FR-RPT-051 | Longest gap and week shape in the instructors lens | Implemented | Should | **3** | **1** |
| FR-RPT-052 | Most used rooms and room details | Implemented | Should | **2** | **1** |
| IR-RPT-054 | My-reports routes | Implemented | Should | **2** | **1** |
| IR-RPT-055 | Morning-brief push endpoint | Implemented | Could | **2** | **1** |
| FR-RPT-056 | Why no results? | Implemented | Should | **2** | **1** |
| FR-RPT-057 | Spoken questions and spelling tolerance | Implemented | Could | **2** | **1** |
| FR-RPT-058 | Ink-saving print on the same sheet | Implemented | Should | **4** | **2** |
| FR-RPT-059 | What was not counted | Implemented | Should | **2** | **1** |
| FR-RPT-060 | Open it in the schedule | Implemented | Should | **2** | **1** |
| FR-RPT-061 | If I moved it, what clashes? | Implemented | Should | **3** | **2** |
| FR-RPT-062 | Share the link from a phone | Implemented | Could | **1** | **1** |
| FR-NTF-001 | Bell derived from current state | Implemented | Must | **2** | **1** |
| FR-NTF-002 | Notification scope and tones | Implemented | Must | **2** | **2** |
| FR-NTF-003 | Two-term bell | Implemented | Should | **2** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-NTF-004 | Feature notices and fault isolation | Implemented | Should | **2** | **1** |
| DR-NTF-005 | Server-side read marks | Implemented | Must | **3** | **1** |
| IR-NTF-006 | Bell interface | Implemented | Should | **1** | **2** |
| FR-NTF-007 | Opening a notice on its department | Implemented | Should | **3** | **2** |
| NFR-NTF-008 | Bell cost | Implemented | Should | **3** | **1** |
| FR-NTF-009 | Live schedule channel | Implemented | Must | **3** | **2** |
| FR-NTF-010 | Cross-instance change broadcast | Implemented | Must | **2** | **1** |
| FR-NTF-011 | Board presence | Implemented | Must | **4** | **2** |
| FR-NTF-012 | Presence and change pulse | Implemented | Must | **2** | **2** |
| NFR-NTF-013 | Browser pulse cadence | Implemented | Should | **2** | **1** |
| FR-NTF-014 | Advising and registration team presence | Implemented | Should | **3** | **1** |
| IR-NTF-015 | Colleague faces chip | Implemented | Should | **3** | **2** |
| FR-NTF-016 | Stale-write protection | Implemented | Must | **3** | **1** |
| FR-NTF-017 | Push subscription | Implemented | Must | **4** | **1** |
| FR-NTF-018 | Department coordinator push | Implemented | Should | **2** | **1** |
| FR-NTF-019 | Faculty card push | Implemented | Must | **6** | **2** |
| NFR-NTF-020 | Delivery limits | Implemented | Must | **2** | **1** |
| FR-NTF-021 | Subscription rotation and sign-out | Implemented | Should | **2** | **1** |
| IR-NTF-022 | Push service worker | Implemented | Must | **3** | **2** |
| FR-NTF-023 | Activity trail recording | Implemented | Must | **3** | **1** |
| FR-NTF-024 | Who sees the trail | Implemented | Must | **3** | **1** |
| FR-NTF-025 | Read-only trail and last-edit stamp | Implemented | Must | **3** | **1** |
| FR-NTF-026 | Row memory: why is it here | Implemented | Should | **2** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-NTF-027 | Public subscription calendar (ICS) | Implemented | Must | **2** | **2** |
| FR-NTF-028 | Stable instructor feed and quiet pause | Implemented | Must | **3** | **1** |
| NFR-NTF-029 | Calendar key secret | Implemented | Must | **2** | **1** |
| FR-NTF-030 | One-day reminder file | Implemented | Could | **2** | **3** |
| IR-NTF-031 | Mobile alert routes for an account and a faculty card | Implemented | Should | **9** | **1** |
| IR-NTF-032 | Public schedule and calendar routes by link | Implemented | Must | **4** | **2** |
| FR-NTF-033 | Student phone notifications in Masari | Implemented | Must | **3** | **2** |
| FR-ENG-001 | Survey payload | Implemented | Must | **1** | **2** |
| FR-ENG-002 | Request validation on submit | Implemented | Must | **1** | **2** |
| FR-ENG-003 | Case number as second key and identity lock | Implemented | Must | **1** | **2** |
| FR-ENG-004 | Graduation-sheet proof | Implemented | Must | **1** | **2** |
| FR-ENG-005 | My request status | Implemented | Must | **1** | **1** |
| FR-ENG-006 | Legacy survey link | Implemented | Should | **2** | **0** |
| NFR-ENG-007 | Attempt limit on survey endpoints | Implemented | Must | **2** | **1** |
| NFR-ENG-008 | Public page security policy | Implemented | Must | **1** | **2** |
| IR-ENG-009 | Public page kit and invalid link | Implemented | Should | **3** | **2** |
| FR-ENG-010 | Where the script and ad are injected | Implemented | Must | **1** | **1** |
| DR-ENG-011 | Ad slots and image rules | Implemented | Must | **2** | **1** |
| FR-ENG-012 | Campaign validation and placement conflicts at approval | Implemented | Must | **2** | **1** |
| FR-ENG-013 | Campaign state management and audit | Implemented | Must | **2** | **2** |
| FR-ENG-014 | Image quality check | Implemented | Should | **3** | **1** |
| FR-ENG-015 | Choosing ads to serve | Implemented | Must | **3** | **1** |
| IR-ENG-016 | Browser rendering and impression counting | Implemented | Must | **4** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-ENG-017 | Clicks and filtering of automated and repeated | Implemented | Must | **2** | **1** |
| FR-ENG-018 | Anonymous audience pulse | Implemented | Must | **3** | **1** |
| FR-ENG-019 | Unique coupon and store verification page | Implemented | Could | **3** | **1** |
| FR-ENG-020 | Campaign report for the company | Implemented | Should | **5** | **1** |
| FR-ENG-021 | Partnership profile and its links | Implemented | Should | **5** | **1** |
| FR-ENG-022 | Campaign request from the profile | Implemented | Should | **3** | **1** |
| FR-ENG-023 | Optional email and administrator alerts | Implemented | Could | **2** | **1** |
| FR-ENG-024 | Audience dashboard | Implemented | Must | **4** | **1** |
| FR-ENG-025 | Audience story mode | Implemented | Could | **2** | **1** |
| FR-ENG-026 | Landing page and presentation deck | Implemented | Could | **4** | **0** |
| FR-ENG-027 | Delivery of a landing-page inquiry | Implemented | Should | **5** | **1** |
| IR-ENG-028 | Legacy survey and request-status routes | Implemented | Must | **7** | **2** |
| IR-ENG-029 | Ad serving and counting routes | Implemented | Should | **5** | **1** |
| IR-ENG-030 | Unique coupon, verification page and partner badge routes | Implemented | Could | **6** | **1** |
| IR-ENG-031 | Campaign report routes for the company | Implemented | Should | **4** | **1** |
| IR-ENG-032 | Partnership profile and campaign request routes | Implemented | Should | **4** | **1** |
| IR-ENG-033 | Ads and audience administration interface | Implemented | Must | **14** | **1** |
| FR-ENG-034 | Contents of the company campaign report page | Implemented | Should | **5** | **1** |
| FR-ENG-035 | Contents of the partnership profile page and its script-free form | Implemented | Should | **5** | **1** |
| FR-ENG-036 | Sponsored placements inside Masari | Implemented | Could | **5** | **1** |
| FR-ENG-037 | Interactive sections of the landing page | Implemented | Could | **5** | **1** |
| FR-DSH-001 | Term shown on the dashboard | Implemented | Must | **3** | **1** |
| FR-DSH-002 | Empty term state and upcoming term | Implemented | Must | **3** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-DSH-003 | Scope of what the dashboard shows | Implemented | Must | **3** | **2** |
| FR-DSH-004 | Today's lectures and the weekend | Implemented | Must | **2** | **0** |
| FR-DSH-005 | Scope load reading | Implemented | Should | **1** | **1** |
| FR-DSH-006 | Trend over the last terms | Implemented | Should | **2** | **1** |
| FR-DSH-007 | Dashboard loading and enrichment | Implemented | Should | **1** | **1** |
| FR-DSH-008 | Decision card and signals | Implemented | Should | **1** | **0** |
| IR-DSH-009 | Today's lecture track | Implemented | Should | **2** | **0** |
| FR-DSH-010 | Public journey reading | Implemented | Should | **3** | **1** |
| FR-DSH-011 | Global search | Implemented | Should | **2** | **1** |
| FR-DSH-012 | Sentence search | Implemented | Could | **2** | **2** |
| FR-DSH-013 | Term story | Implemented | Should | **2** | **0** |
| FR-DSH-014 | Semester readiness score | Implemented | Must | **1** | **1** |
| IR-DSH-015 | Semester readiness panel | Implemented | Should | **3** | **1** |
| IR-DSH-016 | Period-balance drawing | Implemented | Should | **3** | **2** |
| IR-DSH-017 | Mini ring | Implemented | Could | **2** | **0** |
| IR-DSH-018 | Helper drawings | Implemented | Could | **3** | **0** |
| FR-DSH-019 | Welcome tour by role | Implemented | Should | **3** | **1** |
| IR-DSH-020 | Tour playback and accessibility | Implemented | Should | **1** | **1** |
| FR-DSH-021 | Render fault recovery | Implemented | Must | **1** | **1** |
| IR-DSH-022 | General dashboard presentation constraints | Implemented | Should | **3** | **0** |
| FR-DSH-023 | Demo limits | Implemented | Could | **3** | **1** |
| FR-DSH-024 | Day list, legacy total and the instructor's personal day | Implemented | Should | **1** | **0** |
| FR-DSH-025 | Dashboard header and term badge | Implemented | Could | **2** | **0** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-DSH-026 | Scope figures and main-administrator panels | Implemented | Should | **1** | **1** |
| FR-DSH-027 | Global search result categories by permitted screens | Implemented | Should | **2** | **1** |
| FR-DSH-028 | Sentence search parsing rules | Implemented | Should | **2** | **3** |
| IR-DSH-029 | The tour stage on the department's own week | Implemented | Could | **4** | **0** |
| IR-DSH-030 | Shared display primitives (the DNA kit) | Implemented | Could | **5** | **1** |
| FR-OPS-001 | Boot order, private directory and environment file | Implemented | Must | **6** | **2** |
| FR-OPS-002 | Cloud Run production mode | Implemented | Must | **1** | **1** |
| FR-OPS-003 | Firestore target selection and refusal of an implicit target | Implemented | Must | **4** | **1** |
| FR-OPS-004 | No service without a database | Implemented | Must | **2** | **1** |
| FR-OPS-005 | Account reconciliation and scheduled jobs at boot | Implemented | Should | **1** | **2** |
| IR-OPS-001 | Health interface | Implemented | Must | **4** | **3** |
| IR-OPS-002 | Build identity and version interface | Implemented | Must | **4** | **1** |
| FR-OPS-006 | Security headers on every response | Implemented | Must | **1** | **2** |
| FR-OPS-007 | Compression and request size limits | Implemented | Must | **1** | **1** |
| FR-OPS-008 | Refuse cross-site write requests | Implemented | Must | **1** | **0** |
| FR-OPS-009 | Public-surface and teacher-card rate limits | Implemented | Must | **2** | **3** |
| FR-OPS-010 | Anonymous-door guard | Implemented | Must | **3** | **1** |
| FR-OPS-011 | Sign-in attempt limit | Implemented | Must | **1** | **0** |
| FR-OPS-012 | Document reading gate | Implemented | Must | **2** | **1** |
| FR-OPS-013 | Static serving and cache policy | Implemented | Must | **3** | **1** |
| FR-OPS-014 | Error contract | Implemented | Must | **2** | **1** |
| FR-OPS-015 | Resumable full-system export | Implemented | Must | **3** | **1** |
| FR-OPS-016 | Backup preview, import, system reset and undo | Implemented | Must | **2** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| FR-OPS-017 | An isolated demo sandbox per visitor | Implemented | Must | **5** | **3** |
| FR-OPS-018 | Demo sandbox limits and management | Implemented | Must | **4** | **2** |
| FR-OPS-019 | Demo seeding and role stories | Implemented | Should | **8** | **4** |
| FR-OPS-020 | Service worker and offline behaviour | Implemented | Must | **3** | **2** |
| FR-OPS-021 | The 'we are updating' page | Implemented | Must | **3** | **1** |
| IR-OPS-003 | Installable-app manifest | Implemented | Should | **4** | **1** |
| FR-OPS-022 | Continuous-integration pipeline | Implemented | Must | **2** | **1** |
| FR-OPS-023 | Deploy target guard and release pipeline | Implemented | Must | **2** | **1** |
| FR-OPS-024 | Repository hygiene guard | Implemented | Should | **1** | **1** |
| FR-OPS-025 | Test runner policy | Implemented | Must | **4** | **1** |
| NFR-OPS-001 | A small, fail-early runtime image | Implemented | Must | **3** | **0** |
| FR-OPS-026 | Backup and recovery procedure | Implemented | Should | **1** | **1** |
| FR-OPS-027 | University working day read before every request | Implemented | Should | **4** | **1** |
| FR-OPS-028 | Data mode, port and client address | Implemented | Must | **2** | **0** |
| FR-OPS-029 | Local data files in demo and development mode | Implemented | Should | **3** | **0** |
| FR-OPS-030 | Private-state protection script | Implemented | Could | **2** | **0** |
| FR-OPS-031 | Shared failure limit for public doors | Implemented | Must | **5** | **1** |
| FR-OPS-032 | Upload package audit | Implemented | Could | **2** | **0** |
| FR-OPS-033 | The system vault screen and its in-browser job driver | Implemented | Should | **7** | **0** |
| FR-OPS-034 | Print letterhead and shared interface elements | Implemented | Could | **5** | **0** |
| FR-OPS-035 | Developer screenshot-capture tools | Implemented | Could | **8** | **0** |
| FR-OPS-036 | Server-split tooling | Implemented | Should | **8** | **1** |
| FR-OPS-037 | Rendering and auditing the brand assets and icons | Implemented | Should | **3** | **0** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| NFR-OPS-038 | The two guide audit gates in the build | Implemented | Should | **3** | **1** |
| FR-OPS-039 | Generators of test fixtures and example images | Implemented | Could | **2** | **2** |
| FR-OPS-040 | System vault: abandoning a stalled import, and a typed phrase for every replacement | Implemented | Must | **4** | **1** |
| FR-OPS-041 | System vault: reset and full undo as resumable stepped jobs | Implemented | Must | **4** | **1** |
| FR-OPS-042 | System vault: reset and undo screens shaped like import | Implemented | Must | **1** | **1** |
| FR-OPS-043 | System vault: one step at a time per job (lease and version) | Implemented | Must | **4** | **1** |
| FR-OPS-044 | System vault: one lock, one open job | Implemented | Must | **3** | **1** |
| FR-OPS-045 | System vault: _meta out of scope, counters set only at completion | Implemented | Must | **2** | **1** |
| FR-OPS-046 | System vault: stepped return to the safety point after abandoning a reset or undo | Implemented | Must | **3** | **1** |
| FR-OPS-047 | System vault: restore points that are a running job's target are never evicted | Implemented | Should | **2** | **1** |
| NFR-OPS-039 | Maintenance gate: ordinary writes stop while a vault job is open | Implemented | Must | **3** | **1** |
| FR-OPS-048 | System health: a root-only station with five cards | Implemented | Should | **6** | **1** |
| FR-OPS-049 | Morning glance and «Check now» for system health | Implemented | Could | **5** | **1** |
| FR-OPS-059 | Acceptance round: a ten-minute human checklist and an automated demo rehearsal | Implemented | Could | **3** | **1** |
| NFR-OPS-040 | System health: read-only, no personal data, a failed probe never fails the page | Implemented | Should | **3** | **1** |
| FR-OPS-050 | New-features health: six tiles inside system health | Implemented | Should | **5** | **1** |
| FR-OPS-051 | Identity-free aggregate counters for feature health | Implemented | Should | **3** | **1** |
| NFR-OPS-052 | Feature health: root only, counts only, lean cached read | Implemented | Should | **5** | **1** |
| NFR-NFR-001 | Student journey throughput | Implemented | Must | **3** | **1** |
| NFR-NFR-002 | Limit fairness on a shared network | Implemented | Must | **3** | **2** |
| NFR-NFR-003 | Opening the teacher card and department screen | Implemented | Should | **3** | **1** |
| NFR-NFR-004 | Guide performance budget | Implemented | Should | **3** | **1** |
| NFR-NFR-005 | Database read economy | Implemented | Must | **3** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| NFR-NFR-006 | Caching layers and delivery weight | Implemented | Should | **5** | **1** |
| NFR-NFR-007 | Permission enforced on the server | Implemented | Must | **4** | **2** |
| NFR-NFR-008 | Password protection | Implemented | Must | **5** | **2** |
| NFR-NFR-009 | Sessions and cookies | Implemented | Must | **4** | **1** |
| NFR-NFR-010 | Firestore rules deny every direct connection | Implemented | Must | **3** | **0** |
| NFR-NFR-011 | Secrets handling | Implemented | Must | **4** | **2** |
| NFR-NFR-012 | Public link tokens | Implemented | Must | **5** | **3** |
| NFR-NFR-013 | Escaping and content policy for public pages | Implemented | Must | **2** | **2** |
| NFR-NFR-014 | Input validation and bounds | Implemented | Must | **2** | **1** |
| NFR-NFR-015 | Abuse resistance through rate limits | Implemented | Should | **4** | **1** |
| NFR-NFR-016 | An audit trail without request content | Implemented | Must | **3** | **1** |
| NFR-NFR-017 | External-service boundary | Implemented | Must | **2** | **1** |
| NFR-NFR-018 | A public privacy policy | Implemented | Must | **2** | **0** |
| NFR-NFR-019 | Personal data minimisation | Implemented | Must | **4** | **1** |
| NFR-NFR-020 | 44-pixel touch targets | Implemented | Should | **5** | **1** |
| NFR-NFR-021 | Colour contrast to WCAG AA | Implemented | Should | **4** | **1** |
| NFR-NFR-022 | Controls with accessible names | Implemented | Should | **6** | **1** |
| NFR-NFR-023 | Reduced-motion respect | Implemented | Should | **3** | **1** |
| NFR-NFR-024 | Zoom and focus indication | Implemented | Should | **4** | **0** |
| NFR-NFR-025 | Arabic-first, right-to-left | Implemented | Must | **4** | **1** |
| NFR-NFR-026 | Self-hosted typefaces | Implemented | Should | **4** | **1** |
| NFR-NFR-027 | Numerals and Arabic counts | Implemented | Must | **3** | **2** |
| NFR-NFR-028 | Standard Arabic and text integrity | Implemented | Should | **1** | **2** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| NFR-NFR-029 | Layouts that work from 320 pixels | Implemented | Must | **4** | **2** |
| NFR-NFR-030 | A4 landscape printing with a fixed design | Implemented | Must | **3** | **2** |
| NFR-NFR-031 | A deterministic decision engine | Implemented | Must | **2** | **3** |
| NFR-NFR-032 | Stale-write protection | Implemented | Must | **3** | **2** |
| NFR-NFR-033 | Reversibility of change | Implemented | Must | **3** | **3** |
| NFR-NFR-034 | Process survival on a single request failure | Implemented | Must | **2** | **1** |
| NFR-NFR-035 | Type checking and parity guards | Implemented | Must | **5** | **4** |
| NFR-NFR-036 | Transactional identifier allocation | Implemented | Must | **1** | **1** |
| NFR-NFR-037 | Supported browsers | Implemented | Should | **5** | **1** |
| NFR-NFR-038 | Observability | Implemented | Should | **5** | **1** |
| NFR-NFR-039 | A reversible, error-resistant release | Implemented | Must | **2** | **1** |
| NFR-NFR-040 | Interface fault telemetry without content | Implemented | Should | **3** | **1** |
| NFR-NFR-041 | One message layer and message lifetimes | Implemented | Should | **2** | **0** |
| NFR-NFR-042 | Keyboard behaviour of dialogs and drawers | Implemented | Should | **4** | **1** |
| NFR-NFR-043 | Field labels and the way out of forms | Implemented | Should | **4** | **1** |
| NFR-NFR-044 | Latin digits (0-9) only | Implemented | Must | **2** | **1** |
| DR-DAT-001 | One store, closed to clients | Implemented | Must | **3** | **1** |
| DR-DAT-002 | Core entities and identifiers | Implemented | Must | **2** | **1** |
| FR-DAT-003 | Block-based id allocation | Implemented | Must | **1** | **0** |
| DR-DAT-004 | Hierarchy: college, department, course | Implemented | Must | **2** | **1** |
| FR-DAT-005 | Delete refused while referenced | Implemented | Must | **3** | **1** |
| DR-DAT-006 | Course code unique within a department | Implemented | Must | **1** | **0** |
| DR-DAT-007 | Uniqueness of department code and term name | Implemented | Should | **2** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| DR-DAT-008 | Instructor civil number | Implemented | Must | **2** | **1** |
| DR-DAT-009 | Core appointment fields | Implemented | Must | **1** | **1** |
| FR-DAT-010 | Revision number and no overwriting of newer data | Implemented | Must | **2** | **1** |
| DR-DAT-011 | Academic identity snapshot of an appointment | Implemented | Must | **2** | **2** |
| DR-DAT-012 | Scope key | Implemented | Must | **1** | **1** |
| DR-DAT-013 | Timetable versions | Implemented | Must | **2** | **1** |
| DR-DAT-014 | Drafts | Implemented | Must | **2** | **0** |
| DR-DAT-015 | Share links in storage | Implemented | Must | **3** | **1** |
| DR-DAT-016 | Accounts and passwords | Implemented | Must | **2** | **1** |
| DR-DAT-017 | Permissions and scopes | Implemented | Must | **2** | **2** |
| DR-DAT-018 | Sessions | Implemented | Must | **2** | **1** |
| DR-DAT-019 | Visiting-instructor model | Implemented | Must | **2** | **1** |
| FR-DAT-020 | Visiting ⇄ appointed conversion rule | Implemented | Must | **2** | **1** |
| FR-DAT-021 | Legacy import under original ids | Implemented | Must | **3** | **2** |
| DR-DAT-022 | Historical table archive | Implemented | Should | **2** | **1** |
| NFR-DAT-023 | Short-lived read caches | Implemented | Must | **3** | **1** |
| DR-DAT-024 | Demo world separated from the real one | Implemented | Must | **3** | **2** |
| FR-DAT-025 | Deleted-records bin | Implemented | Should | **1** | **0** |
| DR-DAT-026 | Retention and automatic expiry | Implemented | Should | **2** | **0** |
| DR-DAT-027 | Indexes | Implemented | Must | **1** | **1** |
| DR-DAT-028 | Backup and restore | Implemented | Must | **2** | **0** |
| DR-DAT-029 | Student data privacy | Implemented | Must | **2** | **0** |
| DR-DAT-030 | The shared server secret: storage and selection | Implemented | Must | **3** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| DR-DAT-031 | What must travel with the database for sealed data to stay readable | Implemented | Must | **8** | **5** |
| DR-DAT-032 | The legacy password vault key | Implemented | Should | **3** | **0** |
| FR-DAT-033 | Legacy snapshot migration script | Implemented | Must | **2** | **0** |
| FR-DAT-034 | Extraction from the legacy system | Implemented | Should | **3** | **1** |
| NFR-DAT-035 | Safeguards of live-data scripts | Implemented | Must | **4** | **0** |
| FR-DAT-036 | One-time repairs for one department's two plan sheets | Implemented | Could | **5** | **0** |
| FR-DAT-037 | One-time repair: one department's sheet courses and the test course | Implemented | Could | **2** | **0** |
| FR-DAT-038 | One-time repair: removing signature events recorded in error for one department | Implemented | Could | **3** | **0** |
| FR-DAT-039 | Clearing one department's term schedule with a backup and restore | Implemented | Should | **2** | **0** |
| FR-DAT-040 | One-time exceptional import: one specific department's schedule | Implemented | Could | **3** | **0** |
| FR-DAT-041 | Legacy client-side migration to Firestore | Implemented | Could | **2** | **0** |
| IR-EXT-001 | Firestore through the server only | Implemented | Must | **4** | **1** |
| IR-EXT-002 | Firestore project and database selection | Implemented | Must | **2** | **1** |
| IR-EXT-003 | Hosting on Cloud Run | Implemented | Must | **3** | **1** |
| IR-EXT-004 | Domain and official deployment | Implemented | Must | **2** | **1** |
| IR-EXT-005 | Health endpoint | Implemented | Should | **2** | **0** |
| IR-EXT-006 | Gemini call contract | Implemented | Must | **2** | **1** |
| IR-EXT-007 | Gemini output behind validators and confirmation | Implemented | Must | **2** | **1** |
| IR-EXT-008 | When Gemini is unavailable | Implemented | Must | **2** | **0** |
| IR-EXT-009 | OCR language packs | Implemented | Must | **2** | **1** |
| IR-EXT-010 | The authority's SWRSCHA file as an input | Implemented | Must | **3** | **2** |
| IR-EXT-011 | Web Push protocol | Implemented | Must | **1** | **1** |
| IR-EXT-012 | Allowed push destinations and pruning | Implemented | Must | **2** | **1** |

| ID | Title | Status | Priority | Code | Tests |
|---|---|---|---|---|---|
| IR-EXT-013 | Per-device notification limit | Implemented | Should | **2** | **1** |
| IR-EXT-014 | Outbound company e-mail | Implemented | Could | **1** | **1** |
| IR-EXT-015 | ICS calendar file for a department timetable | Implemented | Must | **3** | **1** |
| IR-EXT-016 | The instructor's stable calendar subscription | Implemented | Must | **3** | **1** |
| IR-EXT-017 | One-day calendar reminder | Implemented | Could | **1** | **3** |
| IR-EXT-018 | Excel export | Implemented | Must | **2** | **1** |
| IR-EXT-019 | Service worker and PWA contract | Implemented | Must | **3** | **1** |
| IR-EXT-020 | Push worker and manifests | Implemented | Must | **4** | **1** |
| IR-EXT-021 | Public link scheme | Implemented | Must | **6** | **1** |
| IR-EXT-022 | Token rules | Implemented | Must | **4** | **2** |
| IR-EXT-023 | Anonymous door protection | Implemented | Must | **3** | **1** |
| IR-EXT-024 | Browser contract: security and headers | Implemented | Must | **1** | **0** |
| IR-EXT-025 | Body limits and asset caching | Implemented | Should | **2** | **0** |
| IR-EXT-026 | Environment variables and secrets | Implemented | Must | **3** | **1** |
| IR-EXT-027 | Database target from environment variables | Implemented | Could | **3** | **1** |
| IR-EXT-028 | Firestore credentials and platform variables | Implemented | Should | **4** | **1** |
| IR-EXT-029 | Derived secrets and their override variables | Implemented | Must | **7** | **4** |
| IR-EXT-030 | Other operating variables and diagnostic switches | Implemented | Should | **9** | **0** |
| IR-EXT-031 | Push notification HTTP interface | Implemented | Should | **5** | **1** |
| IR-EXT-032 | Public department timetable read | Implemented | Should | **2** | **0** |
| IR-EXT-033 | No browser error reporting to a third party | Implemented | Should | **5** | **1** |

# B ⓘ Inferred requirements for confirmation

↑ Contents

These requirements were derived from the behaviour of the code and no direct test proves them. They need owner confirmation before final approval.

| ID | Title | Module |
|---|---|---|
| FR-ACC-003 | Idle expiry and presence-based renewal | ACC |
| FR-ACC-017 | Main-administration screens and the root account | ACC |
| FR-ACC-018 | Permission and scope administration | ACC |
| NFR-ACC-025 | One identity resolution per request with a short cache | ACC |
| FR-ACC-027 | Audit trail for sign-in and refusals | ACC |
| FR-ACC-028 | Backup vault for the root account | ACC |
| FR-ACC-036 | Editing an account and deleting it permanently | ACC |
| FR-ACC-037 | Granting the schedule screen (7) to every account missing it in one call | ACC |
| FR-ACC-039 | Editing and deleting permission and scope rows | ACC |
| FR-ACC-040 | Administration pick lists: accounts and instructors | ACC |
| FR-ACC-041 | Sections of the system administration screen and who sees them | ACC |
| FR-ACC-044 | Sign-in screen conveniences | ACC |
| FR-ACC-048 | The account form and user list on the screen | ACC |
| FR-ACC-049 | Department account provisioning scripts | ACC |
| FR-ACC-050 | Leadership account provisioning script | ACC |
| FR-ACC-051 | One-time repair: consolidating duplicate advisor accounts | ACC |
| NFR-ACC-052 | Live per-role scope leak audit | ACC |
| FR-ACD-011 | Freezing the identity of a course with history | ACD |
| FR-ACD-012 | Block deleting a linked course | ACD |
| DR-ACD-017 | Faculty identity: civil number | ACD |
| NFR-ACD-030 | Reference-data input validation | ACD |
| FR-ACD-031 | Accounts born with a college or a department | ACD |
| FR-ACD-032 | Travel time between a college's buildings | ACD |
| FR-ACD-033 | Department working hours | ACD |
| FR-ACD-034 | The university day | ACD |
| FR-ACD-035 | University-wide student unit cap in Masari | ACD |
| IR-ACD-036 | Campus travel policy route | ACD |
| FR-ACD-037 | Graduation rules per department | ACD |
| IR-ACD-039 | Academic sheet and transition routes | ACD |
| FR-ACD-040 | Course-editing window for the committee chair | ACD |
| IR-ACD-041 | Visiting directory and instructor affiliation routes | ACD |
| FR-ACD-042 | Not-yet-reached verdict and the open-for-offering decision | ACD |
| FR-ACD-043 | Training phase for teaching assistants in waves | ACD |
| IR-ACD-044 | Advisor seat balance routes | ACD |
| FR-ACD-045 | How many visiting instructors a department needs | ACD |

| ID | Title | Module |
|---|---|---|
| FR-ACD-047 | Creating a course in the current sheet from the Courses screen | ACD |
| FR-ACD-048 | The course list, its card and its form on the screen | ACD |
| FR-ACD-050 | Capacity by course nature for a whole department family | ACD |
| FR-LOC-014 | Boys and girls campuses stay separate | LOC |
| FR-LOC-017 | Request expiry and inbox counter | LOC |
| FR-LOC-029 | Walking time between buildings on a campus | LOC |
| FR-LOC-031 | Read-only historical room list of a department | LOC |
| FR-LOC-032 | List of appointments awaiting room confirmation | LOC |
| FR-SCH-012 | Other departments' halls and hall barter | SCH |
| FR-SCH-022 | Atomic batch move | SCH |
| FR-SCH-025 | Replace an instructor across a term | SCH |
| IR-SCH-001 | Drag preview before the drop | SCH |
| IR-SCH-002 | Saved views, undo and offline work | SCH |
| FR-SCH-038 | Review readiness report | SCH |
| FR-SCH-039 | Instructor's week across the department's colleges | SCH |
| FR-SCH-040 | Course nature from history and hall owner | SCH |
| IR-SCH-042 | The three board views, the phone gate and remembered preferences | SCH |
| IR-SCH-045 | Colour legend: meaning, focus and folding | SCH |
| IR-SCH-049 | Placement reading before and during a drag | SCH |
| FR-SCH-050 | Keyboard move and keyboard shortcuts | SCH |
| FR-SCH-059 | Appointment context panel | SCH |
| FR-SCH-062 | Presentation and focus modes, and printing the schedule | SCH |
| FR-SCH-063 | The «copy a term's schedule» screen | SCH |
| FR-DRF-002 | Validate a draft before saving and cap its size | DRF |
| FR-DRF-008 | Repair time collisions when publishing a start-of-term draft | DRF |
| FR-DRF-011 | Version list and two-version comparison | DRF |
| FR-DRF-028 | Draft list and editing a whole draft | DRF |
| IR-DRF-029 | Difference report between the approved PDF and the live schedule | DRF |
| IR-DRF-030 | Additional radar readings within scope | DRF |
| FR-VIW-003 | An ended term is read and export only | VIW |
| NFR-VIW-009 | The living reading is computed once, not once per asker | VIW |
| FR-VIW-010 | Last reading of the three indicators | VIW |
| FR-VIW-011 | Previous-term ghost over the schedule | VIW |
| FR-VIW-012 | The «decision now» panel | VIW |
| NFR-VIW-013 | Analysis reads are deferred and quiet on failure | VIW |
| FR-VIW-017 | Opening and stopping a link | VIW |
| FR-VIW-021 | Saved views | VIW |
| FR-VIW-022 | Warn when a saved view lost its scope | VIW |
| IR-VIW-025 | «Schedule tools»: three groups | VIW |

| ID | Title | Module |
|---|---|---|
| FR-VIW-030 | The «department fingerprint» card | VIW |
| IR-APR-031 | Single department approval read | APR |
| DR-IMP-021 | Signed header-check receipt | IMP |
| IR-IMP-030 | Gemini call interface and limits | IMP |
| FR-IMP-032 | JSON schedule export and import | IMP |
| NFR-IMP-035 | Import environment variables and receipt secret | IMP |
| FR-IMP-036 | Extracting the legacy system backup | IMP |
| FR-REQ-028 | Cancelling a department-placed appointment and undoing a fix | REQ |
| DR-REQ-037 | Anonymous appointment-entry measure | REQ |
| DR-REQ-038 | Personal request link token: generation, verification and rotation | REQ |
| IR-REQ-045 | Public doors for the member and the department | REQ |
| FR-REQ-046 | Card notification on department decision and reply | REQ |
| FR-PLN-003 | Registration statistics save | PLN |
| FR-PLN-005 | Same-season history and course lineage | PLN |
| DR-PLN-001 | Planning data stores | PLN |
| FR-PLN-033 | Who teaches each course: counts, not names | PLN |
| IR-STU-001 | Public student schedule page | STU |
| NFR-STU-041 | Read caches in Masari | STU |
| FR-STU-052 | Masari entry screens in the browser | STU |
| FR-STU-056 | The «What's new?» and «My cases» cards on the page | STU |
| FR-STU-060 | The «request to the department» sheets on the page | STU |
| FR-STU-062 | The «My profile» tab: correction, code, sign-out and deletion | STU |
| FR-STU-065 | Quick decision, filtering and export in the registration sheet | STU |
| FR-INT-003 | Room insight | INT |
| FR-INT-004 | Instructor insight | INT |
| FR-INT-005 | Appointment story and context | INT |
| FR-INT-006 | Campus movement and safe room swaps | INT |
| FR-INT-007 | Ripple forecast before a drop | INT |
| FR-INT-010 | Deterministic scoped execution of calls | INT |
| FR-INT-014 | Decision room, automatic optimiser and auto proposal | INT |
| FR-INT-015 | Custom scheduling rules | INT |
| FR-INT-017 | Open decisions | INT |
| FR-INT-021 | Live schedule layer | INT |
| FR-INT-029 | Guide friction points for the root administrator | INT |
| FR-INT-030 | Experience health | INT |
| IR-INT-002 | Gemini service interface: request constraints and timeout | INT |
| FR-INT-032 | Department decision memory | INT |
| FR-INT-033 | Contextual decision assistant and emergency plans | INT |
| FR-INT-039 | Updating open decisions and the operations review | INT |

| ID | Title | Module |
|---|---|---|
| FR-INT-041 | Scheduling rule limits, toggling and deletion | INT |
| NFR-INT-045 | Gemini service configuration variables | INT |
| IR-INT-046 | Reading cards in «decision reading» | INT |
| FR-INT-047 | The «why this figure» sheet behind indicators | INT |
| FR-INT-048 | Quality, before-approval, density and movement readings | INT |
| FR-INT-049 | Rooms and instructors readings and their panels in Reports | INT |
| FR-INT-050 | System diagnostics for the full administrator | INT |
| FR-INT-052 | Department fingerprint reading and its unwritten rules | INT |
| FR-INT-053 | The «ask the schedule» screen and printing its results | INT |
| FR-INT-056 | The «history» scene: term comparison, drafts, versions and the decision ledger | INT |
| FR-INT-058 | Guide simulation in the trial copy | INT |
| IR-INT-059 | Health rings above the timetable and decision tools in the Analytics Center | INT |
| FR-INT-060 | Reviewing and publishing the start-of-term draft in the live layer | INT |
| IR-INT-061 | Content of the live-layer scenes | INT |
| DR-INT-062 | Browser session keys of the Analytics Center | INT |
| FR-INT-063 | The Guide panel screens and tools | INT |
| FR-INT-065 | Guide commands on the schedule screen | INT |
| FR-INT-066 | Practice mode on the schedule through the Guide | INT |
| FR-INT-067 | Previewing a change proposed by the Guide on the schedule | INT |
| DR-INT-068 | The Guide profile in the browser | INT |
| FR-RPT-003 | 24-hour time options | RPT |
| FR-RPT-005 | Role-based lens lists | RPT |
| NFR-RPT-003 | Printing from the installed iOS app | RPT |
| FR-RPT-031 | Saved query preferences and filter chips | RPT |
| FR-RPT-033 | List, week, times and instructors presentation | RPT |
| FR-RPT-035 | Occupancy rate scope: site or department family | RPT |
| FR-RPT-036 | The «courses by sites» lens | RPT |
| FR-RPT-037 | The «rooms and instructors» lens | RPT |
| FR-RPT-042 | Load fairness display and sheet | RPT |
| IR-NTF-006 | Bell interface | NTF |
| FR-NTF-011 | Board presence | NTF |
| IR-NTF-015 | Colleague faces chip | NTF |
| FR-ENG-006 | Legacy survey link | ENG |
| FR-ENG-026 | Landing page and presentation deck | ENG |
| FR-ENG-037 | Interactive sections of the landing page | ENG |
| FR-DSH-004 | Today's lectures and the weekend | DSH |
| FR-DSH-008 | Decision card and signals | DSH |
| IR-DSH-009 | Today's lecture track | DSH |
| FR-DSH-013 | Term story | DSH |

| ID | Title | Module |
|---|---|---|
| IR-DSH-017 | Mini ring | DSH |
| IR-DSH-018 | Helper drawings | DSH |
| IR-DSH-022 | General dashboard presentation constraints | DSH |
| FR-DSH-023 | Demo limits | DSH |
| FR-DSH-024 | Day list, legacy total and the instructor's personal day | DSH |
| FR-DSH-025 | Dashboard header and term badge | DSH |
| FR-DSH-026 | Scope figures and main-administrator panels | DSH |
| FR-DSH-027 | Global search result categories by permitted screens | DSH |
| IR-DSH-029 | The tour stage on the department's own week | DSH |
| FR-OPS-006 | Security headers on every response | OPS |
| FR-OPS-007 | Compression and request size limits | OPS |
| FR-OPS-008 | Refuse cross-site write requests | OPS |
| FR-OPS-011 | Sign-in attempt limit | OPS |
| FR-OPS-013 | Static serving and cache policy | OPS |
| FR-OPS-015 | Resumable full-system export | OPS |
| FR-OPS-016 | Backup preview, import, system reset and undo | OPS |
| NFR-OPS-001 | A small, fail-early runtime image | OPS |
| FR-OPS-027 | University working day read before every request | OPS |
| FR-OPS-028 | Data mode, port and client address | OPS |
| FR-OPS-029 | Local data files in demo and development mode | OPS |
| FR-OPS-030 | Private-state protection script | OPS |
| FR-OPS-032 | Upload package audit | OPS |
| FR-OPS-033 | The system vault screen and its in-browser job driver | OPS |
| FR-OPS-034 | Print letterhead and shared interface elements | OPS |
| FR-OPS-035 | Developer screenshot-capture tools | OPS |
| FR-OPS-037 | Rendering and auditing the brand assets and icons | OPS |
| NFR-NFR-006 | Caching layers and delivery weight | NFR |
| NFR-NFR-009 | Sessions and cookies | NFR |
| NFR-NFR-010 | Firestore rules deny every direct connection | NFR |
| NFR-NFR-016 | An audit trail without request content | NFR |
| NFR-NFR-018 | A public privacy policy | NFR |
| NFR-NFR-020 | 44-pixel touch targets | NFR |
| NFR-NFR-022 | Controls with accessible names | NFR |
| NFR-NFR-024 | Zoom and focus indication | NFR |
| NFR-NFR-034 | Process survival on a single request failure | NFR |
| NFR-NFR-037 | Supported browsers | NFR |
| NFR-NFR-038 | Observability | NFR |
| NFR-NFR-040 | Interface fault telemetry without content | NFR |
| NFR-NFR-041 | One message layer and message lifetimes | NFR |

| ID | Title | Module |
|---|---|---|
| FR-DAT-003 | Block-based id allocation | DAT |
| DR-DAT-006 | Course code unique within a department | DAT |
| DR-DAT-014 | Drafts | DAT |
| FR-DAT-025 | Deleted-records bin | DAT |
| DR-DAT-026 | Retention and automatic expiry | DAT |
| DR-DAT-028 | Backup and restore | DAT |
| DR-DAT-029 | Student data privacy | DAT |
| DR-DAT-031 | What must travel with the database for sealed data to stay readable | DAT |
| DR-DAT-032 | The legacy password vault key | DAT |
| FR-DAT-033 | Legacy snapshot migration script | DAT |
| FR-DAT-034 | Extraction from the legacy system | DAT |
| NFR-DAT-035 | Safeguards of live-data scripts | DAT |
| FR-DAT-036 | One-time repairs for one department's two plan sheets | DAT |
| FR-DAT-037 | One-time repair: one department's sheet courses and the test course | DAT |
| FR-DAT-038 | One-time repair: removing signature events recorded in error for one department | DAT |
| FR-DAT-039 | Clearing one department's term schedule with a backup and restore | DAT |
| FR-DAT-040 | One-time exceptional import: one specific department's schedule | DAT |
| FR-DAT-041 | Legacy client-side migration to Firestore | DAT |
| IR-EXT-005 | Health endpoint | EXT |
| IR-EXT-008 | When Gemini is unavailable | EXT |
| IR-EXT-024 | Browser contract: security and headers | EXT |
| IR-EXT-025 | Body limits and asset caching | EXT |
| IR-EXT-028 | Firestore credentials and platform variables | EXT |
| IR-EXT-029 | Derived secrets and their override variables | EXT |
| IR-EXT-030 | Other operating variables and diagnostic switches | EXT |
| IR-EXT-031 | Push notification HTTP interface | EXT |
| IR-EXT-032 | Public department timetable read | EXT |

# C Glossary

↑ Contents

**Academic decision lab**
مختبر القرار الأكاديمي
Bounded read-only what-if calculations over approved plan sheets and student wishes.

**Access card**
بطاقة الدخول
A card with a QR code and personal link sent to someone invited to the system.

**Access scope**
النطاق
The colleges and departments whose data an account may see; a row with department 0 means the whole college for college and all-colleges roles.

**Activity trail**
الأثر
A read-only record of everything that changed something: who did what, and to what.

**Ad slot**
الموقع الإعلاني
A place of fixed size and capacity in a page, such as the student portal or the public schedule.

**Advisor seat balance**
رصيد مقاعد المرشد
Extra seats the administrator grants advisors above a section's base capacity.

**Analytics Center**
مركز التحليلات
The screen from which departments read the same student-case register that the sheet reads.

**Anonymous guard**
الحارس المجهول
A limit that counts failures from unauthenticated addresses and never blocks success.

**Appointed instructor**
معيّن
An instructor who is not visiting a department; conversion to it removes him from the directory and rosters.

**Appointment**
موعد
One schedule row: a class section with its days, time, hall and instructor (FSchedule).

**Approval**
الاعتماد
The review cycle of a department's schedule in a term, from signature to registrar acceptance.

**Approval blocker**
مانع اعتماد
A physical conflict that prevents approving the schedule.

**Approval dossier**
ملف الاعتماد
An A4 sheet gathering what changed, blockers, signatures and department status.

**Assisted reading**
القراءة الأدق
An optional reading through the Gemini service for pages with unread cells; it proposes and never writes.

**Authority document (SWRSCHA)**
وثيقة الجهة المعتمدة
The official timetable file issued by the registration authority for a department, branch and term, whose header carries the term, branch and department.

**Baseline**
خط الأساس
The first reading of the document kept unchanged to compare with the live schedule.

**Baseline**
الرصيد
The audience figures since 2016 approved by the system administration, to which what is measured after 2026-10-17 is added.

**Bell**
الجرس
The notification center icon carrying the number of unread items required of the user.

**Build identifier**

معرّف البناء

The stamp a release carries in the client, server and service worker to tell which version is running.

**Building**

المبنى

A unit of the official registry with a code made of the site prefix and two digits.

**Building board / Corridor screen**

لوحة المبنى / شاشة الممر

A page with a tile per hall of the building, and its full-screen mode for a TV.

**Calendar subscription**

اشتراك التقويم

An ICS file one subscribes to so that it updates itself.

**Campaign**

الحملة

A company's advertisement in one slot with dates and one or two images; it is a draft, approved or paused.

**Campus movement**

الحركة المكانية

An instructor's move between two buildings between lectures, measured as a margin in minutes against the travel time.

**Case number**

رقم الحالة

The first 8 uppercase characters of the record id, held by the student.

**Class section**

الشعبة

A class of a course in a given term, identified by its section code (501 onward in authority schedules).

**Class section**

شعبة

A group of students with a time, hall and instructor for a course in a term; counted in the schedule by its distinct section code (SCode).

**College**

الكلية

A top academic unit with a code and a name; the code may hold the branch code, so its first two digits give the official college identity.

**Companion facility**

المرفق المرافق

A studio or lab booked together with the main hall for the same appointment.

**Comprehensive report**

التقرير الشامل

The official main schedule document, read page by page beside the registration sheet.

**Confidence**

الثقة

An explicit four-level grade attached to every forecast figure that governs whether the action is enabled.

**Course**

المقرر

A subject with credits, hours and capacity; its official number has seven digits: college (2), department (2), course (3).

**Deadline exception**

الاستثناء

A department-specific submission date that takes precedence over the term deadline when later, granted with a written reason.

**Decision board**

لوحة القرار

A read-only planning lens for the department head, dean and above.

**Demo sandbox**

البيئة التجريبية

A per-visitor in-memory data copy lasting one hour that never touches real data.

**Department**

القسم

The scientific department (sectionId in code) to which courses belong; it does not mean a class section.

**Department**

قسم

The scientific department; stored in code as AdSectionId and belonging to a college.

**Department balance**

ميزان الأقسام

A table with one row per department in the term: appointments, instructors, rooms, fairness, quality, blockers and approval status.

**Department family**

عائلة القسم

A group of departments with the same academic code across colleges and sites (boys, girls, branches).

**Department window**

نافذة القسم

An exception narrower than the university day for one department; it never widens it.

**Draft**

مسودة

A proposed schedule for a department and term that is reviewed and edited and does not change the live schedule until published.

**Draft**

المسودة

The plan sheet rule set under review before approval.

**Drift**

انجراف

A row the scenario touches that was deleted or whose revision changed after the scenario was built.

**Ended term**

الفصل المنتهي

An archive term that is not written to and is only read and exported.

**Faculty card**

بطاقة الأستاذ

A public page where an instructor opens their schedule and asks for a change, through the department link or a personal link.

**Faculty member**

عضو هيئة التدريس

The instructor in the instructor register with identity (civil number and name), status (active, retired or on sabbatical) and category (instructor or TA).

**Faculty placeholder**

هيئة تدريسية

A record each department owns that is not a person: it receives sections with no fixed instructor and is excluded from double-booking and fairness checks.

**Full need**

الحاجة الكاملة

The number of the campus's students who need the course, from the registrar's demand report (SWRDASH).

**Guide**

المرشد

An in-app guide that answers usage questions and walks the user through a tour on screen, running entirely in the browser.

**Hall**

القاعة

A teaching room or lab inside a building, identified by its code there.

**Hall barter**

استعارة القاعات

A digital reservation of a free window in another department's hall for one term, with the host's approval.

**Hall door page**

باب القاعة

A public page reached by QR code stating the hall's state now.

**Header**

الترويسة

The page-1 header that decides term, branch and department before rows are read.

**Historical form**

الصيغة التاريخية

An old hall or building code that stays recognised after its code changes.

**Hold**

حجز

Either an instructor-request hold awaiting the department (blocks, and is asked about) or an advisory two-minute colleague hold (never blocks).

**Home dashboard**

لوحة البداية

The first screen after sign-in: scope, term, its figures and the reading of the day and week.

**Individual exception**

الاستثناء الفردي

An edit window for one member with a written reason and a dedicated closing time.

**Initial password**

الكلمة الأولى

A password an administrator sets for the account owner, changed at first sign-in; the default one lapses after 7 days.

**Instructor inbox**

وارد الأساتذة

The department screen where faculty requests are reviewed and decided item by item.

**Instructor replacement**

استبدال أستاذ

Handing all of an instructor's appointments in a term to a replacement or leaving them without an instructor.

**Instructor request card**

بطاقة طلب الأستاذ

The public page (/r/) a faculty member opens with the personal link to request changes to their schedule.

**Journey**

الرحلة

A narrative screen of aggregate counts about the system's memory.

**Lender / Borrower**

المُعير / المستعير

The host department owning the hall, and the department requesting the window.

**Lens**

العدسة

A way of grouping the same filtered results to answer one specific question.

**Live channel**

القناة الحيّة

A light server-to-screen broadcast announcing that something changed without carrying data.

**Live schedule layer**

الطبقة الحية

Live scenes about the schedule's state: overview, pressure, health, brief, why, context assistant and decision minutes, start of term and safety net.

**Living layer**

الطبقة الحيّة

The living-schedule window with its six scenes.

**Load fairness**

عدالة الحمل

An index of the spread of weekly teaching load between instructors.

**Main administration account**

حساب الإدارة الرئيسي

An IsAdminUser account or the root identifier; it assigns roles and sits above them.

**Masari**

مساري

The permanent student door /me: a profile with a personal code, wishes, a plan and request status.

**Material conflict**

التعارض المادّي

An instructor or room double booking in overlapping appointments, or an indistinguishable duplicate; the general rule's only blocker for signing and acceptance.

**Natural-language query**

الاستعلام بلغة طبيعية

A sentence the user writes that is turned into allowed calls executed deterministically and ending in a preview, not a write.

**Nonce**

نونس

A random value created per response that only the page's own scripts may carry.

**Not yet reached**

لم نصل بعد

A judgement that a course in a branch is beyond the level or prerequisites the branch's students have reached.

**Notification center**

مركز الإشعارات

A panel showing what remains for a role holder, derived from state and not stored.

**Occupancy rate**

نسبة الإشغال

The share of the scope's halls occupied at each day and hour.

**Offering state**

حالة الطرح

A per-course entry in a term and department: offered, closed, future or limited sections.

**Official target**

الوجهة الرسمية

The Cloud Run service and Firestore database that serve schedule-kw.com and nothing else.

**Operationally current term**

الفصل الجاري تشغيلياً

The term in which the institution is working now, the same arbiter used by the staff card and the schedule.

**Partnership profile**

ملف الشراكة

A public page with a private token that shows a prospective company the audience figures, slots and terms.

**Pattern library**

مكتبة الأنماط

The approved distributions of a course's days and lengths by its hours (18 patterns).

**Pending hall confirmation**

بانتظار تثبيت القاعة

The state of an appointment saved before an official hall is chosen (PENDING_ROOM).

**Personal link**

رابط شخصي

A card opened only for one instructor, living until the end of the term.

**Plan sheet**

الصحيفة

The study-plan PDF whose text layer is read and against which a department's courses are reconciled.

**Plan-sheet badge**

شارة الصحيفة

A tag beside the course name showing its plan sheet and requirement type.

**Presence**

الحضور

A colleague's current position on a board or screen; it lives seconds and is never stored.

**Preview**

المعاينة

The editable review table showing read rows and their notes before saving.

**Previous term**

الفصل السابق

The one earlier in time than the current term by term chronology, not by identifier order.

**Pulse**

النبضة

A short question answered from memory: who is with me, did anything change, does the bell have news.

**Pulse**

النبض

An anonymous signal counting one visit per day per page kind per browser.

**Push notifications**

تنبيهات الجوال

Encrypted Web Push notices to a device subscribed by account or by card.

**Queries**

الاستعلامات

The entry modes starting with search; their counterpart, Reports, are the modes starting with report.

**Receipt**

الإيصال

An HMAC signature proving the scope of a reading or the gaps and preventing the screen from bypassing checks.

**Refresh and retry**

حدّث ثم أعد

The refusal of a write with an older stamp because a colleague saved first.

**Registrar note**

ملاحظة التسجيل

A one-click note on a cell of a row, carrying the row, field, value at writing time and the round.

**Registration radar**

رادار التسجيل

A simulation of student registration over the offered sections, with counts not names, each figure carrying its basis.

**Registration sheet**

كشف التسجيل

The one screen where the department committee and then registration decide on student requests.

**Release path**

مسار الإصدار

The chain from change request to release and verification on the official domain.

**Request item**

بند الطلب

One line in a request: keep, change, delete or add, with its decision and dialogue.

**Request window**

نافذة الطلبات

The period in which the server accepts submission, governed by the closing time in Kuwait time or by an individual exception.

**Restore point**

نقطة استعادة

Row images before applying and their revisions after, written with the apply and used for the restore.

**Restore point**

نقطة التراجع

A snapshot the server takes before a large system operation so the administrator can return to it.

**Revision number**

رقم المراجعة

A counter that grows with each write to a slot so a write built on an old copy is detected.

**Role**

الصفة

States who the account holder is in the college and determines read or write access, screens and scope.

**Role template**

القالب

The screens and scope a role writes automatically when it is chosen.

**Round**

الجولة

A numbered stage that starts at each send to the registrar or at the first edit after acceptance (amendment round).

**Safety net**

شبكة الأمان

The points captured before every large change and used to go back.

**Safety point**

نقطة أمان

A saved copy of the schedule before a major change that can be restored, with the restore effect stated.

**Saved view**

عرض محفوظ

A personal way of looking at the schedule saved under a name, not a copy of it.

**Scenario**

سيناريو

An ordered layer of changes (move, assign, remove, add) over the live schedule that is not written into it before approval.

**Schedule**

الجدول

All appointments of a department in a term.

**Schedule pulse**

نبض الجدول

A sentence and a ranking of items worth the coordinator's decision.

**Scope**

نطاق

The «college:department:term» combination under which versions, drafts and links are stored.

**Screen (permission)**

الشاشة (الصلاحية)

A number from 1 to 17 in FormSecurity that grants its holder what the screen contains.

**Seat (account chair)**

الكرسي

An account fixed by role and scope whose holder changes while its ledger stays.

**Section request**

طلب شعبة

A request from advising to open a section for a number of students, passing through the committee and then registration.

**Section simulator**

محاكي الشعب

A tab that tries removing, adding, merging or splitting a section with an immediate effect.

**Semester readiness**

جاهزية الفصل

A score out of 100 combining students reaching 12 units and demand finding a seat; an estimate, not a guarantee.

**Service worker**

عامل الخدمة

The script that provides offline operation and serves the updating page (public/sw.js).

**Session**

الجلسة

A record bound to the session_id cookie that establishes identity and ends after 15 minutes of inactivity.

**Share link**

رابط نشر

A long random token of a kind (department, faculty cards, survey, students) that opens a limited reading without an account.

**Share link**

رابط مشاركة

A record with a token, scope, kind and expiry that opens a defined read without an account.

**Shared hall**

القاعة المشتركة

A hall linked to more than one department.

**Sheet stamp**

ختم الورقة

A QR code and eight-character code in the printed report footer used to compare against the live schedule.

**Snapshot**

لقطة

A frozen copy of an appointment's academic identity or of a whole scope's rows.

**Spelling twin**

توأم الإملاء

Two courses in one department with the same name written with different spellings (hamza, ta marbuta or spacing).

**Start ladder**

سُلّم البدايات

The regulation start times: every hour from 08:00 for Sun/Tue/Thu and every 90 minutes for Mon/Wed.

**Start of term**

بداية الفصل

A draft built from a department's previous-term schedule, whose name begins with «بداية الفصل».

**Stick to my lecture**

لاصق بمحاضرتي

A suggested time just before or after an existing lecture, separated by the regulation gap.

**Student survey**

الاستبيان

An account-free public form completed with the civil ID to request a course, report a conflict or submit a graduate request.

**Student ticket**

التذكرة

What the simulation estimates for one student: three plans and a window, with no name.

**Study proposal**

المقترح الدراسي

A draft a department prepares for an instructor, separate from the live schedule until the instructor approves and the department commits.

**Suggested count**

المقترح

The section count the system suggests for a course and campus from the department's history, never below the graduates' sections.

**SWRSCHA**

SWRSCHA

The code of the registration authority's timetable report that the timetable is imported from.

**System vault**

«النسخة الاحتياطية»

The root administration screen for full export, import, reset and undo.

**Teaching load**

النصاب

An instructor's maximum term hours by rank or exception; overtime is added to form the ceiling.

**Team**

الفريق

One account with its head, members and deputy; the unit of visibility in the trail and presence.

**Temporary hold**

الحجز المؤقت

A hold that hides the chosen time from colleagues for ten minutes while editing, becoming timerless after submission.

**Temporary password**

الكلمة المؤقتة

A random 14-character reset password valid for 24 hours and one sign-in.

**Term**

الفصل

An academic term with a name such as first term 2026/2027, a start date, a week count and an ended flag.

**Term freeze**

التجميد

Making a past term read-only: it can be read and not written, announced by the 'Past term · view only' ribbon.

**Term roster**

الروستر

The list of visiting instructors of one department for one term.

**Term story**

قصة الفصل

A card summarising a department schedule's approval cycle in figures, rounds and a copyable sentence.

**Time machine**

آلة الزمن

The scenarios screen: emergency, lab and goal.

**Token**

رمز

A random string in the link that is the permission itself; it carries no personal data.

**Touch target**

هدف اللمس

The pressable area of an interactive element, at least 44 pixels.

**Trial run (no save)**

تجربة بلا حفظ

A full reading with the same checks for a term that has a schedule, drawing the difference without writing.

**Turnaround gap**

الفاصل

The minutes between the end of one lecture and the start of the next in the same hall (10 minutes).

**University teaching day**

الدوام الشامل

A single limit for the start and end of the teaching day for the whole programme (08:00–20:00 by default).

**Vacant section**

شعبة شاغرة

An existing section assigned to the placeholder faculty that a member can request instead of creating a new appointment.

**View-only (read-only)**

الاطّلاع (قراءة فقط)

A role from which the server refuses every write except the narrow approval-cycle doors.

**Viewable impression**

الظهور المرئي

An impression counted after half of the ad stayed visible for a full second while the page was open.

**Visiting instructor**

منتدب

An instructor named in a department's visiting directory and in a term roster; the status belongs to the department, not to the person.

**Visiting instructor**

المنتدب

An instructor listed in the department's visiting-instructor directory for the term.

**Welcome tour**

الجولة التعريفية

A role-specific welcome shown once per account and role.

**Wishes**

الرغبات

A student's units, courses and time constraints during the wishes phase.

# D Revision history

↑ Contents

| Version | Date | Changes |
|---|---|---|
| 1.0 | 2026-11-07 | First release: the baseline document with all its modules, requirement-to-code-and-test traceability, and the interactive page. |

# E Integration and operation

↑ Contents

## E.1 Connecting university accounts

Today every user signs in with an internal account. This section shows exactly where each sign-in happens in the code, what stays as is, and what is replaced if the university wants everyone to sign in with its own accounts (single sign-on through OpenID Connect, SAML or the directory). The rule: only the entrance is replaced and everything after it stays; every permission, scope, signature and audit entry is read from the session, not from how the user signed in.

### Two paths: the university name alone, or the university password too

#### 1. The university username or email as the login name (no code change)

A system account has no separate email field; the login name is the SystemUserLogin field, which accepts any text, including a university email such as name@university.edu. It is changed per account from the users screen (editing checks the name is not taken), and matching at sign-in ignores letter case. Everyone then signs in with their university name or email, the password stays the system's own, and permissions and scopes stay as they are because they are tied to the account number, not its name.

`src/server/routes/usersRoutes.ts#/api/users/:id`
`src/db/repository.ts#getUserByLogin`

#### 2. Signing in with the university password itself (single sign-on, a limited change)

A callback route from the university identity system is added as in the table below, so nobody types a password into the system. Matching stays by login name as in the first path, so if login names are first set to the university email, linking becomes a direct match of what the university system sends.

`src/server/routes/authRoutes.ts#/api/auth/login`

### Every entrance in the code

#### All administrative and academic roles

**Today**

A username and a stored salted password hash; on success a sess_ session is created in the database with a 15-minute idle timeout, and a session_id cookie is set HttpOnly and SameSite=Lax.

**With university accounts**

The sign-in handler is replaced by a callback route from the identity provider: it verifies the provider's response, takes the university login name or email from it, matches it against the SystemUserLogin field with the same Repository.getUserByLogin (exact match, then case-insensitive), then creates the same session with Repository.createSession and sets the same cookie. Nothing after it changes.

`src/server/routes/authRoutes.ts#/api/auth/login` `src/db/repository.ts#createSession` `src/components/Login.tsx`

`FR-ACC-031` `IR-ACC-032`

#### Checking every request

**Today**

One guard at the /api entrance reads the session, then the user, their scopes (UserAssign), screens (FormSecurity) and the seat they occupy, caching them for two minutes.

**With university accounts**

Stays as is.

`src/server/core/auth.ts#authMiddleware` `server.ts#authMiddleware`

`IR-ACC-032`

### Roles, scopes and permissions

**Today**

The role is the Role field from the academic role list, the scope is one or more colleges and departments, screens come from a permission list, system administrators carry IsAdminUser, and the root administrator is ROOT_ADMIN_USER_ID.

**With university accounts**

They stay in the system and are managed from the users screen. If the university wants them to come from directory groups, a table mapping each group to a role and scope is added at sign-in.

`src/utils/academicRoles.ts#ACADEMIC_ROLES` `src/server/core/auth.ts#isPowerUser` `src/server/core/auth.ts#ROOT_ADMIN_USER_ID`

`FR-ACC-033` `FR-ACC-034` `DR-ACC-047`

### Password lifecycle

**Today**

An expiring first password, a single-use temporary password, a mandatory change before any screen, a self-service change, and an encrypted copy of the passwords set by the migration and provisioning tools, keyed by PASSWORD_VAULT_KEY.

**With university accounts**

With single sign-on they are switched off: the password-change gate is removed, the password form on the sign-in screen is hidden and replaced by a «sign in with the university account» button, and the encrypted copy is no longer needed.

`src/server/accountPassword.ts#passwordChangeGate` `src/server/routes/authRoutes.ts#/api/auth/change-password` `src/db/repository.ts#passwordVaultKey`

`FR-ACC-031` `DR-ACC-035`

### Seat teams

**Today**

Someone working as a team member switches to a new session carrying the member id, on top of their own sign-in.

**With university accounts**

Stays as is; it works on top of any sign-in method.

`src/server/seatsRoutes.ts#/api/seats/switch`

`FR-STU-045` `FR-STU-050`

### Sign-out

**Today**

Deletes the session from the database and clears the cookie.

**With university accounts**

Stays, optionally followed by a redirect to the provider's sign-out page if the university wishes.

`src/server/routes/authRoutes.ts#/api/auth/logout`

`IR-ACC-032`

### Students in «مساري» (My path)

**Today**

The civil id and a personal code the student chooses (salted with scrypt). The profile key is an HMAC fingerprint of the civil id, the name and civil id are sealed with AES-GCM, and the session is a signed sh_session cookie. Five consecutive errors lock the profile for 15 minutes, and «forgot my code» requests deletion of the profile after 30 days.

**With university accounts**

The entrance is replaced by a callback from the identity provider that returns the student's civil id (or university id with a table mapping it to the civil id), so the same fingerprint is computed and the same session issued; the code and «forgot my code» are no longer needed. The provider must supply the civil id or its equivalent, because existing profiles are indexed by its fingerprint.

`src/server/studentDoorRoutes.ts#/api/public/me/enter` `src/server/studentDoor.ts#signDoorSession` `src/server/core/studentIdentity.ts#studentIdentityKey`

`DR-STU-030` `FR-STU-031` `FR-STU-032` `FR-STU-034` `DR-STU-042`

### Teacher card

**Today**

A personal link per teacher per term, opened by typing the civil id once; «remember me» gives the device a signed key (sk_dev) with STAFF_DEVICE_SECRET bound to the link token, for at most 180 days.

**With university accounts**

It can stay as is (no password by design), or single sign-on can be required before the card opens instead of typing the civil id, matching the university identity to the teacher's civil id AdInstructorCivil.

`src/server/routes/publicStaffRoutes.ts#/api/public/staff/:token` `src/server/staffDeviceKey.ts#deriveStaffDeviceSecret`

`FR-REQ-031` `DR-REQ-038`

### Public links without an account

**Today**

The survey, the request, the published schedule and the room door open with a link token, not an account.

**With university accounts**

Stay as they are.

`src/server/core/auth.ts#bindPublicLinkContext`

`DR-REQ-038`

### What to ask university IT before starting

1. The protocol: OpenID Connect, SAML or LDAP, the provider URL, the application registration details and the redirect addresses.
2. The attribute carrying the login name or email for staff, and the attribute carrying the civil id or university id for students and teachers.
3. Whether roles and scopes stay managed in the system or come from directory groups, and who approves the mapping table.
4. Whether single sign-on covers students and teachers or staff only.
5. Multi-factor authentication, the sign-out page, and a test tenant to try before production.

## E.2 Keys that must travel with the data

Some data is sealed or fingerprinted with server keys. Whoever receives the database must receive these keys with it, through a separate secure channel; otherwise the sealed data becomes unreadable without any visible error.

### systemSecrets/student-case-identity-v1

**Where**

A Firestore document (in local mode the file database/student-case-identity.key)

**Protects**

Sealing of student names and civil ids, the civil-id fingerprint that indexes «مساري» profiles and student cases, and the source of the teacher card «remember me» key when its own secret is not set.

**If missing or changed**

Without it: no student reaches their profile, sealed names cannot be read, and the door sticker tokens, calendar and teacher-card keys derived from it change. It travels with a full Firestore export of the database, but the in-system backup deliberately leaves it out; if data is moved with that backup, this document must be moved too, or STUDENT_CASE_SECRET set to the same value before the first run.

`src/db/repository.ts#STUDENT_CASE_SECRET_DOC`

`src/server/studentCaseSecret.ts#chooseStudentCaseSecret`

`DR-DAT-030` `DR-DAT-031` `DR-STU-042`

### PASSWORD_VAULT_KEY

**Where**

An environment variable (or the key file in the private folder)

**Protects**

The encrypted copy of passwords written by the migration and provisioning tools (the SystemUserPassVault field).

**If missing or changed**

Without it the encrypted copy cannot be read; sign-in with the salted password hashes keeps working as is.

`src/db/repository.ts#passwordVaultKey`

`DR-ACC-035`

### CALENDAR_SECRET

**Where**

An environment variable; derived from the shared secret when absent

**Protects**

Teachers' calendar subscription links, and unsealing old cases sealed with it before the two secrets were separated.

**If missing or changed**

Changing it invalidates every existing calendar subscription.

`src/server/calendarSecret.ts`

`src/server/core/shareLinks.ts#calendarSecret`

`IR-EXT-029`

### STAFF_DEVICE_SECRET

**Where**

An optional environment variable; derived from the shared secret under the label staff-device-key-v1 when absent

**Protects**

The teacher card «remember me on this device» keys.

**If missing or changed**

Changing it asks every teacher to type their civil id once more; nothing is lost.

`src/server/staffDeviceKey.ts#deriveStaffDeviceSecret`

`FR-REQ-031` `IR-EXT-029`

### VAPID_PUBLIC_KEY / VAPID_PRIVATE_KEY

**Where**

Environment variables

**Protects**

Mobile notifications (Web Push).

**If missing or changed**

Changing them drops existing push subscriptions, so each device subscribes again.

`src/server/pushRoutes.ts`

`IR-EXT-031`

## E.3 Runtime settings (environment variables)

Every environment variable the server reads is listed here with its effect and default. The document check fails at build time if the code reads a variable that is not listed, so the list stays complete with every change.

### Data and database 8

| Variable | Default | Effect |
|---|---|---|
| DATA_MODE | firestore | The data source: firestore for production, or demo for the isolated showcase. |
| FIREBASE_PROJECT_ID | — | The Firestore project; with FIREBASE_CONFIG_SOURCE=environment it is the only source. |
| FIREBASE_CONFIG_SOURCE | the config file first on the platform | environment makes the two variables the only source of the database target, and refuses to start if one is missing or contradicts the config file. |
| FIREBASE_DATABASE_ID | (default) | The Firestore database inside the project. |
| FIREBASE_SERVICE_ACCOUNT_KEY | — | A service-account key as JSON for running outside the Google platform; on the platform the service identity is used. |
| FIRESTORE_EMULATOR_HOST | — | Points the server at the local Firestore emulator for testing. |
| AUTO_IMPORT_LEGACY_DATA | true locally, false on the platform | Allows automatic import of legacy data at start-up on an empty database. |
| SCHEDULE_PRIVATE_DIR | the database folder locally, /tmp/schedule-private on the platform | The private folder for local files and keys, with 0700 permissions. |

## Security and keys 6

| Variable | Default | Effect |
|---|---|---|
| STUDENT_CASE_SECRET | generated and stored | Seeds the student identity secret when none is stored; the stored one always wins, and a differing value is refused with a loud warning. |
| PASSWORD_VAULT_KEY | the key file, if present | The key of the encrypted password copy (32 bytes as hex or base64); when absent it is read from legacy-password-vault.key in the private folder. |
| CALENDAR_SECRET | derived from the shared secret | The calendar link secret, and unsealing of old cases. |
| STAFF_DEVICE_SECRET | derived from the shared secret | The secret of the teacher card «remember me» keys. |
| ROOT_ADMIN_USER_ID | 1 | The account id of the root administrator. |
| DEFAULT_ADMIN_PASSWORD | admin123, development only | The first administrator password when an empty local development database is created; production refuses to start with a missing local database instead of creating a known account. |

## External services 12

| Variable | Default | Effect |
|---|---|---|
| VAPID_PUBLIC_KEY | — | The public key for mobile notifications. |
| VAPID_PRIVATE_KEY | — | The private key for mobile notifications; without both, notifications quietly stop. |
| MORNING_BRIEF_TOKEN | — | The morning-brief scheduler secret: an external scheduler calls the brief endpoint with it; without it the endpoint answers 404 and nothing is sent. |
| GEMINI_API_KEY | — | The Gemini service key for import reading and text queries; without it the deterministic parser works alone. |
| GOOGLE_GEMINI_API_KEY | — | An alternative name for the same key. |
| GEMINI_MODEL | gemini-3.6-flash | The Gemini service version used. |
| GEMINI_SCHEDULE_MODEL | GEMINI_MODEL | A specific version for schedule reading that takes precedence over GEMINI_MODEL. |
| AD_PUBLIC_ORIGIN | https://schedule-kw.com | The public address used to build ad-report links sent by email; the hosting party sets it to its own domain. |
| AD_MAIL_API_KEY | — | The mail-sending API key for ad reports and lead alerts; without it no mail is sent and everything else keeps working. |

| Variable | Default | Effect |
|---|---|---|
| AD_MAIL_FROM | — | The sender address approved by the mail provider. |
| AD_MAIL_API_URL | https://api.resend.com/emails | The sending API address (a JSON request with a Bearer key). |
| AD_LEAD_NOTIFY_TO | — | The address alerted on a new ad request; empty or invalid means no mail. |

## Limits and schedules 17

| Variable | Default | Effect |
|---|---|---|
| PUBLIC_ATTEMPT_MAX_FAILURES | 10 | Errors allowed per address at the public doors (identity checks) before a temporary block. |
| PUBLIC_ATTEMPT_WINDOW_MINUTES | 10 | The window in minutes for counting those errors. |
| STUDENT_DOOR_IDENTITY_MAX | 24000 | The ceiling of identity questions in «مساري» per address every 10 minutes (one campus network serves thousands). |
| STUDENT_PUSH | | The value off switches Masari student phone notifications off explicitly (the button is disabled and the scheduled sender sends nothing). |
| STUDENT_SHARE_PER_MINUTE | 60 | The ceiling of public «share with your advisor» page opens per minute from one address. |
| STUDENT_DOOR_CODE_MAX_FAILURES | 600 | The ceiling of personal-code errors per address; the profile itself locks after 5 consecutive errors for 15 minutes. |
| STUDENT_DOOR_WRITES_PER_IP_PER_MINUTE | 1200 | The ceiling of «مساري» write requests per network per minute. |
| STUDENT_DOOR_WRITES_PER_MINUTE | 60 | The ceiling of write requests per student per minute (by civil id or session). |
| STUDENT_DOOR_PROOF_MAX | 12 | Expected-graduate proof attempts (sheet upload) every 10 minutes. |
| ROOM_DOOR_PER_IP_PER_MINUTE | 600 | The ceiling of room-door page requests per address per minute. |
| PUBLIC_RATE_LIMIT_MAX | 60 | The public-endpoint request limit per window; 0 disables it. |
| PUBLIC_RATE_LIMIT_WINDOW_MS | 60000 | The public limit window in milliseconds (at least 1000). |
| PUBLIC_REQUEST_PER_IP_PER_MINUTE | 1500 | The teacher request page ceiling per address per minute. |
| PUBLIC_REQUEST_PER_LINK_PER_MINUTE | 240 | The ceiling per personal link per minute. |
| RADAR_AUTO | on | Automatic registration-radar refresh; false stops it. |
| RADAR_AUTO_HOURS | 24 | How many hours between radar refreshes (at least one). |
| RADAR_MANUAL_GAP_SECONDS | 120 | Minimum seconds between two manual radar runs («refresh radar»); an earlier run is refused with 409 too-soon, and 0 disables the gap. |

## Platform and runtime 10

| Variable | Default | Effect |
|---|---|---|
| SCHEDULE_DEMO_ENABLED | on | false closes the instant demo sign-in. |
| SCHEDULE_DEMO_SERVICE | false | true makes the whole service an isolated showcase (DATA_MODE=demo). |
| PORT | 3000 | The port is fixed at 3000; PORT is read only by the showcase service (DATA_MODE=demo), so the hosting party points its platform at 3000. |
| NODE_ENV | — | production adds Secure to cookies and serves the built interface instead of the development server. |
| K_SERVICE | set by the platform | Detects running on Cloud Run so platform rules apply. |
| K_REVISION | set by the platform | As above; printed in the start-up log. |
| K_CONFIGURATION | set by the platform | As above. |

| Variable | Default | Effect |
|---|---|---|
| APPLET_ID | — | Marks running inside a host frame, so embedding is allowed and Cloud Run rules do not apply. |
| TMPDIR | /tmp | The base of the private folder on the platform. |
| OCR_DATA_DIR | the working folder | Where the Arabic and English language files for scanned-document reading are found. |

### Diagnostics and development 3

| Variable | Default | Effect |
|---|---|---|
| OCR_PROFILE | off | 1 prints the stage timings of scanned-document reading. |
| SMART_IMPORT_ROW_STRIPS | off | 1 enables an extra row-by-row strip reading in document import. |
| ROOM_DOOR_FAKE_NOW | — | A pretend time for the room door page to try it outside teaching hours; development only. |

## E.4 Server interface index

Every route the server exposes, read from the code at every build: method, path, access type, module and the requirements that describe it.

Staff session 498 · Student session 34 · Personal link 55 · Public 31

| Method | Path | Access | Requirements |
|---|---|---|---|
| GET | * | Public | FR-REQ-067 NFR-STU-002 FR-STU-074 +4 |
| GET | /_ads/ad.js | Public | IR-ENG-029 |
| GET | /_ads/c/:cid/:crid | Public | IR-ENG-029 |
| GET | /_ads/coupon | Public | IR-ENG-030 |
| GET | /_ads/coupon.svg | Public | IR-ENG-030 |
| POST | /_ads/e | Public | IR-ENG-029 |
| GET | /_ads/img/:id | Public | IR-ENG-029 |
| GET | /_ads/serve | Public | IR-ENG-029 |
| POST | /_pulse | Public | FR-ENG-018 |
| GET | /ad-report/:token | Personal link | IR-ENG-031 |
| GET | /ad-report/:token/calendar.ics | Personal link | IR-ENG-031 |
| POST | /ad-report/:token/redemptions | Personal link | IR-ENG-031 |
| GET | /api/activity-trail | Staff session | FR-NTF-025 |
| GET | /api/activity-trail/stamp/:rowId | Staff session | FR-NTF-025 |
| GET | /api/actual-demand | Staff session | FR-PLN-003 |
| POST | /api/actual-demand/link | Staff session | FR-PLN-003 FR-INT-070 |
| POST | /api/actual-demand/upload | Staff session | FR-PLN-003 |
| GET | /api/admin-instructor-options | Staff session | FR-ACC-040 |
| GET | /api/admin-user-options | Staff session | FR-ACC-040 |
| GET | /api/admin/ads | Staff session | IR-ENG-033 |
| POST | /api/admin/ads/campaigns | Staff session | IR-ENG-033 |
| DELETE | /api/admin/ads/campaigns/:id | Staff session | IR-ENG-033 |
| POST | /api/admin/ads/campaigns/:id/creatives | Staff session | IR-ENG-033 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| DELETE | /api/admin/ads/campaigns/:id/creatives/:crid | Staff session | IR-ENG-033 |
| POST | /api/admin/ads/campaigns/:id/rotate-report | Staff session | IR-ENG-033 |
| POST | /api/admin/ads/campaigns/:id/send-report | Staff session | IR-ENG-033 |
| POST | /api/admin/ads/campaigns/:id/status | Staff session | IR-ENG-033 |
| GET | /api/admin/ads/creatives/:id/img | Staff session | IR-ENG-033 |
| GET | /api/admin/ads/demand | Staff session | IR-ENG-033 |
| POST | /api/admin/ads/leads/:id/contacted | Staff session | IR-ENG-033 |
| POST | /api/admin/ads/partner-links | Staff session | IR-ENG-033 |
| POST | /api/admin/ads/partner-links/:id/revoke | Staff session | IR-ENG-033 |
| GET | /api/admin/audience-stats | Staff session | IR-ENG-033 |
| GET | /api/admin/capacity-exceptions | Staff session | FR-ACD-010 FR-ACD-011 FR-ACD-012 +11 |
| PUT | /api/admin/capacity-exceptions | Staff session | FR-ACD-010 FR-ACD-011 FR-ACD-012 +11 |
| POST | /api/admin/courses/capacity-by-mode | Staff session | FR-ACD-050 |
| GET | /api/admin/location-registry | Staff session | FR-LOC-004 FR-LOC-005 FR-LOC-006 +4 |
| POST | /api/admin/location-registry/buildings | Staff session | FR-LOC-004 FR-LOC-006 FR-LOC-033 |
| PUT | /api/admin/location-registry/buildings/:id | Staff session | FR-LOC-006 FR-LOC-033 |
| POST | /api/admin/location-registry/migration/:id/rollback | Staff session | FR-LOC-011 |
| POST | /api/admin/location-registry/migration/apply | Staff session | FR-LOC-011 |
| GET | /api/admin/location-registry/migration/preview | Staff session | FR-LOC-011 |
| PUT | /api/admin/location-registry/review/:id | Staff session | FR-LOC-011 |
| POST | /api/admin/location-registry/rooms | Staff session | FR-LOC-005 FR-LOC-008 FR-LOC-033 +1 |
| PUT | /api/admin/location-registry/rooms/:id | Staff session | FR-LOC-008 FR-LOC-033 FR-LOC-037 |
| GET | /api/admin/location-room-types | Staff session | FR-ACD-038 |
| POST | /api/admin/location-room-types | Staff session | FR-ACD-038 |
| DELETE | /api/admin/location-room-types/:type | Staff session | FR-ACD-038 |
| PUT | /api/admin/location-room-types/:type | Staff session | FR-ACD-038 |
| PUT | /api/admin/location-room-types/:type/scope | Staff session | FR-ACD-038 |
| GET | /api/admin/location-setup | Staff session | FR-LOC-004 FR-LOC-005 FR-LOC-006 +5 |
| POST | /api/admin/location-setup/buildings | Staff session | FR-LOC-004 FR-LOC-006 FR-LOC-007 |
| DELETE | /api/admin/location-setup/buildings/:id | Staff session | FR-LOC-006 FR-LOC-007 |
| PUT | /api/admin/location-setup/buildings/:id | Staff session | FR-LOC-006 FR-LOC-007 |
| GET | /api/admin/location-setup/capacity-gaps | Staff session | FR-LOC-037 |
| POST | /api/admin/location-setup/capacity-import/apply | Staff session | FR-LOC-039 |
| GET | /api/admin/location-setup/capacity-import/last | Staff session | FR-LOC-038 FR-LOC-039 |
| POST | /api/admin/location-setup/capacity-import/preview | Staff session | FR-LOC-038 FR-LOC-039 |
| GET | /api/admin/location-setup/capacity-import/template | Staff session | FR-LOC-038 FR-LOC-039 |
| POST | /api/admin/location-setup/capacity-import/undo | Staff session | FR-LOC-038 FR-LOC-039 |
| POST | /api/admin/location-setup/rooms | Staff session | FR-LOC-005 FR-LOC-007 |
| DELETE | /api/admin/location-setup/rooms/:id | Staff session | FR-LOC-007 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| GET | /api/admin/location-setup/usage | Staff session | FR-LOC-035 |
| GET | /api/admin/section-schedule-windows | Staff session | FR-ACD-033 |
| PUT | /api/admin/section-schedule-windows | Staff session | FR-ACD-033 |
| GET | /api/admin/teaching-load | Staff session | FR-ACD-022 |
| PUT | /api/admin/teaching-load | Staff session | FR-ACD-022 |
| GET | /api/admin/teaching-load/member/:id | Staff session | FR-ACD-022 |
| PUT | /api/admin/teaching-load/member/:id | Staff session | FR-ACD-022 |
| PUT | /api/admin/university-day | Staff session | FR-ACD-034 |
| GET | /api/admin/university-day/impact | Staff session | FR-ACD-034 |
| GET | /api/advisor-seats | Staff session | IR-ACD-044 FR-PLN-031 |
| POST | /api/advisor-seats/add | Staff session | IR-ACD-044 FR-PLN-031 |
| PUT | /api/advisor-seats/config | Staff session | IR-ACD-044 FR-PLN-031 |
| POST | /api/advisor-seats/exception | Staff session | IR-ACD-044 FR-PLN-031 |
| POST | /api/advisor-seats/exception/resolve | Staff session | FR-ACD-028 FR-ACD-042 FR-ACD-043 +9 |
| POST | /api/advisor-seats/undo | Staff session | FR-ACD-028 FR-ACD-042 FR-ACD-043 +9 |
| GET | /api/approvals | Staff session | FR-APR-001 FR-APR-004 FR-APR-006 +12 |
| POST | /api/approvals/accept | Staff session | FR-APR-011 |
| POST | /api/approvals/acknowledge-additions | Staff session | FR-APR-007 |
| GET | /api/approvals/badge | Staff session | FR-APR-021 |
| POST | /api/approvals/deadline | Staff session | FR-APR-017 |
| POST | /api/approvals/extension | Staff session | FR-APR-018 FR-APR-019 FR-APR-029 +1 |
| POST | /api/approvals/extension-request | Staff session | FR-APR-019 |
| POST | /api/approvals/extensions | Staff session | FR-APR-018 IR-APR-038 |
| POST | /api/approvals/head-return | Staff session | FR-APR-006 |
| GET | /api/approvals/inbox | Staff session | FR-APR-021 |
| POST | /api/approvals/return | Staff session | FR-APR-010 |
| POST | /api/approvals/sign | Staff session | FR-APR-001 |
| POST | /api/approvals/student-phases | Staff session | FR-APR-020 |
| POST | /api/approvals/submit | Staff session | FR-APR-004 |
| GET | /api/approvals/term | Staff session | FR-APR-022 |
| POST | /api/approvals/withdraw | Staff session | FR-APR-006 |
| GET | /api/audit-logs | Staff session | FR-ACC-027 FR-ACC-056 |
| POST | /api/auth/change-password | Staff session | DR-ACC-035 |
| POST | /api/auth/demo | Public | FR-ACC-026 |
| POST | /api/auth/heartbeat | Staff session | FR-ACC-003 |
| POST | /api/auth/login | Public | FR-ACC-031 |
| POST | /api/auth/logout | Staff session | FR-ACC-004 |
| GET | /api/auth/me | Public | IR-ACC-022 |
| POST | /api/auth/presence | Staff session | FR-ACC-043 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| POST | /api/auth/recover/complete | Staff session | FR-ACC-053 |
| POST | /api/auth/recover/verify | Staff session | FR-ACC-053 |
| GET | /api/campus-travel-policy | Staff session | IR-ACD-036 |
| PUT | /api/campus-travel-policy | Staff session | IR-ACD-036 |
| GET | /api/colleges | Staff session | FR-ACD-005 FR-ACD-031 FR-ACD-032 |
| POST | /api/colleges | Staff session | FR-ACD-005 FR-ACD-031 FR-ACD-032 |
| DELETE | /api/colleges/:id | Staff session | FR-ACD-005 FR-ACD-032 |
| PUT | /api/colleges/:id | Staff session | FR-ACD-005 FR-ACD-032 |
| GET | /api/colleges/:id/mobility | Staff session | FR-ACD-032 |
| PUT | /api/colleges/:id/mobility | Staff session | FR-ACD-032 |
| GET | /api/companion-rooms | Staff session | FR-LOC-027 |
| GET | /api/course-offering | Staff session | FR-ACD-028 FR-PLN-009 FR-PLN-032 |
| PUT | /api/course-offering | Staff session | FR-ACD-028 FR-PLN-009 FR-PLN-032 |
| GET | /api/course-reach | Staff session | FR-ACD-042 FR-PLN-011 FR-PLN-032 |
| POST | /api/course-reach/open | Staff session | FR-ACD-042 FR-PLN-032 |
| GET | /api/courses | Staff session | FR-ACD-011 FR-ACD-012 IR-ACD-029 +2 |
| POST | /api/courses | Staff session | FR-ACD-011 FR-ACD-012 IR-ACD-029 +2 |
| DELETE | /api/courses/:id | Staff session | FR-ACD-011 FR-ACD-012 FR-ACD-040 |
| PUT | /api/courses/:id | Staff session | FR-ACD-011 FR-ACD-012 FR-ACD-040 |
| GET | /api/courses/nature | Staff session | FR-SCH-040 |
| POST | /api/curriculum/plans | Staff session | IR-ACD-039 |
| PUT | /api/curriculum/plans/:planId | Staff session | IR-ACD-039 |
| POST | /api/curriculum/plans/:planId/archive | Staff session | IR-ACD-039 |
| GET | /api/curriculum/plans/:planId/archive-readiness | Staff session | IR-ACD-039 |
| POST | /api/curriculum/plans/:planId/courses | Staff session | IR-ACD-039 |
| DELETE | /api/curriculum/plans/:planId/courses/:courseId | Staff session | IR-ACD-039 |
| GET | /api/curriculum/sections/:sectionId | Staff session | IR-ACD-039 FR-ACD-047 |
| POST | /api/curriculum/transitions | Staff session | IR-ACD-039 |
| DELETE | /api/curriculum/transitions/:id | Staff session | IR-ACD-039 |
| GET | /api/dashboard | Staff session | FR-DSH-001 FR-DSH-024 |
| GET | /api/degree-rules | Staff session | FR-ACD-037 |
| PUT | /api/degree-rules/:sectionId | Staff session | FR-ACD-037 |
| GET | /api/delegates | Staff session | IR-ACD-041 |
| GET | /api/delete-impact/:entity/:id | Staff session | FR-ACD-057 |
| GET | /api/demo/config | Staff session | FR-ACC-044 FR-OPS-018 FR-OPS-035 |
| POST | /api/demo/reset | Staff session | FR-ACC-042 |
| POST | /api/demo/role | Staff session | FR-ACC-026 NFR-ACC-052 |
| GET | /api/demo/seed-status | Staff session | FR-ACC-042 |
| GET | /api/demo/teacher-card | Staff session | FR-ACC-042 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| GET | /api/department-delegates | Staff session | IR-ACD-041 |
| DELETE | /api/department-delegates/:instructorId | Staff session | IR-ACD-041 |
| PUT | /api/department-delegates/:instructorId | Staff session | IR-ACD-041 |
| POST | /api/department-delegates/instructor | Staff session | IR-ACD-041 |
| GET | /api/department-rooms | Staff session | FR-LOC-031 |
| POST | /api/department-rooms | Staff session | FR-LOC-031 |
| GET | /api/forecast/term | Staff session | FR-PLN-034 |
| GET | /api/hall-barter | Staff session | FR-LOC-013 FR-LOC-015 FR-LOC-016 +2 |
| GET | /api/hall-barter/inbox | Staff session | FR-LOC-017 |
| POST | /api/hall-barter/requests | Staff session | FR-LOC-015 FR-LOC-016 FR-LOC-034 |
| POST | /api/hall-barter/requests/:id/cancel | Staff session | FR-LOC-016 |
| POST | /api/hall-barter/requests/:id/end | Staff session | FR-LOC-016 |
| POST | /api/hall-barter/requests/:id/respond | Staff session | FR-LOC-015 |
| GET | /api/health | Public | IR-OPS-001 FR-OPS-021 IR-EXT-005 |
| GET | /api/impact/course | Staff session | IR-INT-043 |
| GET | /api/instructor-affiliations | Staff session | IR-ACD-041 |
| GET | /api/instructor-requests | Staff session | FR-REQ-001 FR-REQ-004 FR-REQ-006 +18 |
| POST | /api/instructor-requests/:id/apply | Staff session | FR-REQ-026 FR-REQ-046 FR-REQ-063 |
| POST | /api/instructor-requests/:id/cancel-scheduled | Staff session | FR-REQ-028 |
| POST | /api/instructor-requests/:id/decide | Staff session | FR-REQ-025 FR-REQ-064 |
| POST | /api/instructor-requests/:id/notified | Staff session | FR-REQ-061 |
| POST | /api/instructor-requests/:id/reopen-fixed | Staff session | FR-REQ-028 |
| POST | /api/instructor-requests/:id/reply | Staff session | FR-REQ-027 FR-REQ-046 |
| POST | /api/instructor-requests/:id/undo-decision | Staff session | FR-REQ-068 |
| GET | /api/instructor-requests/course-defaults | Staff session | FR-REQ-057 |
| POST | /api/instructor-requests/exception/revoke | Staff session | FR-REQ-006 |
| GET | /api/instructor-requests/exceptions | Staff session | FR-REQ-040 |
| GET | /api/instructor-requests/follow-up | Staff session | FR-REQ-057 |
| GET | /api/instructor-requests/history-hints | Staff session | FR-REQ-070 |
| POST | /api/instructor-requests/issue | Staff session | FR-REQ-001 FR-REQ-054 FR-REQ-055 +3 |
| GET | /api/instructor-requests/live-cards | Staff session | FR-REQ-004 |
| GET | /api/instructor-requests/preview | Staff session | FR-REQ-057 |
| GET | /api/instructor-requests/preview-page | Staff session | FR-REQ-057 |
| GET | /api/instructor-requests/recipients | Staff session | FR-REQ-039 |
| GET | /api/instructor-requests/registrar-noted | Staff session | FR-REQ-039 |
| GET | /api/instructor-requests/regulation-teachers | Staff session | FR-REQ-058 |
| POST | /api/instructor-requests/remind | Staff session | FR-REQ-057 FR-REQ-081 |
| POST | /api/instructor-requests/remind-pending | Staff session | FR-REQ-081 |
| GET | /api/instructor-requests/send-log | Staff session | FR-REQ-004 FR-REQ-055 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| GET | /api/instructor-requests/track | Staff session | FR-REQ-058 |
| GET | /api/instructors | Staff session | FR-ACD-018 FR-ACD-026 IR-ACD-041 +1 |
| POST | /api/instructors | Staff session | FR-ACD-018 FR-ACD-026 IR-ACD-041 +1 |
| DELETE | /api/instructors/:id | Staff session | FR-ACD-018 FR-ACD-026 IR-ACD-041 +1 |
| PUT | /api/instructors/:id | Staff session | FR-ACD-018 FR-ACD-026 IR-ACD-041 +1 |
| GET | /api/instructors/:id/affiliation | Staff session | IR-ACD-041 |
| POST | /api/instructors/:id/visiting-conversion | Staff session | FR-ACD-026 |
| GET | /api/instructors/:id/visiting-state | Staff session | FR-ACD-026 |
| POST | /api/intelligence/auto-schedule | Staff session | FR-INT-014 |
| POST | /api/intelligence/autopilot | Staff session | FR-INT-014 |
| GET | /api/intelligence/brief | Staff session | FR-INT-037 |
| GET | /api/intelligence/comments/:scheduleId | Staff session | FR-INT-042 |
| POST | /api/intelligence/comments/:scheduleId | Staff session | FR-INT-042 |
| PUT | /api/intelligence/comments/:scheduleId/:commentId | Staff session | FR-INT-042 |
| GET | /api/intelligence/compare-terms | Staff session | FR-DRF-013 |
| POST | /api/intelligence/conflict-solutions | Staff session | FR-INT-040 |
| GET | /api/intelligence/constraints | Staff session | FR-INT-015 FR-INT-041 |
| POST | /api/intelligence/constraints | Staff session | FR-INT-015 FR-INT-041 |
| DELETE | /api/intelligence/constraints/:id | Staff session | FR-INT-041 |
| PUT | /api/intelligence/constraints/:id | Staff session | FR-INT-041 |
| POST | /api/intelligence/context-copilot | Staff session | FR-INT-033 |
| GET | /api/intelligence/context/:id | Staff session | FR-INT-005 |
| POST | /api/intelligence/copilot | Staff session | FR-INT-008 |
| GET | /api/intelligence/decision-memory | Staff session | FR-INT-032 |
| POST | /api/intelligence/decision-memory | Staff session | FR-INT-032 |
| GET | /api/intelligence/department-start-rhythm | Staff session | FR-INT-034 |
| GET | /api/intelligence/drafts | Staff session | FR-DRF-001 FR-DRF-003 FR-DRF-006 +2 |
| POST | /api/intelligence/drafts | Staff session | FR-DRF-001 FR-DRF-003 FR-DRF-006 +2 |
| PUT | /api/intelligence/drafts/:id | Staff session | FR-DRF-003 FR-DRF-006 FR-DRF-028 +1 |
| GET | /api/intelligence/drafts/:id/import-report | Staff session | IR-DRF-029 |
| POST | /api/intelligence/drafts/:id/publish | Staff session | FR-DRF-006 |
| DELETE | /api/intelligence/drafts/:id/rows | Staff session | FR-DRF-003 |
| DELETE | /api/intelligence/drafts/:id/rows/:rowId | Staff session | FR-DRF-003 |
| PATCH | /api/intelligence/drafts/:id/rows/:rowId | Staff session | FR-DRF-003 |
| POST | /api/intelligence/emergency | Staff session | FR-INT-033 |
| POST | /api/intelligence/evaluate | Staff session | FR-INT-040 |
| GET | /api/intelligence/experience-health | Staff session | FR-INT-030 FR-INT-050 |
| POST | /api/intelligence/genesis | Staff session | FR-INT-036 |
| GET | /api/intelligence/genome | Staff session | FR-INT-040 FR-INT-052 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| GET | /api/intelligence/guide-friction | Staff session | FR-INT-029 |
| POST | /api/intelligence/import-preview | Staff session | FR-IMP-031 |
| GET | /api/intelligence/living | Staff session | FR-INT-021 |
| GET | /api/intelligence/lookups | Staff session | FR-INT-040 |
| POST | /api/intelligence/meeting-minutes | Staff session | FR-INT-037 |
| POST | /api/intelligence/nl-move | Staff session | FR-INT-012 |
| POST | /api/intelligence/nl-schedule | Staff session | FR-INT-009 FR-INT-011 |
| GET | /api/intelligence/open-decisions | Staff session | FR-INT-017 FR-INT-039 |
| POST | /api/intelligence/open-decisions | Staff session | FR-INT-017 FR-INT-039 |
| PATCH | /api/intelligence/open-decisions/:id | Staff session | FR-INT-039 |
| GET | /api/intelligence/operations-review | Staff session | FR-INT-039 |
| GET | /api/intelligence/overview | Staff session | FR-INT-001 |
| POST | /api/intelligence/pdf-import | Staff session | FR-IMP-001 FR-IMP-018 FR-IMP-019 +1 |
| POST | /api/intelligence/pdf-import/bootstrap-section | Staff session | FR-IMP-018 FR-IMP-039 |
| POST | /api/intelligence/pdf-import/create-courses | Staff session | FR-IMP-019 |
| POST | /api/intelligence/policy-simulate | Staff session | FR-INT-016 NFR-INT-001 |
| GET | /api/intelligence/professor/:id | Staff session | FR-INT-004 |
| GET | /api/intelligence/replay/:id | Staff session | FR-INT-005 |
| POST | /api/intelligence/ripple/:id | Staff session | FR-INT-007 |
| GET | /api/intelligence/rollover | Staff session | FR-INT-036 |
| GET | /api/intelligence/room | Staff session | FR-INT-003 |
| GET | /api/intelligence/safety-net | Staff session | FR-INT-038 |
| POST | /api/intelligence/safety-net/:id/undo | Staff session | FR-INT-038 |
| GET | /api/intelligence/settled-drift | Staff session | FR-INT-035 |
| POST | /api/intelligence/smart-import | Staff session | FR-IMP-027 |
| GET | /api/intelligence/spatial-burnout | Staff session | FR-INT-040 |
| GET | /api/intelligence/versions | Staff session | FR-DRF-011 FR-DRF-012 |
| POST | /api/intelligence/versions/:id/restore | Staff session | FR-DRF-012 |
| GET | /api/intelligence/versions/compare | Staff session | FR-DRF-011 |
| POST | /api/intelligence/war-room | Staff session | FR-INT-014 |
| POST | /api/intelligence/why | Staff session | FR-INT-031 |
| POST | /api/intelligence/why-not | Staff session | FR-INT-031 |
| POST | /api/internal/morning-brief | Staff session | IR-RPT-055 |
| GET | /api/journey | Public | FR-ENG-026 FR-DSH-010 |
| POST | /api/landing/inquiry | Public | FR-ENG-027 |
| GET | /api/location-registry | Staff session | FR-LOC-009 FR-LOC-032 |
| GET | /api/location-registry/pending | Staff session | FR-LOC-032 |
| GET | /api/location-room-types | Staff session | FR-ACD-038 FR-ACD-048 |
| GET | /api/metrics/appointment-entry | Staff session | DR-REQ-037 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| POST | /api/metrics/appointment-entry | Staff session | DR-REQ-037 |
| GET | /api/notifications | Staff session | FR-NTF-001 DR-NTF-005 |
| POST | /api/notifications/seen | Staff session | DR-NTF-005 |
| GET | /api/permissions | Staff session | FR-ACC-039 FR-ACC-055 |
| POST | /api/permissions | Staff session | FR-ACC-039 FR-ACC-055 |
| DELETE | /api/permissions/:id | Staff session | FR-ACC-039 |
| PUT | /api/permissions/:id | Staff session | FR-ACC-039 |
| GET | /api/permissions/forms | Staff session | FR-ACC-039 |
| PUT | /api/permissions/user/:userId | Staff session | FR-ACC-039 FR-ACC-055 |
| GET | /api/plan-badges | Staff session | FR-PLN-022 IR-PLN-039 |
| POST | /api/plan-review/approve | Staff session | FR-PLN-019 FR-PLN-038 |
| GET | /api/plan-review/approve-all | Staff session | FR-PLN-038 |
| POST | /api/plan-review/approve-all | Staff session | FR-PLN-038 |
| PUT | /api/plan-review/course-details | Staff session | FR-PLN-018 |
| PUT | /api/plan-review/group | Staff session | IR-PLN-039 FR-PLN-046 |
| POST | /api/plan-review/group/delete | Staff session | IR-PLN-039 FR-PLN-046 |
| POST | /api/plan-review/import | Staff session | FR-PLN-038 |
| GET | /api/plan-review/plan | Staff session | IR-PLN-039 |
| GET | /api/plan-review/previous-ended | Staff session | FR-PLN-037 |
| GET | /api/plan-review/previous-plans | Staff session | FR-PLN-037 |
| POST | /api/plan-review/previous-plans | Staff session | FR-PLN-037 |
| GET | /api/plan-review/reference | Staff session | FR-PLN-021 IR-PLN-039 |
| POST | /api/plan-review/reference/apply | Staff session | FR-PLN-021 |
| PUT | /api/plan-review/rule | Staff session | FR-PLN-018 IR-PLN-039 |
| GET | /api/plan-review/section-accounts | Staff session | FR-PLN-036 |
| POST | /api/plan-review/section-accounts | Staff session | FR-PLN-036 |
| POST | /api/plan-review/service-courses/apply | Staff session | FR-PLN-036 |
| POST | /api/plan-review/service-courses/groups | Staff session | FR-PLN-036 |
| GET | /api/plan-review/sheet/audit | Staff session | FR-PLN-037 |
| POST | /api/plan-review/sheet/compare | Staff session | FR-PLN-037 |
| GET | /api/plan-review/sheet/duplicates | Staff session | FR-PLN-036 |
| POST | /api/plan-review/sheet/duplicates/delete | Staff session | FR-PLN-036 |
| GET | /api/plan-review/sheet/foreign | Staff session | FR-PLN-036 |
| POST | /api/plan-review/sheet/foreign/delete | Staff session | FR-PLN-036 |
| POST | /api/plan-review/sheet/import | Staff session | FR-PLN-020 FR-PLN-037 |
| POST | /api/plan-review/sheet/reconcile | Staff session | FR-PLN-036 |
| POST | /api/plan-review/sheet/scan | Staff session | FR-PLN-037 |
| GET | /api/plan-review/sheet/spelling-twins | Staff session | FR-PLN-036 |
| POST | /api/plan-review/sheet/spelling-twins/merge | Staff session | FR-PLN-036 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| GET | /api/plan-review/status | Staff session | IR-PLN-039 |
| GET | /api/plan-sheets | Staff session | FR-PLN-024 IR-PLN-039 |
| POST | /api/plan-sheets/publish | Staff session | FR-PLN-024 |
| POST | /api/plan-sheets/unpublish | Staff session | FR-PLN-024 |
| GET | /api/public/audience-headline | Public | FR-ENG-026 |
| GET | /api/public/cal/:token/:key | Personal link | FR-REQ-071 IR-NTF-032 IR-EXT-016 |
| GET | /api/public/ics/:token | Personal link | IR-NTF-032 IR-EXT-015 |
| GET | /api/public/ics/:token/:key | Personal link | IR-NTF-032 |
| GET | /api/public/me/${name} | Student session | FR-STU-037 |
| POST | /api/public/me/ack | Student session | FR-STU-010 FR-STU-054 |
| GET | /api/public/me/cal/:file | Student session | FR-STU-073 |
| GET | /api/public/me/calendar | Student session | FR-STU-073 |
| GET | /api/public/me/catalog | Student session | IR-STU-035 FR-STU-084 |
| POST | /api/public/me/code | Student session | FR-STU-033 |
| POST | /api/public/me/enter | Student session | FR-STU-031 |
| POST | /api/public/me/exit | Student session | FR-STU-031 FR-STU-051 FR-STU-062 |
| POST | /api/public/me/exit | Student session | FR-STU-031 FR-STU-051 FR-STU-062 |
| GET | /api/public/me/extras | Student session | IR-STU-084 |
| POST | /api/public/me/forget | Student session | FR-STU-033 FR-STU-062 |
| POST | /api/public/me/graduate/proof | Student session | FR-STU-040 |
| GET | /api/public/me/home | Student session | NFR-STU-001 |
| POST | /api/public/me/identity | Student session | FR-STU-031 |
| POST | /api/public/me/keep | Student session | FR-STU-032 FR-STU-072 |
| GET | /api/public/me/map-page | Student session | FR-STU-036 |
| PUT | /api/public/me/name | Student session | FR-STU-033 FR-STU-062 |
| GET | /api/public/me/plan | Student session | IR-STU-035 |
| GET | /api/public/me/profile | Student session | FR-STU-004 FR-STU-054 FR-STU-084 |
| PUT | /api/public/me/profile | Student session | FR-STU-004 FR-STU-054 FR-STU-084 |
| POST | /api/public/me/push | Student session | IR-STU-084 |
| POST | /api/public/me/push/off | Student session | FR-NTF-033 FR-OPS-051 |
| POST | /api/public/me/push/offered | Student session | FR-NTF-033 FR-OPS-051 |
| POST | /api/public/me/push/test | Student session | FR-NTF-033 FR-OPS-051 |
| POST | /api/public/me/recover | Student session | FR-STU-071 |
| GET | /api/public/me/reminder | Student session | FR-NTF-030 IR-EXT-017 |
| POST | /api/public/me/report | Student session | FR-STU-012 |
| POST | /api/public/me/request | Student session | FR-STU-040 |
| POST | /api/public/me/reset | Student session | FR-STU-034 |
| POST | /api/public/me/share | Student session | IR-STU-084 |
| POST | /api/public/me/share/off | Student session | FR-NTF-033 FR-OPS-051 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| GET | /api/public/me/state | Student session | IR-STU-035 |
| PUT | /api/public/me/wishes | Student session | FR-STU-009 FR-STU-085 |
| GET | /api/public/me/wishes-count | Student session | FR-STU-009 FR-STU-085 |
| GET | /api/public/push/key | Public | IR-NTF-031 IR-EXT-031 |
| POST | /api/public/push/rotate | Public | FR-NTF-021 IR-EXT-031 |
| GET | /api/public/request/:token | Personal link | FR-REQ-013 FR-REQ-016 FR-REQ-017 +15 |
| POST | /api/public/request/:token | Personal link | FR-REQ-013 FR-REQ-016 FR-REQ-017 +15 |
| GET | /api/public/request/:token/academic-advice | Personal link | FR-REQ-043 |
| POST | /api/public/request/:token/check | Personal link | FR-REQ-017 |
| POST | /api/public/request/:token/check-batch | Personal link | FR-REQ-017 |
| POST | /api/public/request/:token/check-times | Personal link | FR-REQ-017 |
| GET | /api/public/request/:token/events | Personal link | IR-REQ-023 |
| GET | /api/public/request/:token/fixed/:itemId.ics | Personal link | FR-REQ-060 |
| POST | /api/public/request/:token/hold | Personal link | FR-REQ-016 |
| POST | /api/public/request/:token/interest | Personal link | FR-REQ-042 |
| GET | /api/public/request/:token/movement | Personal link | DR-REQ-033 |
| GET | /api/public/request/:token/previous | Personal link | FR-REQ-021 |
| GET | /api/public/request/:token/proposals | Personal link | FR-PLN-027 IR-PLN-002 FR-PLN-040 |
| GET | /api/public/request/:token/proposals/:pid | Personal link | FR-PLN-027 FR-PLN-040 |
| POST | /api/public/request/:token/proposals/:pid/respond | Personal link | FR-PLN-027 |
| GET | /api/public/request/:token/push | Personal link | IR-NTF-031 IR-EXT-031 |
| POST | /api/public/request/:token/push | Personal link | IR-NTF-031 IR-EXT-031 |
| POST | /api/public/request/:token/push/off | Personal link | IR-NTF-031 IR-EXT-031 |
| POST | /api/public/request/:token/push/test | Personal link | IR-NTF-031 IR-EXT-031 |
| POST | /api/public/request/:token/reply | Personal link | FR-REQ-027 |
| POST | /api/public/request/:token/reply-batch | Personal link | FR-REQ-027 |
| POST | /api/public/request/:token/stick | Personal link | FR-REQ-018 |
| GET | /api/public/schedule/:token | Personal link | IR-NTF-032 IR-EXT-032 |
| POST | /api/public/staff/:token | Personal link | FR-REQ-030 FR-REQ-031 FR-REQ-032 +1 |
| POST | /api/public/staff/:token/forget | Personal link | FR-REQ-031 |
| POST | /api/public/staff/:token/note | Personal link | FR-REQ-032 |
| GET | /api/public/students/:token | Personal link | IR-REQ-045 |
| GET | /api/public/survey/:token | Personal link | IR-ENG-028 |
| POST | /api/public/survey/:token | Personal link | IR-ENG-028 |
| POST | /api/public/survey/:token/identity-status | Personal link | IR-ENG-028 |
| POST | /api/public/survey/:token/my-case | Personal link | IR-ENG-028 |
| POST | /api/public/survey/:token/proof | Personal link | IR-ENG-028 |
| POST | /api/public/survey/:token/proof-status | Personal link | IR-ENG-028 |
| POST | /api/public/team/:token | Personal link | FR-STU-050 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| POST | /api/public/verify | Public | FR-APR-028 |
| GET | /api/push/status | Staff session | IR-NTF-031 IR-EXT-031 |
| POST | /api/push/subscribe | Staff session | FR-NTF-017 IR-NTF-031 IR-EXT-031 |
| POST | /api/push/test | Staff session | IR-NTF-031 IR-EXT-031 |
| POST | /api/push/unsubscribe | Staff session | IR-NTF-031 IR-EXT-031 |
| POST | /api/report-stamps | Staff session | IR-RPT-028 |
| GET | /api/reports/authority-pdf-diff | Staff session | IR-RPT-027 |
| GET | /api/reports/department-balance | Staff session | FR-RPT-006 |
| GET | /api/reports/excel/:type | Staff session | FR-RPT-015 IR-EXT-018 |
| GET | /api/reports/history-points | Staff session | FR-RPT-047 IR-RPT-048 |
| GET | /api/reports/history-points/:id | Staff session | IR-RPT-048 |
| GET | /api/reports/room-load | Staff session | IR-RPT-029 FR-RPT-034 |
| GET | /api/reports/saved | Staff session | FR-RPT-044 IR-RPT-054 |
| PUT | /api/reports/saved | Staff session | FR-RPT-044 IR-RPT-054 |
| DELETE | /api/reports/saved/:id | Staff session | IR-RPT-054 |
| GET | /api/reports/schedule-changes | Staff session | IR-APR-034 IR-APR-037 IR-RPT-027 |
| GET | /api/reports/schedule-changes/review | Staff session | IR-APR-037 |
| GET | /api/reports/visiting-history | Staff session | IR-RPT-026 |
| GET | /api/reports/visiting-roster | Staff session | IR-RPT-026 |
| GET | /api/reports/visiting-teaching | Staff session | IR-RPT-026 |
| GET | /api/roles | Staff session | DR-ACC-012 |
| GET | /api/room-door/links | Staff session | FR-LOC-024 |
| GET | /api/rooms/owner | Staff session | FR-SCH-040 |
| GET | /api/schedule-day-window | Staff session | FR-ACD-033 |
| DELETE | /api/schedule-holds | Staff session | FR-SCH-014 |
| GET | /api/schedule-holds | Staff session | FR-SCH-014 |
| POST | /api/schedule-holds | Staff session | FR-SCH-014 |
| GET | /api/schedule-notes | Staff session | FR-SCH-030 FR-APR-008 FR-APR-009 +1 |
| POST | /api/schedule-notes | Staff session | FR-SCH-030 FR-APR-008 FR-APR-009 +1 |
| DELETE | /api/schedule-notes/:id | Staff session | FR-SCH-030 FR-APR-009 FR-APR-030 |
| POST | /api/schedule-notes/:id/rebut | Staff session | FR-SCH-030 FR-APR-009 |
| POST | /api/schedule-notes/:id/verdict | Staff session | FR-SCH-030 FR-APR-009 |
| GET | /api/schedules | Staff session | FR-SCH-002 FR-SCH-021 FR-SCH-022 +36 |
| POST | /api/schedules | Staff session | FR-SCH-002 FR-SCH-021 FR-SCH-022 +36 |
| DELETE | /api/schedules/:id | Staff session | FR-SCH-002 FR-SCH-029 IR-INT-043 |
| PUT | /api/schedules/:id | Staff session | FR-SCH-002 FR-SCH-029 IR-INT-043 |
| GET | /api/schedules/:id/exceptions | Staff session | FR-SCH-029 |
| POST | /api/schedules/:id/exceptions | Staff session | FR-SCH-029 |
| DELETE | /api/schedules/:id/exceptions/:exceptionId | Staff session | FR-SCH-029 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| GET | /api/schedules/:id/history | Staff session | IR-INT-043 |
| GET | /api/schedules/:id/substitutes | Staff session | FR-SCH-029 |
| GET | /api/schedules/academic-advice | Staff session | FR-PLN-034 |
| POST | /api/schedules/apply-proposal | Staff session | FR-SCH-023 FR-STU-069 |
| POST | /api/schedules/check-conflicts | Staff session | FR-SCH-021 IR-APR-032 FR-REQ-047 |
| POST | /api/schedules/copy | Staff session | FR-SCH-034 |
| GET | /api/schedules/copy-preview | Staff session | FR-SCH-034 |
| GET | /api/schedules/coreq-pairs | Staff session | FR-SCH-041 |
| GET | /api/schedules/demand | Staff session | FR-PLN-034 FR-STU-076 FR-OPS-020 +2 |
| GET | /api/schedules/events | Staff session | FR-NTF-009 |
| GET | /api/schedules/export | Staff session | FR-IMP-032 FR-IMP-043 |
| POST | /api/schedules/fit-grid | Staff session | FR-SCH-024 FR-SCH-025 FR-SCH-026 +7 |
| POST | /api/schedules/import | Staff session | FR-IMP-023 FR-IMP-032 |
| POST | /api/schedules/import-preflight | Staff session | FR-IMP-023 |
| GET | /api/schedules/meeting-participants | Staff session | FR-SCH-028 |
| POST | /api/schedules/meeting-slots | Staff session | FR-SCH-028 |
| POST | /api/schedules/move-batch | Staff session | FR-SCH-022 IR-APR-032 |
| GET | /api/schedules/openings-preview | Staff session | FR-PLN-034 |
| GET | /api/schedules/outside-clashes | Staff session | IR-APR-032 |
| POST | /api/schedules/placeholder-action | Staff session | FR-SCH-024 |
| GET | /api/schedules/pulse | Staff session | FR-SCH-031 FR-NTF-012 |
| POST | /api/schedules/pulse | Staff session | FR-SCH-031 FR-NTF-012 |
| POST | /api/schedules/replace-instructor | Staff session | FR-SCH-025 |
| GET | /api/schedules/replace-instructor/history | Staff session | FR-SCH-025 |
| GET | /api/schedules/review-readiness | Staff session | FR-SCH-038 FR-APR-024 IR-APR-037 |
| POST | /api/schedules/room-swap-ideas | Staff session | FR-SCH-024 FR-SCH-025 FR-SCH-026 +7 |
| GET | /api/schedules/section-gap | Staff session | FR-PLN-006 FR-PLN-033 |
| GET | /api/schedules/section-gap/staffing | Staff session | FR-PLN-033 |
| GET | /api/schedules/staff-inbox | Staff session | FR-PLN-034 |
| POST | /api/schedules/suggest-slots | Staff session | FR-SCH-027 |
| GET | /api/schedules/ta-conversion | Staff session | FR-SCH-026 |
| POST | /api/schedules/ta-conversion | Staff session | FR-SCH-026 |
| GET | /api/schedules/teacher-family-week | Staff session | FR-SCH-039 |
| POST | /api/schedules/what-if | Staff session | FR-DRF-023 FR-STU-069 |
| GET | /api/schedules/wipe-scope | Staff session | FR-SCH-033 |
| POST | /api/schedules/wipe-scope | Staff session | FR-SCH-033 |
| POST | /api/schedules/wipe-scope/restore | Staff session | FR-SCH-033 |
| GET | /api/schedules/workspace | Staff session | FR-SCH-035 |
| GET | /api/search | Staff session | FR-DSH-011 FR-DSH-027 FR-DSH-028 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| GET | /api/search/natural | Staff session | FR-DSH-028 |
| GET | /api/seats | Staff session | FR-ACC-054 FR-STU-045 FR-STU-046 +3 |
| GET | /api/seats/:id | Staff session | FR-STU-045 FR-STU-046 FR-STU-047 +2 |
| POST | /api/seats/:id/colleges | Staff session | FR-STU-048 |
| POST | /api/seats/:id/deputy | Staff session | FR-STU-047 |
| POST | /api/seats/:id/deputy/end | Staff session | FR-STU-047 |
| POST | /api/seats/:id/first-password | Staff session | FR-STU-046 |
| POST | /api/seats/:id/handover | Staff session | FR-STU-049 |
| GET | /api/seats/:id/handover-candidates | Staff session | FR-STU-049 |
| POST | /api/seats/:id/holder | Staff session | FR-STU-046 |
| POST | /api/seats/:id/members | Staff session | FR-STU-047 |
| POST | /api/seats/:id/members/:mid/link | Staff session | FR-STU-047 |
| POST | /api/seats/:id/members/:mid/reset | Staff session | FR-STU-047 |
| POST | /api/seats/:id/members/:mid/scopes | Staff session | FR-STU-047 |
| POST | /api/seats/:id/members/:mid/status | Staff session | FR-STU-047 |
| POST | /api/seats/:id/password-reset | Staff session | FR-STU-046 |
| POST | /api/seats/college-registrar | Staff session | FR-STU-048 |
| POST | /api/seats/college-registrars/all | Staff session | FR-STU-048 |
| GET | /api/seats/mine | Staff session | FR-STU-045 |
| POST | /api/seats/switch | Staff session | FR-STU-045 |
| GET | /api/seats/switch-options | Staff session | FR-STU-045 |
| POST | /api/section-build/apply | Staff session | FR-PLN-014 |
| POST | /api/section-build/preview | Staff session | FR-PLN-012 |
| POST | /api/section-build/review-rows | Staff session | FR-PLN-035 |
| POST | /api/section-build/undo | Staff session | FR-PLN-015 |
| GET | /api/section-requests | Staff session | IR-STU-043 |
| POST | /api/section-requests | Staff session | IR-STU-043 |
| POST | /api/section-requests/:id/approve | Staff session | IR-STU-043 |
| POST | /api/section-requests/:id/decline | Staff session | IR-STU-043 |
| POST | /api/section-requests/:id/link | Staff session | IR-STU-043 |
| POST | /api/section-requests/:id/register | Staff session | IR-STU-043 |
| POST | /api/section-requests/:id/unlink | Staff session | IR-STU-043 |
| POST | /api/section-requests/:id/withdraw | Staff session | IR-STU-043 |
| GET | /api/section-requests/candidates | Staff session | IR-STU-043 |
| GET | /api/section-requests/compose | Staff session | IR-STU-043 |
| GET | /api/section-roster | Staff session | FR-ACD-046 |
| PUT | /api/section-roster/:id | Staff session | FR-ACD-046 |
| GET | /api/section-roster/ranks | Staff session | FR-ACD-046 |
| GET | /api/sections | Staff session | FR-ACD-006 FR-ACD-051 FR-ACD-052 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| POST | /api/sections | Staff session | FR-ACD-006 FR-ACD-051 FR-ACD-052 |
| DELETE | /api/sections/:id | Staff session | FR-ACD-006 FR-ACD-051 FR-ACD-052 |
| PUT | /api/sections/:id | Staff session | FR-ACD-006 FR-ACD-051 FR-ACD-052 |
| GET | /api/share | Staff session | FR-VIW-014 FR-VIW-015 FR-VIW-018 +4 |
| POST | /api/share | Staff session | FR-VIW-014 FR-VIW-015 FR-VIW-018 +4 |
| GET | /api/share-personal | Staff session | FR-VIW-019 |
| DELETE | /api/share/:id | Staff session | FR-VIW-018 FR-VIW-019 FR-VIW-027 +1 |
| GET | /api/share/:id/faculty | Staff session | FR-VIW-019 FR-VIW-027 |
| POST | /api/share/:id/personal | Staff session | FR-VIW-019 FR-VIW-027 |
| POST | /api/share/:id/sent | Staff session | FR-VIW-019 FR-VIW-027 |
| GET | /api/simulation/insight | Staff session | IR-DRF-030 FR-INT-020 |
| GET | /api/simulation/live-board | Staff session | FR-STU-079 |
| GET | /api/simulation/outcome | Staff session | IR-DRF-030 |
| GET | /api/simulation/predictive | Staff session | IR-DRF-030 FR-INT-018 |
| GET | /api/simulation/predictive-summary | Staff session | IR-DRF-030 |
| POST | /api/simulation/run | Staff session | FR-DRF-024 |
| GET | /api/simulation/suggestions | Staff session | FR-STU-068 |
| GET | /api/simulation/summary | Staff session | FR-DRF-024 |
| POST | /api/student-recovery/code | Staff session | FR-STU-070 |
| GET | /api/student-registration | Staff session | FR-STU-016 IR-STU-044 FR-STU-067 +3 |
| POST | /api/student-registration/:id/case-state | Staff session | IR-STU-044 |
| POST | /api/student-registration/:id/close-opened-section | Staff session | FR-STU-067 |
| POST | /api/student-registration/:id/course-state | Staff session | IR-STU-044 |
| GET | /api/student-unit-cap | Staff session | FR-ACD-035 |
| PUT | /api/student-unit-cap | Staff session | FR-ACD-035 |
| GET | /api/study-proposals | Staff session | FR-PLN-025 FR-PLN-026 FR-PLN-027 +3 |
| POST | /api/study-proposals | Staff session | FR-PLN-025 FR-PLN-026 FR-PLN-027 +3 |
| PUT | /api/study-proposals/:id | Staff session | FR-PLN-025 FR-PLN-027 FR-PLN-028 +1 |
| POST | /api/study-proposals/:id/commit | Staff session | FR-PLN-028 |
| POST | /api/study-proposals/:id/send | Staff session | FR-PLN-027 |
| POST | /api/study-proposals/:id/undo-commit | Staff session | FR-PLN-028 |
| POST | /api/study-proposals/:id/withdraw | Staff session | FR-PLN-040 |
| POST | /api/study-proposals/alternatives | Staff session | FR-PLN-040 |
| GET | /api/study-proposals/context | Staff session | FR-PLN-040 |
| GET | /api/study-proposals/course-history | Staff session | FR-PLN-040 |
| POST | /api/study-proposals/evaluate | Staff session | FR-PLN-026 |
| POST | /api/study-proposals/vacancies | Staff session | FR-PLN-029 |
| GET | /api/system-backup/export | Staff session | FR-ACC-028 |
| DELETE | /api/system-backup/export-jobs | Staff session | FR-ACC-028 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| POST | /api/system-backup/export-jobs | Staff session | FR-ACC-028 |
| GET | /api/system-backup/export-jobs/:id | Staff session | FR-ACC-028 |
| GET | /api/system-backup/export-jobs/:id/download | Staff session | FR-ACC-028 |
| POST | /api/system-backup/export-jobs/:id/step | Staff session | FR-ACC-028 |
| POST | /api/system-backup/import | Staff session | FR-ACC-028 FR-OPS-040 |
| POST | /api/system-backup/import-jobs | Staff session | FR-ACC-028 FR-OPS-040 |
| DELETE | /api/system-backup/import-jobs/:id | Staff session | FR-ACC-028 FR-OPS-040 |
| GET | /api/system-backup/import-jobs/:id | Staff session | FR-ACC-028 FR-OPS-040 |
| POST | /api/system-backup/import-jobs/:id/step | Staff session | FR-ACC-028 |
| DELETE | /api/system-backup/op-jobs/:id | Staff session | FR-OPS-041 |
| GET | /api/system-backup/op-jobs/:id | Staff session | FR-OPS-041 |
| POST | /api/system-backup/op-jobs/:id/step | Staff session | FR-OPS-041 |
| POST | /api/system-backup/preview | Staff session | FR-ACC-028 |
| POST | /api/system-backup/reset | Staff session | FR-ACC-028 FR-OPS-041 |
| GET | /api/system-backup/status | Staff session | FR-ACC-028 FR-OPS-041 |
| POST | /api/system-backup/undo | Staff session | FR-ACC-028 FR-OPS-041 |
| GET | /api/system-health | Staff session | FR-OPS-049 NFR-OPS-040 NFR-OPS-052 |
| GET | /api/system-health/features | Staff session | NFR-OPS-052 |
| GET | /api/ta-phase | Staff session | FR-ACD-043 FR-PLN-030 |
| POST | /api/ta-phase/allowed | Staff session | FR-ACD-043 FR-PLN-030 |
| POST | /api/ta-phase/close | Staff session | FR-ACD-043 FR-PLN-030 |
| POST | /api/ta-phase/open | Staff session | FR-ACD-043 FR-PLN-030 |
| GET | /api/ta-trainees | Staff session | FR-ACD-043 FR-PLN-030 |
| GET | /api/teaching-load/status | Staff session | FR-ACD-023 |
| POST | /api/telemetry/client | Staff session | IR-INT-044 NFR-NFR-038 NFR-NFR-040 +1 |
| GET | /api/terms | Staff session | FR-ACD-001 FR-ACD-004 |
| POST | /api/terms | Staff session | FR-ACD-001 FR-ACD-004 |
| DELETE | /api/terms/:id | Staff session | FR-ACD-001 |
| PUT | /api/terms/:id | Staff session | FR-ACD-001 |
| GET | /api/terms/scoped | Staff session | FR-ACD-004 |
| GET | /api/time-machine/context | Staff session | FR-DRF-015 |
| GET | /api/time-machine/scenarios | Staff session | DR-DRF-014 FR-DRF-015 FR-DRF-017 +1 |
| POST | /api/time-machine/scenarios | Staff session | DR-DRF-014 FR-DRF-015 FR-DRF-017 +1 |
| DELETE | /api/time-machine/scenarios/:id | Staff session | FR-DRF-015 FR-DRF-017 FR-DRF-018 |
| POST | /api/time-machine/scenarios/:id/apply | Staff session | FR-DRF-017 |
| POST | /api/time-machine/scenarios/:id/copy | Staff session | FR-DRF-018 |
| POST | /api/time-machine/scenarios/:id/restore | Staff session | FR-DRF-018 |
| POST | /api/time-machine/scenarios/:id/share | Staff session | FR-DRF-015 |
| GET | /api/time-machine/scopes | Staff session | FR-DRF-015 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| POST | /api/time-machine/students | Staff session | FR-DRF-021 |
| GET | /api/university-day | Staff session | FR-OPS-027 |
| GET | /api/user-scopes | Staff session | FR-ACC-039 |
| POST | /api/user-scopes | Staff session | FR-ACC-039 |
| DELETE | /api/user-scopes/:id | Staff session | FR-ACC-039 |
| PUT | /api/user-scopes/:id | Staff session | FR-ACC-039 |
| GET | /api/users | Staff session | FR-ACC-036 FR-ACC-037 FR-ACC-038 +3 |
| POST | /api/users | Staff session | FR-ACC-036 FR-ACC-037 FR-ACC-038 +3 |
| DELETE | /api/users/:id | Staff session | FR-ACC-036 FR-ACC-054 |
| PUT | /api/users/:id | Staff session | FR-ACC-036 FR-ACC-054 |
| POST | /api/users/advisors | Staff session | FR-ACC-038 |
| POST | /api/users/advisors/consolidate | Staff session | FR-ACC-038 |
| GET | /api/users/advisors/preview | Staff session | FR-ACC-038 |
| POST | /api/users/department-heads | Staff session | FR-ACC-038 |
| GET | /api/users/department-heads/preview | Staff session | FR-ACC-038 |
| POST | /api/users/grant-decision-centre | Staff session | FR-ACC-037 |
| GET | /api/version | Staff session | IR-OPS-002 |
| GET | /api/visiting-lookup | Staff session | FR-ACD-024 |
| GET | /api/visiting-roster | Staff session | FR-ACD-025 IR-ACD-041 |
| PUT | /api/visiting-roster | Staff session | FR-ACD-025 IR-ACD-041 |
| POST | /api/visiting-roster/copy | Staff session | FR-ACD-025 |
| POST | /api/visiting-roster/instructor | Staff session | FR-ACD-025 |
| GET | /b/:token | Personal link | FR-LOC-021 |
| GET | /b/:token/now | Personal link | FR-LOC-021 |
| GET | /d/:token | Personal link | FR-LOC-020 |
| GET | /d/:token/now | Personal link | FR-LOC-020 |
| GET | /i/:username | Public | FR-OPS-011 |
| GET | /k/:token | Personal link | FR-STU-050 |
| GET | /m/:token | Personal link | FR-STU-014 IR-ENG-028 |
| GET | /me | Public | IR-ACC-022 FR-ACD-022 FR-SCH-028 +46 |
| GET | /me/demo | Public | FR-STU-015 |
| GET | /me/share/:token | Personal link | FR-STU-083 IR-STU-084 |
| GET | /measurement | Public | IR-ENG-016 IR-EXT-033 |
| GET | /partner-badge/:id.svg | Public | IR-ENG-030 |
| GET | /partners/:token | Personal link | IR-ENG-032 |
| POST | /partners/:token/lead | Personal link | IR-ENG-032 |
| GET | /plans/ | Public | IR-ACD-039 IR-PLN-001 IR-EXT-021 |
| GET | /plans/:dept/ | Public | IR-PLN-001 |
| GET | /plans/:dept/:plan/ | Public | IR-PLN-001 |

| Method | Path | Access | Requirements |
|---|---|---|---|
| GET | /q/:token | Personal link | IR-ENG-028 |
| GET | /r/:token | Personal link | FR-REQ-009 IR-REQ-045 FR-REQ-067 +3 |
| GET | /r/:token/manifest.webmanifest | Personal link | IR-NTF-031 IR-EXT-031 |
| GET | /r/:token/proposal/:pid | Personal link | IR-REQ-045 IR-PLN-002 |
| GET | /s/:token | Personal link | FR-REQ-009 IR-REQ-045 |
| GET | /t/:token | Personal link | IR-REQ-045 IR-STU-001 |
| GET | /v | Public | FR-ACD-024 FR-ACD-025 FR-ACD-026 +41 |
| GET | /verify | Public | FR-APR-028 NFR-APR-003 FR-REQ-077 +7 |
| GET | /verify/:vid | Public | IR-ENG-030 |
| POST | /verify/:vid | Public | IR-ENG-030 |